

2522

93N/14W

REPORT ON
MAGNETOMETER AND INDUCED POLARIZATION SURVEYS
OMINECA RIVER AREA, BRITISH COLUMBIA
ON BEHALF OF
DOLMAGE CAMPBELL ASSOCIATES

by

Jon G. Baird, B.Sc., P.Eng.

October 28, 1969

CLAIMS:

<u>Name</u>		<u>Record Number</u>
DAWN	39 to 48	65139 M to 65148 M
DAWN	22	65122 M
DAWN	24 to 28	65124 M to 65128 M

LOCATION:

Near Haha Creek
About 70 miles northwest of Fort St. James, B.C.
125° 55° NW

DATES: September 1 to September 13, 1969

TABLE OF CONTENTS

Page No.

SUMMARY

INTRODUCTION

1

GEOLOGY

3

DISCUSSION OF RESULTS

3

CONCLUSIONS AND RECOMMENDATIONS

6

PLATES (in text)

#1 Plate 1 - Location Map

1" = 30 miles

(in envelope) *(rear)*

#2 Plate 2 - Chargeability Profiles

1" = 200'

#3 Plate 3 - Resistivity Profiles

1" = 200'

#4 Plate 4 - Magnetic Contours


1" = 200'

#5 Plate 5 - Geophysical Interpretation

1" = 200'

Department of
Mines and Petroleum Resources
ASSESSMENT REPORT


NO. 2522 MAP



SUMMARY

The present induced polarization survey has revealed only one area on the fringe of the survey grid which exhibits modestly above background chargeability response. If the geology and geochemistry of this area are of interest, further induced polarization surveying may be executed to further define the zone of increased chargeability. Trenching or diamond drilling might then be warranted.

An interpretation of the magnetic map indicates two possible fault junctures only one of which has been covered by the present induced polarization survey. Induced polarization coverage of the second and strongest of these features may be warranted.



REPORT ON
MAGNETOMETER AND INDUCED POLARIZATION SURVEYS
OMINECA RIVER AREA, BRITISH COLUMBIA
ON BEHALF OF
DOLMAGE CAMPBELL ASSOCIATES


INTRODUCTION

During the period September 1 to September 13, 1969, a geophysical field party under the direction of Mr. Bob Mischler executed induced polarization and magnetometer surveys in the Omineca River area, British Columbia, on behalf of Dolmage Campbell & Associates Limited.

As shown on Plate 1, on the scale of 1" = 30 miles, the property lies approximately 70 miles NW of Fort St. James, B.C. The topography of the area surrounding the property may be described as mountainous however the survey grid lies in an alpine meadow which is open except for a few clumps of tree growth. The elevation is about 5300' which is just above the treeline. Access was by helicopter.

The claims covered by the present survey are listed on the cover page of this report and are shown on Plate 2 on the scale of 1" = 200'.

Seigel Mk VI time domain (pulse-type) induced polarization equipment has been employed on this property. The transmitting unit had a rating of 2.5 kw and equal on and off times of 2.0 seconds. The receiving unit was a remote, ground-pulse type triggered by the rising and falling primary voltages set up in the ground by the transmitter. The integration of the




transient polarization voltages takes place for 0.65 seconds after a 0.45 second delay time following the termination of the current-on pulse. The accompanying copy of H. O. Seigel's paper entitled "Three Recent Irish Discovery Case Histories Using Pulse Type Induced Polarization" gives a description of the phenomena involved in this type of survey, the equipment employed, the field procedures and the nature of the results obtained over various base metal ore bodies.

The purpose of an induced polarization survey is to map the subsurface distribution of metallicly conducting mineralization beneath the grids covered. In the present area such mineralization could include pyrite, chalcopyrite, molybdenite, and other metallic sulphide minerals. As well, minerals such as magnetite, sericite, chlorite and others may contribute to charge-ability responses and may not always be distinguishable from responses due to sulphides.

On the present property the survey lines were laid out oriented east-west at 400' intervals. The three electrode array with electrode spacings of 400' was employed for reconnaissance purposes. Station intervals were 200'. For additional detail portions of some profiles were covered with the three electrode array and electrode separations of 200', 100' and 50'.

A Sharpe MF-1 vertical force fluxgate magnetometer was used for the magnetometer survey. The reading accuracy of this instrument is ± 5 gammas on the 1000 scale and ± 15 gammas on the 3000 scale, the two scales which were used for most of the



survey. Readings were taken each 100' along east-west grid lines spaced 400' apart and diurnal corrections were made by checking, at least once per hour, with established base stations.

GEOLOGY

The geology of the area including and surrounding the present claims is shown on GSC map sheet 844 A on a scale of 1" = 4 miles. The survey grid lies within a large area mapped as underlain by acidic intrusive rocks of the Upper Jurassic or Lower Cretaceous Omineca Intrusions. These rocks are confirmed to exist within the survey grid by Bob Adamson of Dolmage, Campbell and Associates who has studied the geology of the area.

The main target of the present survey was a low grade, disseminated copper and/or molybdenum deposit which might occur within about 300' of the ground surface.

DISCUSSION OF RESULTS

Plate 2, on the scale of 1" = 200', shows the chargeability results in profile form. The vertical scale for these profiles is 1" = 10 milliseconds. Different symbols have been used to indicate the observations taken with the various electrode separations.

Plate 3, also on the scale of 1" = 200', shows the resistivity profiles. The scale for these profiles is 2" = 1 logarithmic cycle with the line trace taken as 1000 ohm-metres.





Plate 4 is a magnetic contour plan on a scale of 1" = 200'. The observed vertical magnetic intensity values have been shown and a contour interval of 400 gammas has been adopted.

Plate 5 is an interpretation of the magnetic data shown on Plate 4. Areas of increased magnetic intensities and magnetic lineaments have been shown as well as the boundary of one area of high resistivity.

The chargeability profiles indicate that the background chargeability range is from 5.0 to 10.0 milliseconds, a normal response range for acidic intrusive rocks as are believed to underlie the present property. With this background a subsurface distribution of 1% by volume of metallicly conducting mineralization is expected to add approximately 6.0 milliseconds to the background level. Chargeabilities in excess of about 12.0 milliseconds may be considered worthy of further investigation since large deposits of very low concentrations of certain metallic minerals may have economic significance.


Chargeabilities in excess of 12.0 milliseconds have been observed between 54 E and 59 E on L 64 N, the eastern extremity of the last line in the northern part of the survey area. The present data are not sufficient to make any quantitative interpretations of the location, size or possible metallicly conducting content of the body causing the increased chargeabilities. While the peak response is only 15.0 milliseconds, it is noted that the responses for the reconnaissance electrode spacings may be



somewhat less than the peak intrinsic chargeability of an anomalous body.

The resistivity profiles indicate that the resistivities over much of the property are just less than 1000 ohm-metres and remain quite uniform, however one zone of resistivities ranging up to several thousand ohm-metres lies in the northwest corner of the grid.

Plate 4 indicates that the vertical magnetic intensities over the grid cover a range of approximately 5000 gammas which is a broader range than one would anticipate for a survey area underlain uniformly by acidic intrusive rocks. In the interpretation of results, shown on Plate 5, the areas of increased magnetic intensities and magnetic lineaments have been shown. This interpretation reveals at least five bodies of high intensity which in the normal terminology of magnetic interpretation could be called "intrusives". These intrusives are cut by three sets of lineaments trending north-south, east-west and northwest-southeast, which may be interpreted as faults. It is possible that the areas of high intensities are not distinct intrusives but consist of the same rock unit which has been faulted. Due to alteration resulting in the destruction of magnetite or some other mechanism the faults may be expressed as magnetic lows. Some of the high amplitude, local distortions of the magnetic field may be explained by narrow, near surface lenses of magnetic material such as magnetite or pyrrhotite. Quantitative interpretation of these



magnetic features indicates that strikes are generally north-south and dips are nearly vertical.

It is noted that the area of high magnetic intensity in the northwest corner of the grid corresponds with the above-mentioned high resistivity zone. This correspondence could be interpreted to mean that this area is underlain by a different rock type than the remainder of the grid.

CONCLUSIONS AND RECOMMENDATIONS

The present induced polarization survey has revealed only one area on the fringe of the survey grid which exhibits modestly above background chargeability response. No magnetic surveying has been carried out in this area. If the geology and geochemistry of this area are of interest, further induced polarization surveying may be executed to further define the zone of increased chargeability. Trenching or diamond drilling might then be warranted.

The magnetometer survey has allowed the interpretation of several linear features which may correspond to faults. Two perpendicular fault junctures have been interpreted, one near 30 N at 6 E and the other on L 0 at 6 E. Only the first of these areas has been covered by induced polarization surveying. Since a fault juncture may provide a control for ore deposition induced polarization surveying in the area of L 0 may be warranted.


Respectfully submitted,

SEIGEL ASSOCIATES LIMITED



Jon G. Baird, B.Sc., P.Eng.
Geophysicist

Vancouver, B.C.
October 28, 1969



Harold O. Seigel

President,
Harold O. Seigel & Assoc., Ltd.,
Downsview, Ontario

Annual General Meeting,
Toronto, March, 1965

Three Recent Irish Discovery Case Histories Using Pulse-Type Induced Polarization

Transactions, Volume LXVIII, 1965, pp. 343-348

ABSTRACT

In the intensive Irish exploration program which has followed the discovery of the Tynagh deposit (Northgate Exploration, Ltd.) in 1962, three base metal discoveries have been made to date. These include the lead-zinc-silver deposits at Silvermines (Consolidated Mogul Mines, Ltd.), which are now being readied for production, the copper-silver deposit at Gortdrum (Gortdrum Mines, Ltd.) and the lead-zinc deposits near Keel (Rio Tinto-Zinc Ltd.). Each of these discoveries is the result of a combined geological-geochemical-geophysical exploration sequence in which pulse-type induced polarization surveys defined the precise location and lateral extent of the near-surface metallic sulphide mineralization and guided the initial drilling program. Whereas the Silvermines mineralization is, in part, composed of massive sulphides, the other two deposits are characterized by generally less than 5 per cent conducting sulphides and constitute an excellent demonstration of the unique merits of the pulse-type induced polarization system.

Introduction

FOR the benefit of those who are unfamiliar with the induced polarization method in general or with the pulse-type method in particular, a few introductory remarks will be directed on the system employed in the present case histories. Those who wish a fuller treatment of the subject are directed to Seigel (1962),* which paper also includes an extensive list of references.

Induced polarization, in its broadest sense, means a separation of charge to form an effective dipolar (polarized) distribution of electrical charges throughout a medium under the action of an applied electric field. When current is caused to pass across the interface between an electrolyte and a metallic conducting body (Figure 1a) double layers of charge are built up at the interface, in the phenomenon known

*Seigel, H. O., "Induced Polarization and its Role in Mineral Exploration," C.I.M. *Bulletin*, Vol. 55, No. 600, pp. 242-249; *Transactions*, Vol. LXV, pp. 151-158; 1962.

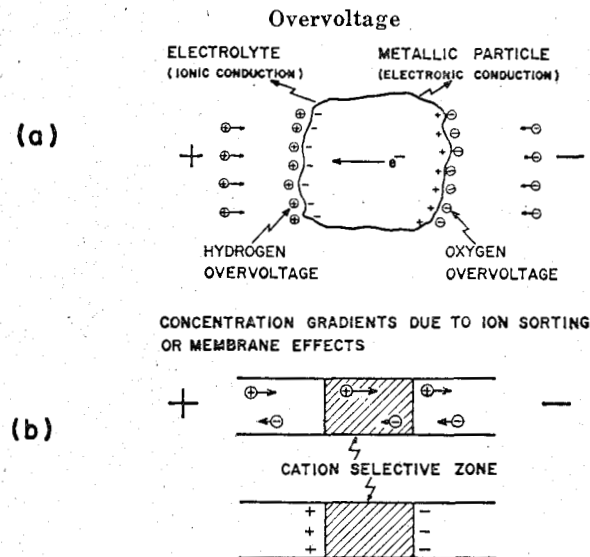


Figure 1.—Induced Polarization Agents.

to the electrochemists as "overvoltage." This is the phenomenon which can be utilized for the detection of the metallic conducting rock-forming minerals such as most sulphides, arsenides, a few oxides and, unfortunately, graphite. In addition, effective dipolar charge distributions occur to some extent in all rocks, due to ion-sorting or membrane effects in the fine capillaries in which the current is passing (Figure 1b). Induced polarization responses may therefore arise from metallic or non-metallic agencies. Fortunately, the latter generally fall within fairly low and narrow limits for almost all rock types, although there is still no reliable general criterion for differentiating overvoltage responses from graphite and metallic sulphides, or for distinguishing between the responses of one type of sulphide and another. Despite these limitations, the induced polarization method has amply demonstrated its value in mineral exploration since its initial development as a useful exploration tool in 1948. (Wait *et al.*, 1953).**

**"Overvoltage Research and Geophysical Applications," Pergamon Press, 1959, edited by J. R. Wait.

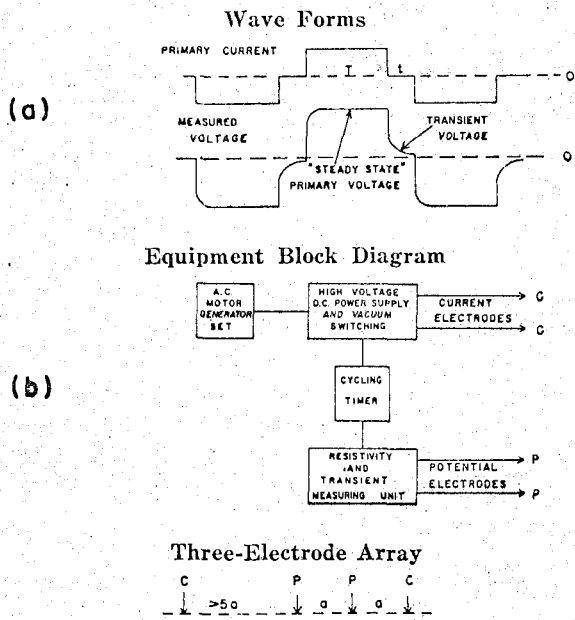


Figure 2.—The Pulse System.

Description of Method

For the present program, the pulse or time-domain system was employed. As shown on Figure 2a, the primary current wave form consists of square wave pulses of 1.5 seconds duration, separated by a 0.5-second gap and alternately reversed in direction. The polarization voltages established during the current-on time decay slowly during the current-off time. They are amplified, integrated over the current-off time and divided by the amplitude of the steady-state voltage measured during the current-on time. In this way, we determine the "chargeability;" i.e., the induced polarization property of the region under investigation. The units of chargeability are milliseconds. Normal (non-metallic) background chargeabilities in most rocks range from 1 millisecond to 5 milliseconds. A distribution of 1 per cent, by volume, of metallic conducting material of an average range of

particle size may be expected to increase the response level by about 3 milliseconds, which is readily visible.

The pulse system provides an absolute measurement of induced polarization; i.e., the significant measurement is made in the absence of the primary field. As such, it is inherently more sensitive than the frequency variation system, wherein two measurements are compared, both of which are made in the presence of the primary field. This is a critical consideration when mineralized bodies of low sulphide content, small size or great depth are being sought.

Figure 2b shows a block diagram of the apparatus employed and the electrode array used. The spacing "a" of the three-electrode array determines the effective depth of penetration of the survey and is selected to give adequate penetration to the depth desired. By varying the electrode spacing over an anomalous area and comparing the responses on the various spacings, one may obtain an estimate of the depth of burial of the source and its dip, etc.

A photograph of the type of apparatus employed on these surveys is shown in Figure 3. This is known as Seigel Mk V equipment and consists of the following major components: (a) a 1,200-watt A.C. motor-generator set, (b) a power control unit capable of supplying up to 1000 volts and 2 amperes D.C. output current and (c) a measuring unit. All of these items are packboard-mounted for maximum portability.

Figure 4 shows a typical instrumental set-up in Ireland. In the normal operating procedure, the electronic chassis are set up in a tent and cables are fed out to the line being surveyed. As the line crew is prepared, both mentally and by apparel, to work under all types of weather conditions, the survey is not stopped by rain, etc. This is important in Ireland, where, traditionally, there are no more than 60 rain-free days a year.

For the primary survey coverage on most properties, an electrode spacing of 200 to 300 ft. was generally employed, with a station interval of 200 ft. and a line separation of 300 to 500 ft. On anomalous areas located by the primary coverage, more closely spaced stations and lines are employed, as well as additional spacings to supply the detail necessary for subsequent drilling, etc.

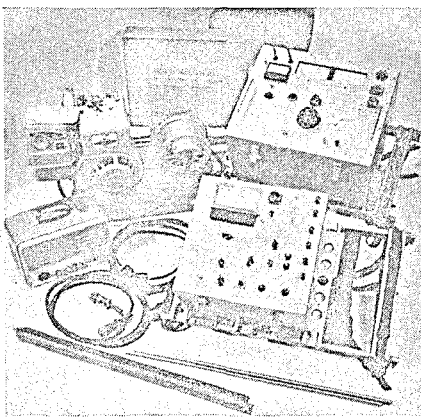


Figure 3.—(above)—The Seigel Mk V Induced Polarization Unit.

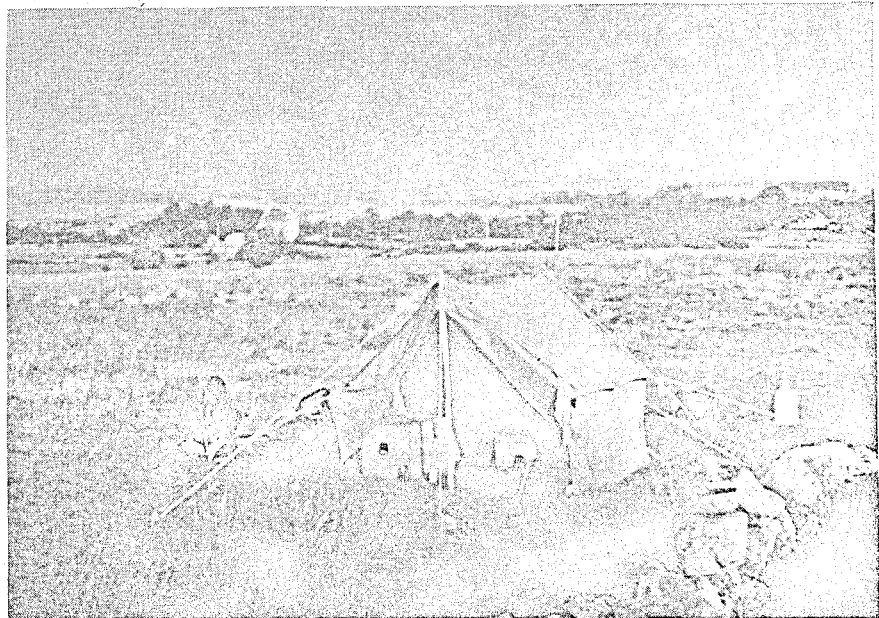


Figure 4.—(right)—Typical Field Operational Base in Ireland.

Case Histories

In presenting the three case histories that follow, it must be made perfectly clear at the outset that these mineral discoveries are the product of teamwork, involving geological, geochemical and geophysical phases. It is on the basis of the first two phases that the areas for geophysical investigation have been selected. As the writer and his organization have been concerned only with the geophysical phase, this paper will, naturally, appear to emphasize it. The contribution of others to the broader exploration program must not be minimized, however.

In January, 1962, a large lead-zinc-silver deposit of a very unusual type was discovered near Tynagh, Co. Galway, in the Republic of Ireland. This deposit includes both a supergene enriched, partly oxidized upper zone and a sulphide primary zone and lies in dolomitic reef limestones of Carboniferous age near a fault contact with Devonian sandstones. Similar rock types and contacts occur in many parts of Ireland, so that an extensive program of exploration was initiated by a number of mining companies, starting in the summer of 1962. Although the pace has slowed up somewhat from the hectic days of 1962 and early 1963, this exploration program continues to the present time.

The usual exploration sequence, although not followed in detail by all companies, is as follows:

1

A selection of areas is made, based on the good government geological maps available. As nearly as possible, rock types and structures similar to those of the Tynagh deposit are sought. Those areas with known mineral showings are given high priority, of course.

2

The stream sediments in the drainage pattern are sampled and analyzed for significant amounts of copper, lead and zinc. Soil samples may also be taken, often on a regular grid basis, and analyzed. In this fashion, areas of abnormal metal content may be broadly defined. In detail, such geochemical sampling has often been hampered by man-made contamination and confused by soil transport by glacial, fluvial or human agencies.

3

Geophysical surveys, primarily the induced polarization type, are then conducted to map the subsurface distribution of sulphide mineralization and to provide guidance for a drilling program thereon.

This exploration program has already been remarkably successful, resulting, to date, in a new lead-zinc-silver mine-to-be at Silvermines, Co. Tipperary, for Consolidated Mogul Mines, Ltd., the probable copper-silver mine-to-be at Gortdrum, Cos. Tipperary and Limerick, for Gortdrum Mines, Ltd., and the interesting lead-zinc prospect at Keel, Co. Longford, for the Rio Tinto-Zinc group (Riofinex Ltd.). Figure 5 shows the location of the various recent mineral discoveries in Ireland. Despite a remarkable similarity in geological setting, the deposits are widely separated geographically, over a length of 80 miles, and no two are located on what can be called the same structure. This bodes well for the possibility of further discoveries being made in Ireland.

Each of the three case histories will be discussed below.

Silvermines Deposit

As the very name of the area implies, the Silvermines region had been known, for many centuries, as a locality mineralized with lead, zinc and silver. Metal production had taken place at several periods in the past, although at the time of the present investigations the mines were dormant. The very prominent Silvermines fault, striking about N 70°E, was known to be the significant control in the region, with the old mines and prospect pits scattered along its length over a distance of about 2 miles. Due to the past mining activity and transport by both drainage and man, a very extensive area gave rise to extremely high geochemical indications in lead and zinc. The induced polarization survey executed in late 1962 and early 1963 covered much of the concession area on 800-ft. sections and the geologically interesting portion thereof on 400-ft. sections. The three-electrode array, with 200-ft. electrode spacing, was employed on all lines, and spacings of 100 ft. and 400 ft. were also employed on the 400-ft. detail lines. In all, approximately 5 miles of the strike length of the Silvermines fault were covered by the present survey, 2½ miles in detail. At least ten distinct zones of abnormally high polarization were indicated, of which about half lay in the Silvermines mineralized belt and its extensions to the west and east.

One of these zones, designated the Garryard, has responded favourably to the subsequent drilling, resulting in the discovery of a mineable orebody.

To date, the announced proven tonnage figures include 12 million tons averaging approximately 8 per cent zinc, 3 per cent lead and 1 ounce of silver in the Garryard zone. This zone lies to the west of the zone from which the previous production had taken place.

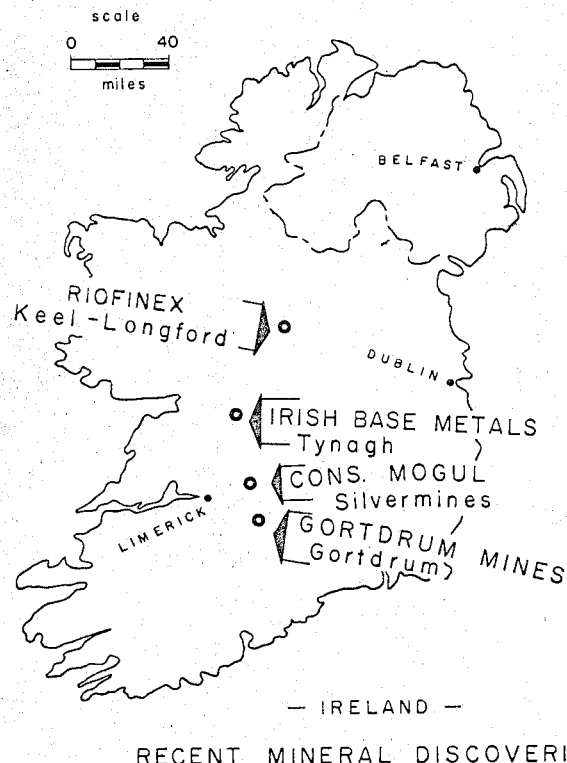


Figure 5.—Location Plan of Recent Mineral Discoveries in Ireland.

Figure 6 shows a typical discovery profile across the main ore zone, on the section 38,400E. The 200-ft. electrode spacing results, both chargeability and resistivity, are shown in profile form. The geologic section, as deduced from nine drill holes, is shown below the geophysical profiles. In a fashion almost identical

to that of the Tynagh deposit, the Silvermines ore-body is located in gently north-dipping dolomitic limestones adjacent to a fault contact with the Devonian "Old Red" sandstone. The mineralization here is composed of both massive and disseminated sulphides, with the former composed of a high percentage of pyrite. The mineralization is essentially conformable, in two distinct horizons, and is therefore flatly dipping except in the vicinity of the fault, where the dips are much steeper, perhaps due to "drag folding" on the fault.

Because of the high pyritic content of the mineralization near the fault, along which it comes closest to the ground surface, we see both a marked increase in chargeability and a sharp decrease in resistivity in that vicinity. From a normal background of 2-4 milliseconds, the chargeability curve rises to a peak response of 20 milliseconds over the sub-outcrop of the body on this section. The subsidiary peak of about 12 milliseconds near 11N is believed to be due to disseminated pyrite in the chert horizon.

Figure 7 shows the multiple spacing chargeability results on the same section, using electrode spacing of 100, 200 and 400 ft. and the three-electrode array. On comparing the results with the various spacings, two items of interest may be noted; firstly, the progressive increase in peak amplitude with spacing, testifying to the increase of mineralization with depth, even down to a depth of 300 ft., and, secondly, the presence of buried material of high polarization at depth beneath section 10N to 18N on this line. The latter is undoubtedly due to the down-dip extension of the upper mineralized horizon, which is present at depths of 300 to 400 ft. over this region.

The induced polarization results on the Silvermines deposit were quite definitive and have provided good guidance for the exploratory drilling. It is true, however, that the massive sulphide portions of this deposit would be amenable to detection by the more conventional electrical methods, such as electromagnetic induction or resistivity. As such, it is not as good a test of the capabilities of the induced polarization method as are the two case histories which follow.

Gortdrum Deposit

The Gortdrum area, near the mutual border of Cos. Limerick and Tipperary, was originally selected to cover the eastern extension of the former Oola Mines lead-zinc deposit, some 3 miles to the west. Regional geochemical sampling of the stream sediments in this area, followed by soil traverses, indicated a moderately strong copper soil anomaly. Induced polarization surveys were carried out in May, 1963, and January, 1964, leading to the localization of the sulphide mineralization associated with the geochemical anomaly. As there was a 300-ft. lateral displacement between the centers of the geophysical and geochemical indications and the surface topography is very gentle, it was initially queried as to whether the two indications

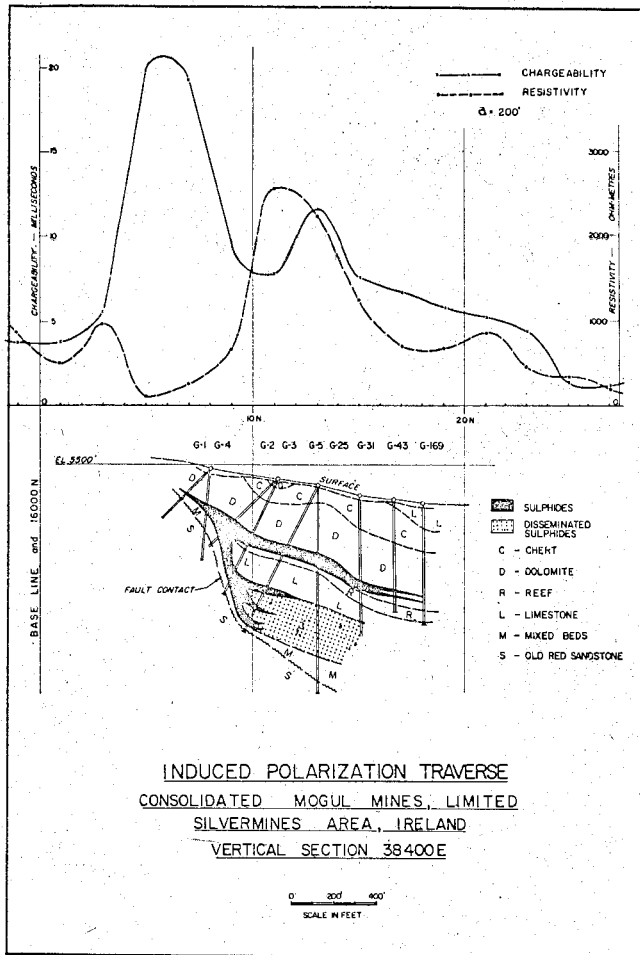


Figure 6.—Typical Discovery Traverse, Silvermines Deposit.

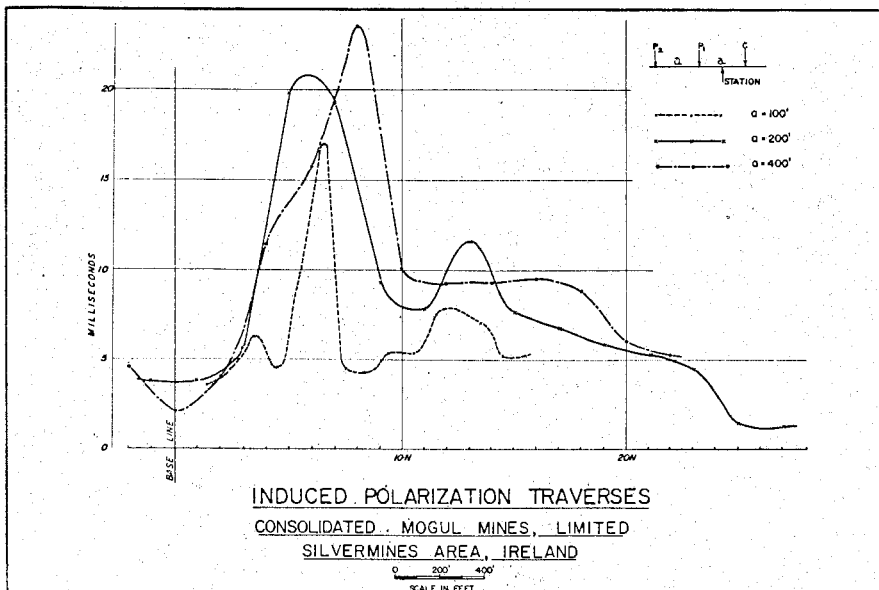


Figure 7.—Multiple Spacing Results, Silvermines Deposit.

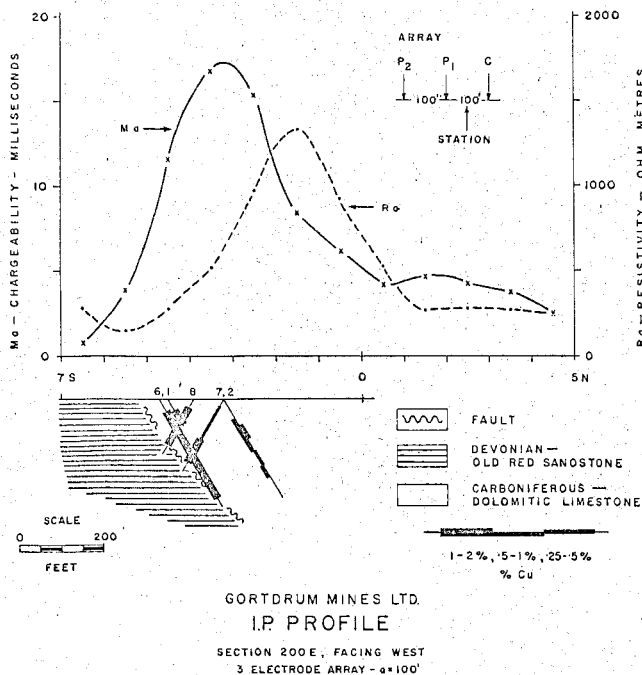


Figure 8.—Typical Discovery Traverse, Gortdrum Deposit.

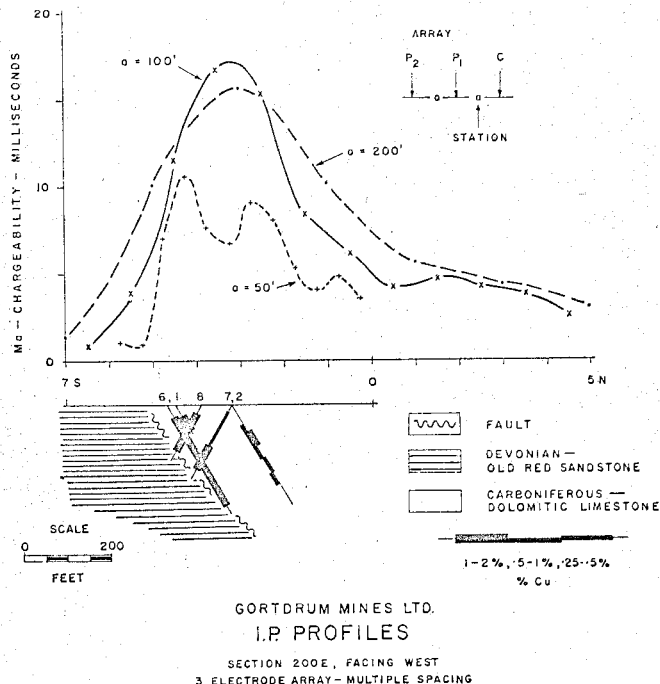


Figure 9.—Multiple Spacing Results, Gortdrum Deposit.

were related. The subsequent drilling has fully confirmed the geophysical predictions.

On the initial two geophysical programs, the three-electrode array with 100-ft. spacing was employed, as a relatively shallow source of the geochemical anomaly was expected. The survey lines were at 200-ft. intervals. Figure 8 presents a typical discovery traverse, showing both the chargeability and resistivity profiles as well as the corresponding geologic section. A peak chargeability of about 17 milliseconds is observed, rising from the normal background of 2-4 milliseconds. There is no resistivity expression of the mineralized zone, lying as it does on the flank of a high-resistivity area.

Figure 9 shows the chargeability profiles for electrode spacings of 50, 100 and 200 ft. Points of special interest deduced from these profiles include the following:

1.—The extremely sharp cut-off of the high chargeability levels on the south side of the area and the gradual drop-off in level on the north side. This was inconsistent with the thought of a bedded-type deposit conformable with the limestones, which are known to dip flatly to the south. A fault or other contact was postulated, dipping steeply, probably to the north. The initial drill holes on the section (Nos. 1, 2 and 6) were drilled to the north on the original geologic-dip premise, but the later holes (e.g., Nos. 7 and 8) have all been drilled to the south.

2.—The high-polarization material does not quite outcrop, but still comes within about 25 ft. of the ground surface across a width of about 200 ft., including two or more lenses. This material extends to at least 200 ft. in depth.

The actual drilling results confirm the presence of a zone of finely disseminated chalcocite and bornite, with very minor chalcopyrite, in dolomitic limestones. The mineralization is somewhat erratically distributed but, in general, increases as one approaches a north-

dipping fault, which brings the limestones into contact with the Devonian Old Red sandstones. This fault has been found to strike about N 70°E. Geologically, therefore, this environment is almost identical to that of the Tynagh and Silvermines deposits. The mineralization in the Gortdrum area is quite different, however, both in type and amount. The average grade of the deposit is less than 2 per cent copper, with about 0.65 ounce of silver for each 1 per cent copper (although considerable potential open-pit tonnage may exist), so that the average sulphide content, by volume, is 3 per cent or less. The high chargeability responses observed over this deposit are a remarkable tribute to the sensitivity of the pulse-type induced polarization method, particularly when dealing with truly disseminated-type sulphide mineralization with a small average particle size.

As development drilling is still in progress on this deposit, no over-all grade or tonnage figures have as yet been released.

Keel Deposit

The deposits near Keel and Longford, Co. Longford, occur on a known limestone-sandstone contact, which is, no doubt, one of the reasons why exploration interest was attracted thereto. Soil sampling traverses by Riofinex Ltd., an exploration subsidiary of Rio Tinto-Zinc Corporation, Ltd., established the presence of anomalous lead and zinc concentrations. A horizontal-loop electromagnetic survey was initially executed in another attempt to determine the source of the geochemical indications, but with negative results. This was followed by induced polarization surveys in November and December, 1962. The three-electrode array, with an electrode spacing of 200 ft., was employed on the reconnaissance survey. Anomalous chargeability zones were indicated and exploratory drilling commenced shortly thereafter. Although no publication of results has been made, they are of some potential interest, as drilling has continued, at intervals, to the present time.

Figure 10 shows a typical section across the prospect, presenting the geophysical and geochemical results in profile form, as well as the geological section interpreted from three holes. The relationship between the mineralized horizon, the geophysical peak and the geochemical peaks is a matter of considerable interest. The sub-outcrop of the mineralized horizon and the geophysical peak are in good agreement (see also Figure 11). The lead peak is displaced about 400 - 500 ft. down slope to the south. The zinc peak

is displaced still another 300 ft. to the south. The actual topographic slope is only 1-2 degrees to the south, so that this displacement is difficult to account for on the basis of soil creep. There is only a minor resistivity depression associated with the mineralization, indicating why the electromagnetic survey failed to give any positive response to it.

The mineralization itself is primarily sphalerite, with some galena and, on the average, less than 5 per cent pyrite. It is found to lie primarily in a dolomite horizon adjacent to a contact with sandstone. In this case, the contact may be largely a depositional one and not due to a fault. Mineralization occurs to a minor extent in the sandstone as well.

Figure 11 shows the chargeability results of the multiple spacing profiles on this section. Spacings of 50, 100 and 200 ft. were used. The progressive step-out of the peak values to the south with the increase in electrode spacing indicates the effect of the relatively flat dip to the south of the mineralization. The sub-outcrop of the mineralization is near station 26N, at a depth of less than 25 ft. As hole K3B, only 100 ft. away, intersected almost 60 ft. of overburden one must conclude that the bedrock surface is rather irregular in this area. The peak chargeability of 24 milliseconds would suggest a metallic conductor content of the order of 6 to 12 per cent, by volume, in this area.

It is the writer's hope that he has not given the impression that every induced polarization anomaly in Ireland inevitably defines an orebody, or that every exploration venture there is crowned with success. Aside from effects due to the many man-made conductors, such as grounded power lines, rabbit fences and buried pipe lines, there are certain carbonaceous sediments, in particular the Calp limestone, which overlies the ore-bearing dolomitic limestone in some places, which yield high polarization responses. Fortunately, the areal distribution of the latter is usually broad enough to suggest a formational origin. Also, fortunately, the Calp is, stratigraphically, sufficiently well separated from the ore-bearing limestones so that the effect from these two horizons may be resolved. With the geological and geochemical information available, one can usually determine whether a particular induced polarization indication warrants investigation by drilling. Despite its limitations, the pulse-type induced polarization method has well demonstrated its application to a broad range of base metal exploration problems in Ireland.

Acknowledgments

The writer wishes to express his thanks to Consolidated Mogul Mines, Ltd., and Dr. W. W. Weber, to Gortdrum Mines, Ltd. and Dr. D. R. Derry, and to Rio Tinto-Zinc Corp. Ltd. and Mr. Jocelyn Pereira, for their kind permission to present the geophysical and other details relating to their respective mineral discoveries. In addition, the writer wishes to acknowledge the able assistance of the staff of Canadian Aero Mineral Surveys, Ltd., with which our company, Harold O. Seigel & Associates Ltd., has acted on a co-operative basis in Ireland.

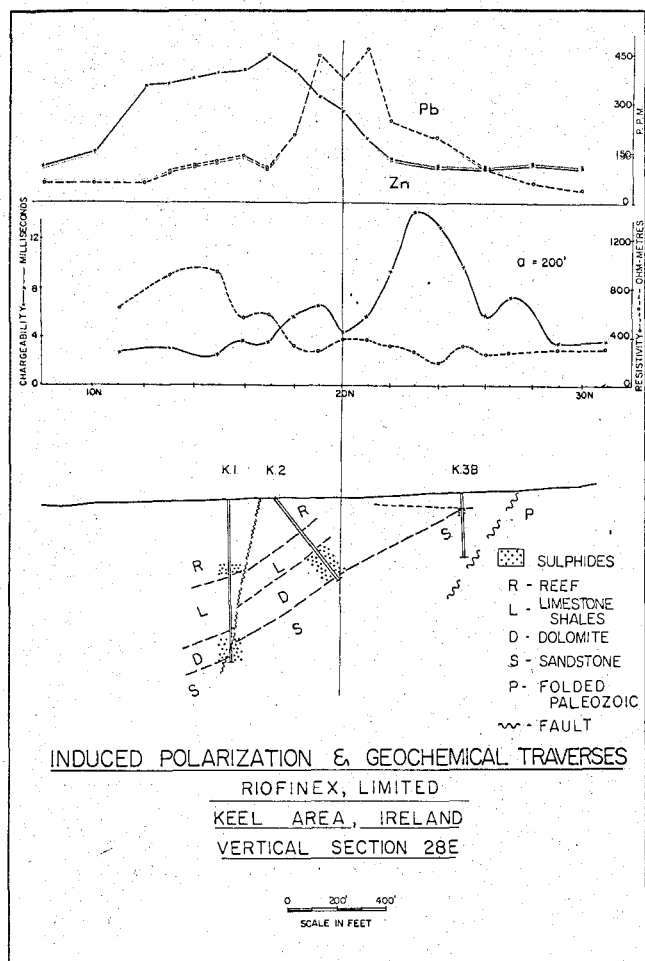


Figure 10.—Typical Discovery Traverse, Keel Deposit.

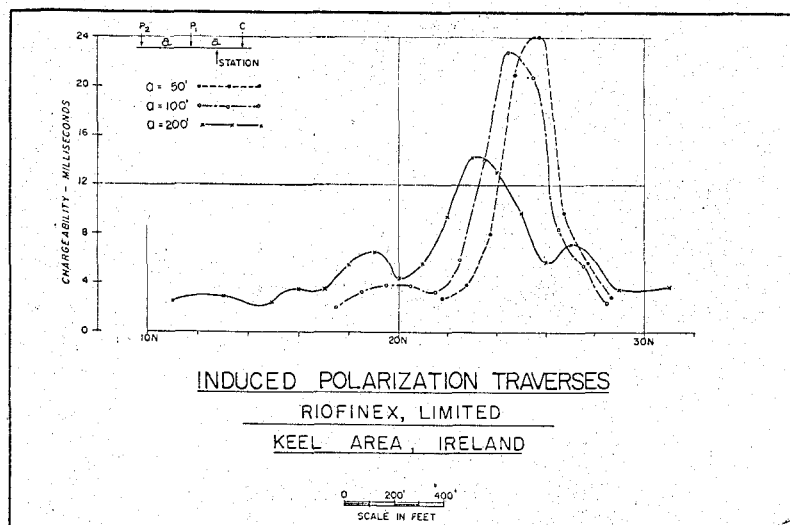


Figure 11.—Multiple Spacing Results, Keel Deposit.

DOMINION OF CANADA:
PROVINCE OF BRITISH COLUMBIA.
To WIT:

In the Matter of a geophysical survey on behalf of Dolmage Campbell Associates.

I, J. L. McCrea for Seigel Associates Limited


of 750 - 890 West Pender Street, Vancouver

in the Province of British Columbia, do solemnly declare that induced polarization and magnetometer surveys have been executed on some DAWN claims, Omineca River area, British Columbia between September 1 to September 13, 1969. The following expenses were incurred:

(1) Wages:			
Bob Mischler	13 days @ \$35.00/day	\$455.00	
M. Lengweiler	13 days @ \$27.50/day	357.50	
R. Brocard	13 days @ \$27.50/day	357.50	
F. Butikofer	13 days @ \$27.50/day	357.50	
P. Calame	13 days @ \$27.50/day	<u>357.50</u>	\$1,885.00
(2) Transportation & shipping to the job.			248.25
(3) Food & living expenses.			275.79
(4) Use of geophysical equipment			
IP equipment 13 days @ \$50.00/day		\$650.00	
Magnetometer 13 days @ \$10.00/day		<u>130.00</u>	780.00
(5) Paid to Seigel Associates Limited to cover geophysicist's supervision, calculating, plotting and fairdrawing data and preparation of final reports.			<u>2,015.00</u>
			\$5,204.04

And I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath and by virtue of the "Canada Evidence Act."

Declared before me at the City
of Vancouver, in the
Province of British Columbia this 14th
day of August, 1970, A.D.

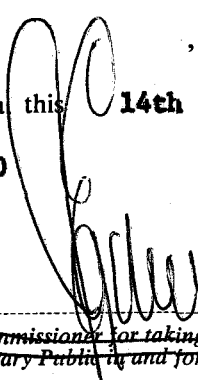

Gold Commissioner

A Commissioner for taking Affidavits within British Columbia or
A Notary Public in and for the Province of British Columbia.

SEIGEL ASSOCIATES LIMITED
 GEOPHYSICAL CONSULTANTS & CONTRACTORS
 A DIVISION OF SCINTREX LIMITED

October 31, 1969

Invoice No. BC 91033

Dolmage, Campbell & Associates
 1000 - 1055 W. Hastings St.
 Vancouver, B.C.

UMEGREN - Omineca
Geophysical Surveys
R.S.D.

Attention: Mr. R. S. Adamson

FOR PROFESSIONAL SERVICES RENDERED

To execute induced polarization and magnetometer surveys on your behalf in the Omineca River area, B.C. as per contract dated August 19, 1969.

Magnetometer surveying minimum 10 line miles @ \$50/mile = \$ 500.00

Induced polarization services
 6 days mobilization, demobilization and setup @ \$137.50/day 825.00

7 field crew days survey @ \$275/day 1,925.00
 13 days possible for period

Field Assistants

M. Langweiler	13 days	
R. Brocard	13 days	
F. Buetikofer	13 days	
P. Calame	<u>13</u> days	
	52 days @ \$27.50/day	1,430.00

Portion of mobilization to Fort St. James - shared with another client 200.00

Shipping	\$ 3.20
Travel	45.05
Food	179.59
Lodging	<u>96.20</u>
	324.04


324.04

\$ 5,204.04

Less down payment 2,000.00

\$ 3,204.04

PAID
 Date *12/12/69*
 Ch. No. *635*



ALPINE HELICOPTERS LTD

P. O. BOX 208, KELOWNA, BRITISH COLUMBIA

BOLMAGE, CAMPBELL & ASSOCIATES,
823 - 409 GRANVILLE ST.,
VANCOUVER, B.C.

Invoice No: K 1526

Date: SEPTEMBER 29, 1969

Contract No: K500

Work Order No:

TO: CHARGE FOR HIRE OF BELL 47G3B HELICOPTER
IN THE MACKENZIE AREA

~~CF-NOB~~ SEPT. 14/69 FLIGHT REPORT NO. 6733

4:25 hrs.

4 hrs. .25 mins. @ \$125.00 per hr.



\$552.08

TOTAL AMOUNT DUE THIS INVOICE:

\$552.08

PAID
Date... 1/10/69
Chk. No... 530

ALPINE HELICOPTERS LTD
VANCOUVER, B.C.
SEP 30 1969

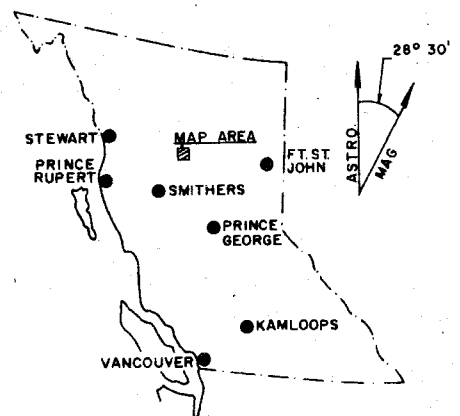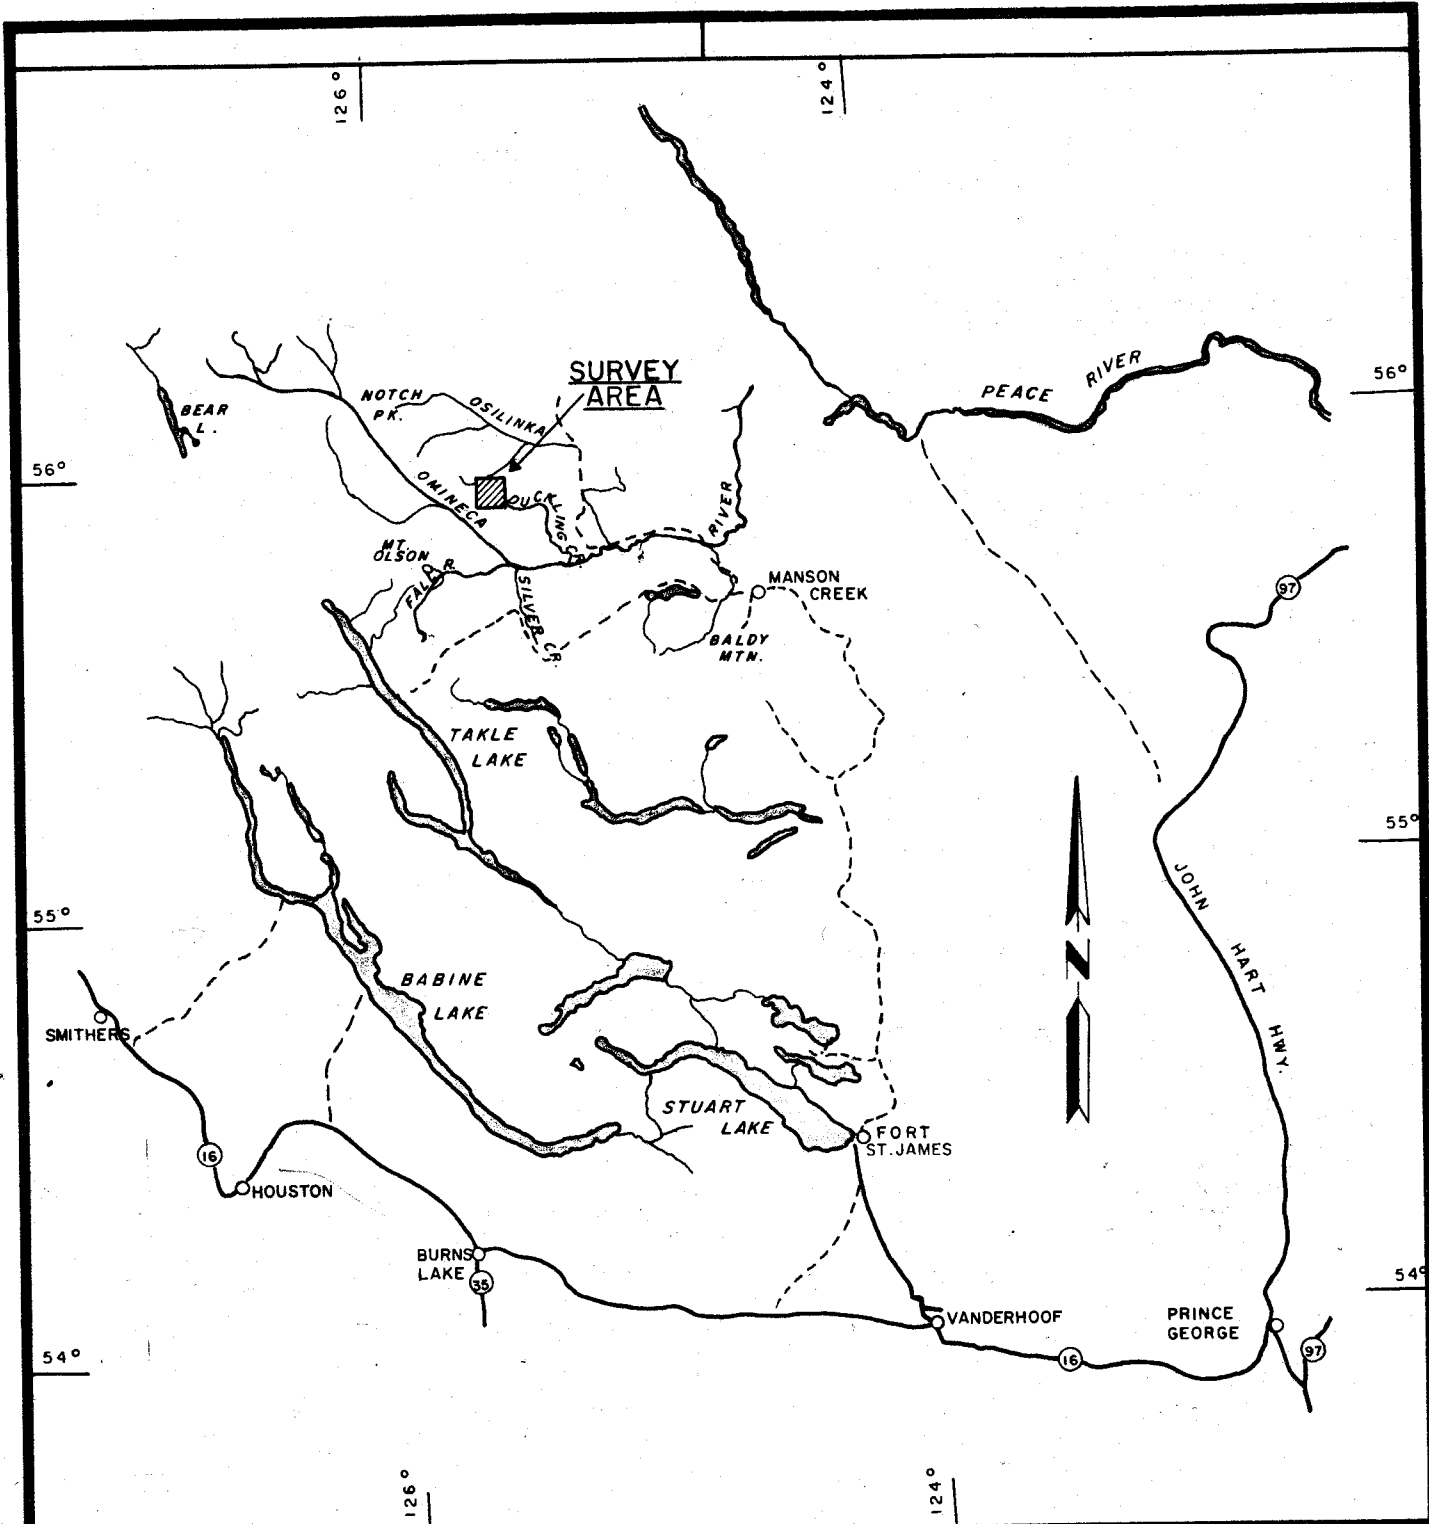


DOLMAGE CAMPBELL ASSOCIATES

LOCATION MAP

J. Baird

OMINECA RIVER AREA, BRITISH COLUMBIA




SURVEY BY
SEIGEL ASSOCIATES LIMITED
SEPTEMBER 1969

PLATE I

BRITISH COLUMBIA

10 W 8 W 6 W 4 W 2 W 0 2 E 4 E 6 E 8 E 10 E 12 E 14 E 16 E 18 E 20 E 22 E 24 E 26 E 28 E 30 E 32 E 34 E 36 E 38 E 40 E 42 E 44 E 46 E

BASE LINE

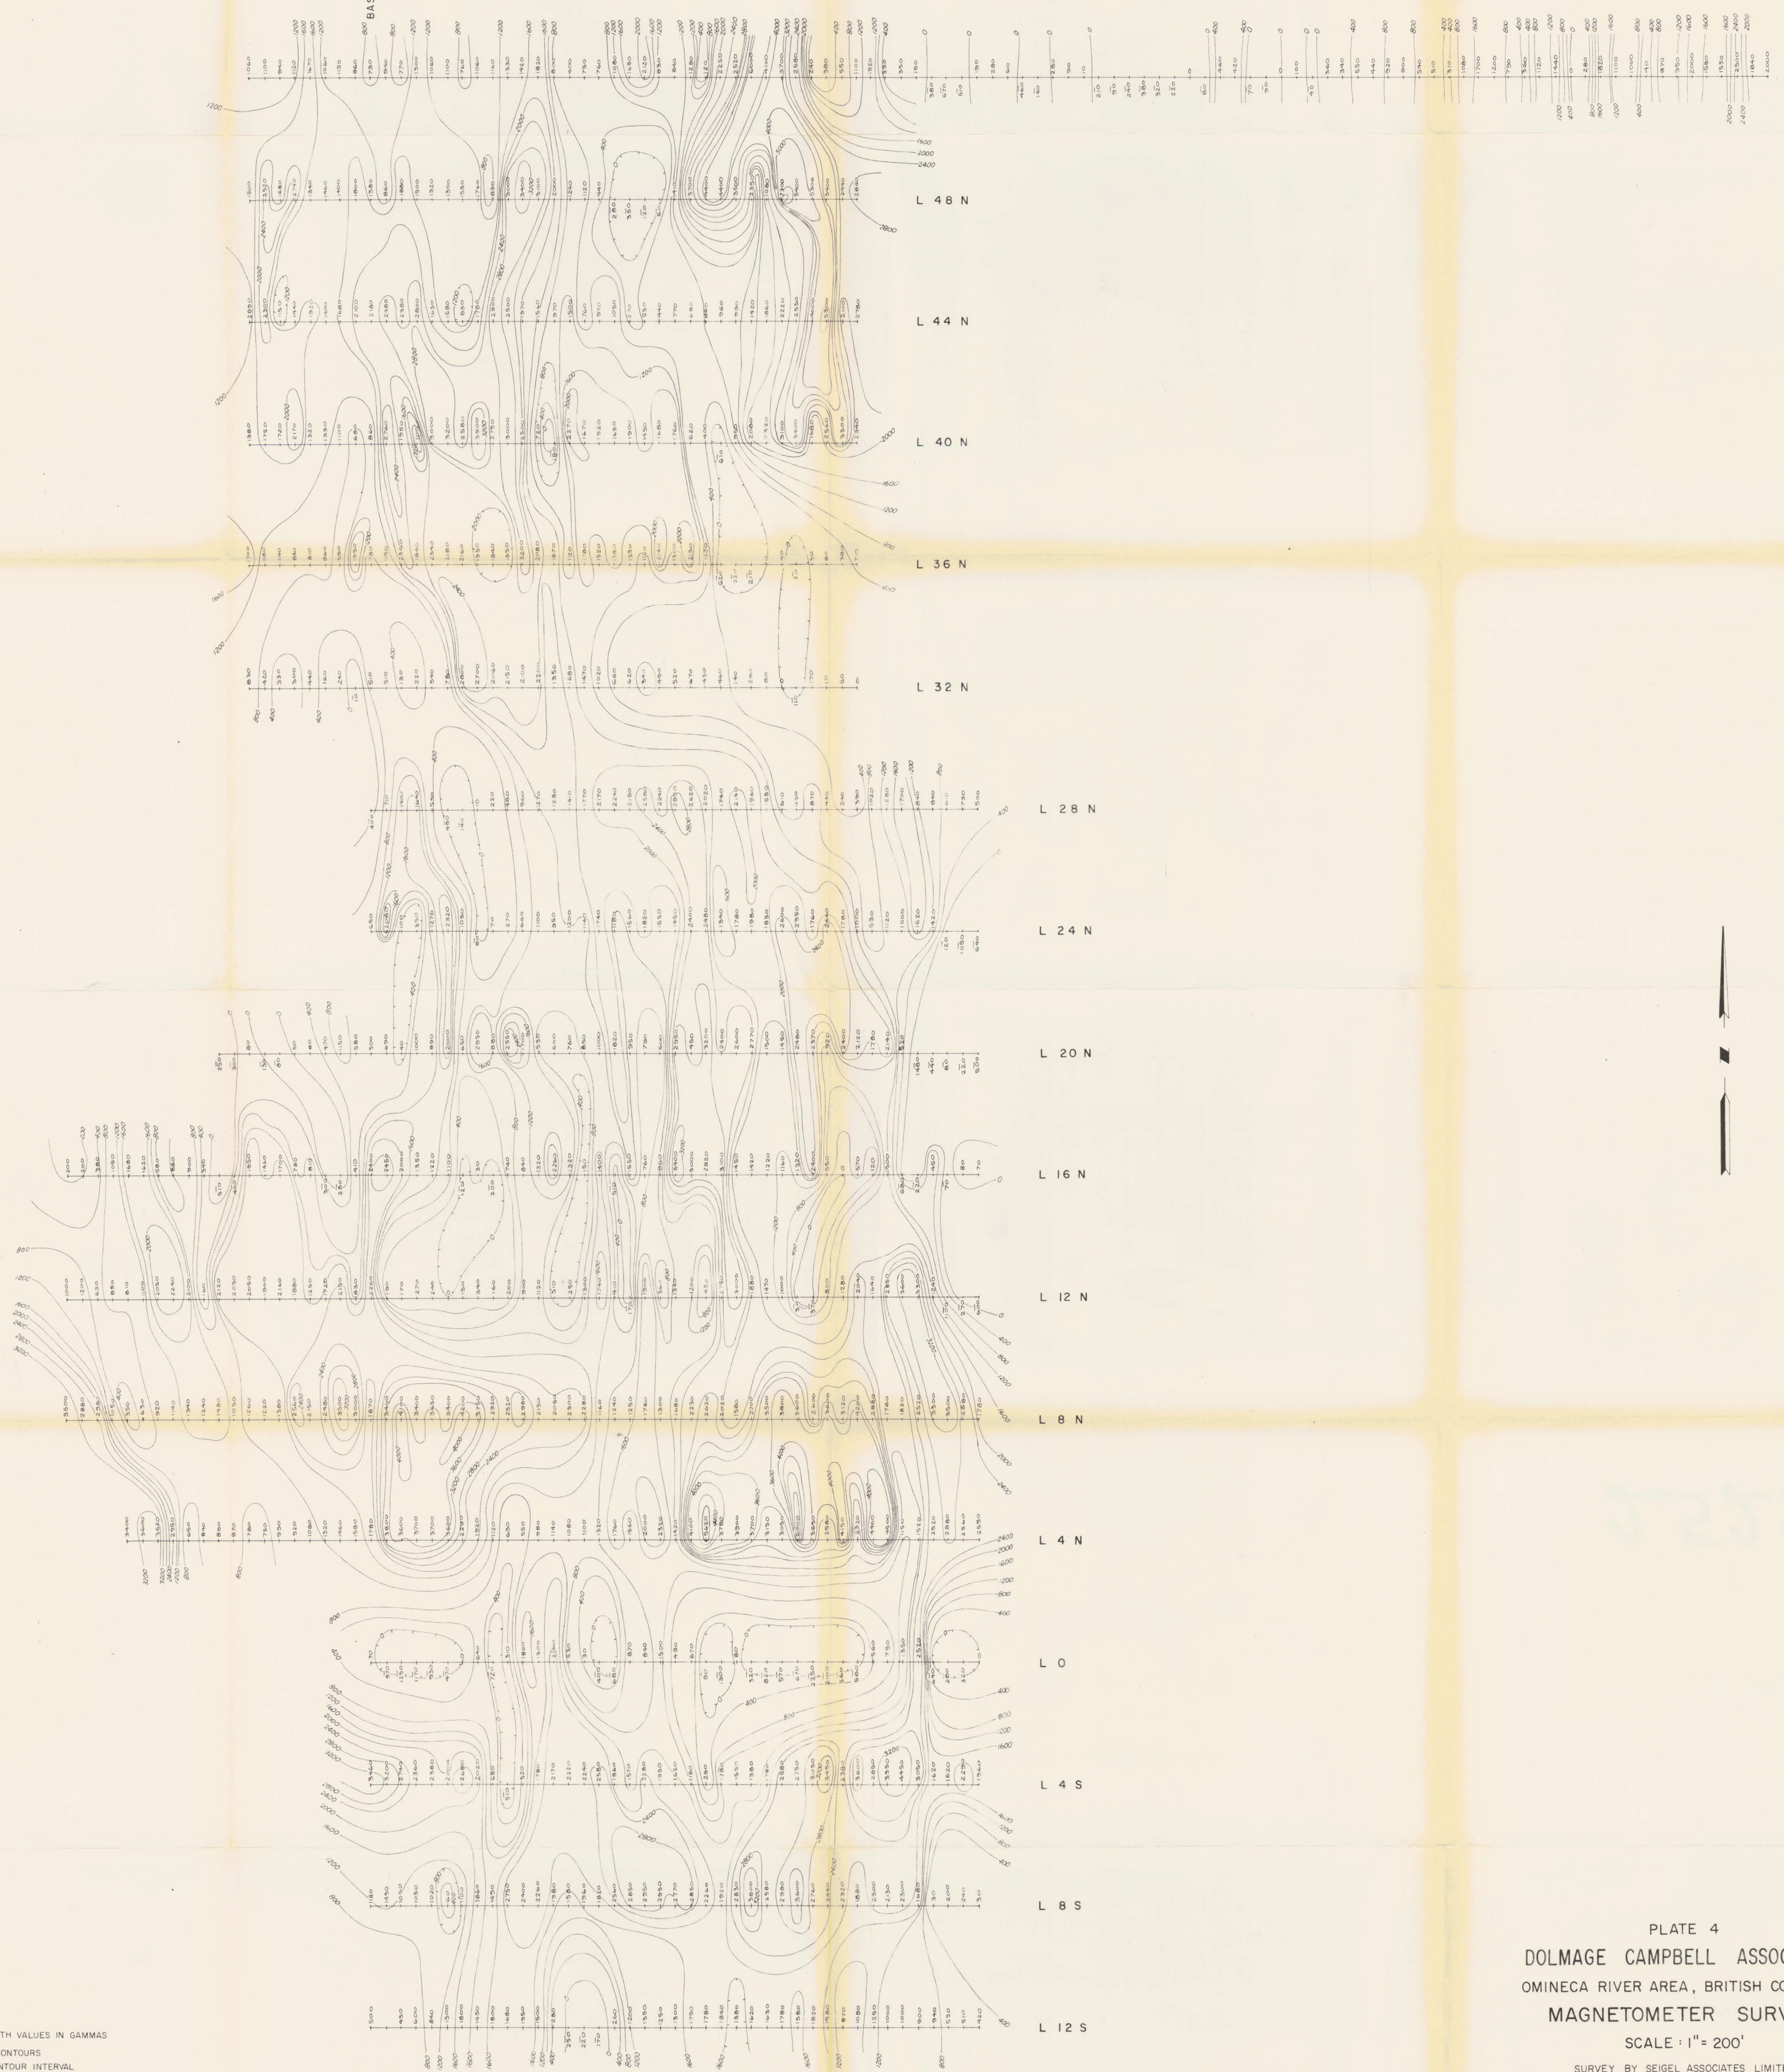

LEGEND

— LINE TRACE WITH VALUES IN GAMMAS

— ISOMAGNETIC CONTOURS

— 400 GAMMA CONTOUR INTERVAL

NOTE: SHARPE MF-1 MAGNETOMETER DATA

Department of
Mines and Petroleum Resources
ASSESSMENT REPORT
NO. 2522 MAP #4

TO ACCOMPANY A GEOPHYSICAL REPORT
BY J.G. BAIRD DATED OCTOBER 28, 1969

PLATE 4
DOLMAGE CAMPBELL ASSOCIATES
OMINECA RIVER AREA, BRITISH COLUMBIA
MAGNETOMETER SURVEY
SCALE: 1" = 200'
SURVEY BY SEIGEL ASSOCIATES LIMITED
SEPTEMBER, 1969

2522

J.G. Baird

10 W 8 W 6 W 4 W 2 W 0+00 2 E 4 E 6 E 8 E 10 E 12 E 14 E 16 E 18 E 20 E 22 E 24 E 26 E 28 E 30 E 32 E 34 E 36 E 38 E 40 E 42 E 44 E 46 E 48 E 50 E 52 E 54 E 56 E 58 E 60 E 62 E 64 E

BASE LINE

L64 N

40

L52 N

42

L48 N

L44 N

44

L40 N

39

46

L36 N

41

L32 N

43

48

L28 N

28

45

L24 N

26

47

L20 N

27

24

L16 N

25

22

LEGEND

CHARGEABILITY SCALE : 1" = 10 MILLISECONDS

ELECTRODE SPACING :
o = 400'
o = 200'
o = 100'
o = 50'

NOTES
SEIGEL MK VI INDUCED POLARIZATION DATA
THREE ELECTRODE ARRAY.

Department of
Mines and Petroleum Resources
ASSESSMENT REPORT
NO. 2522 MAP #2

TO ACCOMPANY A GEOPHYSICAL REPORT
BY J.S. BAIRD DATED OCTOBER 28, 1969

PLATE 2

DOLMAGE CAMPBELL ASSOCIATES
OMINECA RIVER AREA, BRITISH COLUMBIA

INDUCED POLARIZATION SURVEY
CHARGEABILITY PROFILES

SCALE: 1" = 200'

SURVEY BY SEIGEL ASSOCIATES LIMITED
SEPTEMBER, 1969

2522

Baird

10 W 8 W 6 W 4 W 2 W 0+00 2 E 4 E 6 E 8 E 10 E 12 E 14 E 16 E 18 E 20 E 22 E 24 E 26 E 28 E 30 E 32 E 34 E 36 E 38 E 40 E 42 E 44 E 46 E 48 E 50 E 52 E 54 E 56 E 58 E 60 E 62 E 64 E

BASE LINE

L 64 N

L 52 N

L 48 N

L 44 N

L 40 N

L 36 N


L 32 N

L 28 N

L 24 N

L 20 N

L 16 N

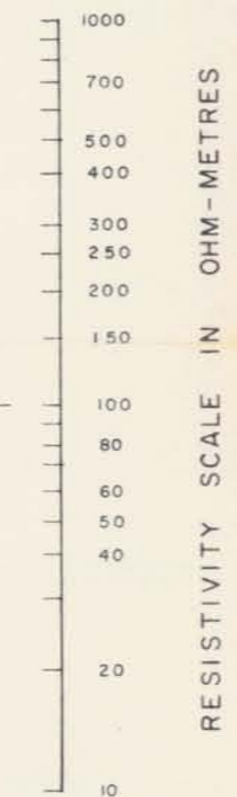

LEGEND

RESISTIVITY SCALE: 2" = 1 LOGARITHMIC CYCLE WITH LINE
 TRACE TAKEN AS 1000 OHM-METRES
 ELECTRODE SPACING:
 400' - - - - -
 200' - - - - -
 100' - - - - -
 50' - - - - -

NOTES
 THREE ELECTRODE ARRAY

Department of
 Mines and Petroleum Resources
 ASSESSMENT REPORT
 NO. 2522 MAP #3

TO ACCOMPANY A GEOPHYSICAL REPORT
 BY J. G. BAIRD DATED OCTOBER 28, 1969

5255


PLATE 3
 DOLMAGE CAMPBELL ASSOCIATES
 OMINECA RIVER AREA, BRITISH COLUMBIA
 INDUCED POLARIZATION SURVEY
 RESISTIVITY PROFILES
 SCALE: 1" = 200'

SURVEY BY SEIGEL ASSOCIATES LIMITED
 SEPTEMBER, 1969




2522

J. Baird

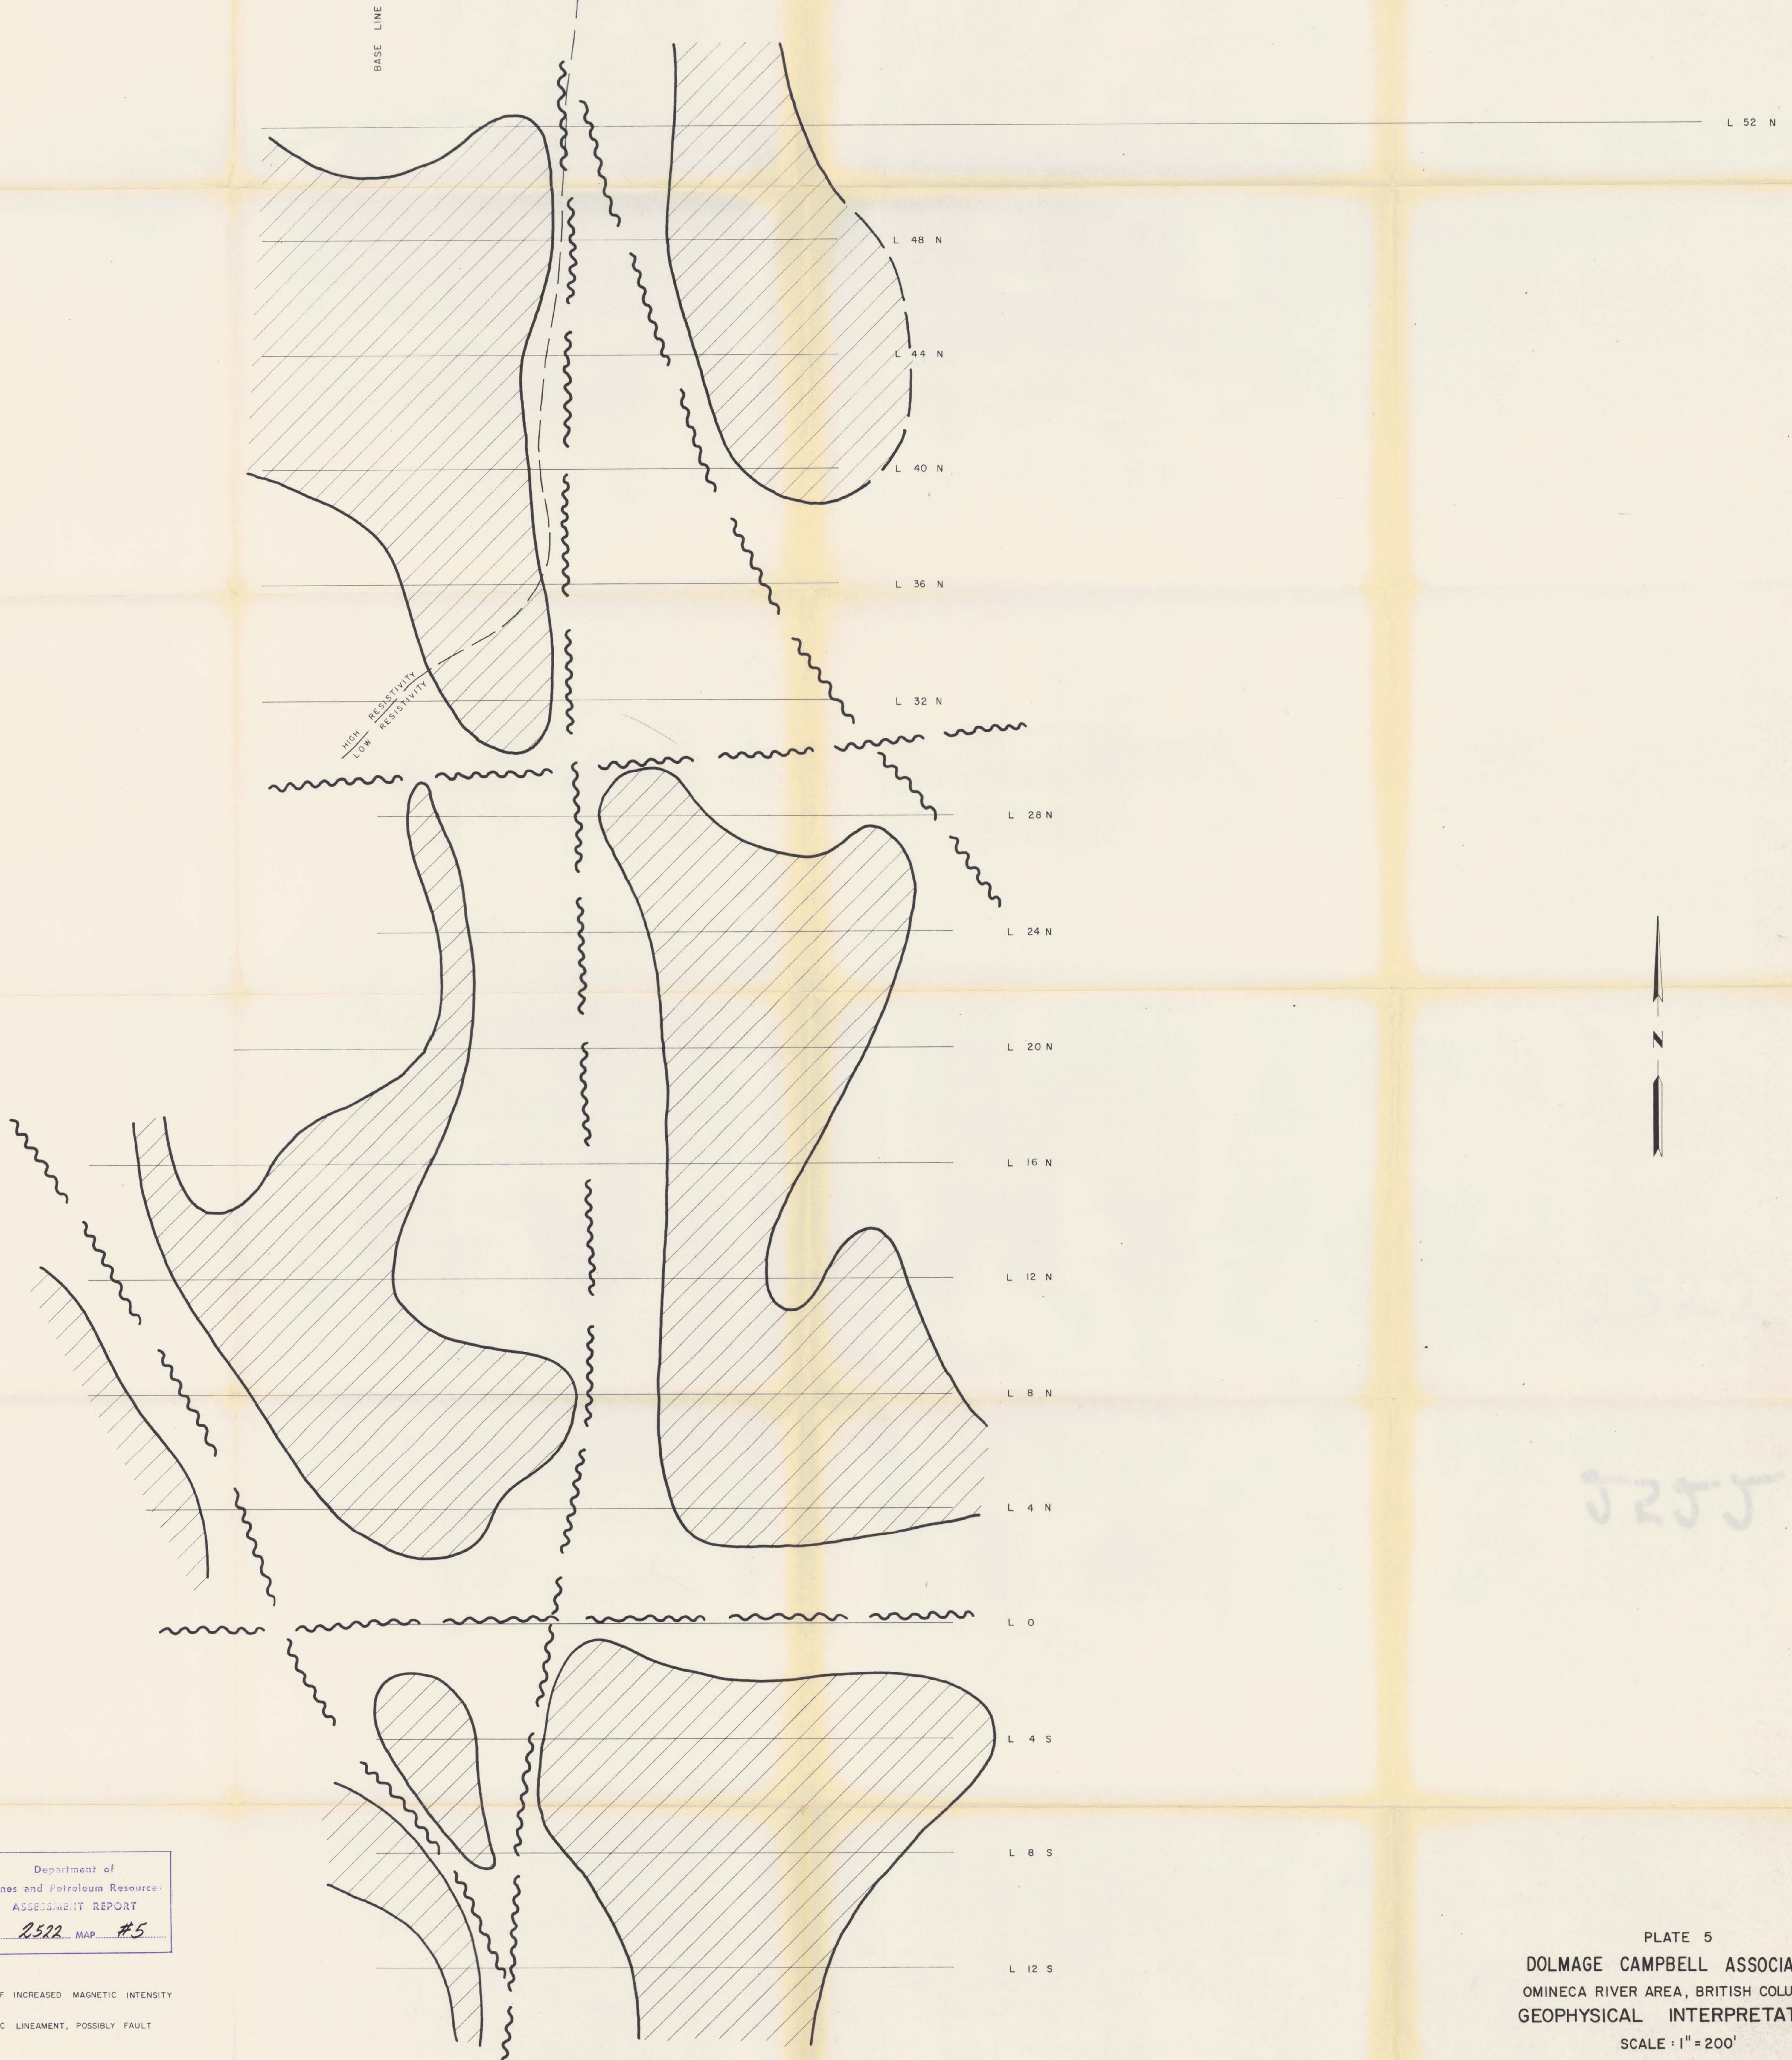10 W 8 W 6 W 4 W 2 W 0 2 E 4 E 6 E 8 E 10 E 12 E 14 E 16 E 18 E 20 E 22 E 24 E 26 E 28 E 30 E 32 E 34 E 36 E 38 E 40 E 42 E 44 E 46 E



LEGEND

-  AREA OF INCREASED MAGNETIC INTENSITY
-  MAGNETIC LINEAMENT, POSSIBLY FAULT
-  MAGNETIC HIGHS

Department of
Mines and Petroleum Resources
ASSESSMENT REPORT
NO. 2522 MAP #5

TO ACCOMPANY A GEOPHYSICAL REPORT
BY J.G. BAIRD DATED OCTOBER 28, 1969

PLATE 5
DOLMAGE CAMPBELL ASSOCIATES
OMINECA RIVER AREA, BRITISH COLUMBIA
GEOPHYSICAL INTERPRETATION
SCALE: 1" = 200'

SURVEY BY SEIGEL ASSOCIATES LIMITED
SEPTEMBER, 1969
2522

J.G. Baird