

2632

Department of
Mines and Petroleum Resources
ASSESSMENT REPORT

NO. 2632 MAP

REPORT ON
A TURAM ELECTROMAGNETIC SURVEY
SQUAMISH AREA, BRITISH COLUMBIA
ON BEHALF OF
CROYDON MINES LTD.

92 G/10W, 11E

by

P. J. Fominoff, B.A.Sc.
&
Jon G. Baird, B.Sc., P.Eng.

October 7, 1970

LOCATION:

About 8 miles SE of Squamish, B. C.
Vancouver Mining Division
123° 49' NE

DATES:

July 23 to August 5, 1970
August 12 to September 2, 1970

TABLE OF CONTENTS

	<u>Page No.</u>
SUMMARY	
INTRODUCTION	1
GEOLOGY	2
DISCUSSION OF RESULTS	3
CONCLUSIONS AND RECOMMENDATIONS	4
PLATES:	
(in text)	
#1 Plate 1 - Location Map	1" = 16 miles
(in envelope)	
#2 Plate 2 - Interpretation Claims and Survey Grid	1" = 1000'
#3 Plate 3 - Geophysical Profiles	1" = 400'



SUMMARY

The present Turam survey has revealed six extensive areas exhibiting abnormal electromagnetic responses which are thought most likely to arise from overburden or conductive rock types such as argillite.

Several conductor axes have been interpreted. If a review of the geology shows that any of these may be considered to correspond to sulphide mineralization, diamond drilling may be warranted.



REPORT ON
A TURAM ELECTROMAGNETIC SURVEY
SQUAMISH AREA, BRITISH COLUMBIA
ON BEHALF OF
CROYDON MINES LTD.

INTRODUCTION

During the periods from July 23 to August 5, 1970 and from August 12 to September 2, 1970, a geophysical field party executed a Turam electromagnetic survey in the Squamish area, British Columbia on behalf of Croydon Mines Ltd. The field work was under the direction of Mr. Peter Fominoff, B.A.Sc., and Peter Werder, both experienced geophysical operators on the staff of Seigel Associates Limited. This survey was the continuation of a previous survey reported by Mr. Jon G. Baird, B.Sc., P.Eng. The data from the previous survey is included in the present report.

As shown on Plate 1, the survey area is located about 8 miles southeast of Squamish. The baseline of the grid lies in a valley with the grid lines climbing up extremely rugged wooded slopes on either side.

The claims covered in whole or part by the present survey are listed on a page at the conclusion of the text and are shown on Plate 2 on the scale of 1" = 1000'.

The Turam fixed source compensation method was chosen for the electromagnetic survey since, in comparison with other electromagnetic techniques, it is relatively unaffected by orientation errors caused by rough topography, provides deep penetration and allows accurate interpretation of anomaly characteristics. The attached copy of a paper by R. A. Bosschart and H. O. Seigel entitled "Some Aspects of the Turam



Electromagnetic Method" describes the equipment, the field procedures, the nature of results and the interpretative procedures involved in this type of survey.

Electromagnetic methods detect massive sulphide bodies by means of measurement of the secondary electromagnetic field produced by eddy currents induced by a transmitted or primary electromagnetic field. The Turam method employs a large closed loop of wire as transmitter, while the field strength ratio and phase difference at two nearby observation points are measured by means of two receiver coils.


The presence of a subsurface conductor will be indicated by abnormal field strength ratios and phase differences. A typical anomaly will show a correspondence between high values of the field strength ratio and negative phase differences. The depth of burial of the current axis is reflected in the shape of the anomaly, and the ratio of the maximum amplitudes of field strength and phase is a measure of the resistivity/thickness (r/d) ratio of the body.

Approximately 37.4 line miles of profile were covered with readings taken each 100' along lines oriented N 45° E spaced 400' apart.

A Scintrex SE-71 instrument was employed with a receiving coil separation of 100'. Transmitting loops were usually about 4000' by 3000' or 3000' by 2000' and were energized with either 400 cps or 800 cps current.

GEOLOGY

The geology of the property has been studied by Mr. John Hogan of the staff of L. J. Manning & Associates Ltd. and is the subject of his reports.



The claims are underlain by metamorphosed Mesozoic volcanics and sediments of the Gambier Group. These rocks are the host rocks at the nearby Britannia Mine where pyrite, chalcopyrite and sphalerite occur as lodes and massive replacements.

The goal of the present survey was to locate massive sulphide bodies which are expected to be sufficiently conductive to give response to electromagnetic techniques.

DISCUSSION OF RESULTS

Plate 3 shows the results of the electromagnetic survey on the scale of 1" = 400'. The parameters plotted in profile form are the field strength ratios on a scale of 1" = 40% and phase differences on a scale of 1" = 20°. In order to accommodate the geophysical profiles, the interline spacing is not to scale. The locations of the transmitting loops are also shown along with the frequency used for each loop.

Over much of the survey area the profiles are seen to be quite flat and within a reasonable noise level considering the extremely rough topography.

Six confined areas exhibiting distorted electromagnetic responses have been outlined on Plate 3 and are shown to scale on Plate 2. These distortions consist of high amplitude, positive and negative field strength ratio and phase shift disturbances. Most peaks are very narrow and are defined by only one or two observations. While conducting bodies are normally expected to give rise to field strength ratio increases and negative phase shifts, the profiles within the six disturbed areas often show the opposite results. The four zones revealed by 800 cps traverses show higher amplitude distortions than the two zones covered



by 400 cps traverses. The interpreted current axis intersections, both positive and negative, are shown on Plate 3. Wherever sufficient correlation exists the current axis has been interpolated from line to line. Such axes have also been shown to scale on Plate 2.


An isolated positive current axis intersection occurs at 77 E on L 64 S which is supported by three anomalous observations although no definite anomalous indications are seen on flanking lines 400' away. This conductor has a r/d ratio of 8 ohm-cm/m which is in the moderate resistivity-thickness range. The depth to the current axis is approximately 250'.

CONCLUSIONS AND RECOMMENDATIONS

The present Turam survey has revealed six rather extensive areas exhibiting abnormal electromagnetic responses and one isolated conductor axis.

The responses in the areas of extensive distortions are interpreted to arise from near-surface sources of poor conductivity such as overburden or certain rock types, although one cannot rule out the possibility that they may be due, at least in part, to sulphide mineralization. A banded and folded geologic horizon such as argillite would be a good model to explain these distortions, particularly the sharp positive and negative responses. Despite high background effects in these six areas, the occurrence of a fairly large massive sulphide conductor would be interpretable.

The present results should be compared with the known geology to determine if any of the interpreted current axes may be considered



to correspond to sulphide mineralization. Diamond drilling may then be proposed based upon the present electromagnetic data.

Respectfully submitted,

SEIGEL ASSOCIATES LIMITED


Peter J. Fominoff

P. J. Fominoff, B.A.Sc.
Geophysicist

Jon G. Baird


Jon G. Baird, B.Sc., P.Eng.
Geophysicist



Vancouver, B. C.
October 7, 1970



CLAIMS

	<u>Name</u>	<u>Record Numbers</u>
4	I.R.C. 1 - 4	15149 - 15152
6	I.R.C. 17 - 22	15139
1	I.R.C. 24	16227
	L.H. 1 Fr.	16493P
	L.H. 2 - 7	16387M - 16392M
	L.H. 8 - 9	16442M - 16443M
	SI 5 - 14	15440P - 15449P
	MAIN 1 - 5	5754M - 5758M
14	AGAPE	15966 - 15979
	DAL 1	16492P
4	LILY	15976E - 15979E
	LILY	L 6161
	ROSE	L 6163
	WHISTLER	L 6160
	GROUSE Fr.	L 6157
	HEATER	L 6159
	VIOLET	L 6162
	HARDING	L 6152
	RAINSTORM	L 6153
	SLIDE Fr.	L 6156
	CABIN Fr.	L 6158
	NOODAY	L 6154
	MAMQUAM	L 6155



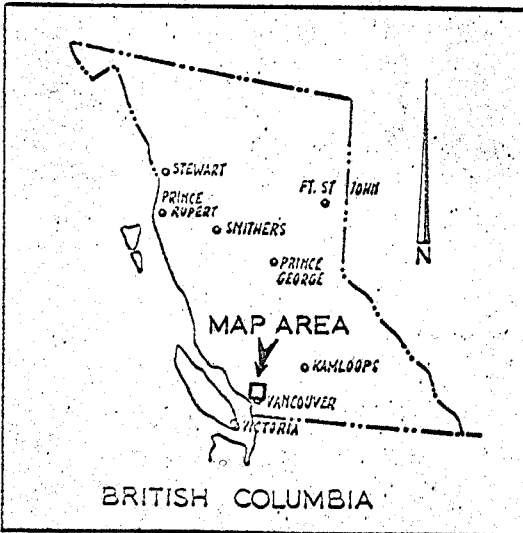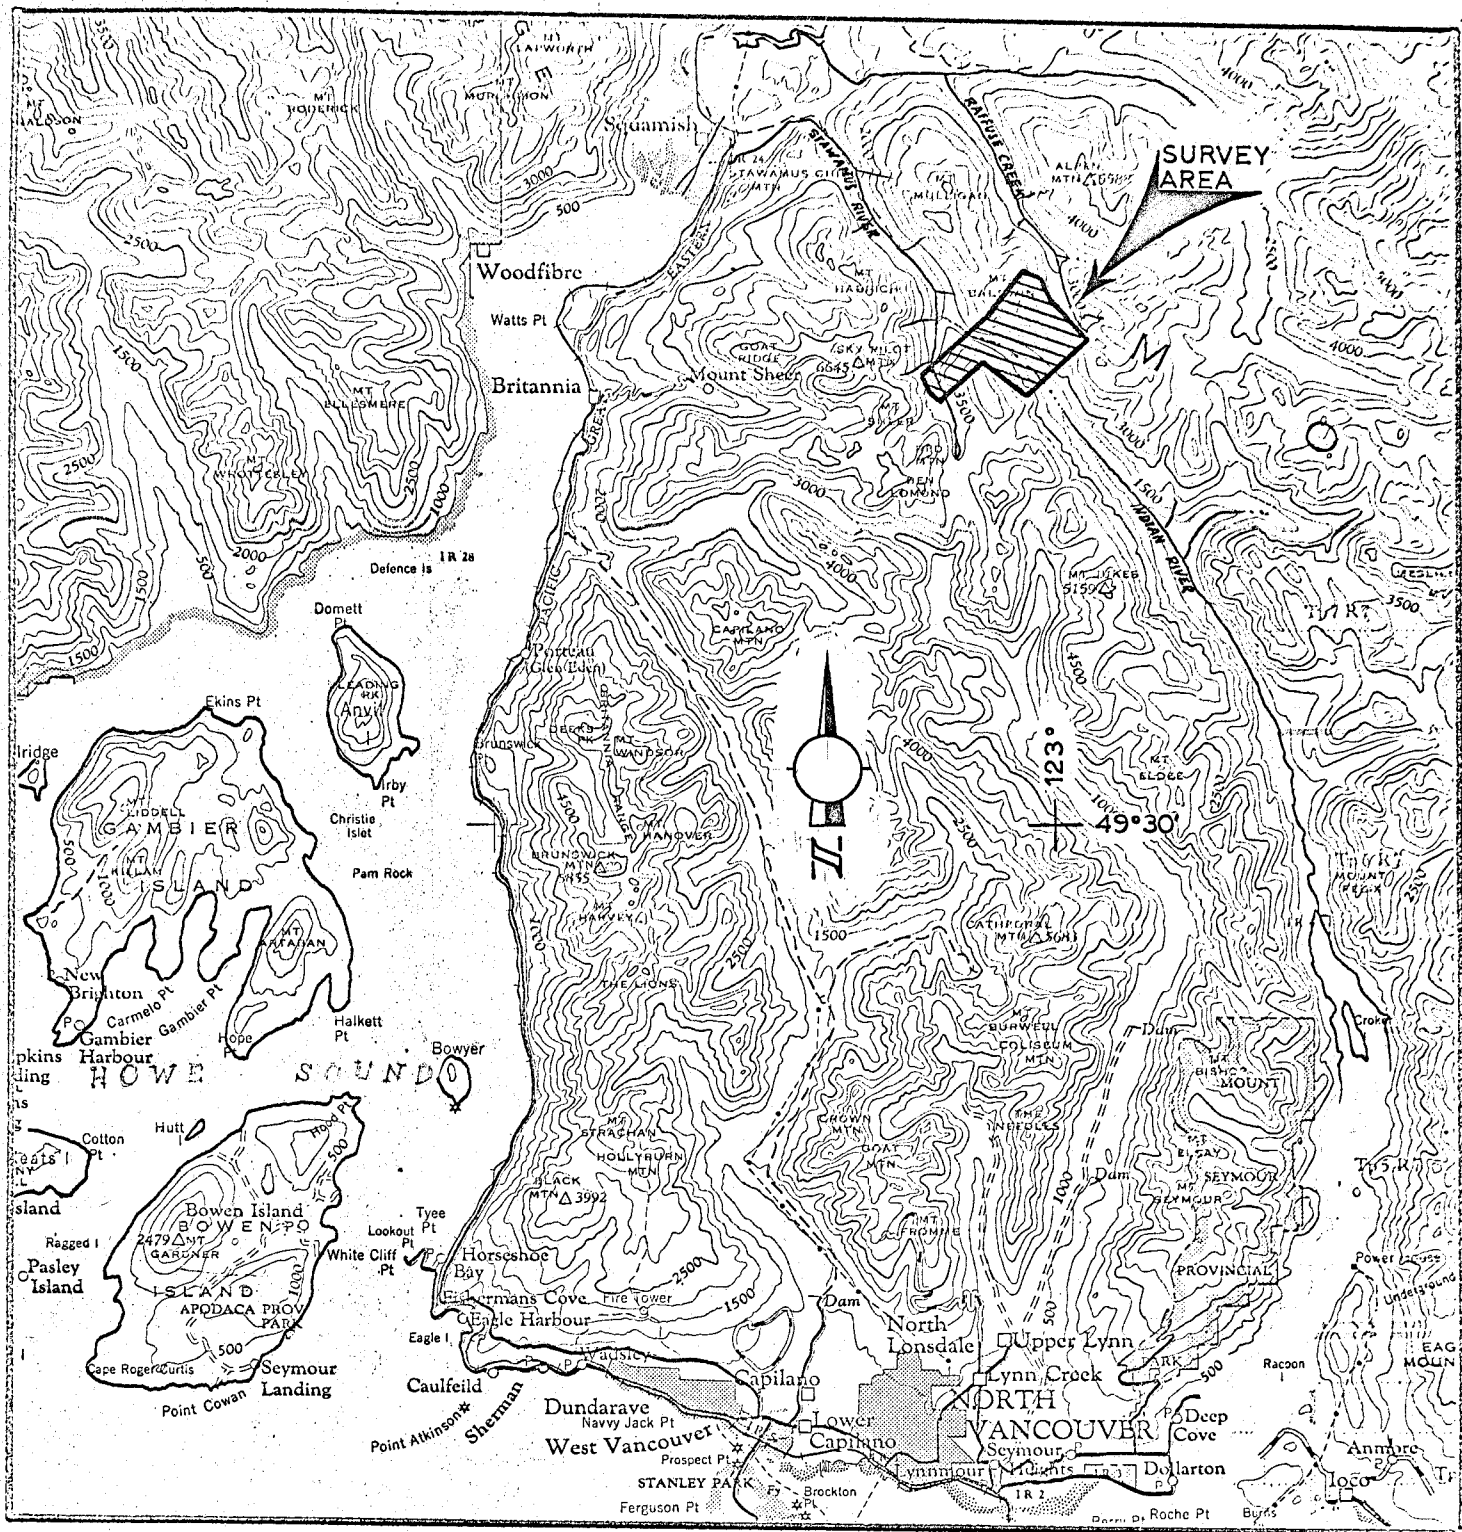


CROYDON MINES LTD.

LOCATION MAP

SQUAMISH AREA, BRITISH COLUMBIA

Handwritten signature



Survey by
SEIGEL ASSOCIATES LTD.
September 1970

PLATE 1

Some Aspects of the Turam Electromagnetic Method

SEIGEL ASSOCIATES LIMITED

115 - 744 West Hastings St.

Vancouver 1, B.C.

Robert A. Bosschart
and
Harold O. Seigel

Harold O. Seigel & Associates,
Geophysical Contractors and
Consultants,
Downsview, Ontario

Transactions, Volume LXIX, 1966, pp. 156-161

ABSTRACT

Most electromagnetic methods presently used in mining exploration are of the moving source type; i.e., the primary field source is moved simultaneously and in a fixed configuration with the receiver.

Of the fixed-source methods, which employ a stationary primary field and a moving receiver, the Turam method is the most effective and has marked advantages over alternative electromagnetic methods.

The results are little affected by topographic relief, and a high degree of resolution can be obtained because of the constant relation between source field and investigation area.

Another inherent advantage of the Turam configuration is that it provides more favourable dimensional relations. Thus, the primary field attenuates at a much lower rate than in moving-source configurations and, secondly, the method is size sensitive; i.e., conductor size affects the strength of the response, which is not the case with moving-source methods.

These factors result in a considerably better potential depth penetration.

Introduction

IN the period following the first world war, Scandinavia became the cradle of geo-electrical prospecting. The Swedish "Tvaram" (Sundberg, 1931) and "Compensator" (Sundberg & Hedstrom, 1933) were the forerunners of the large majority of present-day electromagnetic methods. From the Compensator method were derived, in quick succession, the "Turam" (Hedstrom, 1937) and the "Slingram" (Hedstrom, 1945) methods. Both techniques are still being used in virtually unmodified form, although the "Slingram" has been adapted to a variety of airborne applications and has, in the course of time, assumed a confusing array of pseudonyms, such as "Loop Frame," "Horizontal Loop," "E.M. Gun," "Minigun," "Ronka," "Magniphase," etc., as well as a number of names for the airborne adaptations. The Slingram-derived methods are characterized by a constant transmitter-receiver configuration, which is moved over the target area. They are called "Moving Source Compensation Methods."

The Turam method has been in active use since its development in 1932. In principle, it comprises a fixed transmitting layout of large dimensions and a moving receiver system which measures the gradients of phase and amplitude of the induced electromagnetic field. The coupling between the field source and a conductor, which is variable in the moving-source systems, is constant in the Turam or related configurations, resulting in a response of a somewhat different character. Therefore, a distinction is made between "Fixed Source" and "Moving Source" Compensation methods.

A typical Turam layout (*Figure 1*) consists of a rectangular transmitting loop of insulated wire with sides several thousand feet long, to which alternating current of one or more frequencies between 10^2 and 10^3 c.p.s. is fed by a gasoline-engine-driven alternator. The receiver system embodies two induction coils, carried at a constant separation (e.g., 100 ft.) and connected to a compensator which measures the intensity ratio and the phase difference between the fields received by the two coils.

As a rule, profiles are measured outside the transmitting loop, perpendicular to the long axis of the loop and not exceeding the length of the short axis.

The intensity of the induced primary field depends on the size and shape of the transmitting loop and the location of the observation point. The free air field strength ratios between stations successively occupied by the receiving coils are determined by calculation, and the observed ratios are normalized through division by these values. The presence of secondary fields is characterized by abnormal field strength ratios and phase differences.

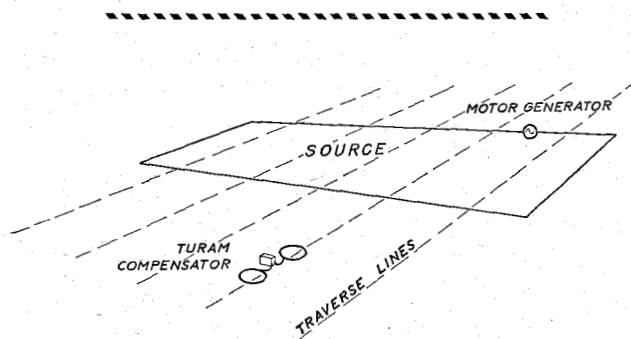


Figure 1.—General layout of the Turam method.

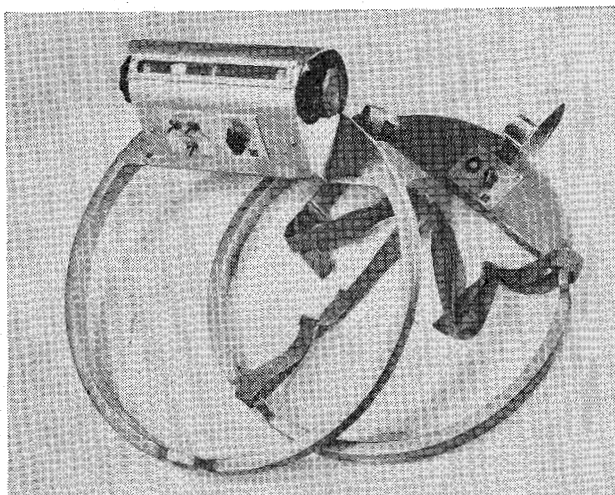


Figure 2.—Three-frequency Turam receiving system (Sharpe SE-700).

Although in practice Turam measurements are, because of the light, mobile receiving system (*Figure 2*), made rapidly (at the rate of 3 to 6 miles per day), a change of primary layout at least each alternate day is required under average conditions. In order to maintain this rate of coverage, a crew of four men is employed—two to measure and two to lay out and recover loops. In terms of line miles per man-day, the Turam method is therefore rather less efficient than the moving-source methods. On the other hand, it has specific advantages in results over the latter, as will be shown below.

Quantitative Interpretation

When a block of ground is energized by means of an alternating electromagnetic (E.M.) field, the resulting field at the surface is, when conductors are present, elliptically polarized. This is because the secondary fields are phase-shifted relative to the primary field. With methods measuring a geometrical component (e.g., Vertical Loop E.M. methods), field ellipticity has the effect of blurring the observations; i.e., instead of a precise angle of zero induction a "null width" of minimum induction is obtained, and this null width widens with increasing phase shift. As a result, such methods may become less definitive in the presence of medium to poor conductors, such as conductive overburden or relatively disseminated mineralization.

A major advantage of Compensation methods is that phase shifts are compensated and field components can be measured accurately, independent of the degree of field ellipticity. Moreover, two related components are usually measured (either phase and amplitude, or in-phase and out-of-phase components), which greatly diminishes the possibility of obtaining spurious anomalies, and, more importantly, because the relation between these components depends on the conductor characteristics, renders possible a quantitative interpretation of the obtained data.

In recent years, much work has been done to investigate the response of mathematical or reduced-scale models of geological conductors in moving-source or fixed-source configurations and so provide a basis for the quantitative interpretation of field data (Wait, 1952, '53, '60; West, 1960; Hedstrom & Parasnis, 1958; Paterson, 1961; Bosschart, 1961, '64). As a result, some conductor characteristics can often be closely enough determined to discriminate between anomalies arising from potential ore conductors and those arising from electrolytic conductors (overburden, weathered shear zones, etc.) and the conducting bodies, even at considerable depth, can be accurately located for diamond drilling. The possibility of assigning significance to anomalies on the basis of amplitude ratios rather than on amplitude strength, and giving precedence to weak anomalies among larger and stronger ones, in itself signifies a considerable extension of the capabilities of these methods.

The response of conductors, calculated theoretically or observed in model experiments in a particular measuring configuration, are usually presented in the form of response diagrams showing a set of two curves which represent the variation of peak amplitudes of the in-phase and out-of-phase components with the variation of a response parameter. The latter includes, in some form, the exciting frequency and the relevant

conductor characteristics. For instance, for an infinite sheet the response parameter may be written as

$$\lambda = 10^3 \frac{r}{fd}$$
 in which r = resistivity in ohm-cm, f = frequency, and d = thickness in m.

Such a diagram, representing the response of a medium-size tabular conductor (1000 ft. strike length) in a Turam configuration, is shown in *Figure 3A*. The straight line marked Q is the in-phase to out-of-phase ratio. This ratio varies with the response parameter and the strike length and thus gives, for a determinate frequency, a value for the resistivity/thickness ratio of the conductor. The validity of this particular diagram is limited to the specified strike length, but it illustrates the general relations. As they show the relation between the relative amplitudes of the response and the frequency, an important function of such diagrams is to indicate how anomalies caused by bodies of different conductivity can be emphasized or de-emphasized by changing the exciting frequency. An example of this application is described below.

In some areas, the overburden is both conductive and of irregular configuration and thickness. At standard prospecting frequencies, the strong field distortion arising from this condition could mask the response of underlying conductors, even when these would have appreciably better conductivity. In *Figure 3B-1*, an example of extreme overburden distortion at a frequency of 800 c.p.s. is shown, with anomalies as strong as 40 per cent field strength ratio (R) and a 24-degree phase difference (P). The same traverse at a frequency of 200 c.p.s. is shown in the bottom profile. The field strength anomaly has almost disappeared; from 40 per cent it has decreased to 4.5 per cent. The phase difference is down to 7.5 from 24 degrees. When these results are compared with the response diagram (*Figure 3-1*) they appear to be entirely predictable. The overburden anomalies have a r/d value of approximately 50 ohm-cm./m. and thus λ equals 62 ohm-cm.sec./m. at 800 c.p.s. and 250 ohm-cm.sec./m. at 200 c.p.s. As the curves show, the in-phase component drops 80 per cent and the out-of-phase component 60 per cent with the change of λ from 62 to 250 ohm-cm.sec./m. This example shows that the overburden response can be drastically reduced by lowering the frequency. The process would, however, be futile if the response from underlying better conductors would be proportionally decreased. With the use of properly selected exciting frequencies, however, this is not the case; for a good conductor with, say, an r/d value of 1.5, the change in frequency would represent a change from $\lambda = 2$ to $\lambda = 8$, with a corresponding drop of the in-phase amplitude of only 25 per cent and an actual gain in out-of-phase amplitude of 75 per cent (*Figure 3A-2*).

Under 200 ft. of cover, this conductor might (subject to size and over-all geometry), at a frequency of 800 c.p.s., give rise to a 22 per cent in-phase and a 4 per cent out-of-phase anomaly (approximately 20 per cent field strength ratio, 2.5 degree phase difference) (*Figure 3B-2*), and would be difficult to distinguish from the 800-c.p.s. overburden noise shown in *Figure 3B-1*. At the lower frequency, the anomaly would be 17 per cent in-phase and 7 per cent out-of-phase (15 per cent field strength ratio, 5-degree phase difference), and it would stand out clearly from the reduced overburden response.

Potential Depth Penetration

In assessing the capabilities of electromagnetic methods, the effective depth penetration is among the most important factors to consider. It can be defined as the maximum depth at which the response of conductors of potential economic interest can be clearly distinguished from electromagnetic fields arising from other sources.

An examination of the descriptions of some fifty producing orebodies on the Canadian and Baltic Precambrian shields shows that the large majority are

steeply dipping, lenticular or tabular bodies of concentrated sulphides, with strike lengths varying from 300 to 3,000 ft. (see Figure 4A) and depth extensions, where known, of a comparable order of magnitude. An example of the response of good conductors within this size range in typical moving-source and fixed-source configurations is shown in the same diagram (Figure 4B). The conductor is a tabular body of good conductivity ($\lambda = 10.3$ ohm-cm.sec./m.) at a depth of 60 ft. The strike length and height have been increased simultaneously from 10^2 to 10^4 feet. It can be seen that, up to a strike length of 400 ft.,

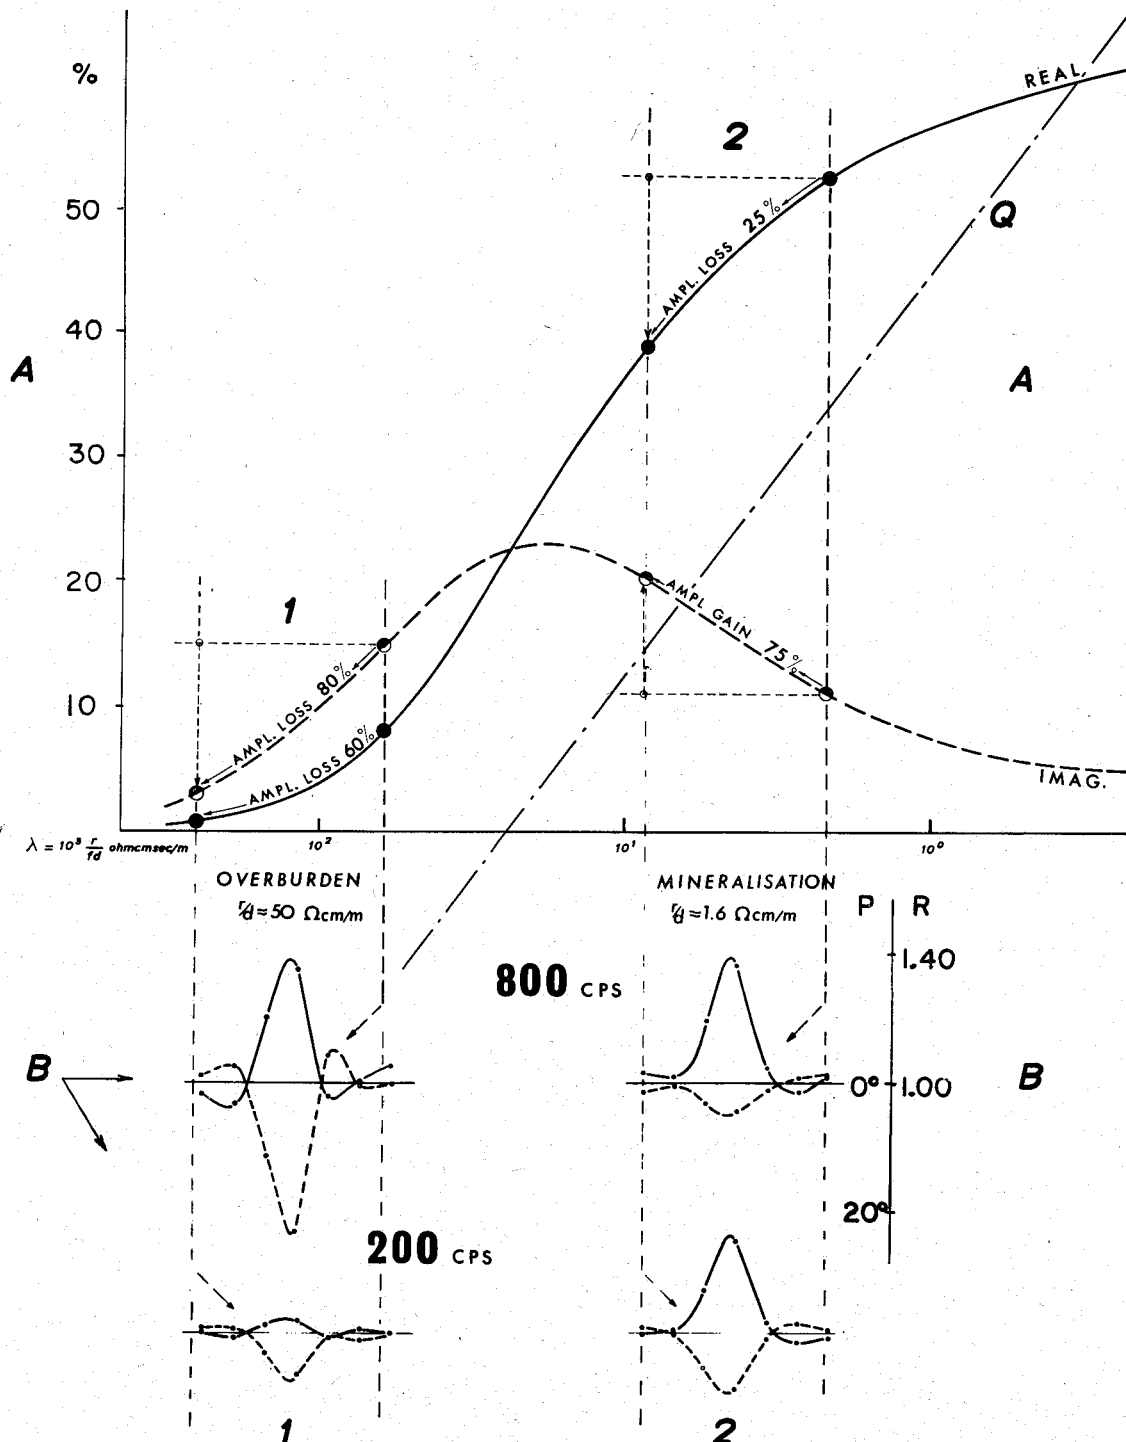


Figure 3.—Response of a thin, medium-size tabular conductor (1000-ft. strike length) in a fixed-source measuring configuration.

the response in both configurations is comparable. In the moving-source configuration (Horizontal Loop), a further increase in size results in very little gain in the response. Saturation is reached at a strike length of 600 to 800 ft.

In the fixed-source (Turam) configuration, the response shows its steepest gain where the moving-source response flattens off; for an increase in strike length from 300 to 3,000 ft., the fixed-source response increases from 6 per cent to 80 per cent, or

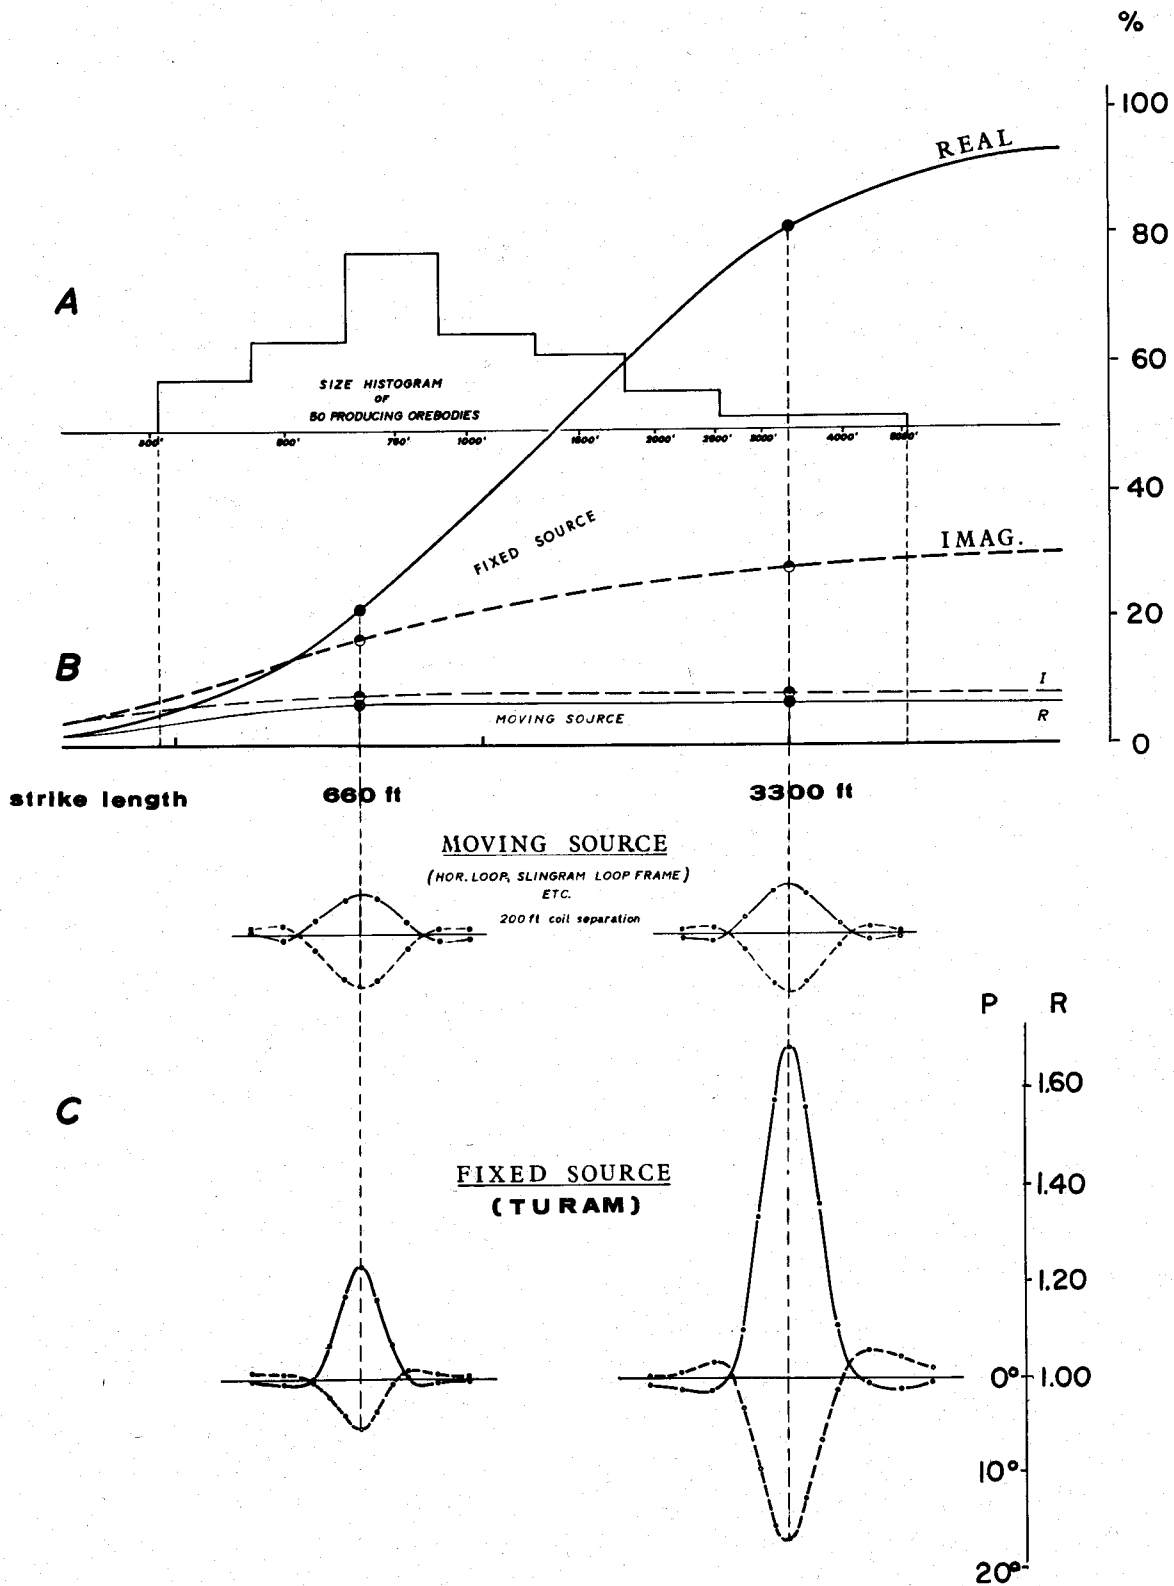


Figure 4.—A comparison of the response of conductors of varying size in moving-source and fixed-source measuring configurations.

more than 13 times, whereas the moving source response increases from 4 per cent to 7.5 per cent, or by a factor of less than 2.

In practical terms, this means that size has a negligible effect on the detectability of a conductor in a moving-source configuration, but contributes materially to its detectability in a fixed-source system. The larger the body, the greater the depth at which it can be found with the Turam method. A major reason for the observed difference in potential depth penetration of the two types of configuration is the different rate of fall-off of the response of bodies of the shapes and dimensions discussed above.

For moving-source configurations, this question has been examined by Hedstrom & Parasnis (1958). In a diagram, for instance, they show the variation of the response of a 2,000 by 2,000 ft. sheet conductor of good conductivity ($\lambda = 4$ ohm-cm.sec./m.) with the depth. (Figure 5). Between depth to coil separation ratios of 0.2 and 0.8 the rate of fall-off increases from the 1st to the 5th power of the depth. In ground surveys, where the in-phase noise level is, under average conditions, rarely less than 2 per cent, a discernible anomaly will thus have to have an in-phase amplitude of at least 4 per cent. As the diagram shows, the response falls below this value at a depth to coil separation ratio of 0.57. At 300 ft., which is the largest separation practical, the potential depth penetration is therefore less than 170 ft.; at the standard 200 ft. separation, it is less than 115 ft.

The variation with depth of the response of a smaller conductor (1,000 by 1,000 ft) of comparable conductivity ($\lambda = 3.5$) in a Turam configuration is

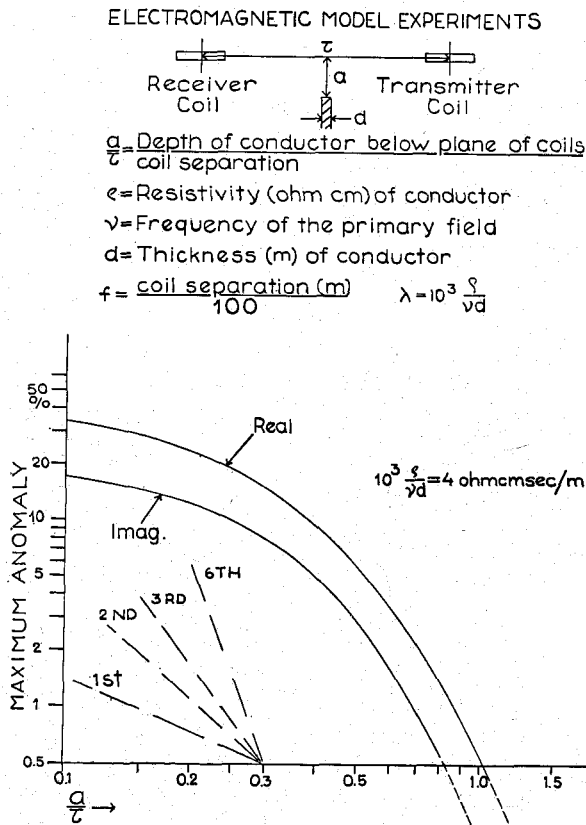


Figure 5.—Variation of the response with depth of a thin tabular conductor of infinite strike length in a moving source configuration. (Hedstrom and Parasnis, 1958).

shown in Figure 6. To a depth of 200 ft. the response falls off at a rate of less than the 1st power; to depths of well over 600 ft., it falls off at a rate of less than the 2nd power.

At a 600-ft. depth, the in-phase amplitude is still better than 4 per cent. For a 2,000 by 2,000-ft. body, it would be approximately 6 per cent, and, with a further increase in size, it could reach 8 per cent. The potential depth penetration can thus be conservatively estimated to be 600 ft.

Figure 7 is a field example of a 400-c.p.s. Turam traverse over two steeply dipping mixed graphite and sulphide conductors under 340 ft. of overburden (Timmins area). The field strength ratio anomaly of the strongest conductor is 23 per cent, which is approximately three times stronger than the field strength ratio anomaly of the smaller conductor shown in Figure 6 at the same depth of burial. This example indicates that the present body could be found at much greater depth and that the estimate of the potential depth penetration, based on the smaller body, is indeed conservative. It may be noted that the in-phase response in a moving-source system (300 ft. coil separation) would be less than 1 per cent and that the body would be undetectable with such a method.

Effect of Topographic Relief

Neglecting external sources, the noise level of moving-source compensation methods is strongly dependent on the coupling between transmitter and receiver; i.e., if the configuration is not rigidly maintained during operation, spurious in-phase anomalies result. For instance, an error of 5 per cent in the

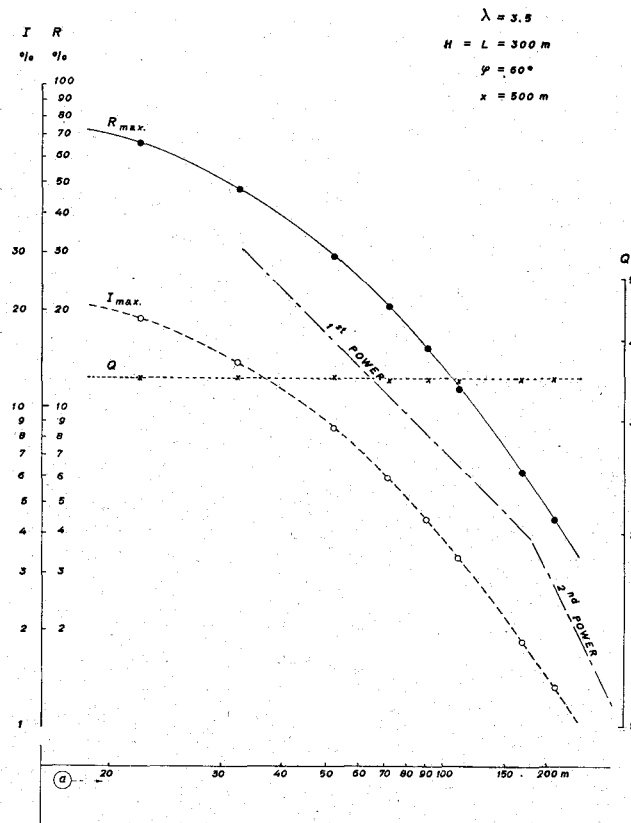


Figure 6.—Variation of the response with depth (a) of a thin tabular conductor of finite strike length (1000 ft.) in a fixed-source measuring configuration.

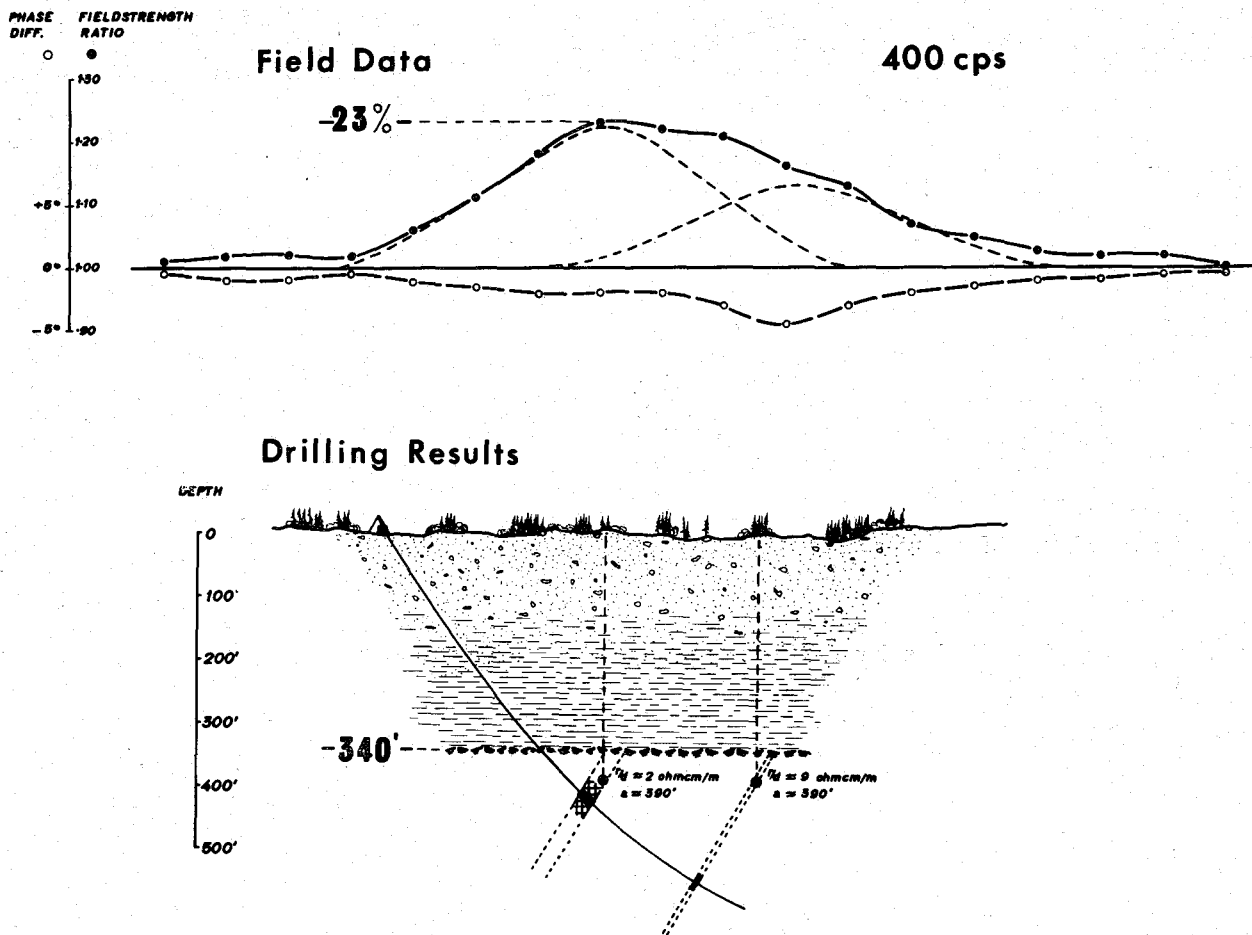


Figure 7.—Turam traverse over deeply buried conductors in the Timmins area.

coil separation causes a change of 15 per cent in the in-phase component. In the presence of secondary fields, both components are affected. Elevation differences between the coils produce a comparable effect. As a result, these methods become impractical in areas of appreciable topographic relief.

With the Turam system, a 5 per cent error in coil separation causes a change of 2 per cent at a distance of 300 ft. from the source, 0.5 per cent at 500 ft. and 0.2 per cent at 1000 ft. The effect of elevation differences between coils is, because the field at the surface is predominantly vertical, even smaller.

The effect of terrain relief on the measurements is therefore negligible, except in areas of very rugged topography. Moreover, where corrections are required, they can be made, because of the fixed relation between source and terrain, in a simple and straightforward manner.

Conclusions

In the foregoing, those aspects of the Turam method that have marked advantages over alternative methods have been stressed. It is, at present, the most powerful electromagnetic prospecting tool at our disposal.

It is also a rather elaborate method and therefore does not necessarily represent the most efficient approach under all circumstances.

In areas of thin cover and level topography, systematic surveys may, for instance, be done more

economically with moving-source compensation methods. Also, for fast ground follow-up of airborne electromagnetic surveys, where the problem is usually confined to determining the accurate location of pre-selected anomalies, methods measuring geometrical components will yield the desired information more rapidly and at less expense.

The proper field of application of the Turam method lies where conditions are more difficult and the requirements severe; in particular in cases where a high degree of discrimination between conductors is desired, where the depth of overburden limits the use of other methods or where appreciable topographic relief occurs.

References

- (1931) Sundberg, K., "Principles of the Swedish Geoelectrical Methods," *Erganzungshafte fur Angewandte Geophysik*, Vol. I.
- (1933) Sundberg, K., and E. H. Hedstrom, "Structural Investigations by Electromagnetic Methods," *World Petroleum Congress*.
- (1937) Hedstrom, E. H., "Phase Measurements in Electrical Prospecting," *A.I.M.E. Techn. Publ. 827*.
- (1945) Hedstrom, E. H., and Nordstrom, A., "Malmletningsteknikens Nuvarande Standpunkt," Uppsala.
- (1958) Hedstrom, E. H., and Parasnis, D. S., "Some Model Experiments Relating to Electromagnetic Prospecting with Special Reference to Airborne Work," *Geophys. Prosp.*, Vol. VI, 4.
- (1964) Bosschart, R. A., "Analytical Interpretation of Fixed Source Electromagnetic Prospecting Data," Delft.

(Reprinted from The Canadian Mining and Metallurgical Bulletin, April, 1966)

Printed in Canada

DOMINION OF CANADA:
 PROVINCE OF BRITISH COLUMBIA.
 To Wit:

**In the Matter of a geophysical survey on behalf of
 Croydon Mines Limited**

I, J. L. McCrea for Seigel Associates Limited
 of **750 - 890 West Pender Street, Vancouver**

in the Province of British Columbia, do solemnly declare that **Turam electromagnetic surveys have been executed on claims SI 5 - 14, LH 1 - 9, INDIAN RIVER COPPER 1 - 4, and 17 - 24, MAIN 1 - 5 and others as listed in the report, in the Squamish area, British Columbia between November 5 to November 26, 1969 and July 23 to September 2, 1970. The following expenses were incurred:**

(1) Wages:		
A. Lefebvre	22 days at \$35.00/day	\$770.00
P. Fominoff	14 days at \$35.00/day	490.00
H. P. Werder	22 days at \$35.00/day	770.00
L. Todden	22 days at \$27.50/day	605.00
R. Albert	9 1/2 days at \$27.50/day	261.25
K. Stoll	36 days at \$27.50/day	990.00
D. Lorimer	22 days at \$27.50/day	605.00
G. Matter	22 days at \$27.50/day	605.00
V. McLean	16 days at \$27.50/day	440.00
G. Budgell	7 days at \$27.50/day	192.50
H. P. Werder	6 days at \$27.50/day	165.00
		<u>\$5,893.75</u>
		\$5,893.75
(2) Transportation and shipping to the job		142.15
(3) Transportation on the job		1,287.87
(4) Food and living expenses		2,124.28
(5) Use of geophysical equipment		
58 days at \$50.00/day		2,900.00
(6) Paid to Seigel Associates Limited to cover geophysicist's supervision, calculating, plotting and fairdrawing data and preparation of final reports.		
		<u>7,026.96</u>
		\$19,377.01

And I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath and by virtue of the "Canada Evidence Act."

Declared before me at the **City**
 of **Vancouver**, in the
 Province of British Columbia, this **16th**
 day of **September, 1970**, A.D.

J. L. McCrea


Jan Suver
 A Commissioner for taking Affidavits within British Columbia or
 A Notary Public in and for the Province of British Columbia.
Sub-mining Recorder

DOMINION OF CANADA:
PROVINCE OF BRITISH COLUMBIA.

To Wit:

In the Matter of

(Matachewan Consolidated Mines Limited
(44 King Street West, Toronto 105, Ontario
(-F.M.C. 96668
(
(Bill Demmitt, Route 2, Hope, B.C.
(-F.M.C. 96667
(
(Kennedy Silver Mines Ltd.
(P. O. Box 279, Port Alberni, B.C.
(-F.M.C. 72597

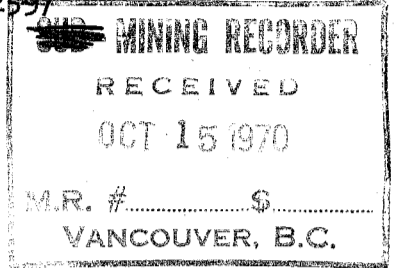

I, J. W. Hogan - F.M.C. 87970

of 859 Prospect Avenue
North Vancouver, B. C.

in the Province of British Columbia, do solemnly declare that The following work was done on the S.I. 5-14, Main 1-5, Lily (4), Dal #1, Agape (9), claims and the Harding, Rainstorm, Noonday, Mamquam, Slide Fraction, Grouse Fraction, Cabin Fraction, Heather, Whistler, Lily, Violet, Rose, Crown Grants.

Line Cutting


<u>Personnel Engaged</u>	<u>Time Expended</u>	<u>Wages</u>	
White, J.E.	67 days	\$ 1,900.00	
Coyle, P.	3 days	75.00	
Boucha, J.	6 days	150.00	
Hansen, Einer	1 day	25.00	
Hansen, Eric	11 days	157.50	
Ovington, W.	50 days	875.00	
Goss, L	8 days	124.00	
Sandberg, R.	8 days	124.00	
Wenzel, M	24 days	475.00	
Carrico, R.	2 days	60.00	
Woods, R.	2 days	20.00	
Dawson, V.	1 day	20.00	
Acorn, D.	1 day	20.00	
Fenton, I.	11 days	170.00	
Dawson, C.	16 days	275.00	
Goodall	1 day	10.00	
St. Laurent	1 day	10.00	
Fenton, Lyall	1 day	20.00	
		\$ 4,530.50	\$ 4,530.50

Direct Costs (See attached sheet)

And I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath and by virtue of the "Canada Evidence Act."

Declared before me at the City
of Vancouver, in the
Province of British Columbia, this 15
day of October 1970, A.D. *J. W. Hogan*

Julie Turner
A Commissioner for taking Affidavits within British Columbia or
A Notary Public in and for the Province of British Columbia.
Sub-mining Recorder

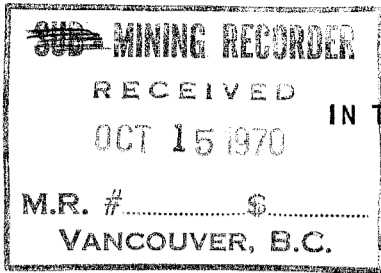

(Matachewan Consolidated Mines Limited
 (44 King Street West, Toronto 105, Ont.
 (-F.M.C. 96668
 (Bill Demmitt, Route 2, Hope, B.C.
 (-F.M.C. 96667
 (Kennedy Silver Mines Ltd.
 (P.O.Box 279, Port Alberni, B.C.
 (-F.M.C. 72597

Line Cutting (Carried forward) \$ 4,530.50

Direct Costs

Accommodation and Meals	\$ 1,030.10	
Camp Costs	444.44	
Supplies & Equipment	309.59	
Travel -- Truck Operation	525.06	
-- Truck Rental	95.41	
Maps, Stationery, etc.	11.47	
Telephone	48.00	
	<u>\$ 2,464.07</u>	<u>2,464.07</u>

Line Cutting - Total Wages & Direct Costs \$ 6,994.57

Declared before me at the *City*)
 of *Vancouver*, in the)
 Province of British Columbia, this *15*)
 day of *October 1970*; A.D.)

Jr. Hozy

Julie Turner

 A Commissioner for taking Affidavits within British Columbia
 or A Notary Public in and for the Province of British Columbia
Sub-mining Recorder

DOMINION OF CANADA:
 PROVINCE OF BRITISH COLUMBIA.
 To Wit:

In the Matter of

- (Matachewan Consolidated Mines Limited
- (44 King Street West, Toronto 105, Ontario
- (-F.M.C. 96668
- (Bill Demmit, Route 2, Hope, B. C.
- (-F.M.C. 96667
- (Kennedy Silver Mines Ltd.,
- (P.O. Box 279, Port Alberni, B.C.
- (-F.M.C. 72597
- (Croydon Mines Ltd.,
- (1177 West Hastings St., Vancouver, B.C.
- (-F.M.C. 89441
- (C.M. Boyd, 626 Westview Pl., N. Vancouver
- (- F.M.C. 95702
- (L. Graham, Hope, B. C.
- (-F.M.C. 95703

I, John W. Hogan - F.M.C. 87970
 of 859 Prospect Avenue,
 North Vancouver, B. C.

in the Province of British Columbia, do solemnly declare that
 the following work was done on the S.I. 5-14, Main 1-5, Lily (4), Dal #1, Agape (9),
 Indian River Copper 1-4, 17-24, L.H 1 Fraction, L.H. 2-9 Claims and Harding,
 Rainstorm, Noonday, Mamquam, Slide Fraction, Grouse Fraction, Cabin Fraction,
 Heather, Whistler, Lily, Violet, Rose Crown Grants.

Support for Seigel Associates Ltd. Electromagnetic Turam Survey


Wages - J. E. White - \$	250.00	
W. Ovington	125.00	
M. Wenzel	50.00	
I. Fenton	40.00	
G. Woods	20.00	
	<u>485.00</u>	\$ 485.00
Camp Costs		498.14
Helicopter		<u>1,249.18</u>
		\$ 2,232.32

RECEIVED
 OCT 15 1970
 Mining Recorder's Office
 VANCOUVER, B. C.

And I make this solemn declaration conscientiously believing it to be true, and knowing that it is of
 the same force and effect as if made under oath and by virtue of the "Canada Evidence Act."

Declared before me at the City
 of Vancouver, in the
 Province of British Columbia, this 15
 day of October 1970, A.D. } *[Signature]*

[Signature]
 A Commissioner for taking Affidavits within British Columbia or
 A Notary Public in and for the Province of British Columbia.
Sub-mining Recorder



LEGEND

NEGATIVE CURRENT AXIS INTERSECTION

 POSITIVE CURRENT AXIS INTERSECTION

 WELL DEFINED CURRENT AXIS INTERSECTION

 ZONE OF DISTORTED ELECTROMAGNETIC RESPONSES

 LOCATION OF INTERPRETED CURRENT AXIS

INTERLINE SPACING NOT TO SCALE

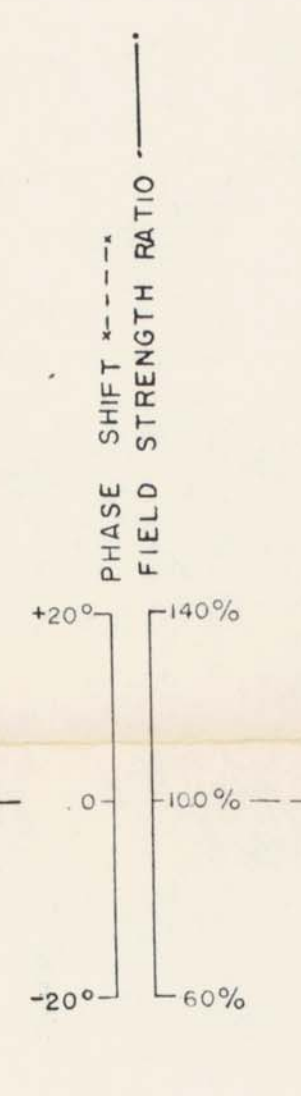


PLATE 3
 CROYDON MINES LTD.
 MT. BALDWIN PROPERTY
 SQUAMISH AREA, BRITISH COLUMBIA
 TURAM ELECTROMAGNETIC SURVEY



TO ACCOMPANY A GEOPHYSICAL REPORT
 BY P.J. FOWNOFF AND J.G. SARGO DATED OCTOBER 7, 1970

2632

SURVEY BY SEIGEL ASSOCIATES LIMITED
 AUGUST - SEPTEMBER 1970

[Handwritten signature]



LEGEND




-  ZONE OF DISTORTED ELECTROMAGNETIC RESPONSES
-  INTERPRETED CONDUCTOR AXIS LOCATION
-  GRID-LINE CUT BUT NOT SURVEYED

PLATE 2


CROYDON MINES LTD.

MT. BALDWIN PROPERTY
SQUAMISH AREA, BRITISH COLUMBIA

TURAM ELECTROMAGNETIC SURVEY

INTERPRETATION
GRID AND CLAIMS

1" = 1000'



TO ACCOMPANY A GEOPHYSICAL REPORT
BY P.J. FOMINOFF AND J.G. BAIRD DATED OCTOBER 7, 1970

2632

SURVEY BY SEIGEL ASSOCIATES LIMITED
AUGUST-SEPTEMBER 1970

J. Baird