

1979 DIAMOND DRILLING PROGRAM

ON THE

A.M. AND A.M. NO. 1 CROWN GRANTED MINERAL CLAIMS

(LOTS 1579 AND 1586 RESPECTIVELY)

AND ON THE VERNON NO. 4 MINERAL CLAIM

(RECORD NO. 5526)

ALL FORMING PART OF THE

GIANT COPPER PROPERTY

OF

G M RESOURCES LIMITED

AND LOCATED IN THE

NEW WESTMINSTER MINING DIVISION


LATITUDE 49° 10'

LONGITUDE 121° 01'

NTS - 92H/3E

BY

E R. GAYFER, P. ENG.

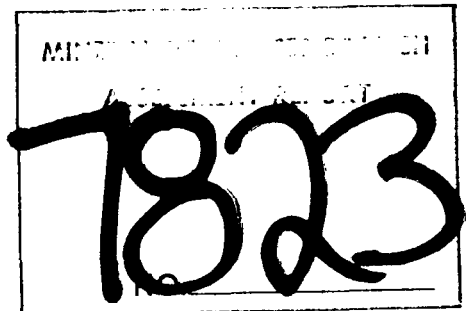

FOR

G M RESOURCES LIMITED, OWNER AND OPERATOR

310 - 800 Sixth Avenue S.W., Calgary, Alberta

JANUARY 22, 1980

TABLE OF CONTENTS

	<u>PAGE</u>
INTRODUCTION	1
DRILLING RESULTS	4
CONCLUSION	7

APPENDICES

APPENDIX I	ITEMIZED COST STATEMENT	8
APPENDIX II	AUTHOR'S QUALIFICATIONS	9
APPENDIX III	DIAMOND DRILL HOLE RECORDS (ATTACHED)	

MAPS

INDEX MAP - DRAWING NO. C-S-08-7	2
PLANS OF 1979 DRILLING (IN POCKET)	
DRAWING NO. C-S-08-8 - A.M. BRECCIA	
DRAWING NO. C-S-08-9 - INVERMAY BRECCIA	

INTRODUCTION


1. HISTORY

The Giant Copper property is situated within the New Westminster Mining Division approximately 35 kilometres to the southeast of Hope, B. C. on the southwestern flank of Silverdaisy Mountain and at elevations ranging from 1000 to 2000 metres above sea level. Access is by 11 kilometres of gravel road up Canam Creek from No. 3 Highway.

The property consists of 161 contiguous mineral claims, the most important of which date back to the 1930's. At that time it consisted of two historically separate but adjoining properties, the A.M. and the Invermay. The Consolidated Mining and Smelting Company of Canada (Cominco) optioned the A.M. group in 1930 from G. Alleson of Hope and carried out extensive underground development. In the late 1940's this group of claims was acquired from Cominco by Canam Copper Company Limited and developed further, with participation at various times by The American Metal Company Ltd., Mogul Mining Company, and again by Cominco.

In 1956 Canam Copper acquired the Invermay group of claims from the Invermay Annex Skagit River Development Company Ltd. and combined the two properties into one. (The Invermay group was staked in 1933 and acquired by the Invermay Annex Mining Company in 1934, and in 1948 by the Invermay Annex Skagit River Development Company Ltd.)

In 1964 Giant Mascot Mines Limited entered into an option agreement with Canam Copper and in 1966 purchased all of that company's assets, thus acquiring full title to the property. A considerable amount of

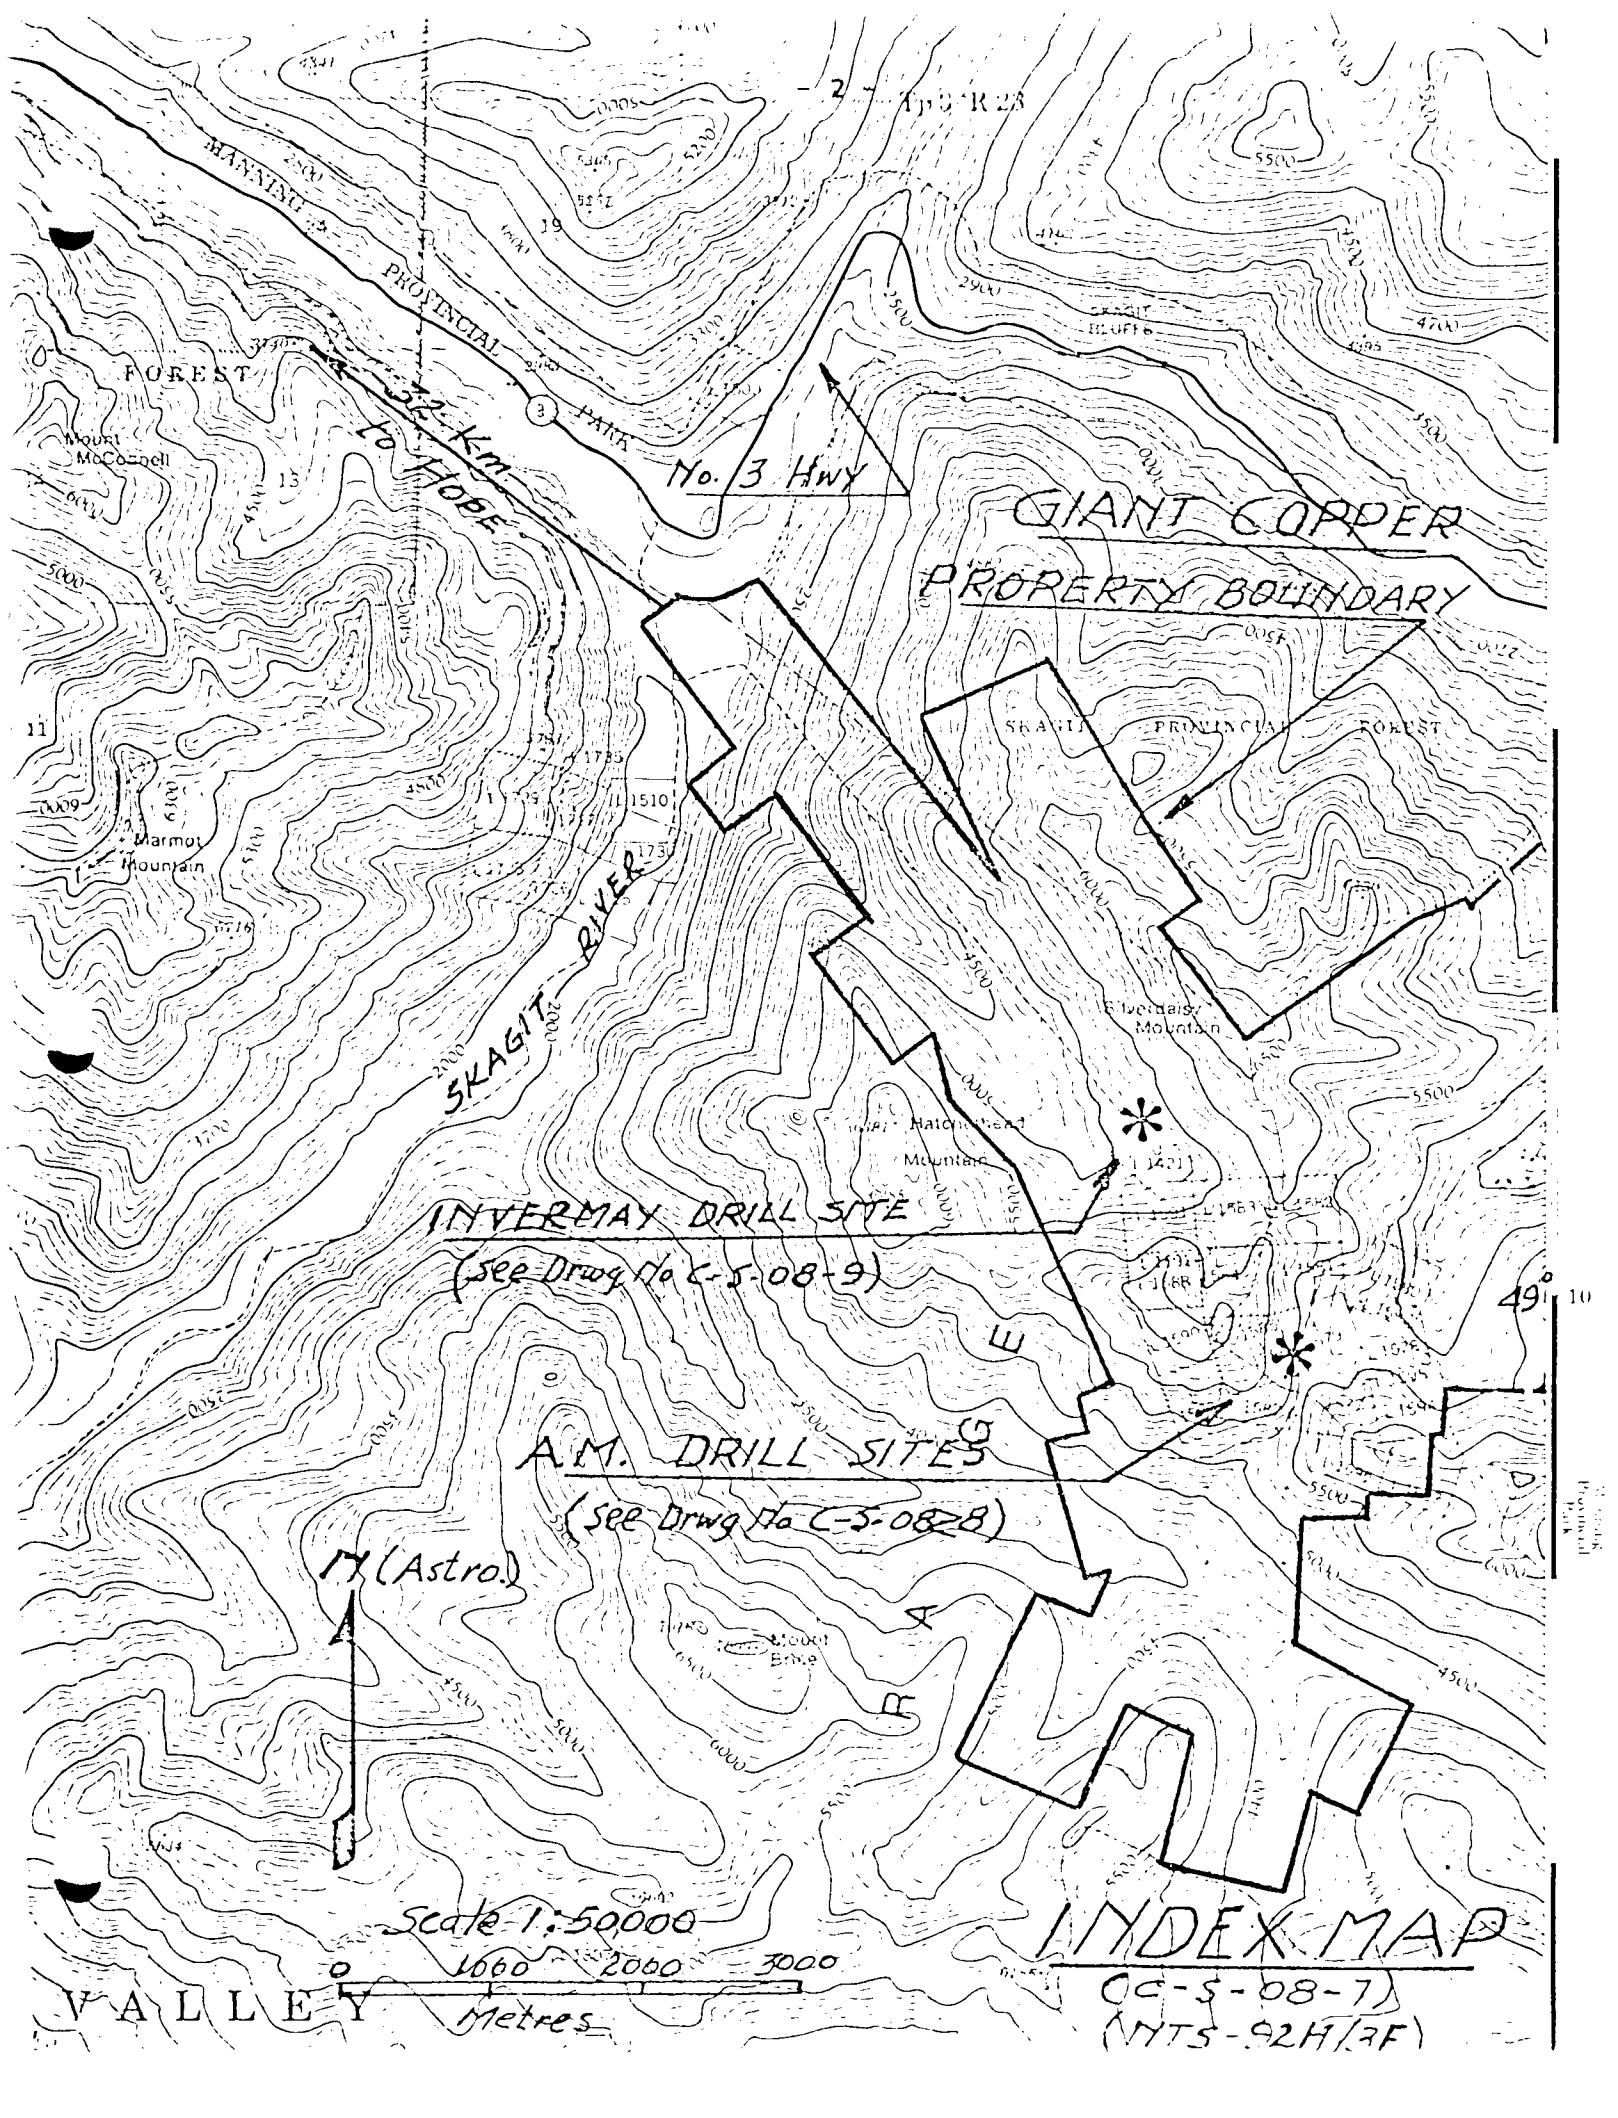

MANNING
PROVINCIAL
FOREST
32 KM
to HOPE

No. 3 Hwy

GIANT COPPER
PROPERTY BOUNDARY

SKAGIT RIVER

INVERMAY DRILL SITE
(see Drwg No C-5-08-9)

A.M. DRILL SITES
(see Drwg No C-5-08-8)

17 (Astro.)

Scale 1:50,000
0 1000 2000 3000
Metres

INDEX MAP
CC-5-08-7)
(NTS-92H/3F)

VALLEY

PROVINCIAL
FOREST

HISTORY (continued)

exploration and development work, both underground and on surface, has been carried out since then by Giant Mascot Mines Limited (now G M Resources Limited by change of name in 1977).

2. MINERAL OCCURRENCES

The A. M. group of claims contains the most highly developed ore-body, with values in copper, gold, silver, and molybdenum occurring within a sedimentary breccia and with possibilities for tonnage expansion.

Mineralization on the Invermay group of claims occurs in an altered, and sometimes brecciated, quartz-diorite intrusion, as disseminations and as fracture filling. The valuable metals of interest are similar to those in the A.M. zone but with the addition of lead and zinc. A potential exists for a large, low-grade "porphyry-type" orebody.

3. PRESENT PROGRAM

After being dormant for several years, 1979 saw the start of renewed activity directed towards proving up tonnage additional to the already proven and probable ore reserves of the A.M. orebody, and to exploring the disseminated mineralization at the Invermay.

537.7 metres of hole were drilled before the onset of winter put a temporary halt to the program.

This report describes the work accomplished, and details the expenditures incurred.

DRILLING RESULTS

1. NOTES

- a) As all the old maps and records of the property are in the customary linear and volume units, these units are being retained for the present program. The drill records, therefore, are in feet and ounces, but the maps submitted with them are to metric scale.
- b) As many competent geologists and petrographers have identified the minerals and classified the rocks at the Giant Copper property over the years, every effort has been made to make this years drill core descriptions correlate with theirs as much as possible. Of particular note, a silvery colored sulphide has been logged as either arsenopyrite or a light colored pyrite because H.C.B. Leitch, M.A. Sc., in his 1951 report on the A.M. group notes on Pages 16 and 17 that "throughout the district it is generally thought that gold is fairly closely associated with arsenopyrite, but a study might show that the gold is more closely associated with a late pyrite (or possibly pyrrhotite).....The fresh pyrite of the underground workings is very light colored, and similar to arsenopyrite. Unless the striations can be noted on the arsenopyrite, it is difficult to distinguish one from the other readily. Small masses of arsenopyrite when filed or hammered seldom yield the characteristic garlic-like odor."
- c) The core has been stored in the G M Resources' warehouse at Silver Creek, about 2 kilometres west of Hope, B. C.
- d) Assaying was carried out by General Testing Laboratories in Vancouver.
- e) Holes were spotted by tape and compass with reference to adjacent adits.

2. A.M. BRECCIA DRILLING

Three holes were drilled from surface at the south end of the A.M. Breccia as follows:

- 79-1 Depth 35.4 metres at -72° and at a bearing of N 60° W
- 79-2 Depth 132.3 metres at -70° and at a bearing of N 60° W
- 79-3 Depth 124.5 metres at -75° and at a bearing of N 60° W

Drawing No. C-S-08-8 (in pocket) shows the location of these holes and the core logs and assays are bound in Appendix form.

The main purpose of the A.M. Breccia drilling in 1979 was to check continuity of mineralization between surface (± 1675 metres elevation) and the No. 10 Level (1490 metre elevation) at the south end of the main breccia where prior drill information was scanty. The holes had to be abandoned somewhat short of the planned depth because of trouble being experienced with fractured and caving ground. They did prove up continuity as far as they went though.

Sludge samples were collected wherever possible so that their assays could provide a check on the core assays. As it turned out, the sludge assays were materially higher than those of the core and so should not be ignored when grade calculations are made for this highly fractured portion of the orebody.

3. INVERMAY DRILLING

One hole (79-4) was drilled from surface on the Invermay to a depth of 245.5 metres. It was located about 17 metres south of the portal of No. 4 adit and inclined at -80° towards the northeast. (See Drawing No. C-S-08-9 in pocket.) Core recovery was excellent (97.5%).

INVERMAY DRILLING (continued)

All the core recovered was mineralized, with the best mineralization occurring in well defined bands from 15 to 45 metres in thickness. A.C.M. de Voogd, in his report of November 5, 1959 for Cominco, notes on Page 6 that "there is a suggestion of a flat-lying control on both the alteration and the best mineralization on this level" (No. 5 Adit). A similar sense of near-horizontal control was also noted during examination of the core in hole 79-4 this summer, as sharp color changes in the rock frequently cut across the core almost at right angles, in spite of the fact that mineralized fractures were more often than not nearly parallel to its axis.


Gold does appear to associate with H.C.B. Leitch's "silvery colored sulphide", particularly at the Invermay where core recovery was good and the sulphide could be more readily noted. Molybdenum, on the other hand, appears to associate with tourmaline. Copper, silver, and lead and zinc (where determined) associate with the chlorite-actinolite alteration and some copper also associates with tourmaline.

There are thus three associations and, possibly, phases of mineralization to be considered when one attempts to develop structuring for the Invermay mineral occurrence.

CONCLUSION

The one hole drilled at the Invermay ore zone proved up mineralization at deeper levels than had been reached before, and the hole was still in interestingly mineralized ground when stopped because of the onset of winter. The three holes at the south end of the A.M. Breccia also penetrated previously unexplored ground, proving up continuous mineralization.

Respectfully submitted,

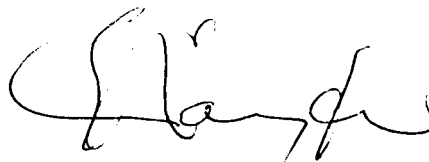A handwritten signature in black ink, appearing to read 'E. R. Gayfer', written in a cursive style.

E. R. Gayfer, P. Eng.

Vancouver, B. C.
January 22, 1980

APPENDIX I

ITEMIZED COST STATEMENT

ITEMIZED COST STATEMENT

1.	Drilling Contractor (Drilcor Industries Ltd. of Richmond, B.C.) September and October 1979		\$49,458.33
2.	Assaying (General Testing Laboratories of Vancouver, B.C.) 223 Au, Ag, Cu, and Mo Determinations @ \$21.00 3 Pb Determinations @ \$13.20 Plus Sample Preparation Charges		4,761.75
3.	Helicopter (Okanagan Helicopters Ltd. of Richmond, B.C.) July 28, 1979		374.00
4.	Road Access and Drill Site Preparation		
	a) Emil Anderson of Hope, B. C. August 13-17, 1979 inclusive 980 Loader @ \$66/hour	\$2,109.78	
	b) Mackenzie Contracting of Hope, B.C. October 3-7, 1979 inclusive D6 Cat @ \$42/hour	<u>1,566.00</u>	3,675.78
5.	Truck Rental (Redhawk Rentals of New Westminster, B.C.) Rentals for September, October, and November 1979		2,393.21
6.	Core Logging, Core Splitting, and On Site Supervision (E.R. Gayfer) Wages - 6 1/2 weeks @ \$400/week Expenses	\$2,600.00 <u>977.93</u>	3,577.93
7.	Report Preparation (Estimate)		<u>759.00</u>
	TOTAL DIRECT EXPENDITURE		<u><u>\$65,000.00</u></u>

APPENDIX II


AUTHOR'S QUALIFICATIONS

AUTHOR'S QUALIFICATIONS

I HEREBY CERTIFY THAT I am a Mining Engineer and Civil Engineer and have been registered as a Professional Engineer in the Province of British Columbia since 1955.

I have pursued my professional career as follows:

1. Graduated in Civil Engineering in 1933 from the University of Manitoba.
2. Spent several years in civil and mining engineering in northern Manitoba.
3. Was engaged for fifteen years in mining engineering and production for a large copper mining company in northern Rhodesia (Zambia), Africa.
4. Was the municipal engineer for approximately ten years for a small city in southern British Columbia.
5. Spent approximately eleven years as Chief Engineer and Manager of Property Acquisition for Giant Mascot Mines Limited in southern British Columbia, being engaged almost exclusively on the exploration, evaluation, and acquisition of mining properties.
6. Was semi-retired and self-employed for three years.
7. Am currently employed as a Senior Engineer with G M Resources Limited (formerly Giant Mascot Mines Limited).

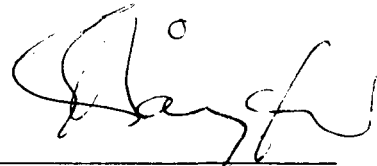

E. R. Gayfer, P. Eng.

January 22, 1980

APPENDIX III

DIAMOND DRILL HOLE RECORDS

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED
GIANT COPPER - INVERMAY BRECCIA

Property _____

Level Surface
Location #4 Adit
Date Started 9/10/79
Date Finished 28/10/79
Depth 805.5 feet

(not surveyed)
Lat. ± 14797 N
Dep. ± 6888 E
Elev. ± 5385
Bearing N 60° E
Slope - 80°

Hole No. 79-4
Sheet No. 1
Core Size BQ & AQ
Logged by E.R. Gayfer

Dip Tests _____

FOOTAGE		DESCRIPTIONS	CORE ASSAYS											RECOVERY		
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu%	MoS ₂ %	Pb	Zn	Depth	RUN	SHORT	% R
0	10	Medium grained quartz diorite with 10% mafics and negligible sulphides.	38068	0	10	10	.002	Tr.	0.05	.005	.01	.03	5	5.0	4.5	10
			38069	10	20	10	.006	.95	0.64	.005	.05	.13	9	4.0	2.4	40
			38070	20	30	10	.020	1.28	0.59	.012	.06	.18	13	4.0	3.9	2
			39022	30	40	10	.006	.46	0.28	.012			15	2.0	0.5	75
10	28	Medium grained to fine grained light colored quartz diorite with minor mafics. Frequent occurrences of massive tourmaline as fracture filling and with associated chalcopryrite.	39023	40	50	10	.004	.49	0.17	.005			16	1.0	-	100
			39024	50	60	10	.006	.44	0.19	.003			16.5	0.5	0.2	60
			39025	60	70	10	.012	.34	0.11	.003			17	0.5	-	100
			39101	70	80	10	.004	.08	0.06	.010			17.5	0.5	-	100
			39102	80	90	10	.010	.19	0.14	.005			20	2.5	0.4	84
			39103	90	100	10	.002	.05	0.09	.003			23	3.0	-	100
			39104	100	110	10	.006	.15	0.25	.003			28	5.0	1.0	80
			39105	110	120	10	.004	.05	0.10	.003			30	2.0	0.5	75
			39106	120	130	10	.004	.34	0.08	.002			38	8.0	-	100
			39107	130	140	10	.014	.48	0.37	.002			43	5.0	-	100
50	58	Medium grained - altered quartz diorite (bleached) - some sections with minor disseminated sulphides (some chalcopryrite and pyrite).	39108	140	150	10	.003	.56	0.40	.002			48	5.0	-	100
			39109	150	160	10	.021	.94	0.66	.010			53	5.0	0.2	96
			39110	160	170	10	.010	Tr.	0.06	.003			58	5.0	0.3	94
			39111	170	180	10	.014	.81	0.33	.002			63	5.0	-	100
58	63	Chloritized quartz diorite with some tourmaline - fair quantity of finely disseminated pyrite and chalcopryrite.	39112	180	190	10	.026	.50	0.08	.002			68	5.0	0.3	94
			39113	190	200	10	.002	Tr.	0.01	.002			73	5.0	-	100
			39114	200	210	10	.002	.40	0.17	.013			78	5.0	0.5	90
			39115	210	220	10	.010	.43	0.25	.017			83	5.0	0.4	92
63	68	Quartz diorite with some alteration and 10-15% mafics. Negligible sulphides.	39116	220	230	10	.032	.86	0.55	.005			88	5.0	-	100
			39117	230	240	10	.002	.09	0.04	.002			93	5.0	0.5	90
			39118	240	250	10	.002	Tr.	0.04	.002			94	1.0	-	100
68	72	Light quartz diorite - fine grained and with very minor sulphides - negligible mafics.	39119	250	260	10	.002	Tr.	0.04	.002			99.5	5.5	0.3	95
			39120	260	270	10	.002	Tr.	0.06	.002			108	8.5	-	100
			39121	270	280	10	.006	Tr.	0.02	.002			113	5.0	-	100
			39122	280	290	10	.006	.10	0.07	.002			118	5.0	-	100
72	80	Quartz diorite with 5% mafics - no disseminated sulphides but the odd tourmaline filled fracture with only minor accompanying sulphides.	39123	290	300	10	.008	.14	0.05	.002			123	5.0	-	100
			39124	300	310	10	.004	.09	0.07	.003			125.5	2.5	0.4	84
			39125	310	320	10	.010	.08	0.05	.005			128	2.5	0.1	96
			38176	320	330	10	.002	.46	0.20	.002			133	5.0	-	100
			38177	330	340	10	.018	.12	0.07	.002			138	5.0	0.2	96
			38178	340	350	10	.010	.10	0.09	.002			143	5.0	-	100

7823

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED
GIANT COPPER - INVERMAY BRECCIA

Property

Level _____
Location _____
Date Started _____
Date Finished _____
Depth _____

Lat. _____
Dep. _____
Elev. _____
Bearing _____
Slope _____

Hole No 79-4
Sheet No. 2
Core Size _____
Logged by _____

Dip Tests _____

FOOTAGE	DESCRIPTIONS	CORE ASSAYS								RECOVERY					
		FROM	TO	NO	FROM	TO	FEET	Au	Ag	Cu %	MoS ₂ %	Depth	RUN	SHORT	% R
				38179	350	360	10	.044	1.06	0.46	.047	148	5.0	-	100
80	100	Generally light colored quartz diorite with only occasional sections of chloritic alteration with accompanying chalcopyrite blebs or tourmaline filled fractures.		38180	360	370	10	.024	0.29	0.13	.005	153	5.0	-	100
				38181	370	380	10	.008	0.02	0.08	.003	158	5.0	-	100
				38182	380	390	10	.008	Tr.	0.10	.003	163	5.0	-	100
				38183	390	400	10	.006	0.03	0.07	.002	168	5.0	-	100
100	105	Frequent altered patches (chlorite) containing sulphides.		38184	400	410	10	.016	Tr.	0.03	.007	173	5.0	-	100
				38185	410	420	10	.014	Tr.	0.10	.005	178	5.0	-	100
105	113	10-15% mafics. Negligible alteration and sulphides.		38186	420	430	10	.006	Tr.	0.08	.003	183	5.0	0.4	92
				38187	430	440	10	.002	Tr.	0.07	.003	186.5	3.5	0.3	91
113	123	10-15% mafics - occasional patches of chloritic alteration with sulphides.		38188	440	450	10	.004	0.06	0.12	.002	188	1.5	0.5	66
				38189	450	460	10	.008	0.20	0.19	.002	193	5.0	-	100
				38190	460	470	10	.010	0.15	0.23	.003	198	5.0	-	100
123	133	10-15% mafics - no disseminated sulphides but some chalcopyrite in a single axial fracture several feet long.		38191	470	480	10	.008	0.15	0.24	.003	203	5.0	-	100
				38192	480	490	10	.006	Tr.	0.09	.002	208	5.0	-	100
				38193	490	500	10	.076	0.34	0.20	.002	213	5.0	-	100
133	143	Mostly bleached quartz diorite with good sized blebs of chalcopyrite.		38194	500	510	10	.016	1.04	0.26	.002	218	5.0	-	100
				38195	510	520	10	.006	0.24	0.11	.003	223	5.0	-	100
				38196	520	530	10	.018	0.50	0.36	.003	228	5.0	-	100
143	148	Mostly unmineralized quartz diorite with 10-15% mafics.		38197	530	540	10	.006	0.26	0.30	.003	228.5	0.5	-	100
				38198	540	550	10	.004	0.41	0.28	.003	229	0.5	-	100
148	165	Alternating bleached and chloritized sections with good mineralization in the chloritized sections. Also strong chalcopyrite and tourmaline from 150 to 152' in one bleached section.		38199	550	560	10	.006	0.20	0.18	.002	233	4.0	0.4	90
				38200	560	570	10	.066	0.29	0.11	.002	238	5.0	0.2	96
				38201	570	580	10	.014	0.38	0.15	.002	243	5.0	-	100
				38202	580	590	10	.018	0.09	0.15	.002	248	5.0	-	100
				38203	590	600	10	.012	0.20	0.28	.003	253	5.0	-	100
165	175	10-15% mafics with some alteration and sulphides.		38204	600	610	10	.010	0.17	0.22	.002	258	5.0	-	100
				38205	610	620	10	.012	0.19	0.32	.003	263	5.0	0.3	94
175	186	Light colored section - highly altered and crumbly in places with much silvery colored pyrite (or arsenopyrite?) in these sections. Only minor chalcopyrite.		38206	620	630	10	.010	0.13	0.17	.005	268	5.0	-	100
				38207	630	640	10	.006	0.40	0.14	.007	273	5.0	-	100
				38208	640	650	10	.004	0.20	0.16	.005	278	5.0	-	100
				38209	650	660	10	.064	0.36	0.15	.003	283	5.0	-	100
				38210	660	670	10	.008	0.30	0.32	.005	288	5.0	-	100
				38211	670	676.7	6.7	.006	Tr.	0.12	.003	293	5.0	-	100

MINERAL
7823

END OF BQ →

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED
GIANT COPPER - INVERMAY BRECCIA

Property__

Level	Lat.	Hole No.	79-4	Dip Tests
Location	Dep.	Sheet No.	3	
Date Started	Elev.	Core Size		
Date Finished	Bearing	Logged by		
Depth	Slope			

FOOTAGE		DESCRIPTIONS	CORE ASSAYS								RECOVERY			
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu %	MoS ₂ %	Depth	RUN	SHORT	% R
		START OF AQ →	38228	676.7	680	3.3	.028	0.10	0.19	.007	298	5.0	-	100
186	201	5-10% mafics - minor alteration - minor disseminated sulphides - occasional chalcopyrite filled fine fracture.	38229	680	690	10	.002	0.10	0.18	.005	303	5.0	-	100
			38230	690	700	10	.022	0.32	0.18	.005	308	5.0	-	100
			38231	700	710	10	.024	0.59	0.19	.005	313	5.0	0.4	92
201	229	Fair amount of chloritic alteration and bleaching - fairly good sulphides in places, as well as tourmaline.	38232	710	720	10	.002	0.72	0.33	.005	318	5.0	-	100
			38233	720	730	10	.004	0.80	0.30	.005	323	5.0	-	100
			38234	730	740	10	.006	0.44	0.12	.005	328	5.0	-	100
229	237	(12" reaming debris at 235') 5% mafics - minor alteration - minor sulphides.	38235	740	750	10	.002	0.43	0.17	.002	333	5.0	-	100
			38236	750	760	10	.002	0.26	0.24	.010	338	5.0	-	100
			38237	760	770	10	.002	Tr.	0.11	.007	343	5.0	-	100
237	245	15% mafics - negligible sulphides.	38238	770	780	10	.004	0.19	0.16	.008	348	5.0	-	100
			38239	780	790	10	.008	0.76	0.16	.003	353	5.0	-	100
		END OF HOLE	38240	790	805½	15½	.004	0.51	0.18	.005	358	5.0	-	100
											363	5.0	-	100
245	263	5-10% mafics - some chlorite alteration in places. Generally minor sulphides.				Average	.0113	0.297	0.184	.0047	368	5.0	-	100
											373	5.0	-	100
263	267	Bleached quartz diorite - some carbonate veinlets - some chloritic alteration with sulphides at 263'.									378	5.0	-	100
											383	5.0	-	100
											388	5.0	-	100
267	315	10-15% mafics - occasional patch of chloritic alteration - some Zn at 282' - occasional tourmaline filled fracture - generally weak sulphides. Some actinolite.									389.5	1.5	-	100
											390	0.5	-	100
											398	8.0	-	100
											408	10.0	0.5	95
											418	10.0	-	100
315	356	Some bleaching and chloritic alteration, scattered blebs and veinlets of mineralization - some tourmaline veining at 333'.									428	10.0	-	100
											438	10.0	-	100
											448	10.0	-	100
356	358	Heavy tourmaline with chalcopyrite.									458	10.0	-	100
											468	10.0	-	100
358	390	10% mafics - some chloritic alteration and sulphide veining - some tourmaline and actinolite.									478	10.0	-	100
											487.5	9.5	-	100
											498	10.5	-	100
											508	10.0	-	100
390	390.5	Carbonate vein with silvery colored pyrite (or arsenopyrite).									518	10.0	-	100
											523	5.0	-	100
											533	10.0	-	100

RANCH
 7823
 NO

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED
GIANT COPPER - INVERMAY BRECCIA

Property_

Level	Lat.	Hole No.	79-4	Dip Tests
Location	Dep.	Sheet No.	4	
Date Started	Elev.	Core Size		
Date Finished	Bearing	Logged by		
Depth	Slope			

FOOTAGE		DESCRIPTIONS	CORE ASSAYS				RECOVERY			
FROM	TO		No.	FROM	TO	FEET	Depth	RUN	SHORT	% R
390.5	510	Generally 5-10% mafics - some lighter sections at 392-395 410-426					543	10.0	-	100
		Some chloritized zones at 395-398 442-445					553	10.0	-	100
		400-410 456-467					563	10.0	-	100
		428-430 478-480					573	10.0	-	100
		439-443 487.5-488.5					583	10.0	-	100
		448-456					588	5.0	-	100
		Carbonate veining at 504-506'.					598	10.0	-	100
							608	10.0	-	100
510	540	A fair amount of both chloritic and sericitic alteration - a fair amount of sulphides in blebs, stringers, and patches.					618	10.0	-	100
							628	10.0	-	100
							638	10.0	-	100
							648	10.0	-	100
							658	10.0	-	100
540	565	10% mafics - patches of chloritic alteration with mineralization.					668	10.0	-	100
							676.7	8.7	-	100
565	573	Considerable chloritic alteration but only minor sulphide mineralization - some tourmaline stringers.					678	1.3	0.5	62
							683	5.0	-	100
							693	10.0	-	100
							703	10.0	-	100
573	580	5% mafics - some alteration and mineralization.					710	7.0	-	100
							710.5	0.5	-	100
580	598	5-10% mafics - fair blebs of sulphide - patchy chloritic alteration.					712.5	2.0	-	100
							713	0.5	-	100
							717	4.0	-	100
598	640	5% mafics - chlorite or actinolite at 620' - generally weak alteration and weak mineralization.					723	5.0	-	100
							732	9.0	-	100
							742.5	10.5	-	100
640	698	0-5% mafics - generally weak mineralization - some alteration particularly in the form of chloritized slips. Scattered mineralization strongest where silicification and car- bonatization has occurred. Beyond 675 - fair amount of kaolin alteration.					753	10.5	-	100
							763	10.0	-	100
							773	10.0	-	100
							783	10.0	-	100
							788	5.0	-	100
							798	10.0	-	100
							799.5	1.5	-	100
							803	3.5	-	100
							805.5	2.5	-	100
							805.5 20.1 97.5			

END OF BQ →
START OF AQ →

7023

END OF HOLE →

DIAMOND DRILL HOLE RECORD

Property: G M RESOURCES LIMITED
GIANT COPPER - INVERMAY BRECCIA

Level	Lat.	Hole No.	79-4	Dip Tests
Location	Dep.	Sheet No.	5	
Date Started	Elev.	Core Size		
Date Finished	Bearing	Logged by		
Depth	Slope			

FOOTAGE		DESCRIPTIONS	CORE ASSAYS								RECOVERY	
FROM	TO		No.	FROM	TO	FEET	%	%			RUN	SHORT
698	699	Crumbly alteration with pyrite (or arsenopyrite?).										
699	772	White and slightly mottled quartz diorite with chloritic alteration - Zn at 706 - chalcopyrite and pyrite associated with chloritic mottles.										
772	792	Mostly white quartz diorite - some chloritization 772-783.5, 783.5 mud seam. Zn at 772. Generally weak mineralization.										
792	805.5	5% mafics with some chloritization - fair sulphides in patches.										
		END OF HOLE.										

7823

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

GIANT COPPER - A.M. BRECCIA

Property

Level	Surface	(not surveyed)
Location	Above #7	Lat. ± 9430 N
Date Started	27-9-79	Dep. ± 9835 E
Date Finished	6-10-79	Elev. ± 5515
Depth	408'	Bearing N 60° W
		Slope - 75°

Hole No.	79-3
Sheet No.	1
Core Size	BQ
Logged by	E.R. Gayfer

Dip Tests

FOOTAGE		DESCRIPTIONS	CORE ASSAYS							RECOVERY				
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu %	MoS ₂ %	Depth	RUN	SHORT	% R
			38054	0	20	20	Tr.	Tr.	.07	.002	8	8.0	7.0	12
0	7	Overburden rubble	38055	20	30	10	Tr.	Tr.	.04	.002	9	1.0	-	100
			38056	30	40	10	Tr.	Tr.	.26	.002	13	4.0	3.5	12
7	8	Hornblendite	38057	40	50	10	Tr.	Tr.	.07	.002	15	2.0	1.7	15
			38058	50	60	10	Tr.	Tr.	.10	.002	18	3.0	2.4	20
8	30	Very broken up siltstone, poorly mineralized. Some short sections of weathered intrusive. Fault zone 23' - 24'. Generally poor core recovery.	38059	60	70	10	Tr.	Tr.	.06	.002	24	6.0	5.0	16
			38060	70	80	10	Tr.	Tr.	.05	.002	25	1.0	0.6	40
			38061	80	90	10	Tr.	Tr.	.10	.002	27	2.0	1.7	15
			38062	90	100	10	Tr.	Tr.	.04	.002	28	1.0	0.6	40
30	40	Fine grained intrusive? Contains some pyrite.	38063	100	110	10	Tr.	Tr.	.08	.002	33	5.0	0.3	94
			38064	110	120	10	Tr.	Tr.	.08	.002	38	5.0	-	100
40	58	Broken siltstone, negligible mineralization.	38065	120	130	10	Tr.	Tr.	.15	.002	40.5	2.5	0.5	80
			38066	130	140	10	Tr.	Tr.	.03	.002	42	1.5	0.8	47
58	64	Fine grained intrusive? Some finely disseminated pyrite.	38067	140	150	10	Tr.	Tr.	.40	.002	43	1.0	-	100
			38071	150	160	10	.002	.10	.34	.002	45.5	2.5	1.0	60
			38072	160	170	10	.002	Tr.	.05	.002	48	2.5	1.4	44
64	75	Light colored siltstone breccia, occasional patches of chalcopyrite.	38073	170	180	10	.002	Tr.	.03	.002	49	1.0	0.4	60
			38074	180	190	10	.002	Tr.	.05	.002	50.5	1.5	0.6	60
			38075	190	200	10	.002	Tr.	.01	.002	51	0.5	-	100
75	79	Hornblendite.	39001	200	210	10	.002	.10	.41	.002	51.5	0.5	-	100
			39002	210	220	10	.002	Tr.	.04	.002	53	1.5	0.5	66
79	85	Much altered and silicified; medium grained intrusive, occasional patch of chalcopyrite.	39003	220	230	10	.002	.13	.48	.002	53.5	0.5	-	100
			39004	230	240	10	.002	.12	.03	.002	54	0.5	0.2	60
			39005	240	250	10	.002	Tr.	.05	.002	54.5	0.5	0.1	80
85	155	Brecciated sediments, generally poorly mineralized. May contain some sections of very fine grained intrusive. Better mineralization from 148' - 155'.	39006	250	260	10	.002	.28	.59	.002	56	1.5	0.6	60
			39007	260	270	10	.002	Tr.	.12	.002	58	2.0	0.2	90
			39008	270	280	10	.002	Tr.	.21	.002	63	5.0	0.5	90
			39009	280	290	10	.002	.12	.16	.002	65	2.0	0.8	60
155	167	Mostly unmineralized mafic dyke.	39010	290	300	10	.002	.05	.12	.002	67	2.0	-	100
			39011	300	310	10	.002	Tr.	.16	.002	70.5	3.5	-	100
167	190	Mostly brecciated sediments with some chloritization and mineralization.	39012	310	320	10	.002	Tr.	.10	.002	73	2.5	0.2	92
			39013	320	330	10	.002	Tr.	.01	.002	78	5.0	-	100
			39014	330	340	10	.002	Tr.	.01	.002	83	5.0	-	100
190	197	Mafic dyke unmineralized.	39015	340	350	10	.002	.07	.02	.002	88	5.0	-	100
			39016	350	360	10	.002	.05	.08	.002	93	5.0	-	100

7823
 Mafic dyke unmineralized

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

Property GIANT COPPER - A.M. BRECCIA

Level	
Location	
Date Started	
Date Finished	
Depth	

Lat.	
Dep.	
Elev.	
Bearing	
Slope	

Hole No.	79-3
Sheet No.	2
Core Size	
Logged by	

Dip Tests	
-----------	--

FOOTAGE	DESCRIPTIONS	CORE ASSAYS								RECOVERY					
		FROM	TO	No.	FROM	TO	FEET	Au	Ag	Cu %	MoS ₂ %	Depth	RUN	SHORT	%R
				39017	360	370	10	.002	.09	.13	.002 ²	98	5.0	0.8	84
197	Quartzitic sediments with the occasional sulphide patch or stringer.	217		39018	370	380	10	.002	.20	.10	.002	103	5.0	1.2	76
				39019	380	390	10	.002	Tr.	.01	.002	106.5	3.5	1.0	71
				39020	390	400	10	.004	.36	.37	.002	112	5.5	1.3	76
217	Mostly bleached intrusive with some mineralization.	224		39021	400	408½	8½	.004	.29	.10	.002	117.5	5.5	0.5	91
												123	5.5	-	100
224	Sediments with generally only minor mineralization. Good values from 250' - 252' and at 254'.	283										128	5.0	-	100
												133	5.0	-	100
												135	2.0	0.9	55
283	Mostly very broken, altered, and crumbly sediments, or possibly intrusives; some white colored sections containing garnierite. Negligible sulphides.	316										136.5	1.5	-	100
												138	1.5	-	100
												143	5.0	0.9	82
												148	5.0	1.0	80
316	Hornblendite dyke, medium to coarse grained.	328										153	5.0	3.0	40
												157	4.0	0.3	92
328	Very broken and kaolinized crumbly sediments. Negligible sulphides. Some nickel stain.	358										161.5	4.5	0.3	93
												163	1.5	-	100
												167	4.0	0.2	95
358	Broken sediments. Largely unmineralized.	378										169.5	2.5	-	100
												172	2.5	1.8	28
378	Medium grained, unmineralized, basic dyke, Hornblendic.	390										173	1.0	-	100
												176.5	3.5	0.7	80
												183	6.5	0.8	88
390	Brecciated sediments containing patches of fair sulphide mineralization.	408.5										186.5	3.5	0.4	89
												188	1.5	0.5	67
												189.5	1.5	1.2	20
End of Hole												193	3.5	0.3	91
												197.5	4.5	0.7	84
												201	3.5	0.4	89
												203	2.0	-	100
												213	10.0	0.5	95
												218	5.0	-	100
												223	5.0	0.3	94
												228	5.0	1.0	80

7823
 NO.

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

Property GIANT COPPER - A.M. BRECCIA

Level _____
Location _____
Date Started _____
Date Finished _____
Depth _____

Lat. _____
Dep. _____
Elev. _____
Bearing _____
Slope _____

Hole No. 79-3
Sheet No. 3
Core Size _____
Logged by _____

Dip Tests _____

FOOTAGE		DESCRIPTIONS	SLUDGE ROD ASSAYS					RECOVERY							
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu%	MoS ₂ %	Depth	RUN	SHORT	% R	
											233	5.0	0.7	86	
											238	5.0	1.7	66	
											242	4.0	0.6	85	
											244	2.0	0.2	90	
											248	4.0	3.5	14	
											250	2.0	1.5	25	
											253	3.0	0.3	90	
											255 ¹ / ₂	2.5	-	100	
											258	2.5	-	100	
			38152	10	20	10)	.002	.16	.19	.009	260	2.0	0.6	70
			38153	20	30	10									
			38154	30	40	10)	.004	.10	.09	.002	261	1.0	0.6	40
			38155	40	50	10									
			38156	50	60	10)	.002	.10	.09	.002	262	1.0	0.6	40
			38157	60	70	10									
			38158	70	80	10)	.002	.10	.09	.002	263	1.0	0.3	70
			38159	80	90	10									
			38160	90	100	10)	No samples	110'-150'			264	1.0	0.5	50
			38161	100	110	10									
			38162	150	160	10)	.005	.13	.22	.002	266 ¹ / ₂	2.5	-	100
			38163	160	170	10									
			38164	170	180	10)	.002	.05	.11	.002	268	1.5	0.4	73
			38165	180	190	10									
			38166	190	200	10)					270 ¹ / ₂	2.5	0.3	88
												273	2.5	1.5	40
												278	5.0	4.0	20
												283	5.0	3.5	30
												288	5.0	1.5	70
												292	4.0	0.8	80
												295 ¹ / ₂	3.5	1.1	69
												296	0.5	0.2	60
												298	2.0	1.0	50
												300	2.0	1.4	30
												301	1.0	0.7	30
												303	2.0	0.2	90
												308	5.0	0.3	94
												313	5.0	0.6	88
												318	5.0	1.8	64
												323	5.0	0.9	82
												328	5.0	1.3	74
												330 ¹ / ₂	2.5	2.0	20
												331 ¹ / ₂	1.0	0.2	20

7823

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

GIANT COPPER - A.M. BRECCIA

Property.

Level Surface
 Location #3 Adit
 Date Started 15/9/79
 Date Finished 26/9/79
 Depth 434 feet

(not surveyed)
 Lat. ± 9365 N
 Dep. ± 10070 E
 Elev. ± 5419
 Bearing N 60° W
 Slope - 70°

Hole No. 79-2
 Sheet No. 1
 Core Size BQ
 Logged by E.R. Gayfer

Dip Tests

FOOTAGE		DESCRIPTIONS	CORE ASSAYS							RECOVERY				
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu %	MoS ₂ %	Depth	RUN	SHORT	% R
			38113	0	10	10	.006	.24	1.32	.063	8	8.0	6.0	25
0	56	Light colored siltstone breccia, generally well mineralized with pyrite, chalcopyrite, some bornite, and some molybdenum. Sulphides occur as disseminations, breccia surrounds, and fracture filling. Some small patches of massive calcite with associated sulphides.	38114	10	20	10	.002	.20	0.37	.072	12	4.0	3.7	8
			38115	20	30	10	.002	.10	0.26	.092	12.5	0.5	0.3	40
			38116	30	40	10	.002	.10	0.59	.097	13	0.5	0.2	60
			38117	40	50	10	.004	.05	0.29	.077	14.5	1.5	0.6	60
			38118	50	60	10	.044	.20	0.73	.008	15	0.5	-	100
			38119	60	70	10	.008	.05	0.23	.005	18	3.0	1.0	66
56	57	Fine grained black dyke (?) with some sulphides in fractures.	38120	70	80	10	.006	.05	0.28	.005	23	5.0	2.0	60
			38121	80	90	10	.010	.20	0.39	.003	25.5	2.5	1.3	48
			38122	90	100	10	.018	.15	0.90	.008	26	0.5	0.3	40
			38123	100	110	10	.034	.05	1.06	.018	28	2.0	0.4	80
57	73	Siltstone breccia with some sulphides.	38124	110	120	10	.002	.05	0.12	.008	29	1.0	0.4	60
			38125	120	130	10	.004	.05	0.10	.008	29.5	0.5	0.2	60
73	170	Sedimentary breccia with sections of fair sulphide mineralization.	38139	130	150	20	.002	.31	1.10	.003	30	0.5	-	100
			38140	150	160	10	.006	Tr.	0.11	.002	31.5	1.5	0.3	80
			38141	160	170	10	.002	.29	0.56	.020	33	1.5	-	100
170	200	Sedimentary breccia with good sulphide mineralization.	38142	170	180	10	.002	.54	1.38	.013	35.5	2.5	-	100
			38143	180	190	10	.014	.77	2.18	.008	38	2.5	1.0	60
200	249	Sediments only slightly brecciated and with negligible sulphides.	38144	190	200	10	.026	.53	1.42	.013	39	1.0	0.7	30
			38145	200	210	10	.004	Tr.	0.05	.003	42	3.0	-	100
			38146	210	220	10	.002	Tr.	0.02	.002	43	1.0	0.2	80
249	278	Broken sediments but with only minor sulphides - chloritized in sections.	38147	220	230	10	.002	Tr.	0.01	.003	48	5.0	2.0	60
			38148	230	240	10	.002	Tr.	0.16	.007	52	4.0	2.7	33
			38149	240	250	10	.008	Tr.	0.01	.003	54	2.0	1.0	50
278	333	Mostly unmineralized quartz diorite.	38150	250	260	10	.002	Tr.	0.01	.003	55	1.0	0.3	70
			38151	260	270	10	.002	Tr.	0.01	.002	58	3.0	0.4	87
333	380	Mostly volcanics (?) and fine grained intrusive (unmineralized).	38212	270	280	10	.002	Tr.	0.09	.003	62	4.0	3.2	20
			38213	280	290	10	.004	.20	0.28	.003	63	1.0	0.1	90
			38214	290	300	10	.002	.15	0.01	.002	65	2.0	1.0	50
			38215	300	310	10	.002	Tr.	0.01	.002	66	1.0	0.2	80
380	434	Mostly fairly fresh unmineralized quartz diorite - occasional chloritized sections.	38216	310	320	10	.006	Tr.	0.12	.002	68	2.0	0.2	90
			38217	320	330	10	.002	Tr.	0.01	.002	73	5.0	3.5	30
			38218	330	340	10	.004	0.05	0.01	.002	75.5	2.5	2.4	4
		END OF HOLE												

MINERAL RESOURCES BRANCH
 7823
 40.

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

Property_

GIANT COPPER - A.M. BRECCIA

Level	Lat.	Hole No.	79-2	Dip Tests
Location	Dep.	Sheet No.	2	
Date Started	Elev.	Core Size		
Date Finished	Bearing	Logged by		
Depth	Slope			


FOOTAGE		DESCRIPTIONS	CORE ASSAYS							RECOVERY				
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu %	MoS %	Depth	RUN	SHORT	% R
			38219	340	350	10	.010	Tr.	0.01	.002	77.5	2.0	1.7	15
			38220	350	360	10	.002	Tr.	0.01	.002	78	0.5	0.3	40
			38221	360	370	10	.002	Tr.	0.02	.002	80	2.0	0.8	60
			38222	370	380	10	.002	Tr.	0.01	.002	81	1.0	0.7	30
			38223	380	390	10	.004	.09	0.03	.002	82	1.0	0.4	60
			38224	390	400	10	.002	.16	0.08	.002	83	1.0	0.7	30
		SLUDGE SAMPLES →	38099	15	20	5	.002	.10	0.70	.200	83.5	0.5	0.1	80
			38100	20	30	10	Not assayed		0.53	.184	86	2.5	2.0	20
			38101	30	40	10	.004	.35	1.50	.070	87.5	1.5	1.1	27
			38102	50	60	10	.024	.47	1.68	.087	88.5	1.0	0.7	30
			38103	60	70	10	.024	.60	1.07	.010	91	2.5	0.4	84
			38104	70	80	10	.002	.65	2.06	.007	96	5.0	2.0	60
			38105	80	90	10	.088	.58	2.49	.008	98	2.0	0.6	70
			38106	90	100	10	.090	.71	3.55	.008	103	5.0	-	100
			38107	100	110	10	.056	.85	2.97	.030	108	5.0	2.7	46
			38108	110	120	10	.032	.59	2.63	.045	113	5.0	4.6	8
			38109	120	130	10	.028	.57	1.89	.028	114.5	1.5	1.3	33
			38110	130	138	8	.024	.61	2.86	.010	116	1.5	0.8	47
			38111	138	145	7	.016	.40	2.54	.007	118	2.0	1.4	30
			38112	145	150	5	.002	.34	1.38	.003	120.5	2.5	1.7	52
			38126	150	160	10	.005	.82	2.54	.007	121.5	1.0	0.7	30
			38127	180	190	10	.005	.34	1.53	.007	122	0.5	-	100
			38128	190	200	10	.005	.38	1.77	.012	126	4.0	3.0	25
			38129	200	210	10	.002	.43	1.37	.008	128	2.0	1.3	35
			38130	210	220	10	.016	Tr.	0.76	.007	133	5.0	4.6	8
			38131	220	230	10	.004	Tr.	0.25	.003	135	2.0	0.8	60
			38132	230	240	10	.002	Tr.	0.35	.010	138	3.0	1.7	43
			38133	240	250	10	.002	.10	0.19	.002	139.5	1.5	0.2	87
			38134	250	260	10	.002	.20	0.17	.002	141.5	2.0	1.7	15
			38135	260	270	10	.002	Tr.	0.20	.003	143	1.5	1.0	33
			38136	270	280	10	.002	Tr.	0.06	.002	144.5	1.5	1.1	27
			38137	280	290	10	.002	Tr.	0.27	.002	147.5	3.0	1.0	66
			38138	290	300	10	.004	.15	0.26	.002	148.5	1.0	0.6	40
			38167	300	310	10					152.5	4.0	3.6	10
			38168	310	320	10	.002	.05	0.21	.003	159	6.5	6.2	5

DIAMOND DRILL HOLE RECORD
 7823
 NO.

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

GIANT COPPER - A.M. BRECCIA



Level	Surface	(not surveyed)		Hole No.	79-1	Dip Tests
Location	#7 Adit	Lat.	± 9155 N	Sheet No.	1	
Date Started	10/9/79	Dep.	± 9980 E	Core Size	BQ	
Date Finished	14/9/79	Elev.	± 5448	Logged by	E.R. Gayfer	
Depth	116 ft.	Bearing	N 60 W			
		Slope	- 72°			

FOOTAGE		DESCRIPTIONS	CORE ASSAYS								RECOVERY			
FROM	TO		No.	FROM	TO	FEET	Au	Ag	Cu %	MoS %	Depth	RUN	SHORT	% R
			38085	0	10	10	.002	Tr.	.07	.001 ²	12	12	2.0	80
0	12	Fine grained, broken sediments, very minor pyrite, malachite stain. Generally light colored.	38086	10	20	10	.002	Tr.	.04	.003	12.5	0.5	-	100
			38087	20	30	10	.002	0.31	.07	.005	14	1.5	0.2	87
			38088	30	40	10	.002	4.15	.08	.007	18.5	4.5	1.0	78
12	40	Mostly fine to medium grained intrusive with + 20% mafics - some sections contain disseminated pyrite and the occasional bleb of chalcopryite.	38089	40	51.5	11.5	.002	3.38	.24	.022	19.5	1.0	0.7	30
			38091	51.5	58	6.5	.006	Tr.	.33	.020	20.5	1.0	-	100
			38092	58	60	2	.180	3.64	10.89	.250	21.5	1.0	0.3	70
			38093	60	70	10	.006	.06	.44	.105	22	0.5	0.3	40
40	58	Mostly dark colored, fine-grained sediments often not distinguishable from overlying intrusive - some chalcopryite in blebs and fractures. Some thin veinlets of molybdenum.	38094	70	80	10	.002	.05	.17	.007	23	1.0	0.3	70
			38095	80	90	10	.030	.05	.45	.234	25	2.0	-	100
			38096	100	110	10	.024	.57	2.03	.234	25.4	0.4	0.2	50
			38097	110	116	6	.010	.10	.75	.250	26	0.6	0.2	67
58	60	Masses of solid sulphide - chalcopryite and pyrite associated with calcite.									29.5	3.5	-	100
			No core recovery 90' - 100'								33	3.5	-	100
											34.5	1.5	-	100
60	80	Broken sediments with pyrite and chalcopryite as disseminations, blebs and fracture filling.									35	0.5	0.4	20
											36	1.0	0.2	80
			Sludge Samples								39	3.0	2.5	17
80	90	Tuff (?) with some pyrite, arsenopryite, chalcopryite, and molybdenum.									41	2.0	1.8	10
											44	3.0	2.0	33
			38076	10	20	10	.002	Tr.	.18	.001	46	2.0	0.5	75
			38077	20	30	10	.002	2.41	.11	.001	47	1.0	0.5	50
90	116	Mostly brecciated sediments with patches and disseminations of sulphide (pyrite, chalcopryite, and arsenopryite). Generally very poor core recovery.	38078	30	40	10	.002	Tr.	.15	.012	51.5	4.5	2.0	56
			38079	40	50	10	.002	0.88	.94	.035	53	1.5	0.8	47
			38080	50	60	10	.028	0.98	2.14	.065	54.5	1.5	1.2	20
			38081	60	70	10	.004	0.69	1.07	.13	56	1.5	0.5	70
		END OF HOLE	38082	70	80	10	.002	0.59	0.80	.13	58	2.0	1.7	15
			38083	80	90	10	.002	0.75	0.51	.27	63	5.0	2.5	50
		Hole cemented at 116' and redrilled from 103 to 113 - then abandoned.	38084	90	100	10	.002	0.83	.05	.43	65	2.0	0.6	70
			38090	100	110	10	.044	0.62	2.05	.317	68	3.0	0.5	83
											73	5.0	4.2	16
											78	5.0	4.2	16
											83	5.0	3.5	10
											88	5.0	3.5	10

7823

DIAMOND DRILL HOLE RECORD

G M RESOURCES LIMITED

Property GIANT COPPER - A.M. BRECCIA

Level _____
 Location _____
 Date Started _____
 Date Finished _____
 Depth _____

Lat. _____
 Dep. _____
 Elev. _____
 Bearing _____
 Slope _____

Hole No. 79-1
 Sheet No. 2
 Core Size _____
 Logged by _____



Dip Tests _____

FOOTAGE		DESCRIPTIONS	CORE ASSAYS							RECOVERY					
FROM	TO		NO.	FROM	TO	FEET	Au	Ag	Cu%	MoS ₂ %	Depth	RUN	SHORT	% R	
											93	5.0	5.0	0	
											98	5.0	5.0	0	
											100	2.0	1.9	5	
											102	2.0	1.3	35	
											103	1.0	0.9	10	
											106.5	3.5	2.3	34	
											108	1.5	0.9	40	
											111	3.0	1.2	27	
											113	2.0	1.4	30	
											114	1.0	0.8	20	
											116	2.0	1.8	10.	
											Total	116	60.8	47.6	
											Cemented at 116' and redrilled from 103'-113' as 79-1A; then abandoned.	79-1A	5.0	4.0	
												5.0	3.2		

MINER 1001 11

7823

110

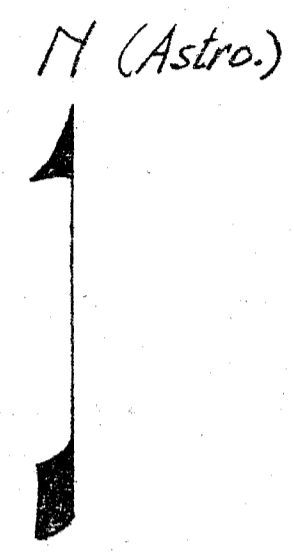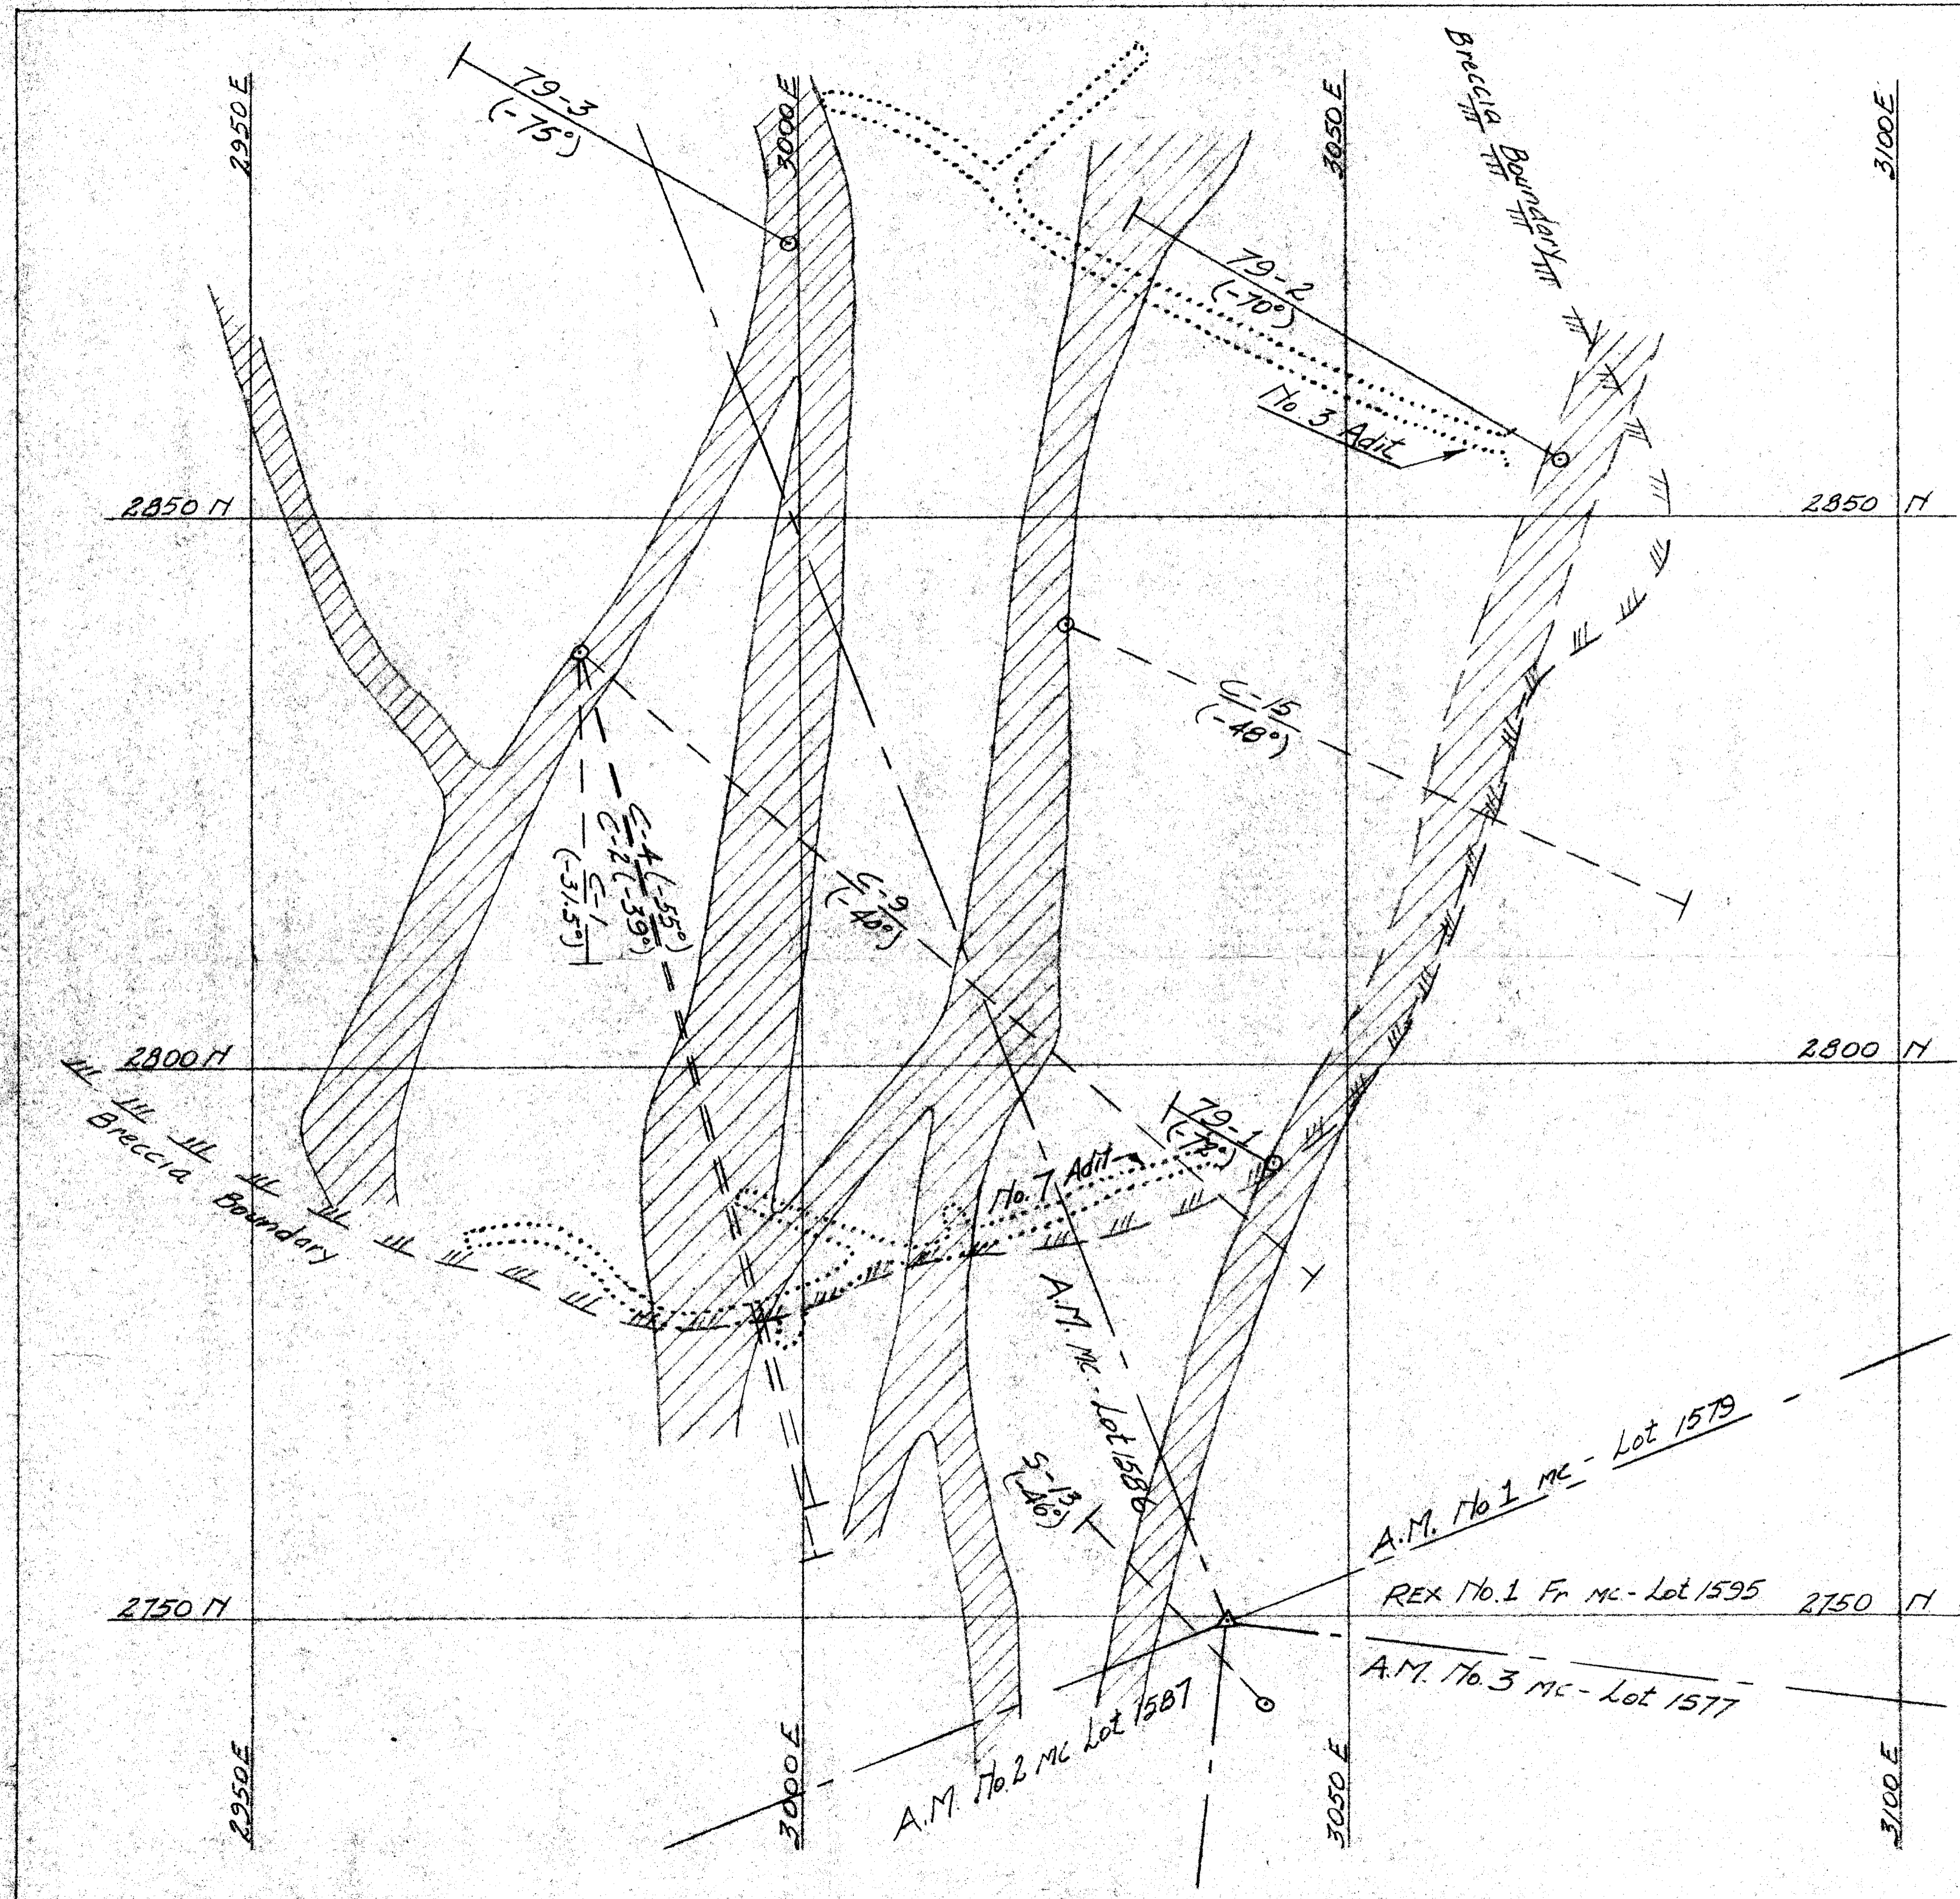

LEGEND:


- Old drill holes
- 1979 drill holes
- Breccia boundary
- Roads and trenches

MINERAL RESOURCES BRANCH
ASSESSMENT REPORT
7823
NO.

To go with the assessment report
of 22-1-80 by E.R. Coates.
[Signature]

GM RESOURCES LIMITED
GIANT COPPER PROPERTY
PLAN OF 1979 DRILLING
- A.M. BRECCIA -

Drawn by ER Coates Scale 1:400
Date 21-1-80 5 metres to 1 cm
Dwg No. C-5-08-B

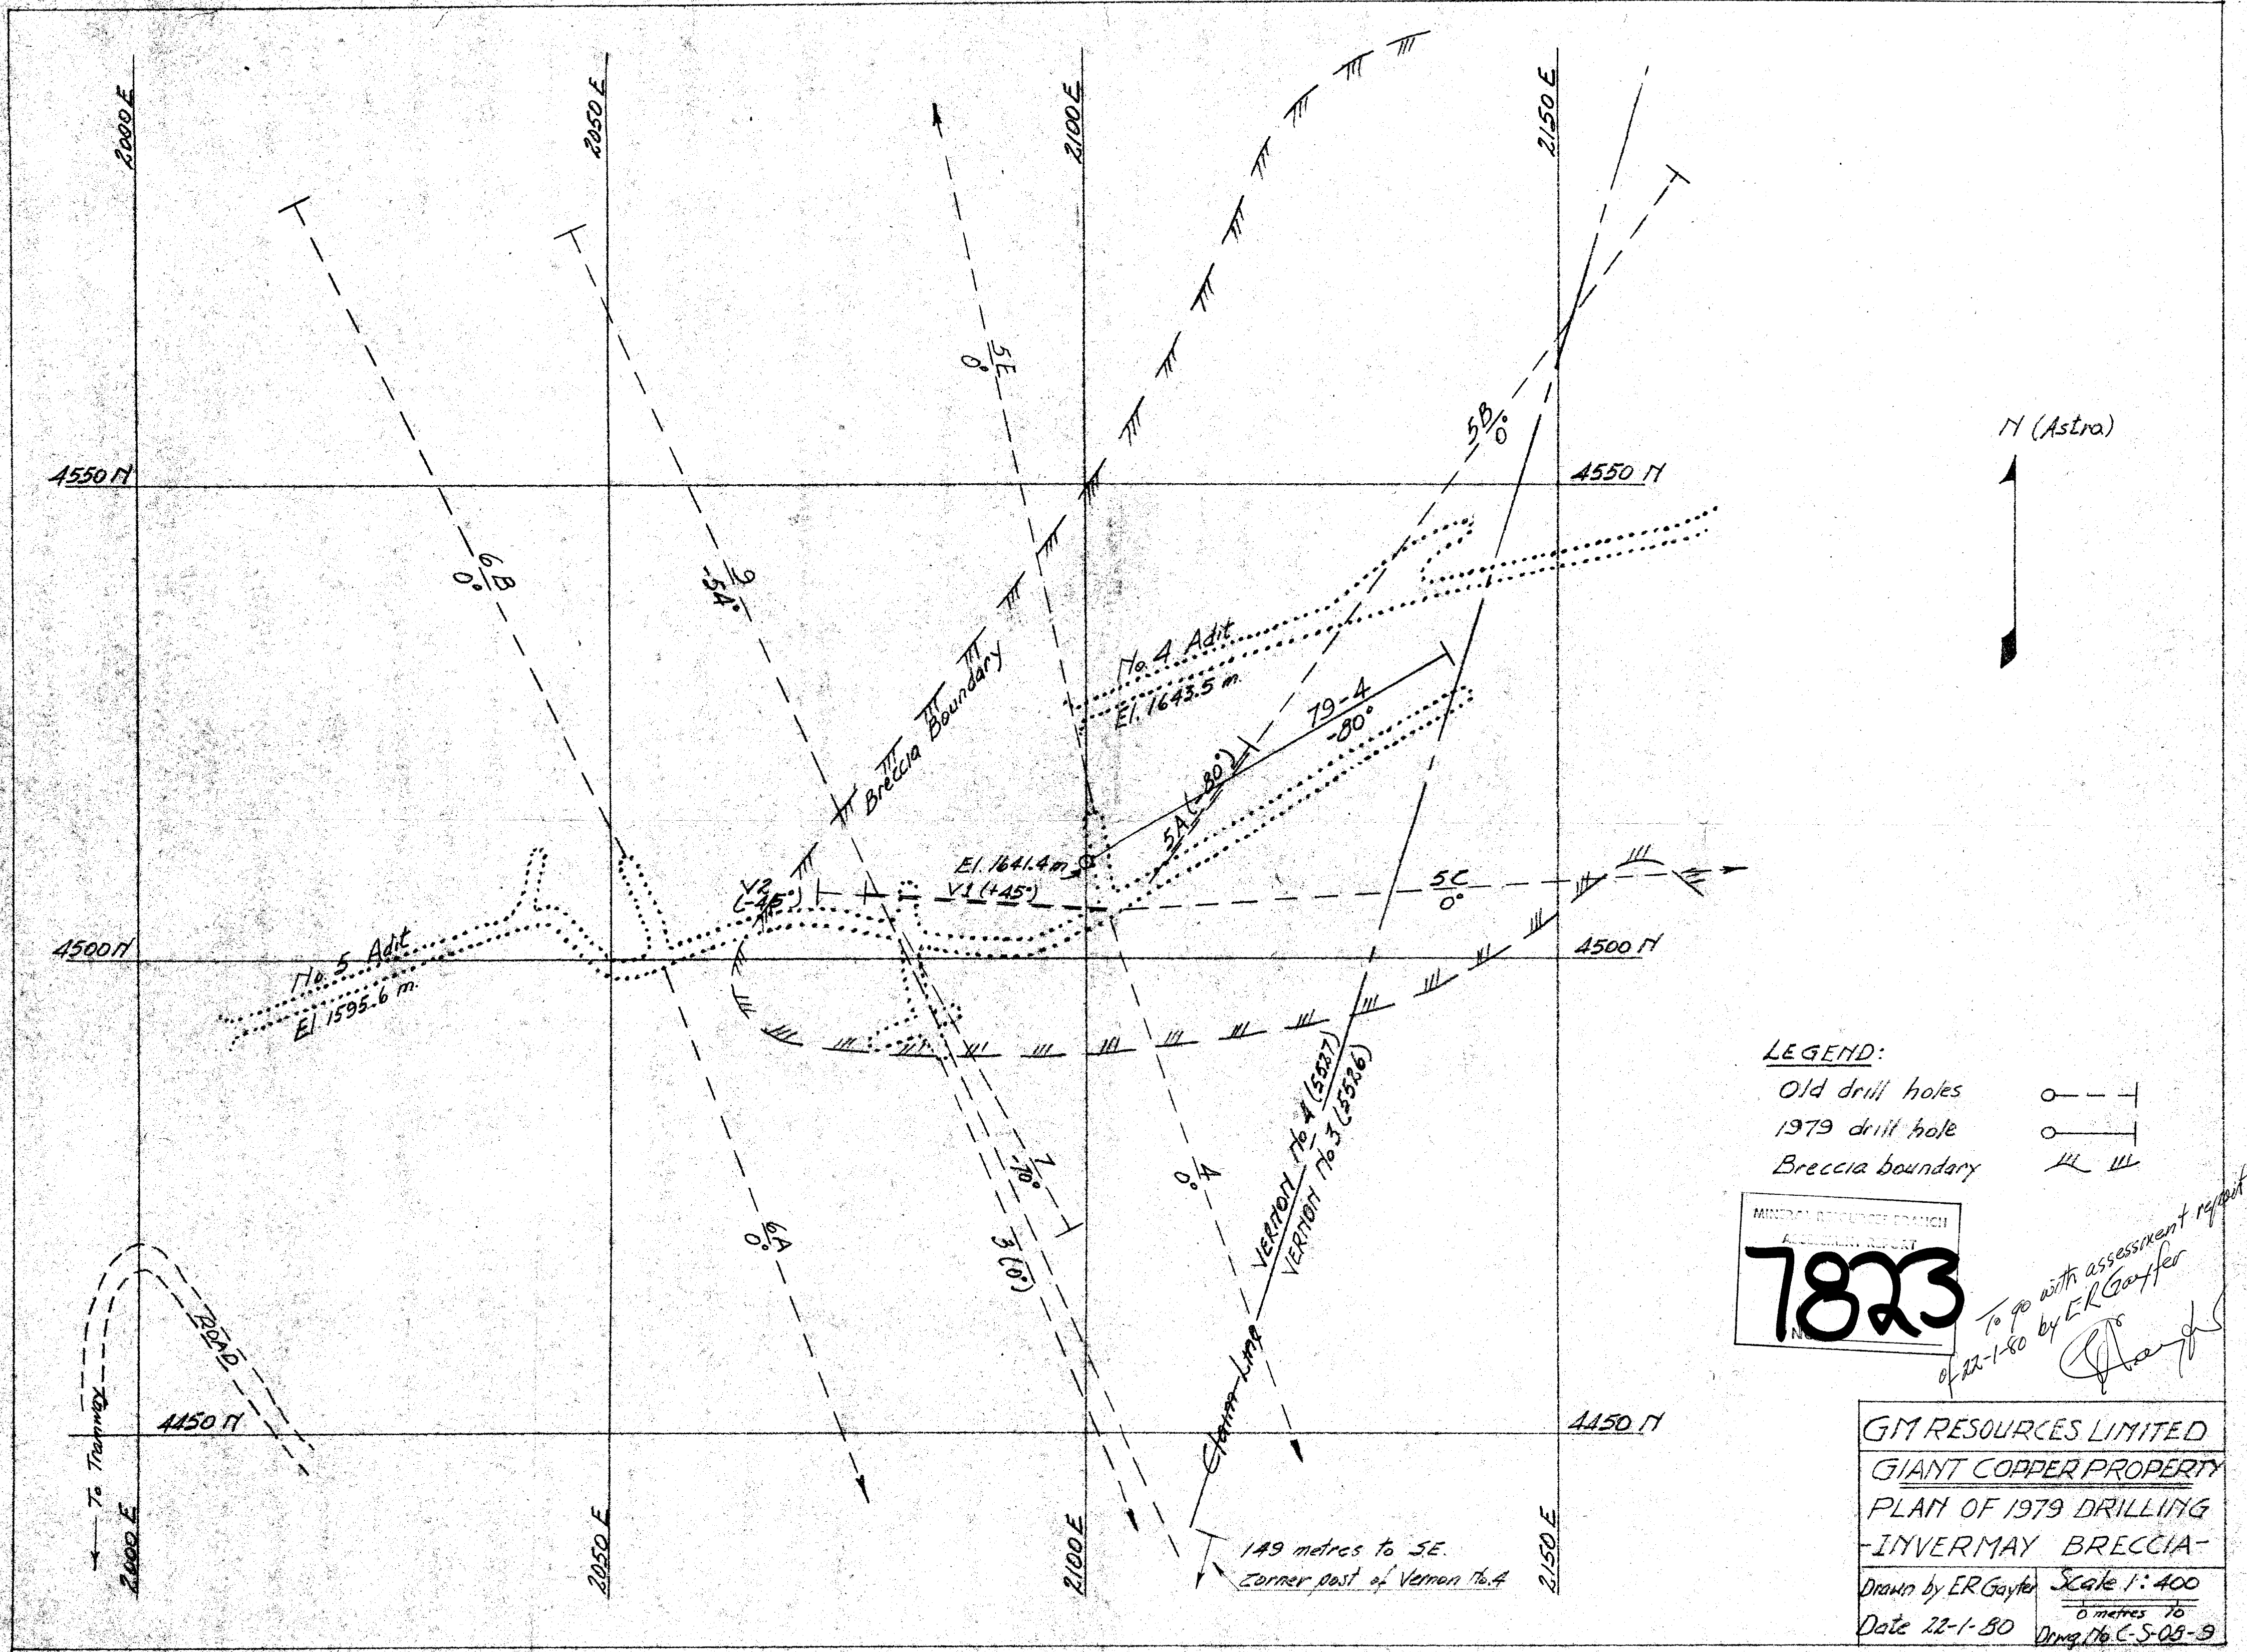

LEGEND:

- Old drill holes
- 1979 drill hole
- Breccia boundary

MINERAL RESOURCES BRANCH
ASSESSMENT REPORT
7823

To go with assessment report
of 22-1-80 by ER Gayfer

GM RESOURCES LIMITED
GIANT COPPER PROPERTY
PLAN OF 1979 DRILLING
- INVERMAY BRECCIA -
Drawn by ER Gayfer Scale 1:400
Date 22-1-80 0 metres to 100 metres
Dwg No. C-5-08-9