


8637

Part 2
of 2

APPENDIX E
ASSAY RESULTS
HATSOFF DRILLING REPORT (1980)
UTAH MINES LTD.

CONFIDENTIAL - 5 YEARS
NOVEMBER, 1980

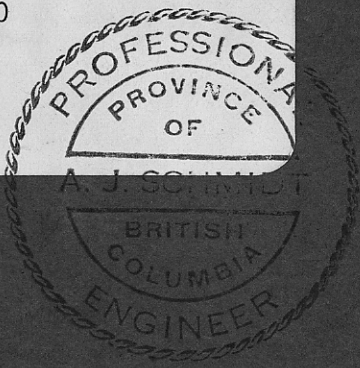

PAGE NO.: 1 OF

CASING COLLAR ELEV.:

COORDINATES: 11793

INCLINATION: -60°

N. 12431 E.

BEARING: 012°

GROUND ELEV.:

PROJECT: Hats

DATE STARTED: 7/8/80

DATE FINISHED:

TOTAL DEPTH:

HOLE NO.: H0-1-80

REF. TO CLAIM CORNER:

SCALE: 1:100

LOGGED BY: T. Pollock

hold - H
assay - A

DEPTH INTERVAL	CORE								DEPTH INTERVAL	SLUDGE									
	FROM	TO	SAMPLE NO.	INCHES REC.	% REC.	ANALYZE ASST				FROM	TO	SAMPLE NO.	LBS. REC.	% REC.	ASSAY				
						Mo	W03	Zn	FL										
0.0	0.0	3.0	Casing																
3.0	3.0	6.0	83954B			5	10	78	1300										
6.0	6.0	9.0	55B																
9.0	9.0	12.0	56B			36	8	52	1750										
12.0	12.0	15.0	57B																

MINERAL RESOURCES BRANCH
ASSESSMENT REPORT
8637
No.

Part 2
gja

PAGE NO.: 23 OF

CASING COLLAR ELEV.:

COORDINATES: 11793

INCLINATION: -60°

GROUND ELEV.: 2930m

N. 12431 E.

BEARING: 0120

PROJECT: Hats Off

DATE STARTED: 7/8/80

DATE FINISHED:

TOTAL DEPTH:

HOLE NO.: HO-1-80

REF. TO CLAIM CORNER:

SCALE: 1:100

LOGGED BY: T Pollock

hold- H
assay- A

	DEPTH INTERVAL		CORE							DEPTH INTERVAL		SLUDGE							
	FROM	TO	SAMPLE NO.	INCHES REC.	% REC.	ANALYZE		ASSAY			FROM	TO	SAMPLE NO.	LBS. REC.	% REC.	ASSAY			
						Mo	WO3	Zn	FL	Sn									
330.0																			
H	330.0	333.0	81563 B																
333.0																			
	333.0	336.0	64 B			5	10	24	810	1									
336.0																			
H	336.0	339.0	15 B																
339.0																			
	339.0	342.0	66 B			7	8	38	860	6									
342.0																			
H	342.0	345.0	67 B																
345.0																			

MINERAL RESOURCES BRANCH
ASSESSMENT REPORT

8637

part 2
of 2

