


COMINCO LTD.

EXPLORATION

NTS: 103 P 5

WESTERN DISTRICT

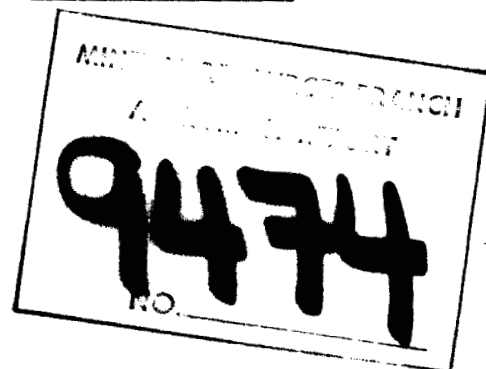

GEOPHYSICAL REPORT ON

INDUCED POLARIZATION AND MAGNETOMETER SURVEYS

on behalf of the

MITSUI/COMINCO JOINT VENTURE

ANYOX PROPERTY

Observatory Inlet Area, Skeena Mining Division, B.C.

LATITUDE: 55°25'N

LONGITUDE: 125°45'W

Field Work Performed: August 19-29, 1981

On Crown Grants:

L480-483, L2219, L2230,  
L2223 (lot numbers)

25 SEPTEMBER 1981

ALAN R. SCOTT

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION. . . . .	1
GEOPHYSICAL SURVEYS	
Induced Polarization . . . . .	1
Magnetometer Survey. . . . .	2
DISCUSSION OF RESULTS . . . . .	2
CONCLUSIONS . . . . .	3

APPENDIX I	Statement
APPENDIX II	Statement of Expenditures
APPENDIX III	Certification

ATTACHMENTS

Plate 213-81-1	General Location Map
Plate 213-81-2	Claim Map
Plate 213-81-3	Chargeability Contour Plan (n=1)
Plate 213-81-4	Apparent Resistivity Contour Plan (n=1)
Plate 213-81-5	Magnetic Field Contour Plan
Plate 213-81-6 to 15	Chargeability/Apparent Resistivity Pseudosections

GEOPHYSICAL REPORT ON  
INDUCED POLARIZATION AND MAGNETOMETER SURVEYS

on behalf of the

MITSUI/COMINCO JOINT VENTURE

A N Y O X      P R O P E R T Y

INTRODUCTION

During the period August 19-29, 1981, a Cominco geophysical crew mobilized to and from, and completed an induced polarization and magnetometer survey on the Anyox property. A total of 5.5 line kilometers on 10 survey lines was surveyed immediately west of the Hidden Creek Mine. This work was done on behalf of the Mitsui/Cominco Joint Venture.

The Anyox property is located on the west side of Observatory Inlet, B.C. Access is by float plane or helicopter from Prince Rupert or Kitsault, B.C. Plate 1 shows the general location of the property and plate 2 the location of the survey lines with respect to the claims.

This report describes the methodology of the surveys, presents the data, and discusses the geophysical results. The Anyox grid was established in Imperial units so that all line and station numbers are in feet, and are referred to in feet in the body of this report. Metric bar scales are included on the plans.

GEOPHYSICAL SURVEYS

Induced Polarization

A Huntec M4 IP receiver in combination with a Phoenix IPT-1 transmitter was deployed on the IP survey. Readings were taken in the time domain using a 2 second current on/2 second current off alternating square wave signal. A delay time of 120 milliseconds and integration time of 900 milliseconds were used to measure the IP effect. The normalized chargeability values are in units of milliseconds.

A pole dipole electrode array was used on the survey with an "a" spacing of 200 feet (60 m) and "n" separations of 1, 2, and 3. The current electrode was kept to the south on all the crosslines and to the west on the surveyed tie line.

The apparent resistivity results are in units of ohm meters and were calculated from the relation:

$$\text{apparent resistivity} = (V/I) \cdot K,$$

2.

where  $V$  is the voltage across the measuring dipole during the current ( $I$ ) on period, and  $K$  is a geometric factor dependant on the "a" spacing and "n" separation.




### Magnetometer Survey

A Scintrex MP-2 total field proton precession magnetometer was used for the magnetics surveys. The field data was corrected for diurnal drift by reference to a fixed base station.

### DISCUSSION OF RESULTS

The IP (chargeability) and apparent resistivity results are presented in pseudo section format on plates 6 to 15. This is a schematic form of data presentation and no specific target depth or geometry is implied by it. The magnetic field results are shown in profile form on the pseudo sections. Additionally, the near separation IP survey results and magnetic field values are plotted in contour plan form on plates 3 (chargeability), 4 (apparent resistivity), and 5 (magnetic field).

Chargeability anomalies have been categorized on the pseudo sections as follows:

 strong chargeability high (>60 milliseconds)  
 moderate chargeability high(40-60 milliseconds)  
 weak chargeability high (20-40 milliseconds)

Zones of very low apparent resistivity (less than 10 ohm meters) have been indicated by a dashed line.

In general, the IP/resistivity responses over the survey area are very complex and the consistently high chargeability values indicate polarizing minerals are ubiquitous. Probable sources are sulphide minerals and/or graphite. In those areas where the resistivity drops to only a few ohm meters, the graphite/sulphide minerals can be expected to be interconnected so that electronic conduction is predominating. Often the chargeability response will decrease over such "massive" electronic conductors, and this is observed in many instances in the Anyox data. Computation of metal factors would be helpful to emphasize those features, and should be initiated if the more massive targets are of primary interest. (The "metal factor" is defined as the chargeability divided by the resistivity, all multiplied by 1000. It emphasizes those chargeability anomalies that are coincident with low resistivities).

Assuming that relatively massive concentrations of sulphides with associated pyrrhotite is a high priority target, six anomalies which show coincident very low resistivity, high chargeability, and local magnetic highs are listed below: (Note, however, that a similar response would be obtained from the economically uninteresting combination of graphite and minor magnetite/pyrrhotite).

3.

line 0+00	7+00S, 12+00N → 18+00N
line 2+00W	11+00N → 20+00N
line 4+00W	16+00N
line 12+00W	10+00N → 13+00N
tie line 19+00N	5+00W

For more disseminated targets, or those that would not be expected to have coincident magnetic response, screening of responses via rock and/or soil geochemistry and geological mapping is required.

The low resistivity response zones are sufficiently conductive that EM methods (such as horizontal loop) would respond. For those targets, an EM survey would provide a more quantitative interpretation in terms of conductor location and dip, and would facilitate positioning for any contemplated drill testing.

### CONCLUSIONS

Portions of the Anyox property were surveyed with time domain IP and total field magnetics in the late summer of 1981.


Consistently high chargeability values were detected over the entire survey area, with readings generally greater than 20 milliseconds. The highest reading was 233 milliseconds, which plots at 1300N on line 1200W (n=2). The high background response suggests that polarizing material is ubiquitous to the survey area, and selection of targets for subsequent testing should be screened via rock and/or soil geochemistry and known geology.

For more massive sources, zones of very low resistivity (less than 10 ohm meters) would be of particular interest and six such have been defined in the previous section of this report. Those zones defined are also coincident with local magnetic highs. A horizontal loop EM survey should be initiated over those zones prior to any contemplated drill testing to better define the location and dip of their causative sources.

It was noted that the chargeability response was often reduced (particularly at the near separation) over the very low resistivity zones. Computation of metal factors would serve to emphasize those anomalies.


The 1981 IP survey left a large unsurveyed gap in the central grid area. Completion of the geophysical coverage in that area is recommended.

Respectfully submitted:

  
Alan R. Scott, Geophysicist

ARS/skg  
Distribution  
Mining Recorder (2)  
Mitsui (2)  
Western District (1)  
Geophysics File (1)  
Administration (1)

Approved for release by:

  
G. Harden, Manager  
Exploration  
Western District

APPENDIX I

IN THE MATTER OF THE B.C. MINERAL ACT  
AND IN THE MATTER OF A GEOPHYSICAL PROGRAMME  
CARRIED OUT ON PORTIONS OF CROWN GRANTED MINERAL CLAIMS  
ON THE ANYOX PROPERTY  
LOCATED AT OBSERVATORY INLET AREA, SKEENA MINING DIVISION, B.C.  
OF THE PROVINCE OF BRITISH COLUMBIA, MORE PARTICULARLY  
N.T.S.: 103P-5

S T A T E M E N T

I, Alan R. Scott, of the City of Vancouver, in the Province of British Columbia, make oath and say:-

- 1) THAT I am employed as a geophysicist by Cominco Ltd. and, as such have a personal knowledge of the facts to which I hereinafter depose;
- 2) THAT the annexed hereto and marked as "Appendix II" to this statement is a true copy of expenditures incurred on geophysical survey on the ANYOX Property;
- 3) THAT the said expenditures were incurred for the purpose of mineral exploration of the above noted claims between the 19th day and 29th day of August, 1981.

Signed:   
Alan R. Scott, Geophysicist

25 September 1981

APPENDIX II

STATEMENT OF EXPENDITURES

(Induced Polarization and Magnetics Surveys)

1. Salaries

B. Lum, geophysicist,	August 19-27; 9 days @ 135.00 =	1,215.00
G. Nolan, technician,	August 19-29; 11 days @ 110.00 =	1,210.00
T. Wong, geophysicist in training,	August 19-27; 9 days @ 110.00 =	990.00
J. Allen, helper,	August 19-27; 9 days @ 93.30 =	839.70
B. Price, helper,	August 19-27; 9 days @ 93.30 =	839.70
		\$ 5,094.40

2. Equipment Rentals

IPT-1/M4 IP survey system,	August 19-29; 11 days @ 105.00 =	1,155.00
MP-2 magnetometer,	August 19-29, 11 days @ 15.00 =	165.00
FM hand held radios,	August 19-29, 11 days @ 40.00 =	440.00
Truck rental,	August 19-29, 11 days @ 55.00 =	605.00
		\$ 2,365.00

3. Charges per survey day (towards drafting, supervision, report)

3 survey days @ 225.00	=	675.00
		\$ 675.00

4. Other Expenditures

airfare, meals, accommodations, survey consumables	=	2,721.46
charter fixed wing aircraft	=	1,392.00
charter helicopter	=	1,800.00
		\$ 5,913.46

5. Linecutting

5 kms @ 300/km	=	1,500.00
		\$ 1,500.00

Total Expenditures:

\$15,547.86



APPENDIX III

CERTIFICATION


I, Alan R. Scott, of 4013 West 14th Avenue, in the City of Vancouver,  
in the Province of British Columbia, do hereby certify:-

- 1) THAT I graduated from the University of British Columbia in 1970  
with a B.Sc. in Geophysics;
- 2) THAT I am a member of the Association of Professional Engineers  
of the Province of Saskatchewan, the Society of Exploration  
Geophysicists of America, and the British Columbia Geophysical  
Society;
- 3) THAT I have been practising my profession for the past eleven years.

Signed:   
Alan R. Scott, Geophysicist

25 September 1981



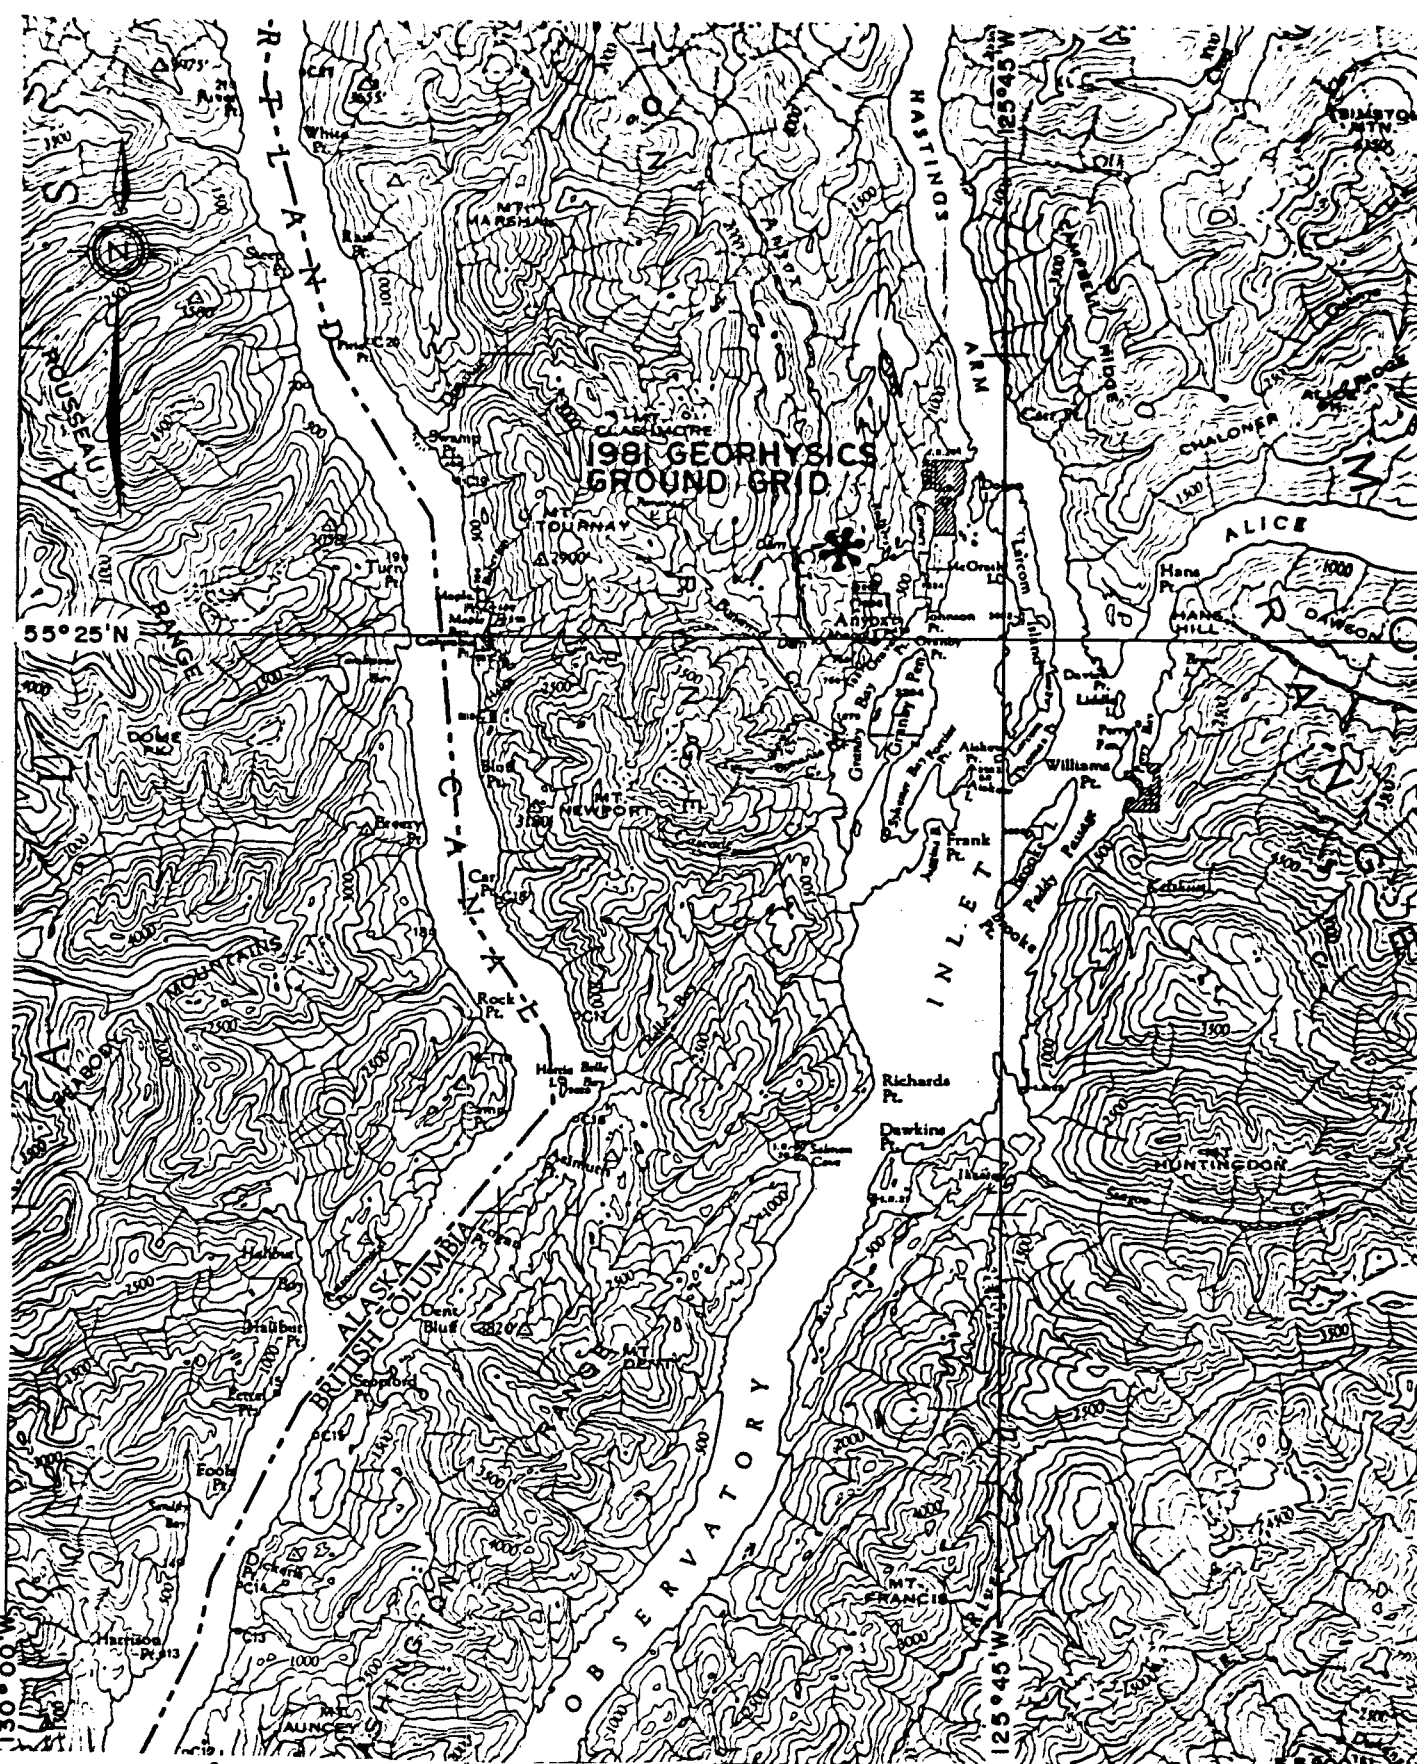

1981 GEOPHYSICS  
GROUND GRID

ANYOX PROPERTY  
HIDDEN CREEK

55°00'N  
NTS  
103 P






Drawn by:		Traced by:	
Revised by	Date	Revised by	Date

LOCATION MAP  
SKEENA M.D., B.C.

Scale: 1:250,000      Date: SEPT. 1981      Plate: 213-81-1

# COMINCO LTD. ANYOX PROPERTY HIDDEN CREEK SKEENA M.D., B.C.

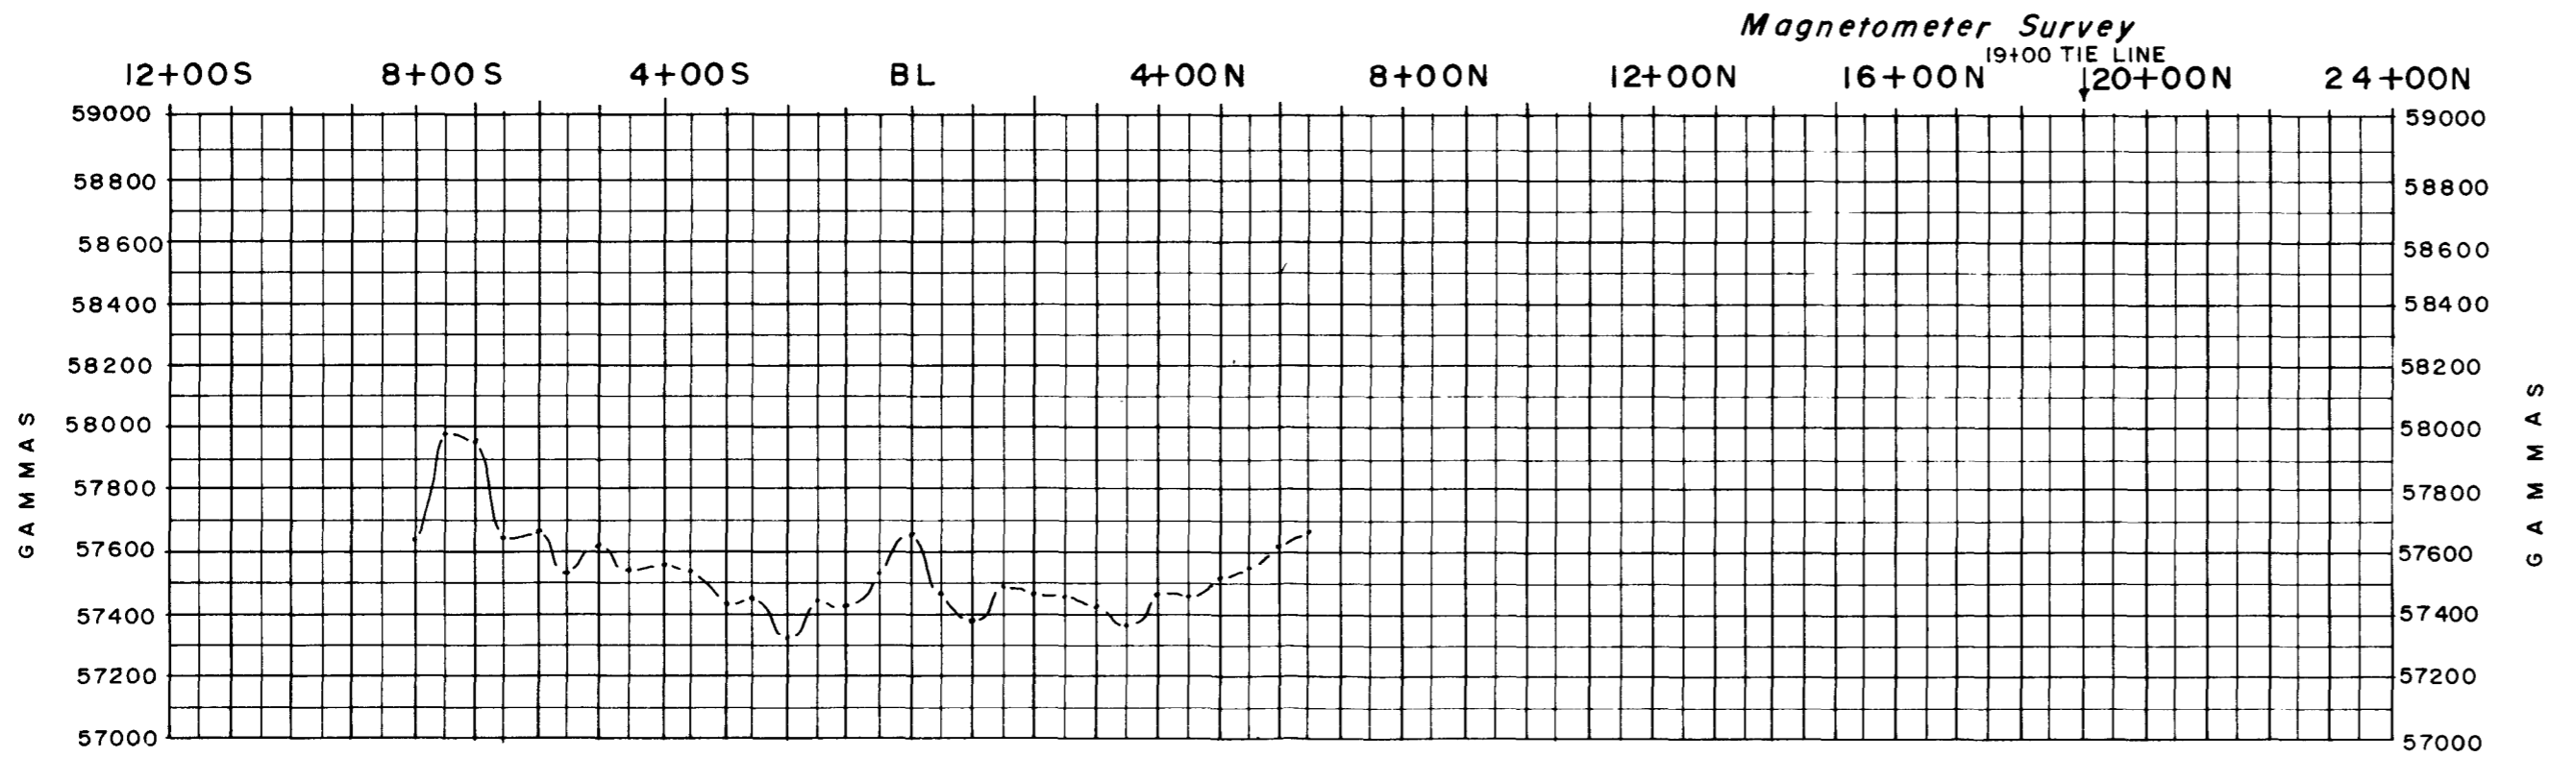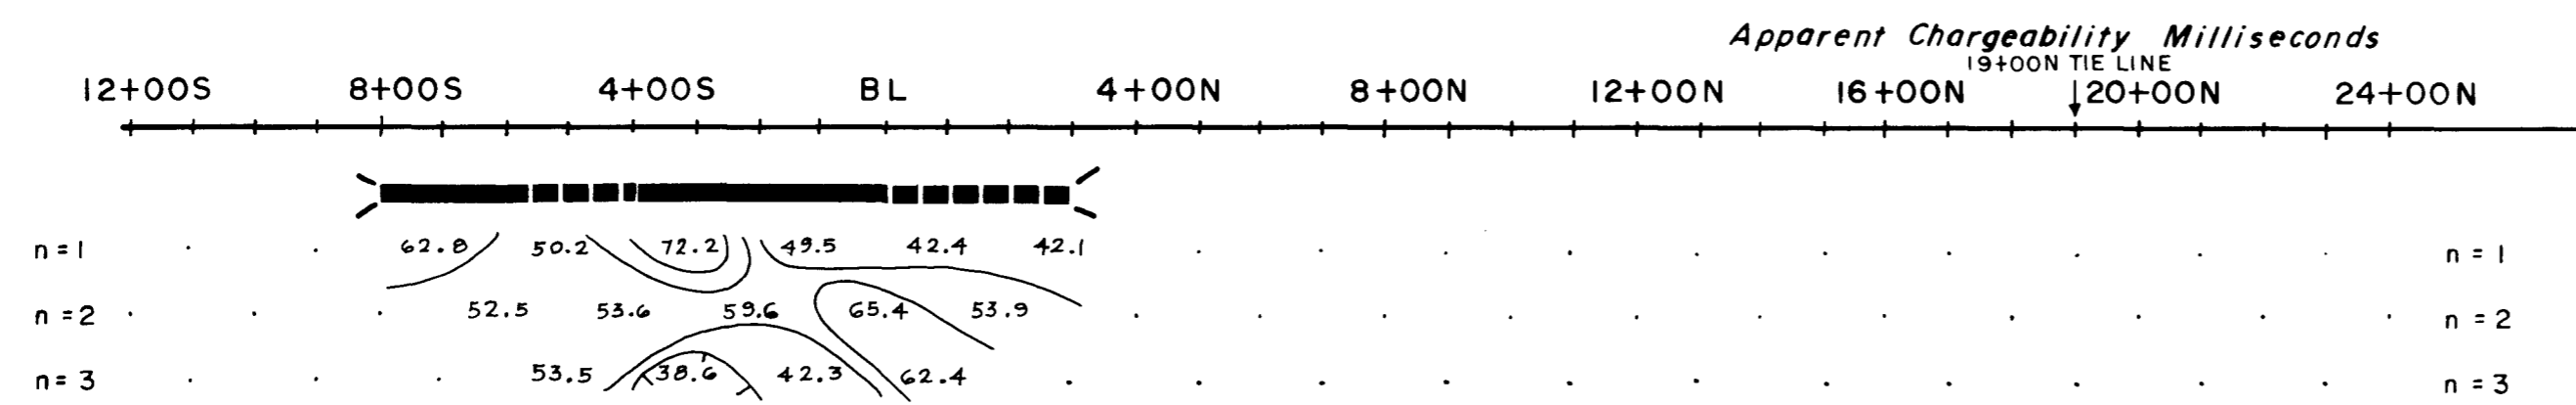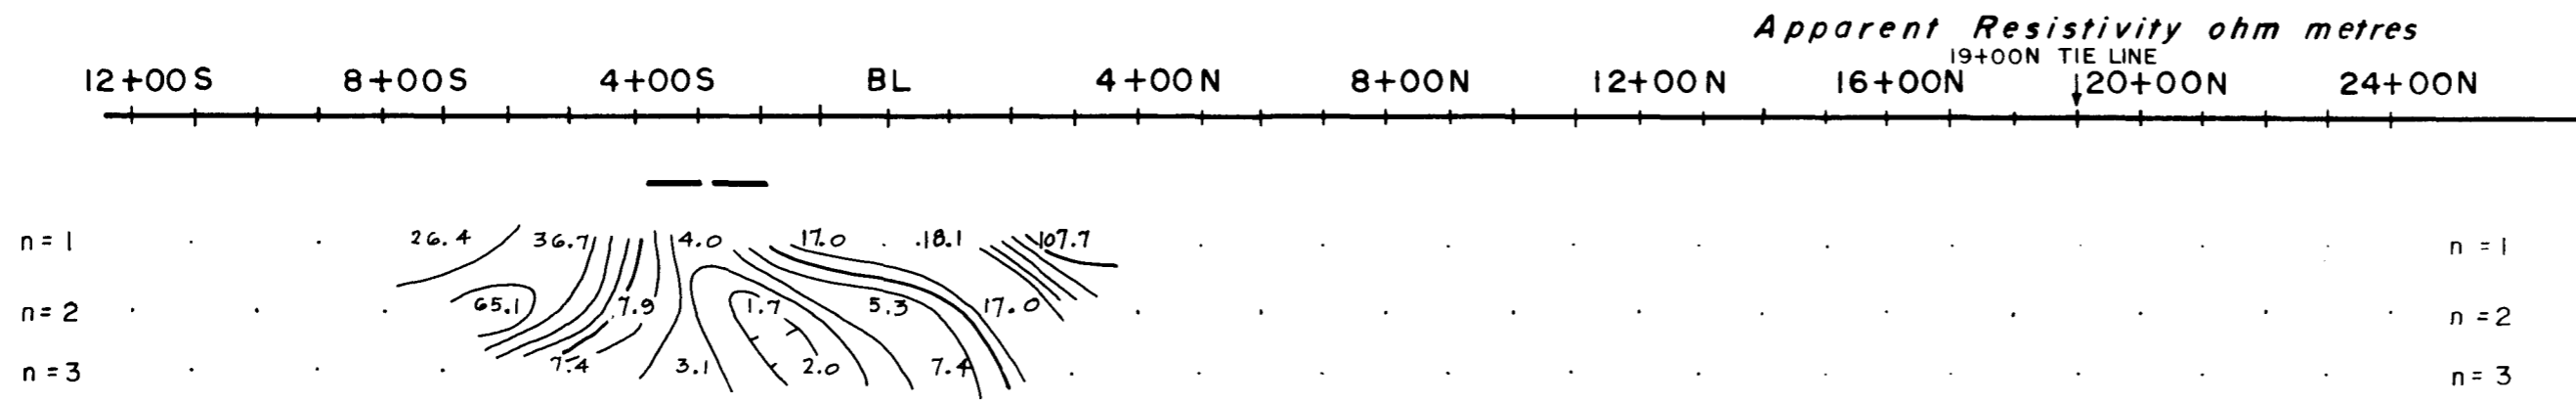

MINERAL RECORD NO. \_\_\_\_\_

ASSESSMENT NO. \_\_\_\_\_

**9474**

NO. \_\_\_\_\_

LINE NO. 2+00 E

POLE-DIPOLE

ELECTRODE CONFIGURATION

x = 200 ft.

SCALE 1" = 300'

PLOTTING POINT n = 1, 2, 3,

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**

██████████ STRONG CHARGEABILITY HIGH

▣▣▣▣▣▣ MODERATE CHARGEABILITY HIGH

▤▤▤▤▤▤ WEAK CHARGEABILITY HIGH

----- VERY LOW RESISTIVITY

DATE SURVEYED AUG. 24, 1981

CONTOUR INTERVALS :

APP. RES. 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED [Signature]

APP. CHARG. 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER : SCINTREX IPT-1

RECEIVER : HUNTEC MARK 4

Td 120 MILLISECONDS

Tw 90 MILLISECONDS





Tm 900 MILLISECONDS

INDUCED POLARIZATION AND RESISTIVITY SURVEY

SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 2+00 E

**COMINCO LTD.  
ANYOX PROPERTY  
HIDDEN CREEK  
SKEENA M.D., B.C.**

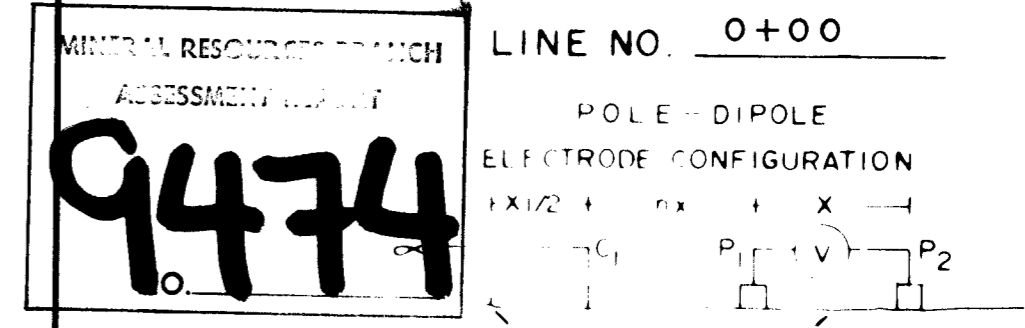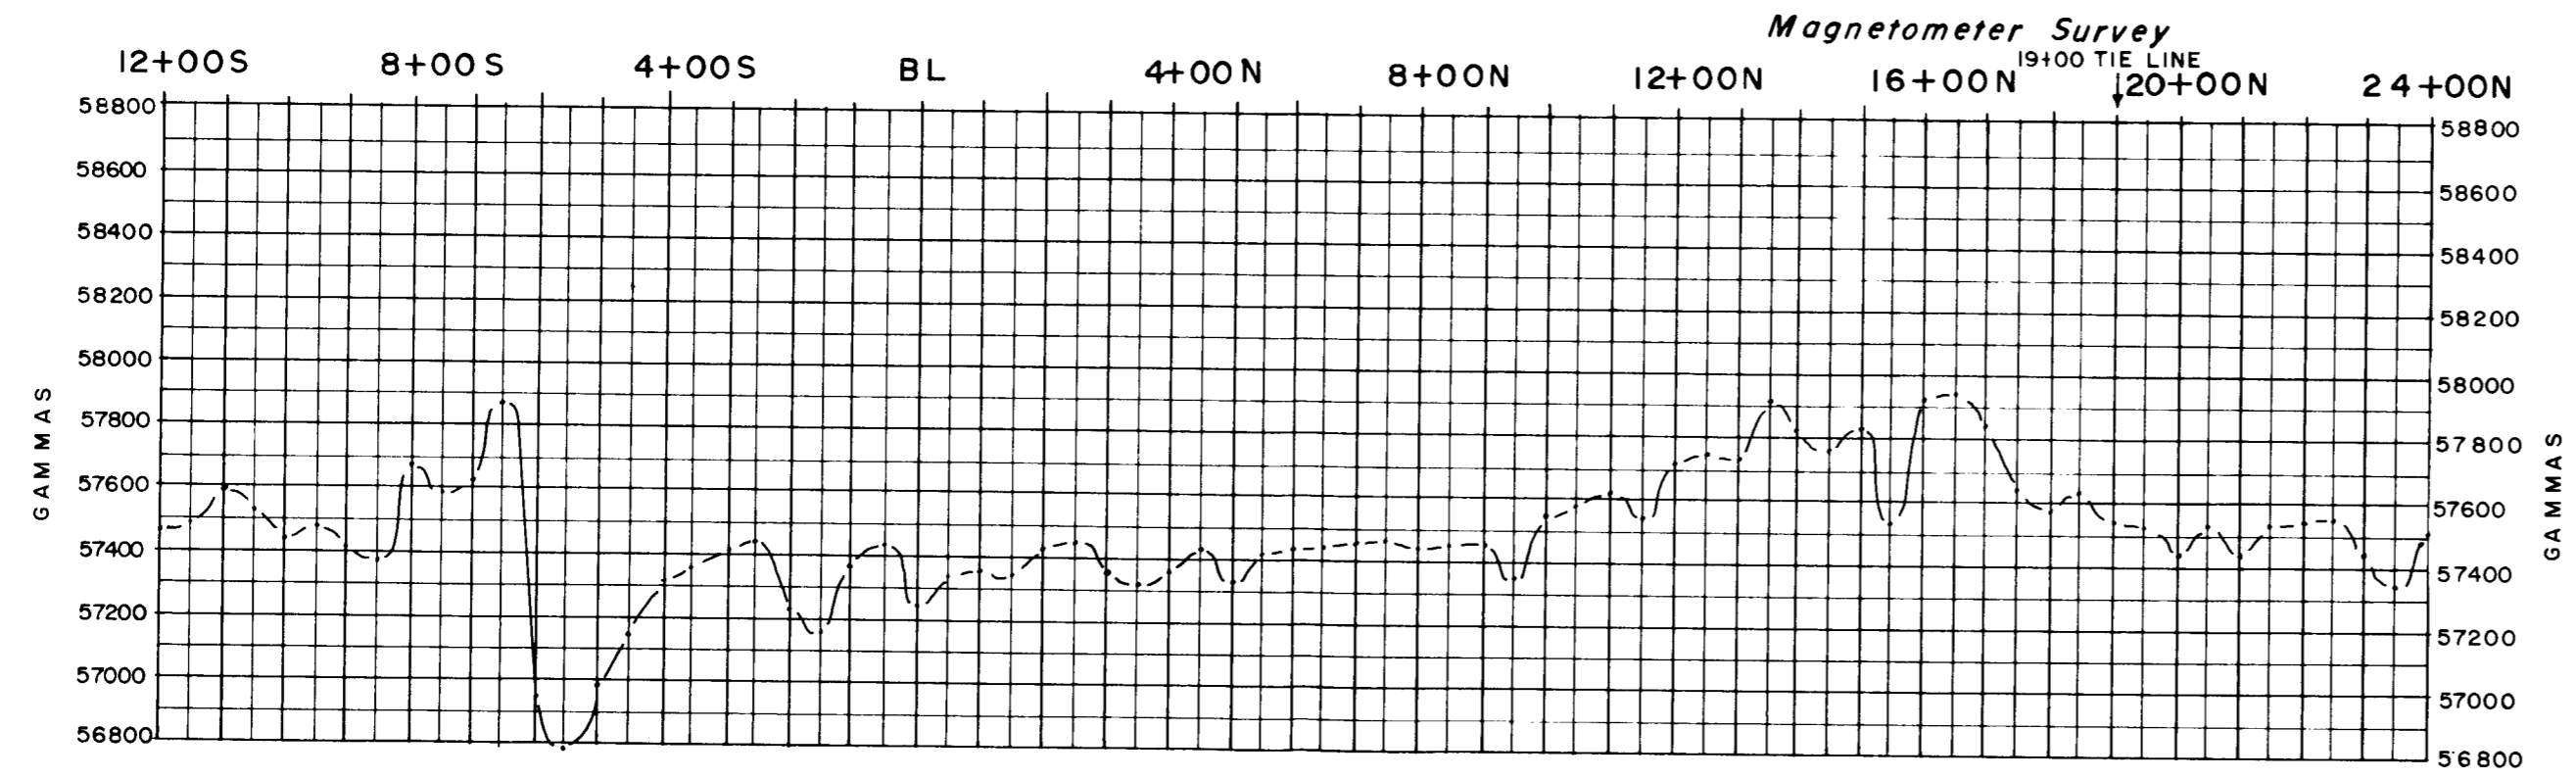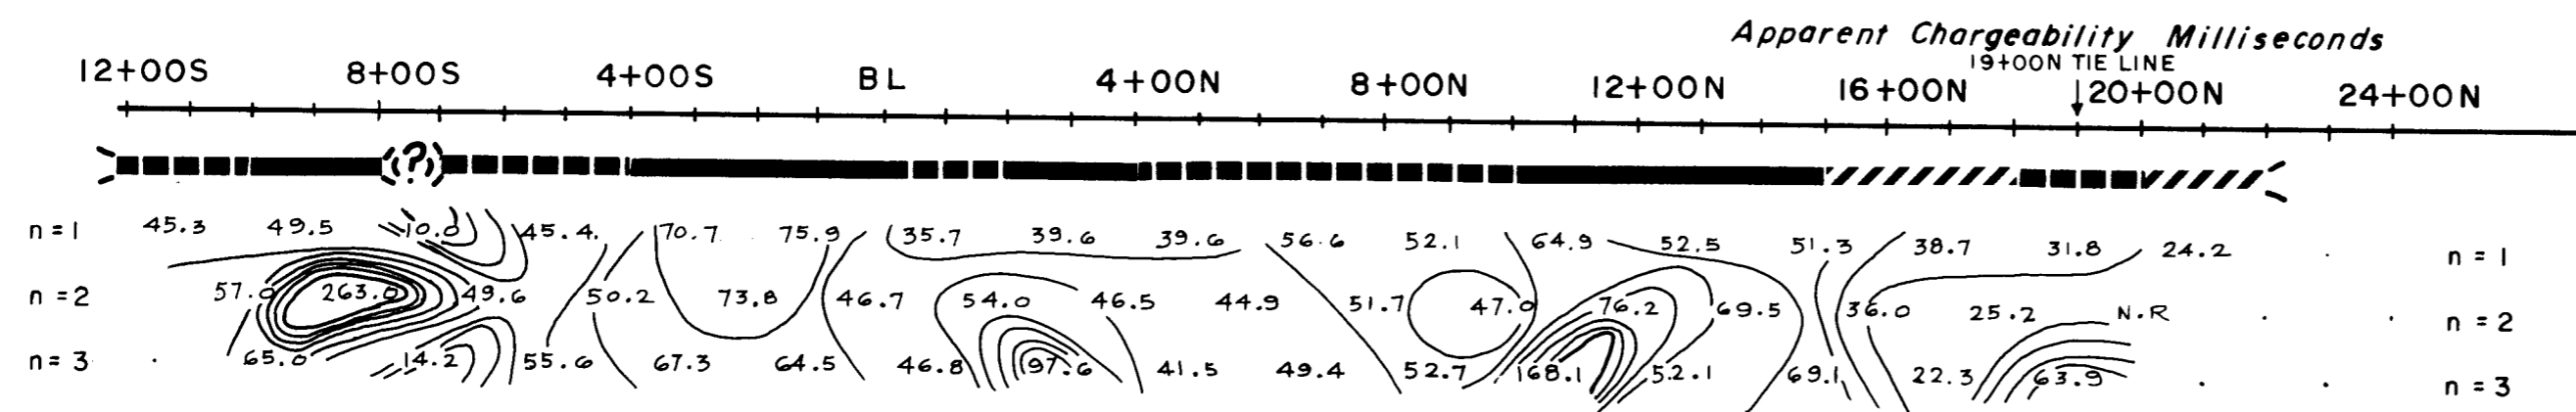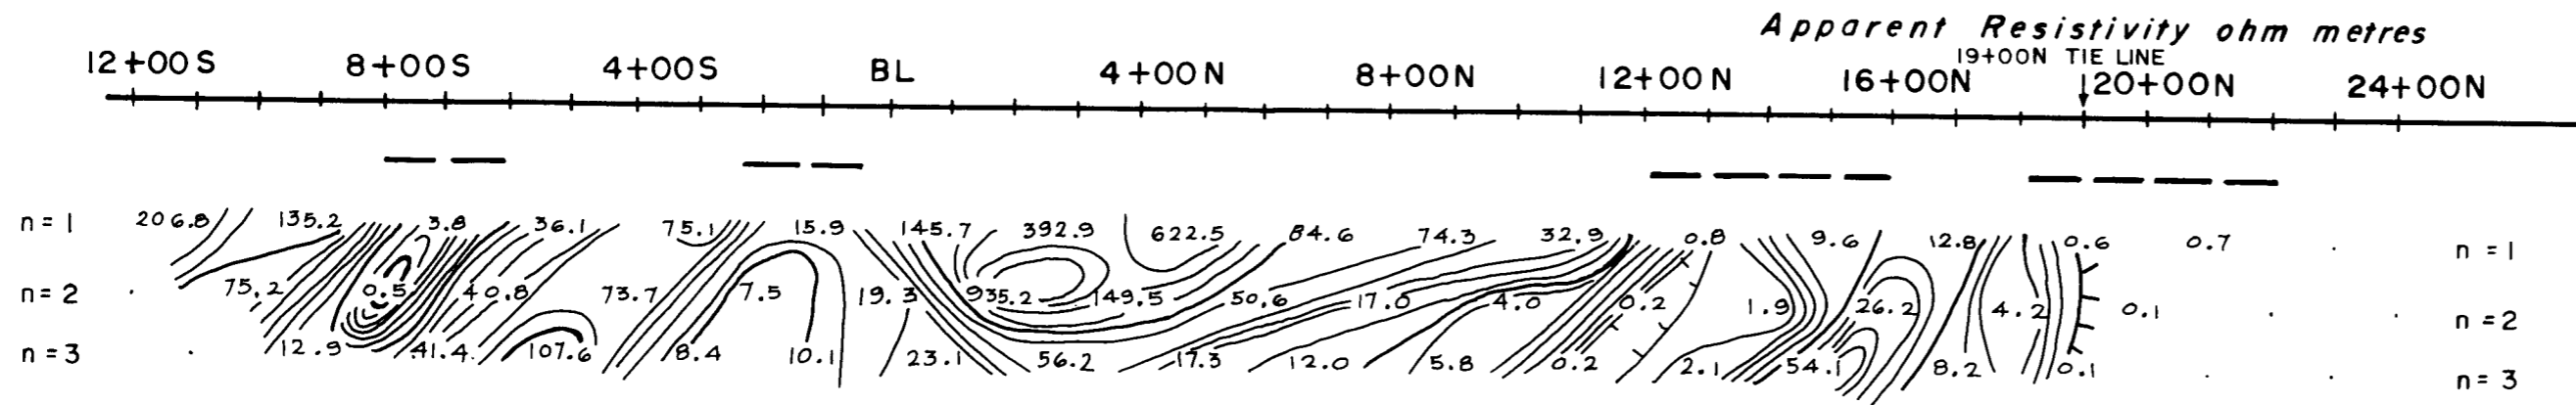

SCALE 1" = 300'

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**

- STRONG CHARGEABILITY HIGH
- MODERATE CHARGEABILITY HIGH
- WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED AUG 24, 1981

CONTOUR INTERVALS:

APP. RES. - 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED *[Signature]*

APP. CHARG. - 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER: SCINTREX IPT-1

RECEIVER: HUNTEC MARK 4

③

Td 120 MILLISECONDS




Tw 90 MILLISECONDS

Tm 900 MILLISECONDS

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 0+00


# COMINCO LTD. ANYOX PROPERTY HIDDEN CREEK SKEENA M.D., B.C.

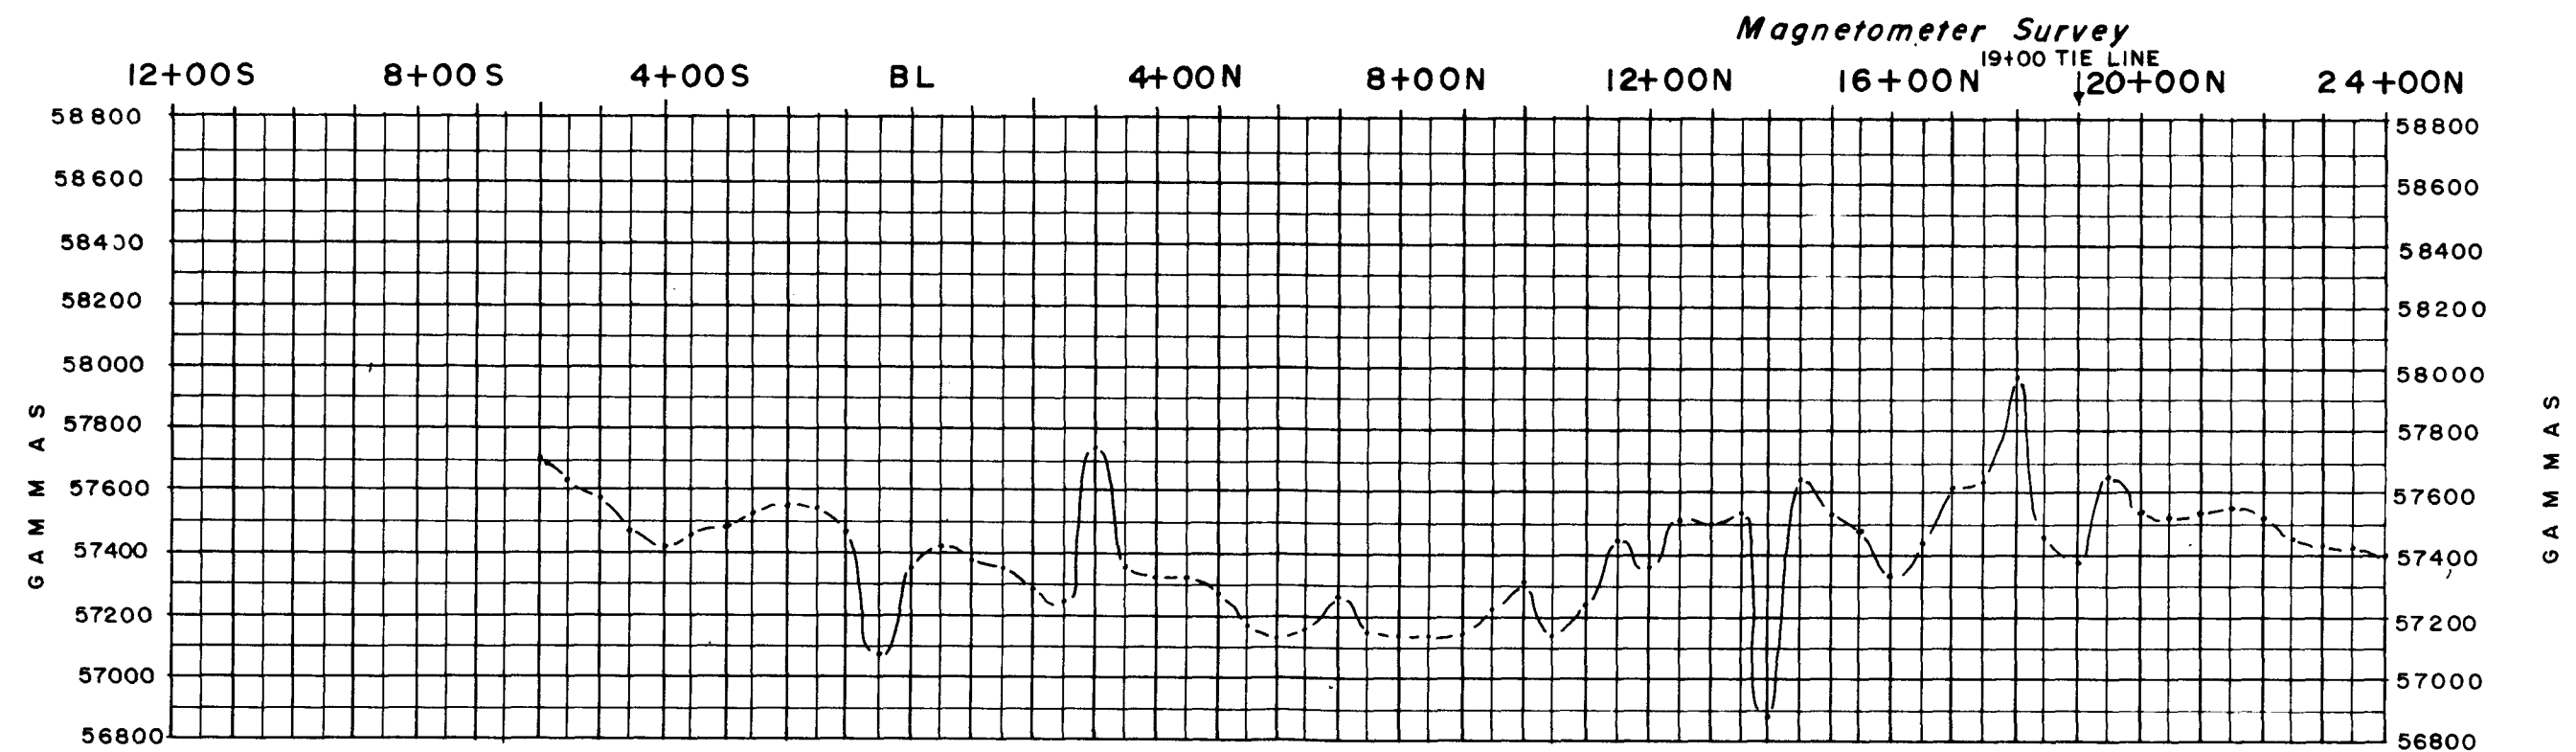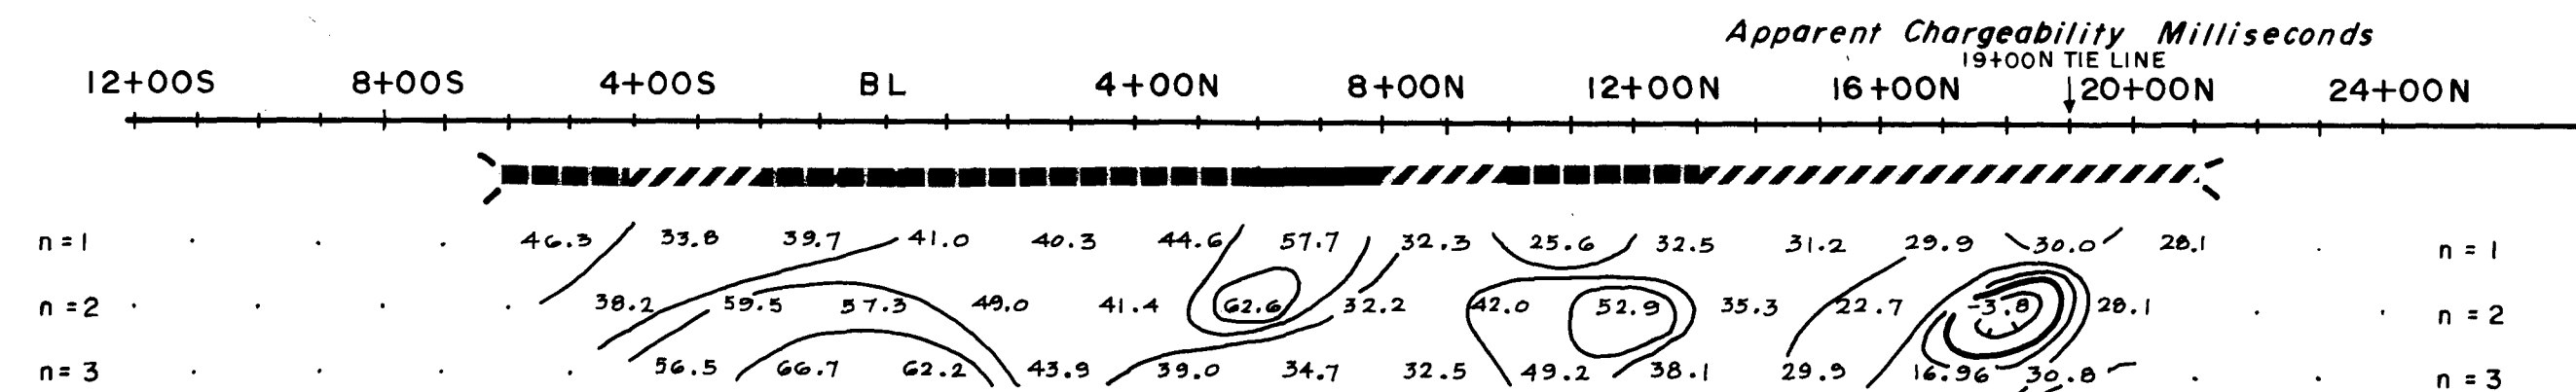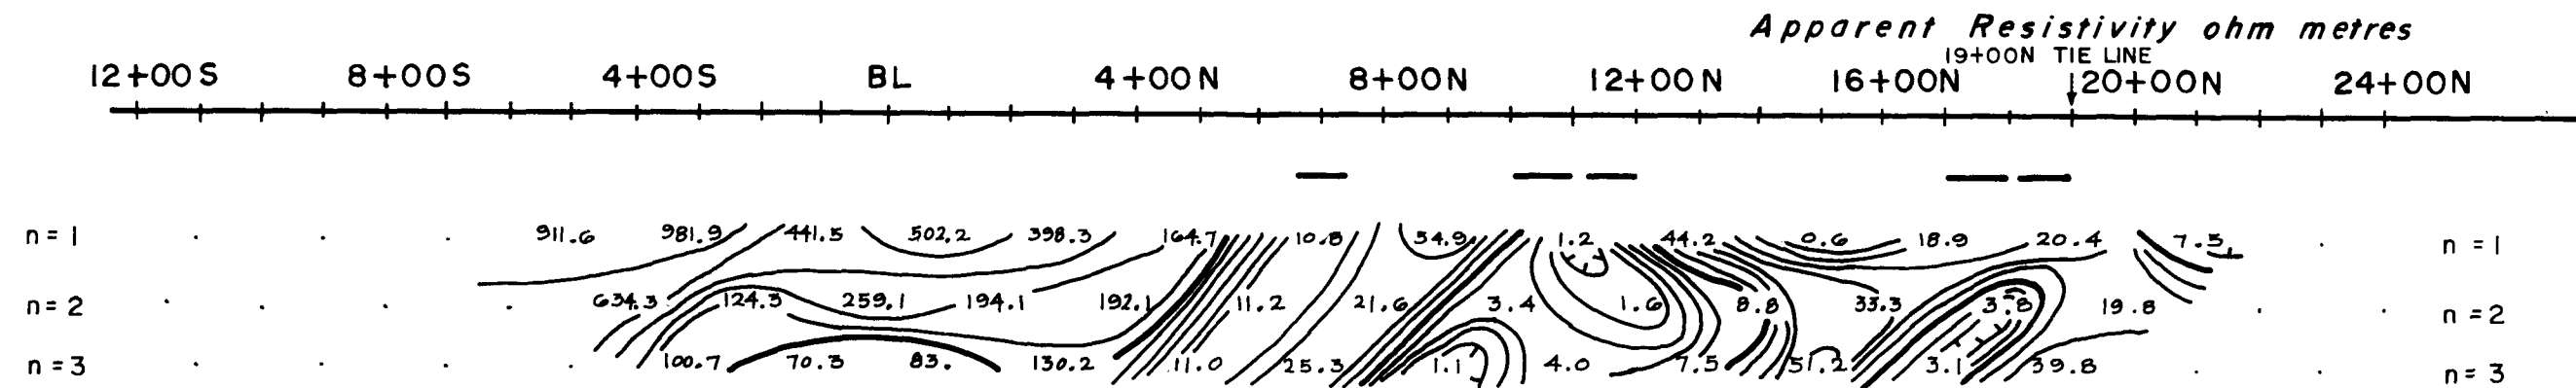

MINERAL RESOURCES BRANCH  
ASSESSMENT REPORT

**9474**

LINE NO. 2+00 W

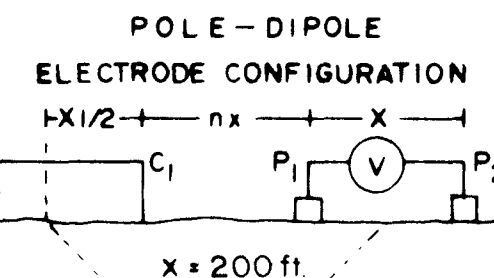

SCALE 1" = 300'

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

CHARGEABILITY (IP) INTERPRETATION

- STRONG CHARGEABILITY HIGH
- MODERATE CHARGEABILITY HIGH
- WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED AUG 24, 1981

CONTOUR INTERVALS :

APP. RES. — 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED [Signature]

APP. CHARG. — 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER : SCINTREX IPT-1

RECEIVER : HUNTEC MARK 4

Td 120 MILLISECONDS

Tw 90 MILLISECONDS




Tm 900 MILLISECONDS

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION


LINE 2+00 W

4

**COMINCO LTD.  
ANYOX PROPERTY  
HIDDEN CREEK  
SKEENA M.D., B.C.**

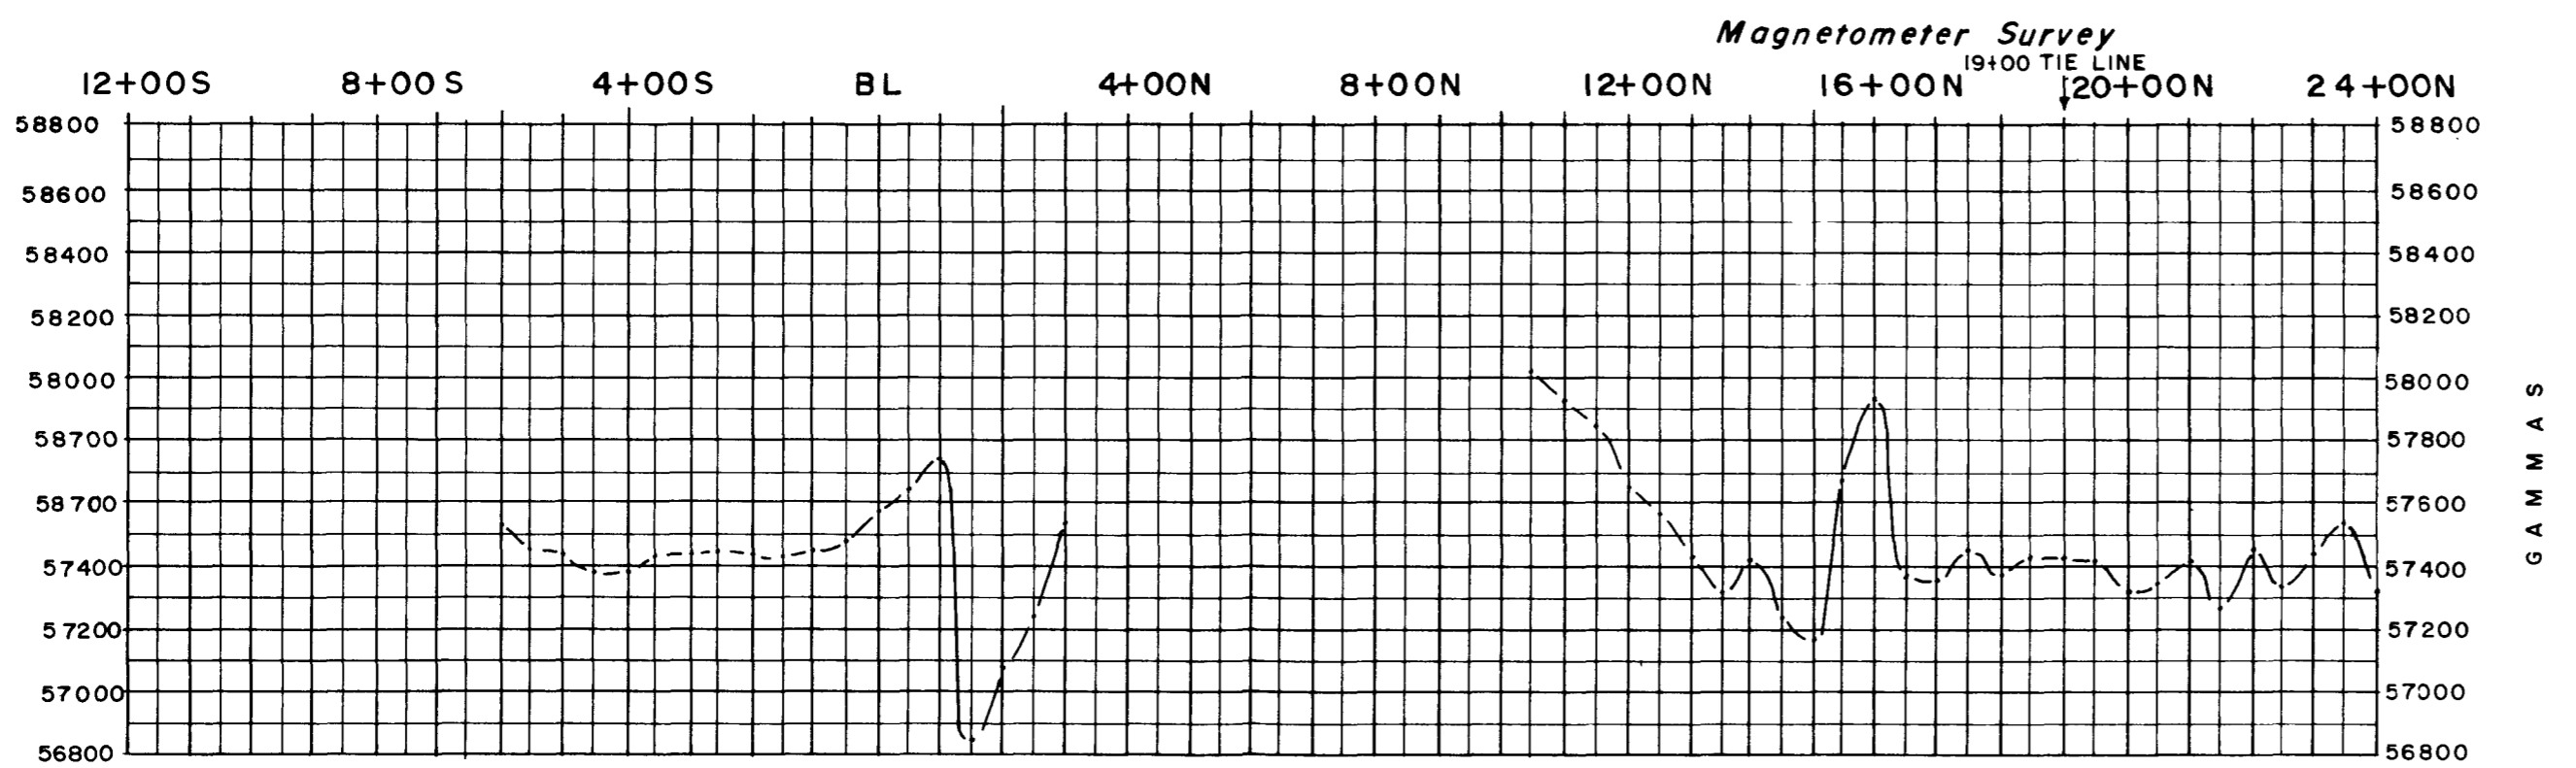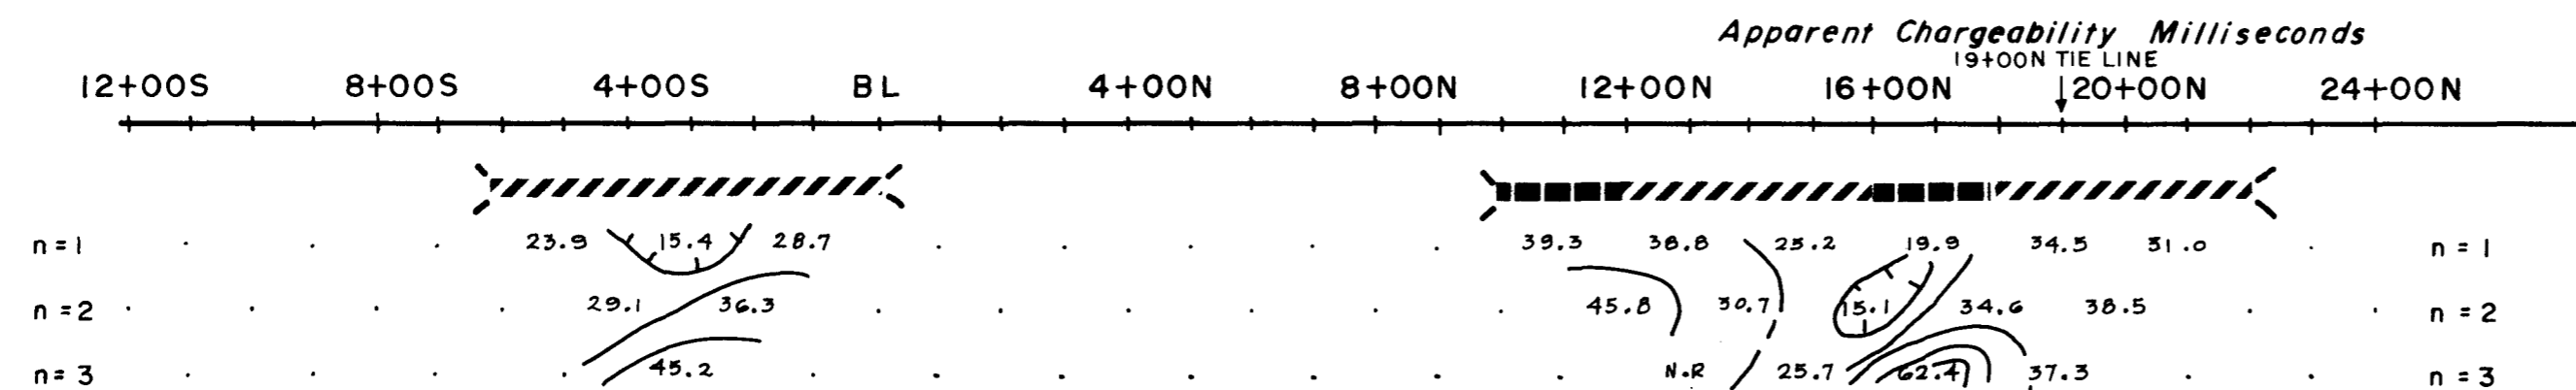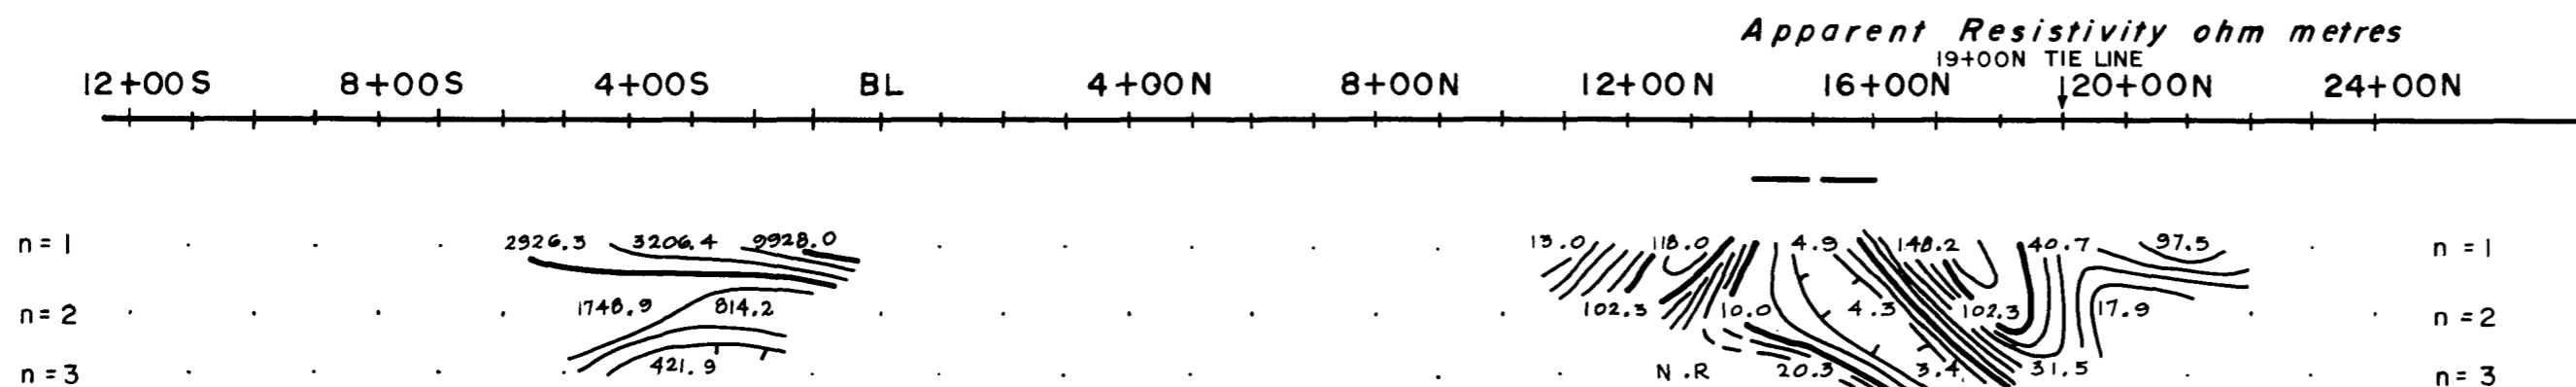

MINE AND RESOURCES BRANCH  
ASSESSMENT REPORT  
**9474**

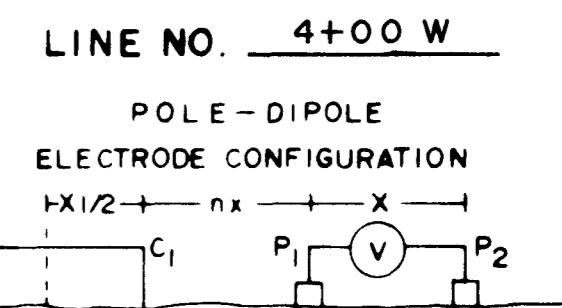

SCALE 1" = 300'

PLOTTING POINT  
n = 1, 2, 3,

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**

- ██████████ STRONG CHARGEABILITY HIGH
- ▣▣▣▣▣▣ MODERATE CHARGEABILITY HIGH
- ▨▨▨▨▨▨ WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED AUG 23, 1981

CONTOUR INTERVALS :

APP. RES. — 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED [Signature]

APP. CHARG. — 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER : SCINTREX IPT-1

RECEIVER : HUNTEC MARK 4

Td 120 MILLISECONDS




Tw 90 MILLISECONDS

Tm 900 MILLISECONDS

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 4+00W

**COMINCO LTD.  
ANYOX PROPERTY  
HIDDEN CREEK  
SKEENA M.D., B.C.**

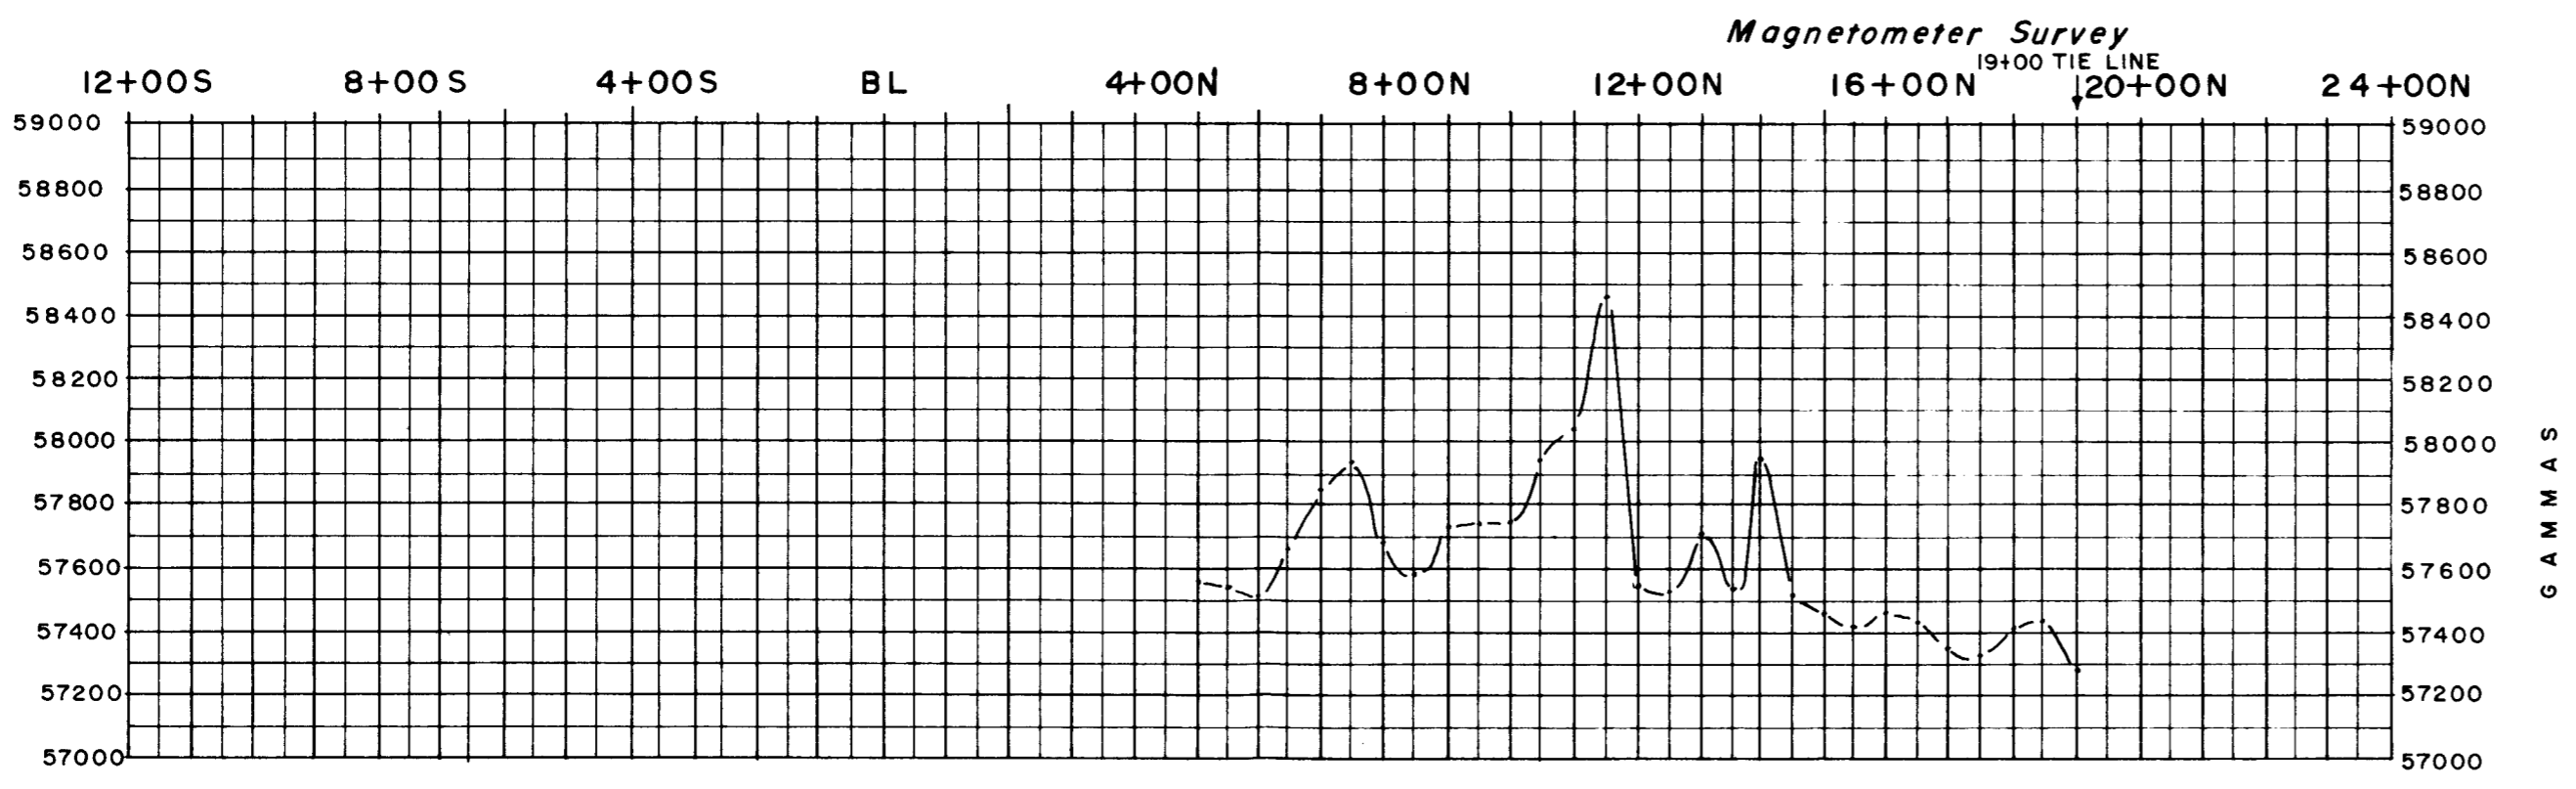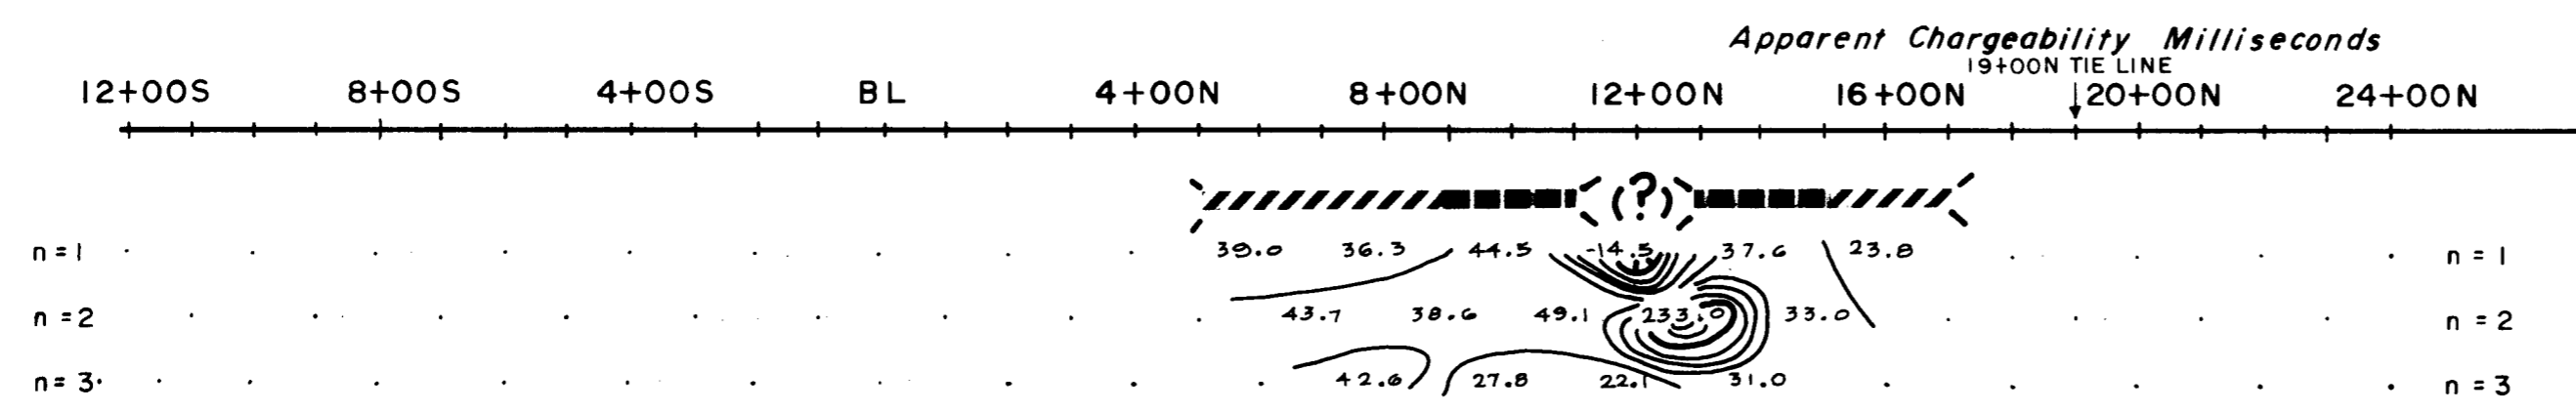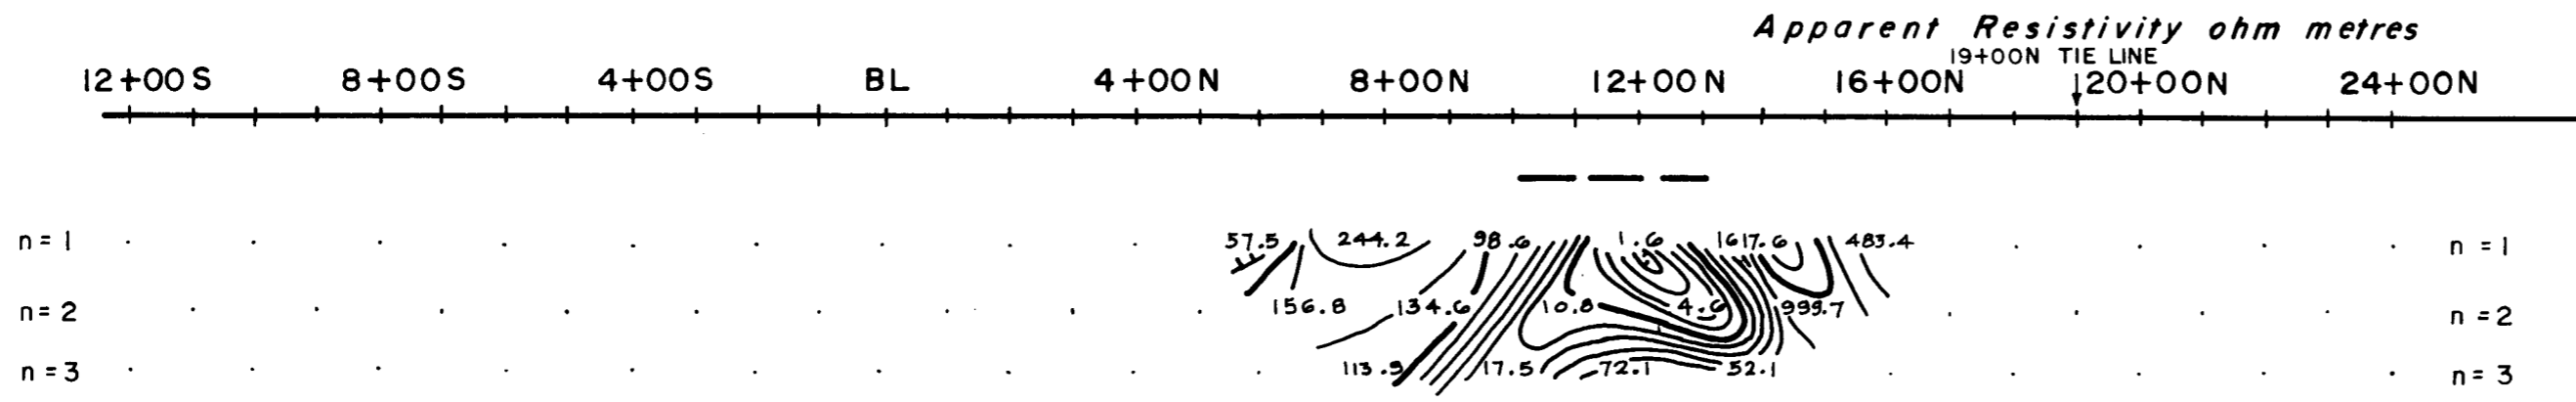

MINERAL REPORT NO. **9474**    LINE NO. 12+00 W

ASSESSMENT REPORT    POLE-DIPOLE

ELECTRODE CONFIGURATION

x = 200 ft.

PLOTTING POINT  
n = 1, 2, 3,

SCALE 1" = 300'

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

CHARGEABILITY (IP) INTERPRETATION

- ██████████ STRONG CHARGEABILITY HIGH
- ▣▣▣▣▣▣ MODERATE CHARGEABILITY HIGH
- ▨▨▨▨▨▨ WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED AUG 22, 1981

CONTOUR INTERVALS :

APP. RES. — 1, 1.5, 2, 3, 5, 7.5, 10.0 ohm metres APPROVED CA

APP. CHARG. — 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER : SCINTREX IPT-1

RECEIVER : HUNTEC MARK 4

(6)

Td 120 MILLISECONDS

Tw 90 MILLISECONDS

Tm 900 MILLISECONDS

INDUCED POLARIZATION AND RESISTIVITY SURVEY

SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 12+00 W


**COMINCO LTD.  
ANYOX PROPERTY  
HIDDEN CREEK  
SKEENA M.D., B.C.**

MINERAL RESOURCES BRANCH  
ASSESSMENT REPORT

**9474**

LINE NO. 14+00 W

POLE-DIPOLE  
ELECTRODE CONFIGURATION

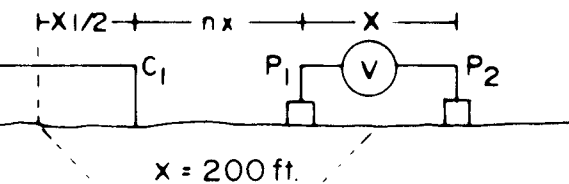

SCALE 1" = 300'

PLOTTING POINT  
n = 1, 2, 3,

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**

- STRONG CHARGEABILITY HIGH
- MODERATE CHARGEABILITY HIGH
- WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED AUG 22 1981

CONTOUR INTERVALS :

APP. RES. - 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED [Signature]  
APP. CHARG - 100 milliseconds

DATE \_\_\_\_\_


TRANSMITTER : SCINTREX IPT-1  
RECEIVER : HUNTEC MARK 4  
Td 120 MILLISECONDS  
Tw 90 MILLISECONDS

7


INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 14+00 W


**Apparent Resistivity ohm metres**

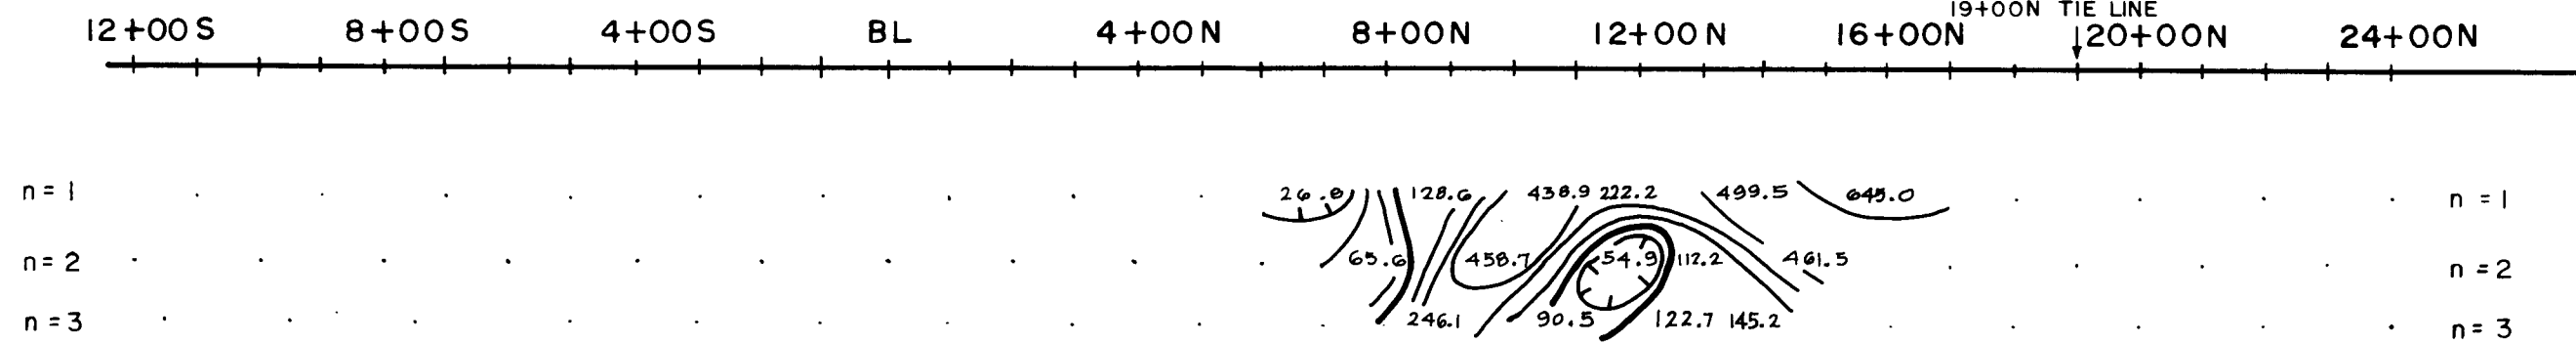




**Apparent Chargeability Milliseconds**

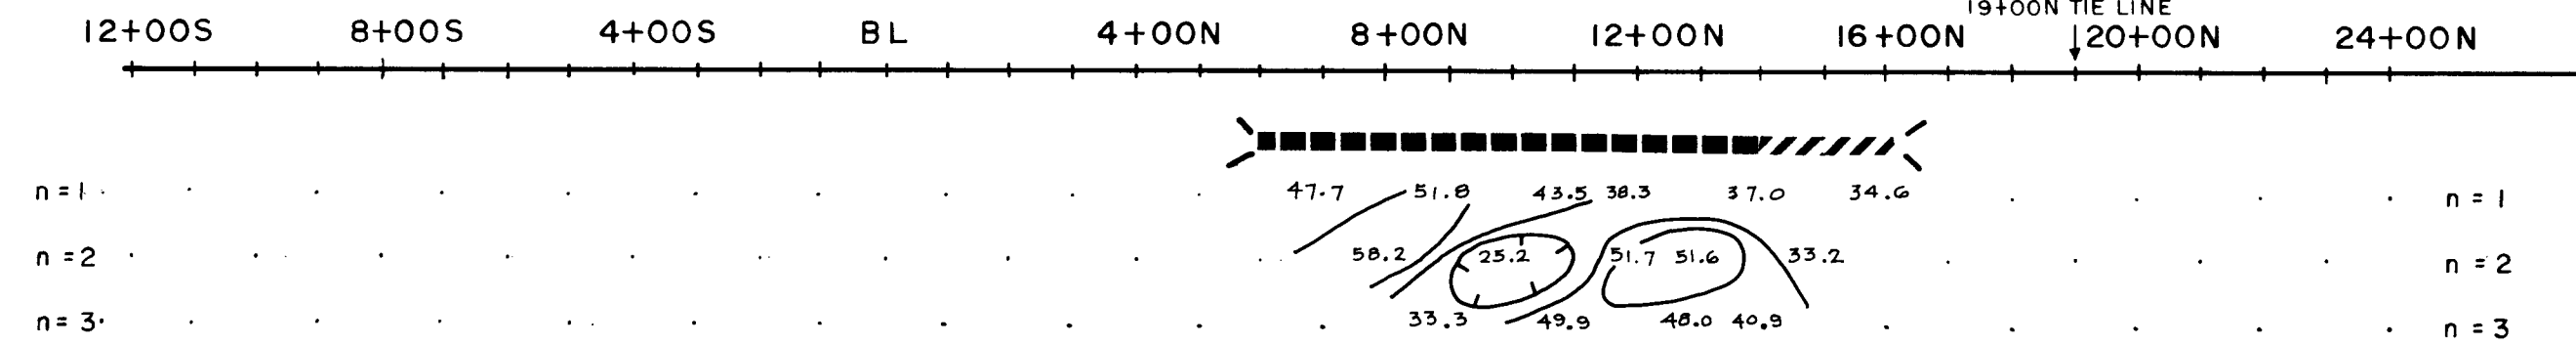

**Magnetometer Survey**

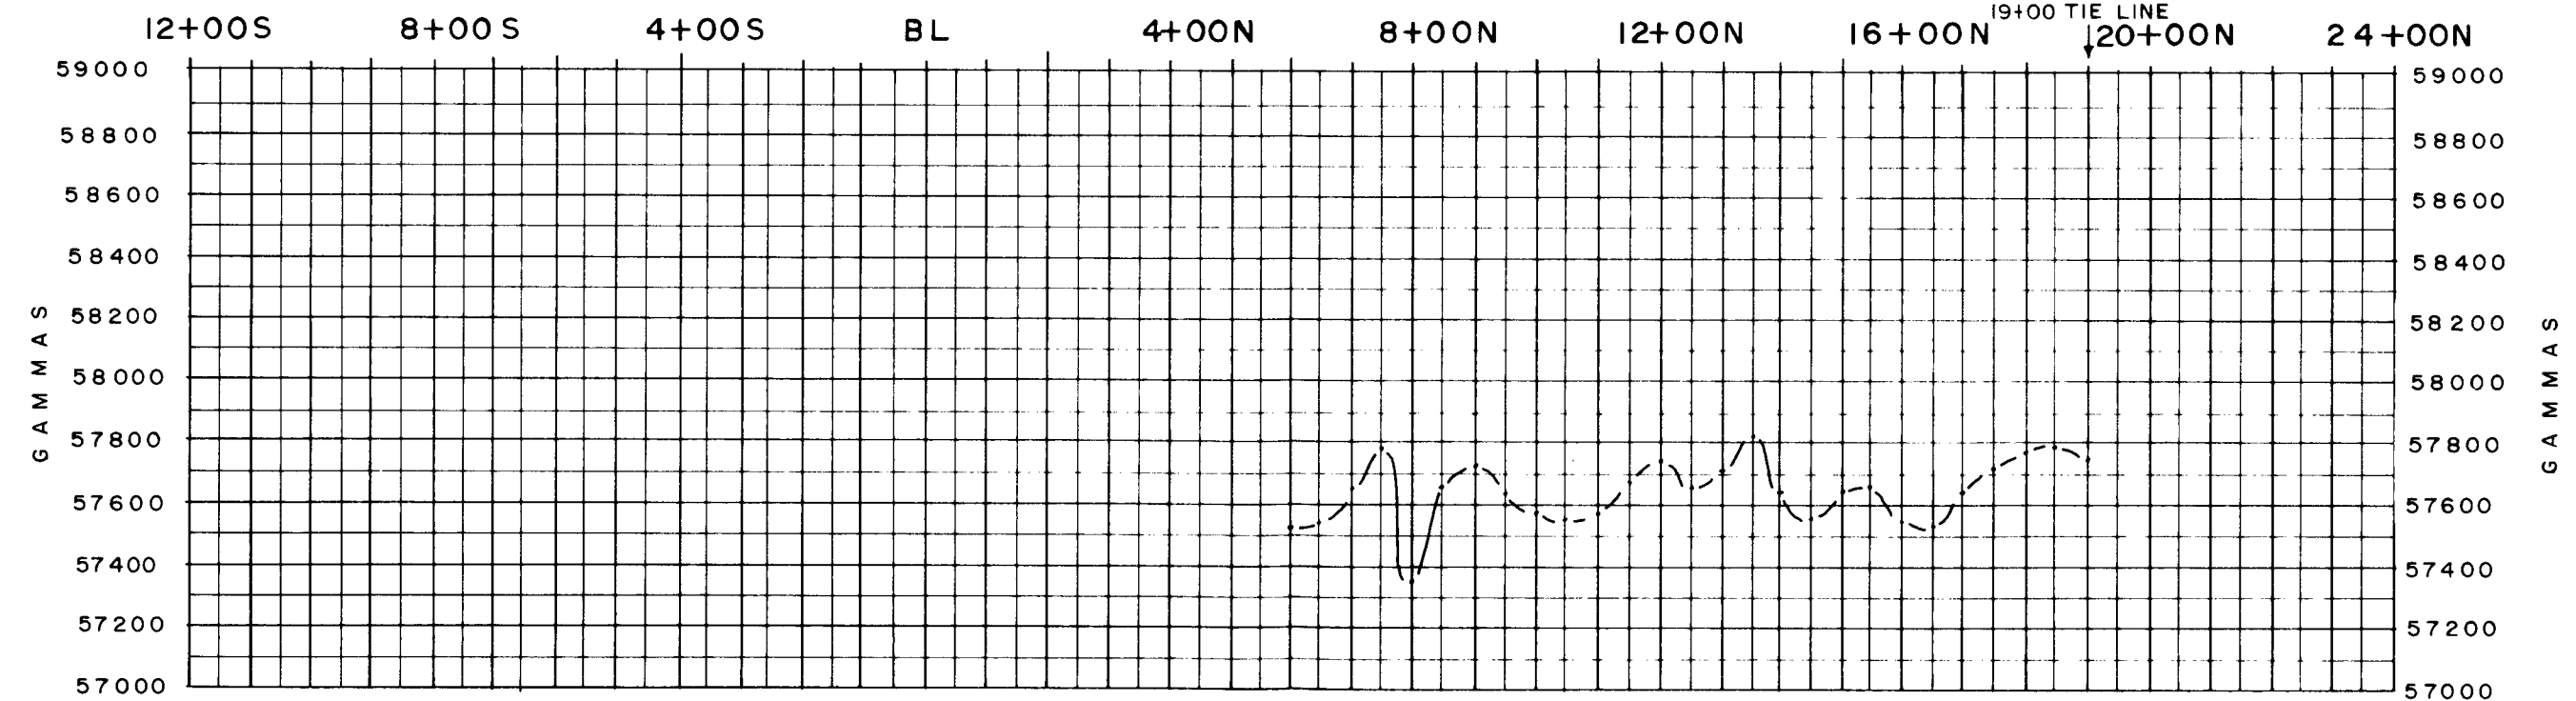


# COMINCO LTD. ANYOX PROPERTY HIDDEN CREEK SKEENA M.D., B.C.

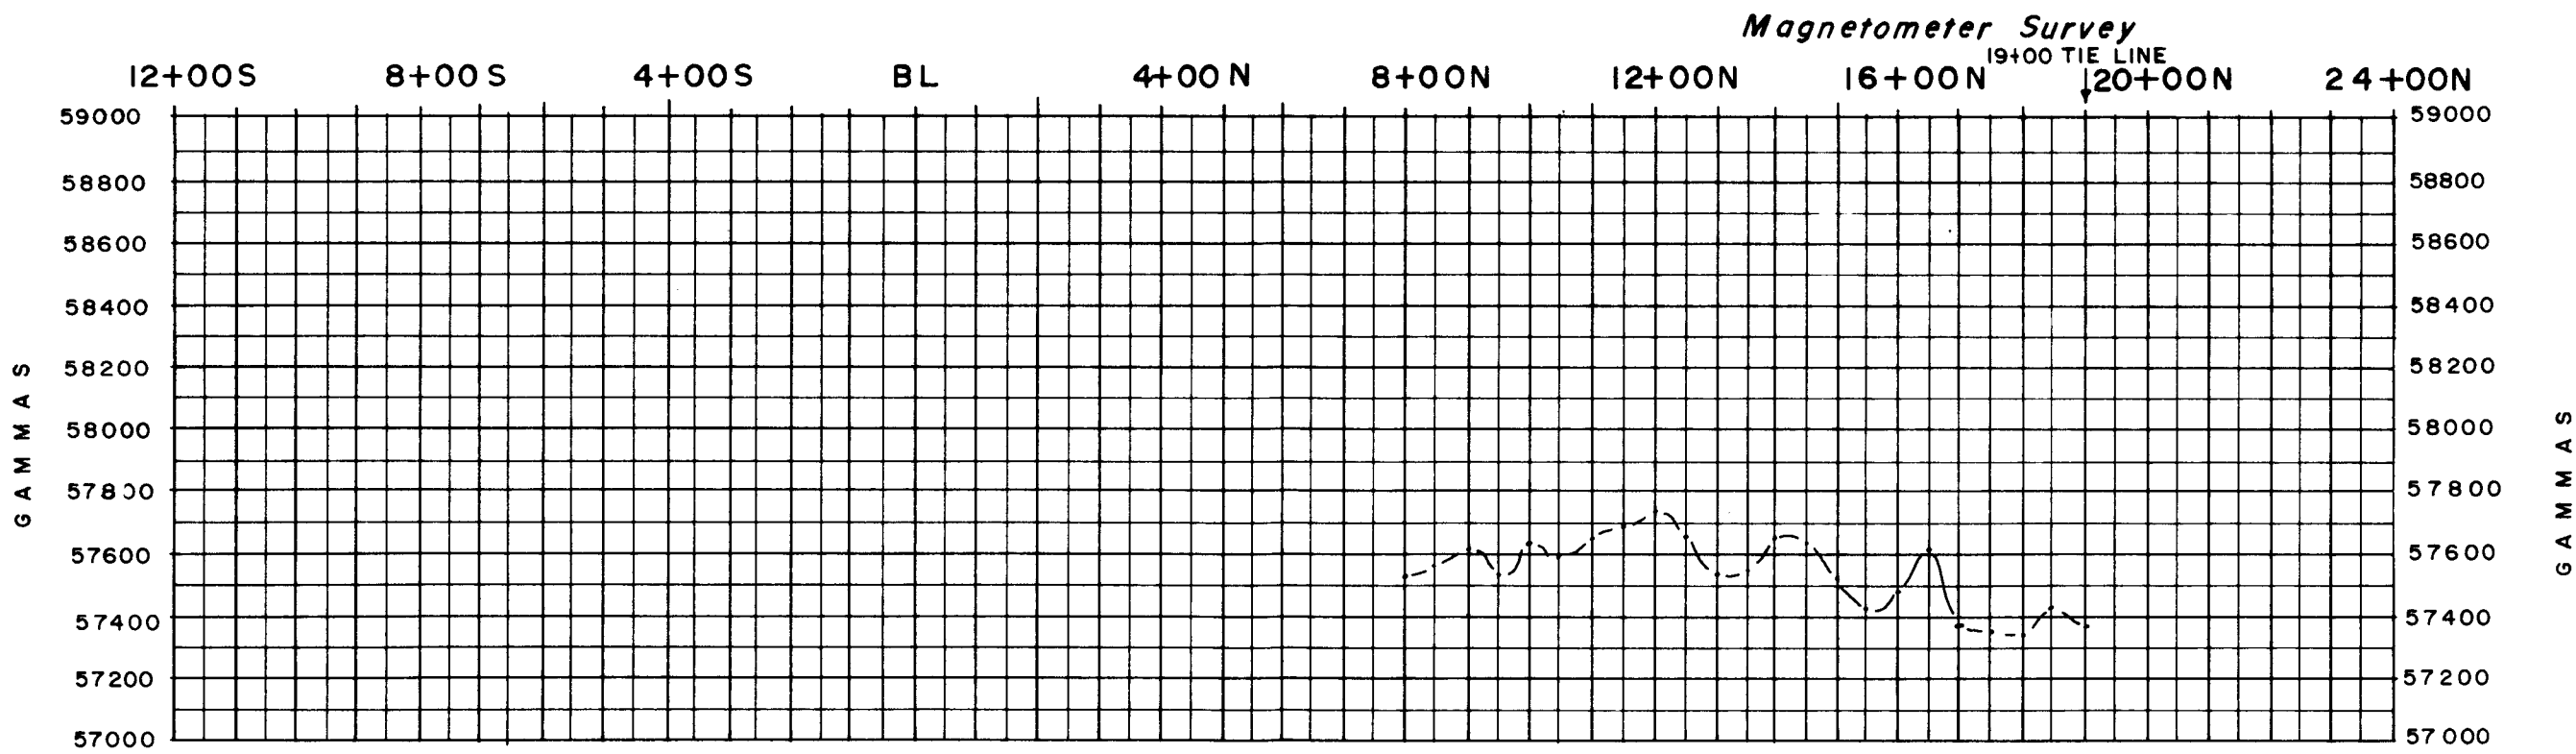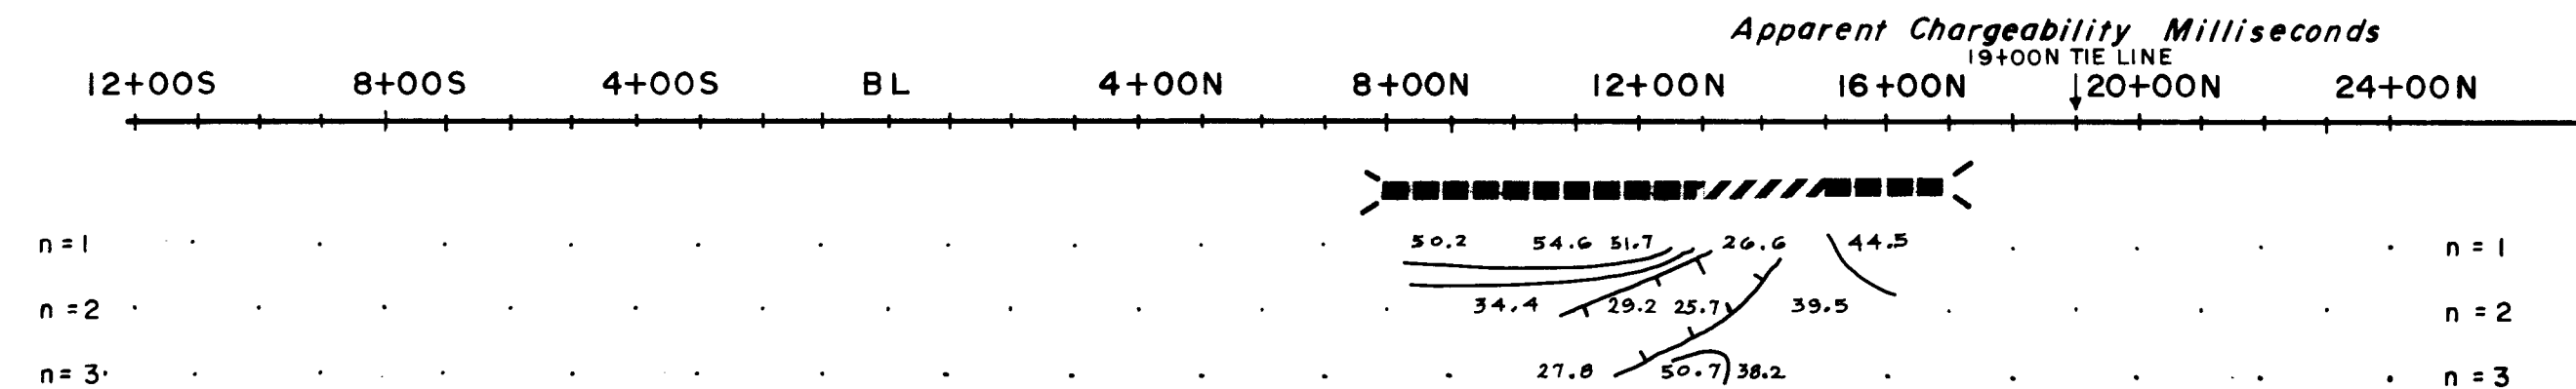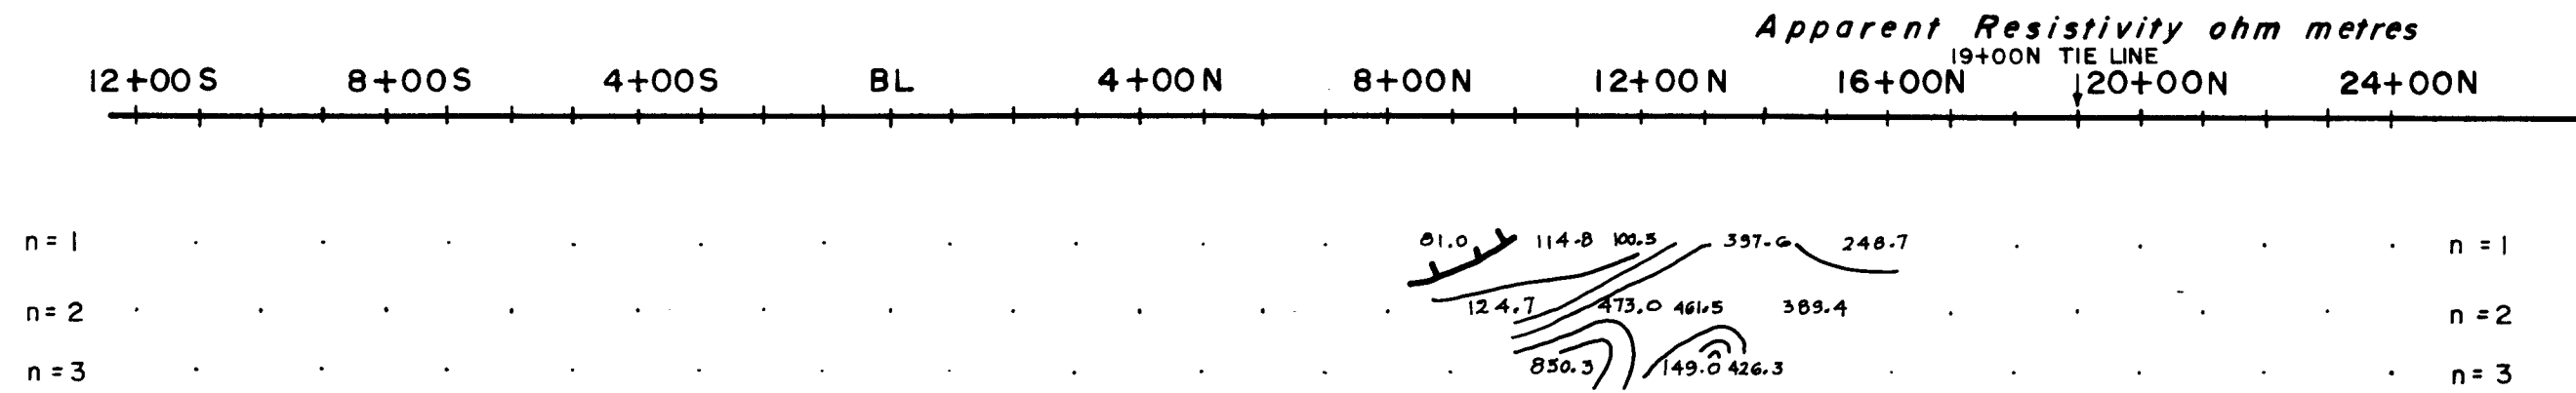

9474

LINE NO. 16+00 W

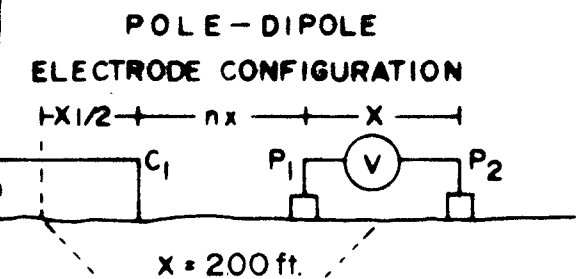

SCALE 1" = 300'

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

- CHARGEABILITY (IP) INTERPRETATION
- STRONG CHARGEABILITY HIGH
  - MODERATE CHARGEABILITY HIGH
  - WEAK CHARGEABILITY HIGH
  - VERY LOW RESISTIVITY

DATE SURVEYED AUG 22, 1981

CONTOUR INTERVALS:

APP. RES. — 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED

APP. CHARG. — 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER: SCINTREX IPT-1  
 RECEIVER: HUNTEC MARK 4  
 Td 120 MILLISECONDS  
 Tw 90 MILLISECONDS  
 Tm 900 MILLISECONDS





8

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 16+00 W



# COMINCO LTD. ANYOX PROPERTY HIDDEN CREEK SKEENA M.D., B.C.

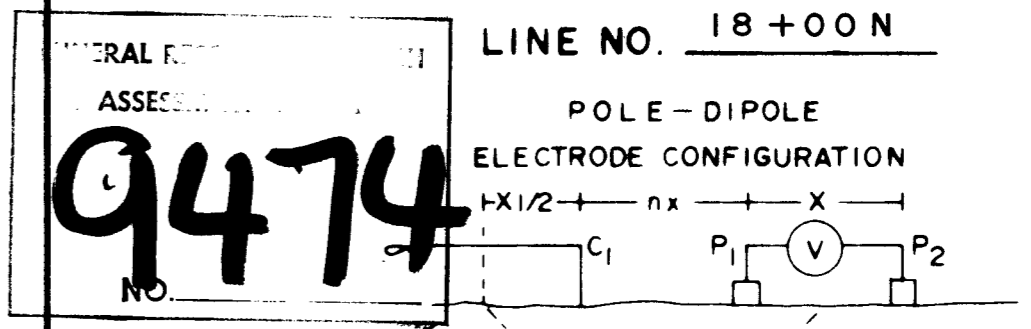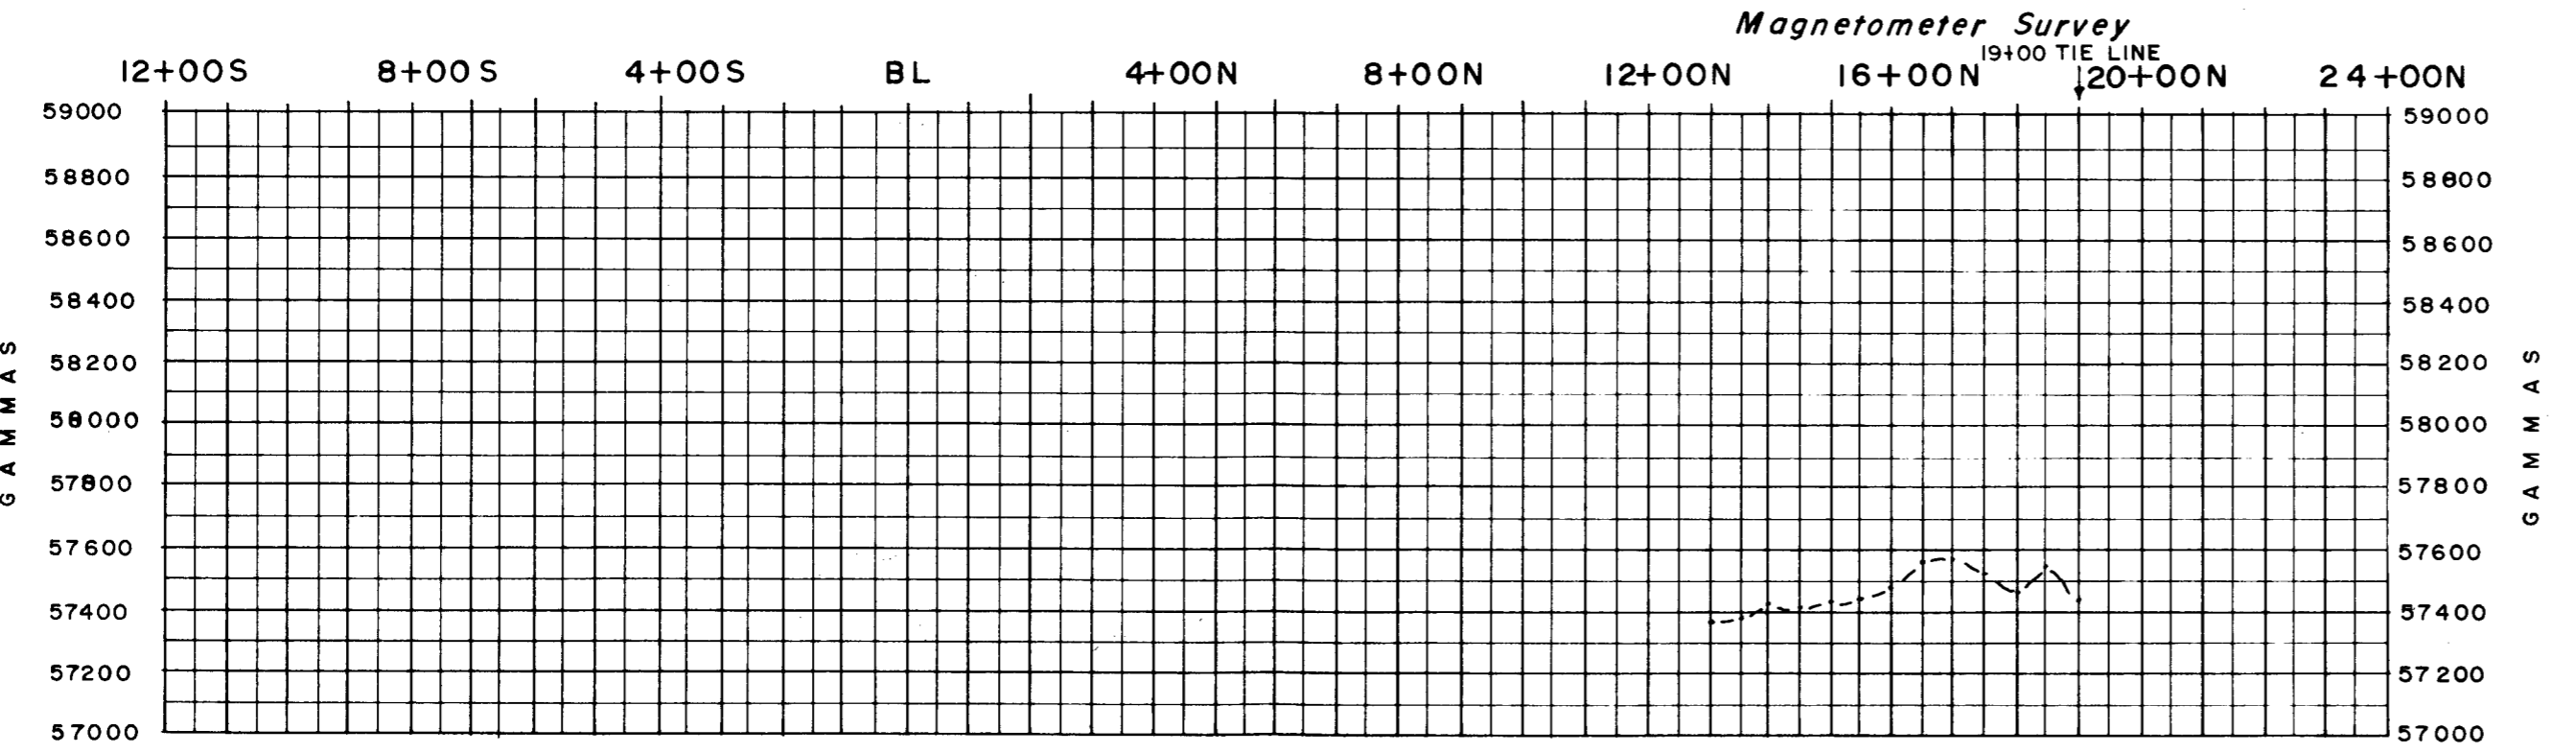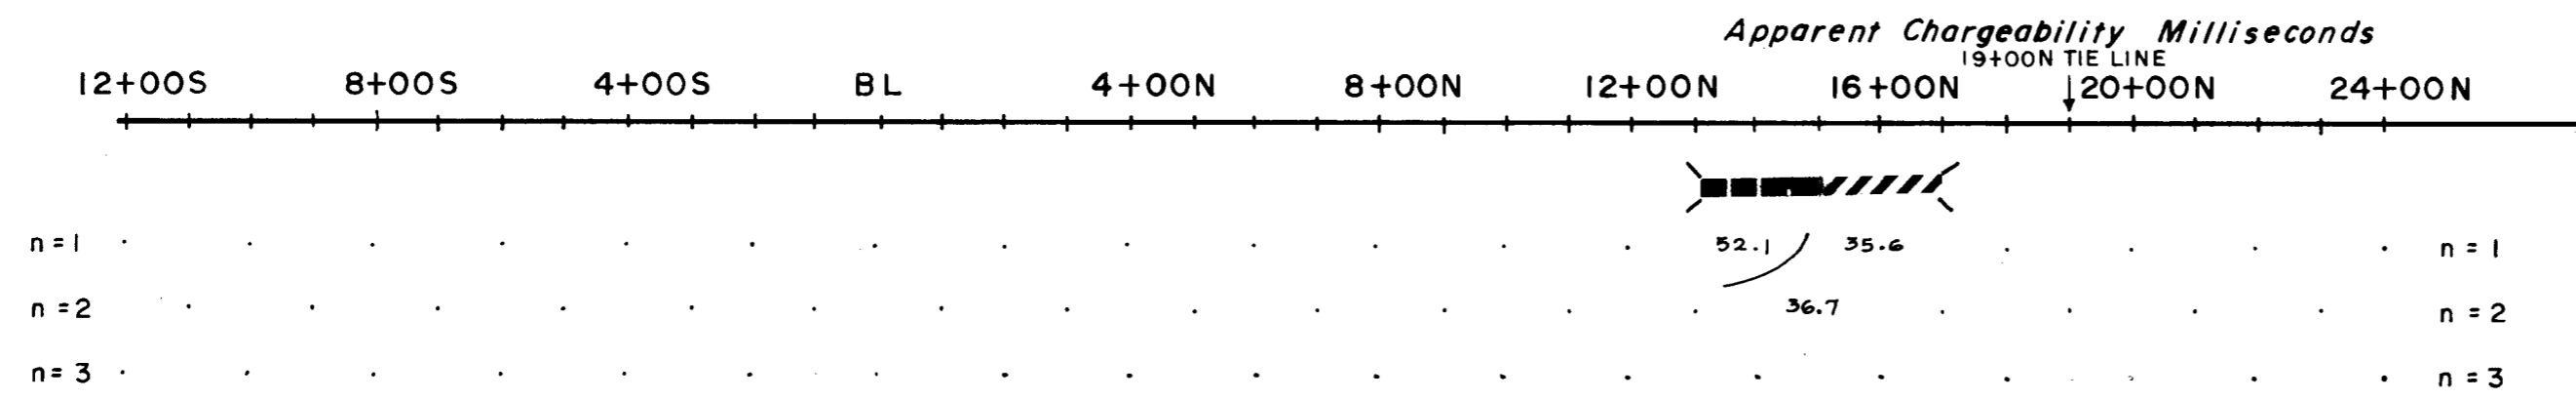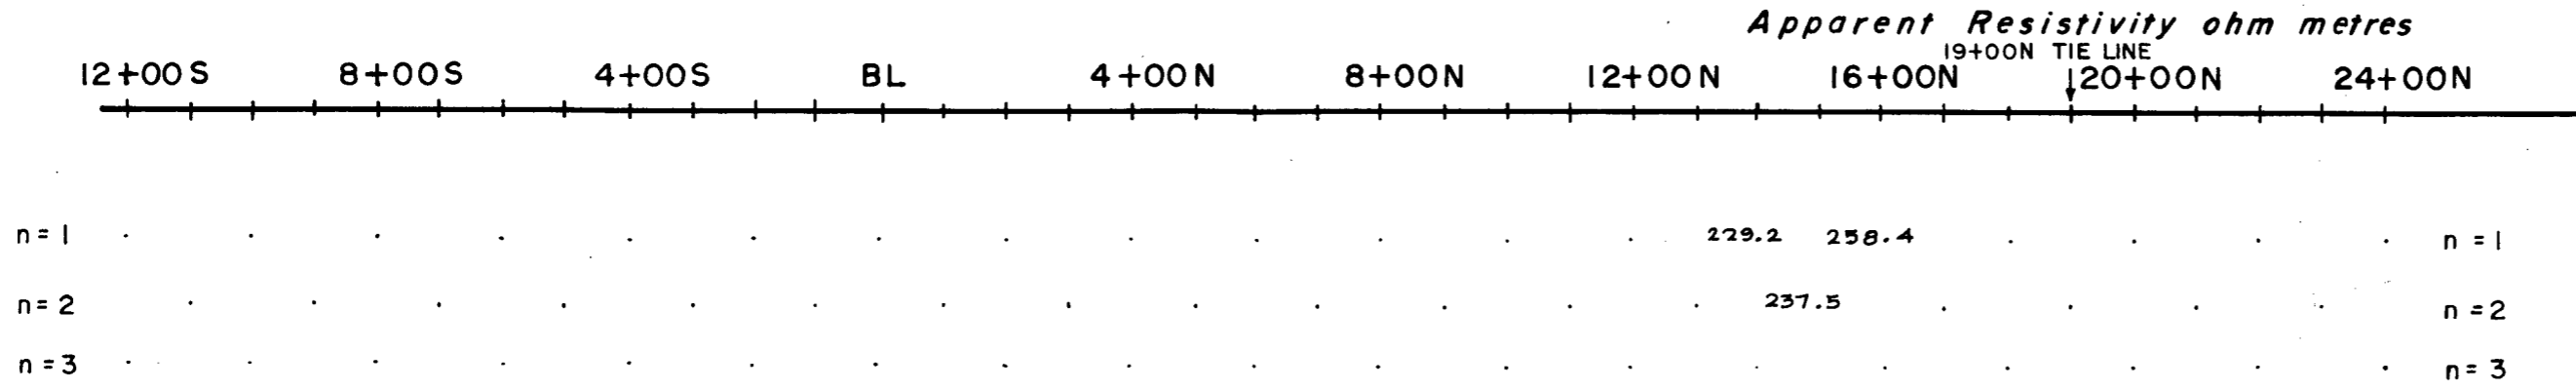

SCALE 1" = 300'

CURRENT ELECTRODE SOUTH OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**

- STRONG CHARGEABILITY HIGH
- MODERATE CHARGEABILITY HIGH
- WEAK CHARGEABILITY HIGH
- VERY LOW RESISTIVITY

DATE SURVEYED \_\_\_\_\_

CONTOUR INTERVALS :

APP. RES. - 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED

APP. CHARG. - 10.0 milliseconds

DATE \_\_\_\_\_

TRANSMITTER : SCINTREX IPT-1

RECEIVER : HUNTEC MARK 4

Td 120 MILLISECONDS





Tw 90 MILLISECONDS

(9)

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 18+00N

**COMINCO LTD.  
ANYOX PROPERTY  
HIDDEN CREEK  
SKEENA M.D., B.C.**

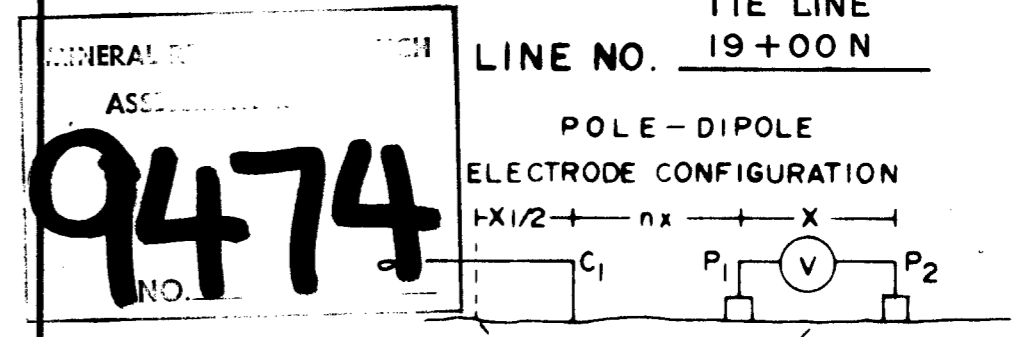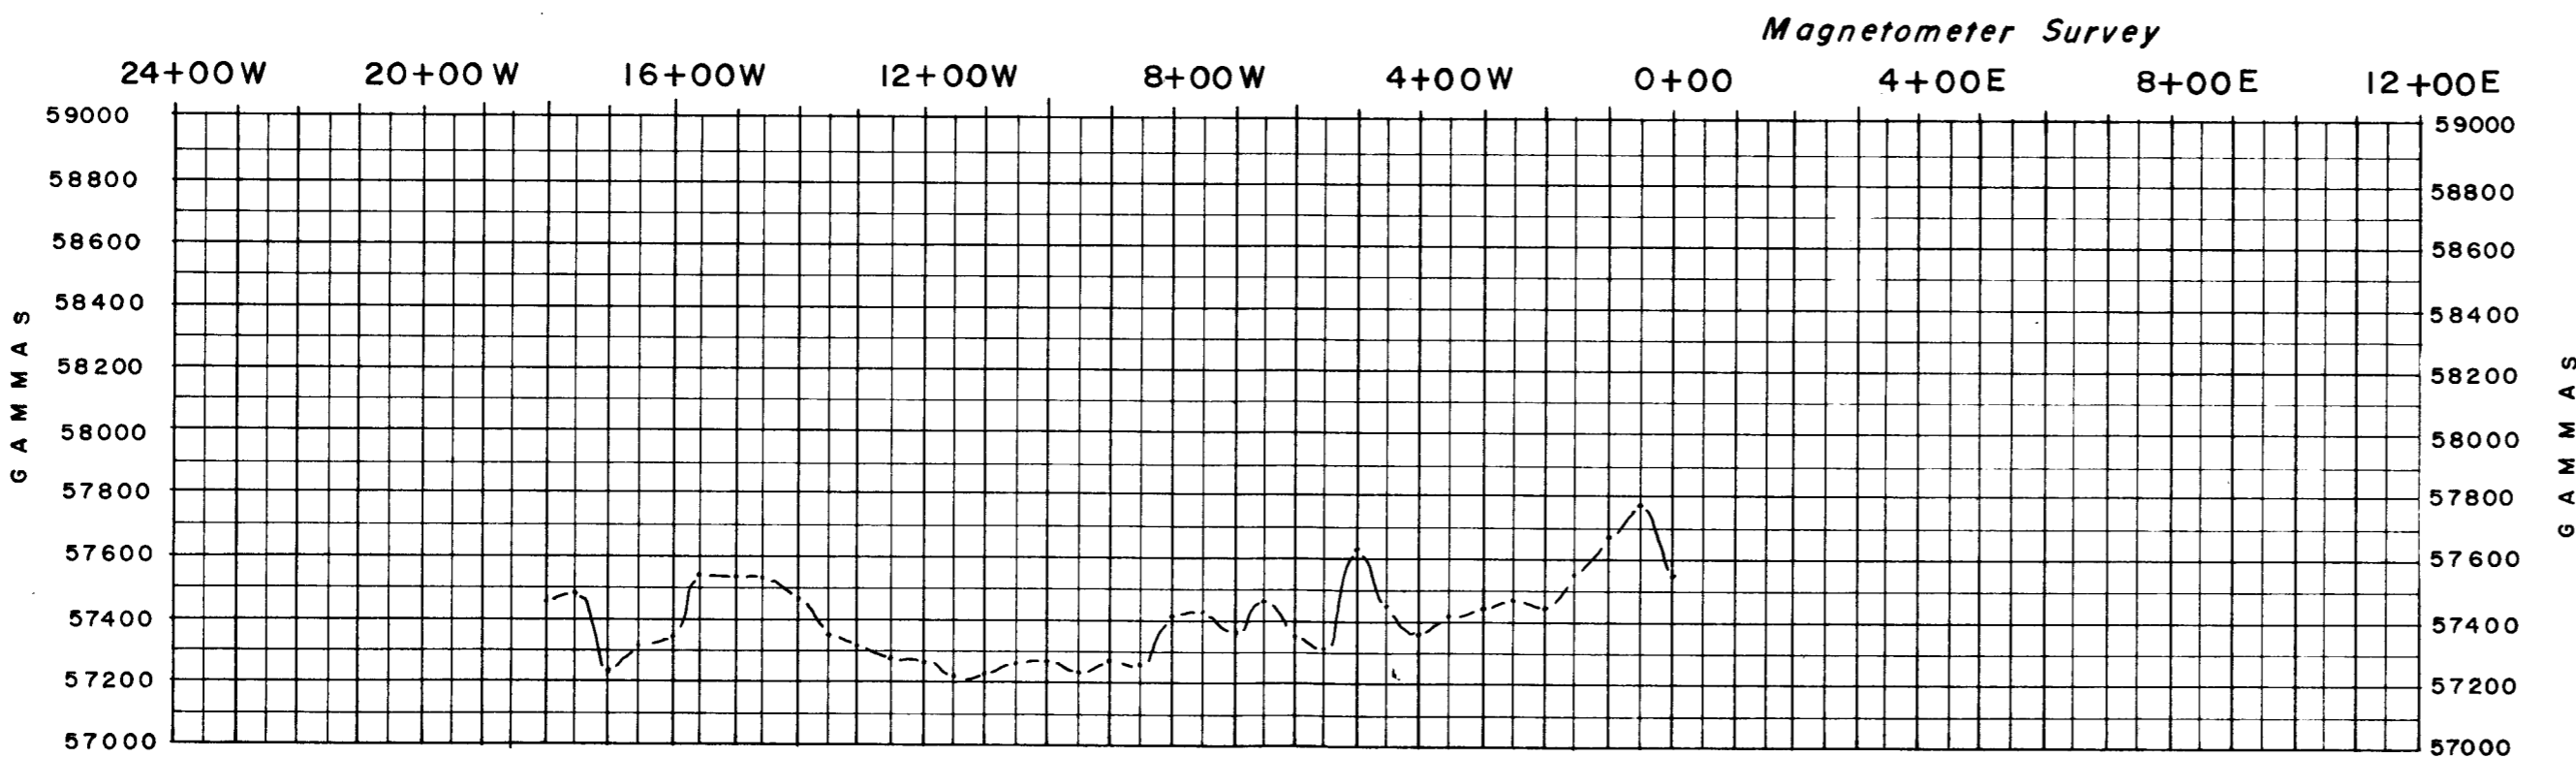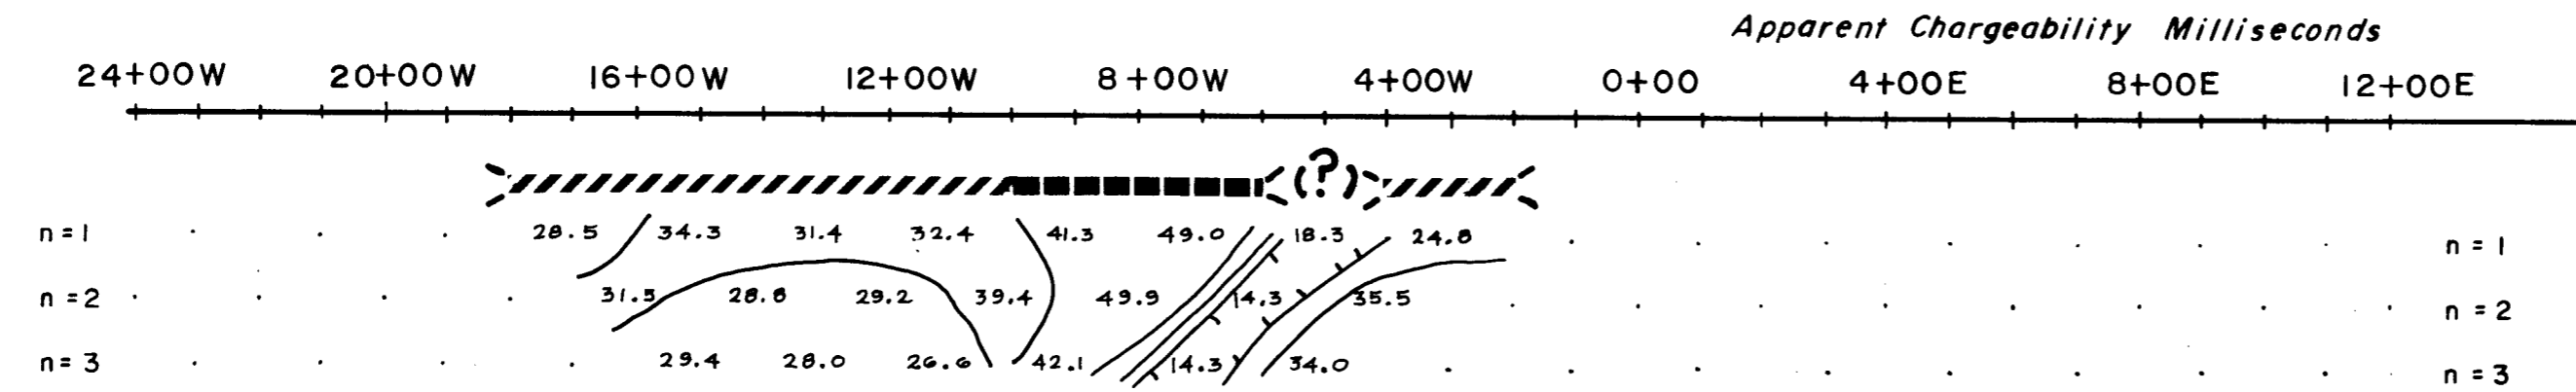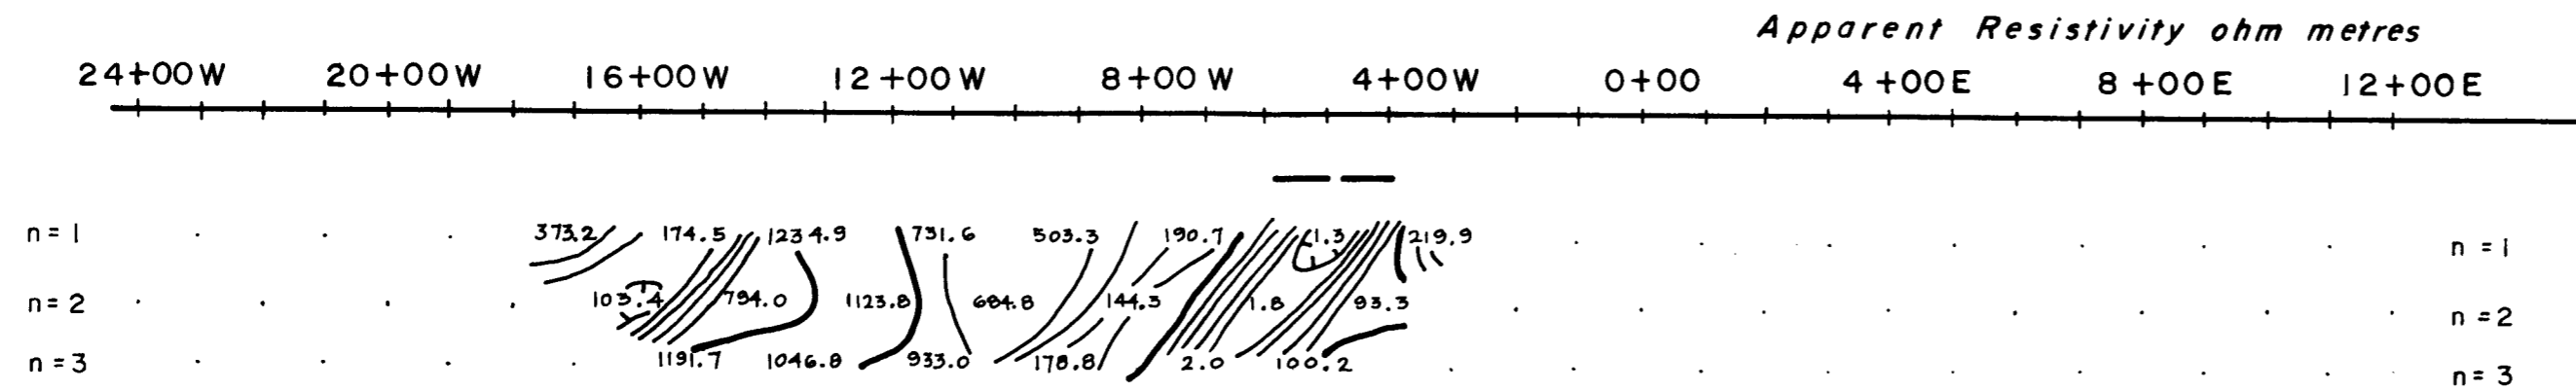

SCALE 1" = 300'  
CURRENT ELECTRODE WEST OF POTENTIAL DIPOLE

**CHARGEABILITY (IP) INTERPRETATION**  
 ■ STRONG CHARGEABILITY HIGH  
 ■ MODERATE CHARGEABILITY HIGH  
 ▨ WEAK CHARGEABILITY HIGH  
 - - - - - VERY LOW RESISTIVITY

DATE SURVEYED \_\_\_\_\_

CONTOUR INTERVALS:  
 APP. RES. - 1, 1.5, 2, 3, 5, 7.5, 10 ohm metres APPROVED *[Signature]*  
 APP. CHARG. - 10.0 milliseconds

DATE \_\_\_\_\_



TRANSMITTER: SCINTREX IPT-1  
 RECEIVER: HUNTEC MARK 4  
 Td 120 MILLISECONDS  
 Tw 90 MILLISECONDS  
 Tm 900 MILLISECONDS

10

INDUCED POLARIZATION AND RESISTIVITY SURVEY  
 SURVEYED BY COMINCO LTD., EXPLORATION DIVISION

LINE 19+00N TIE LINE



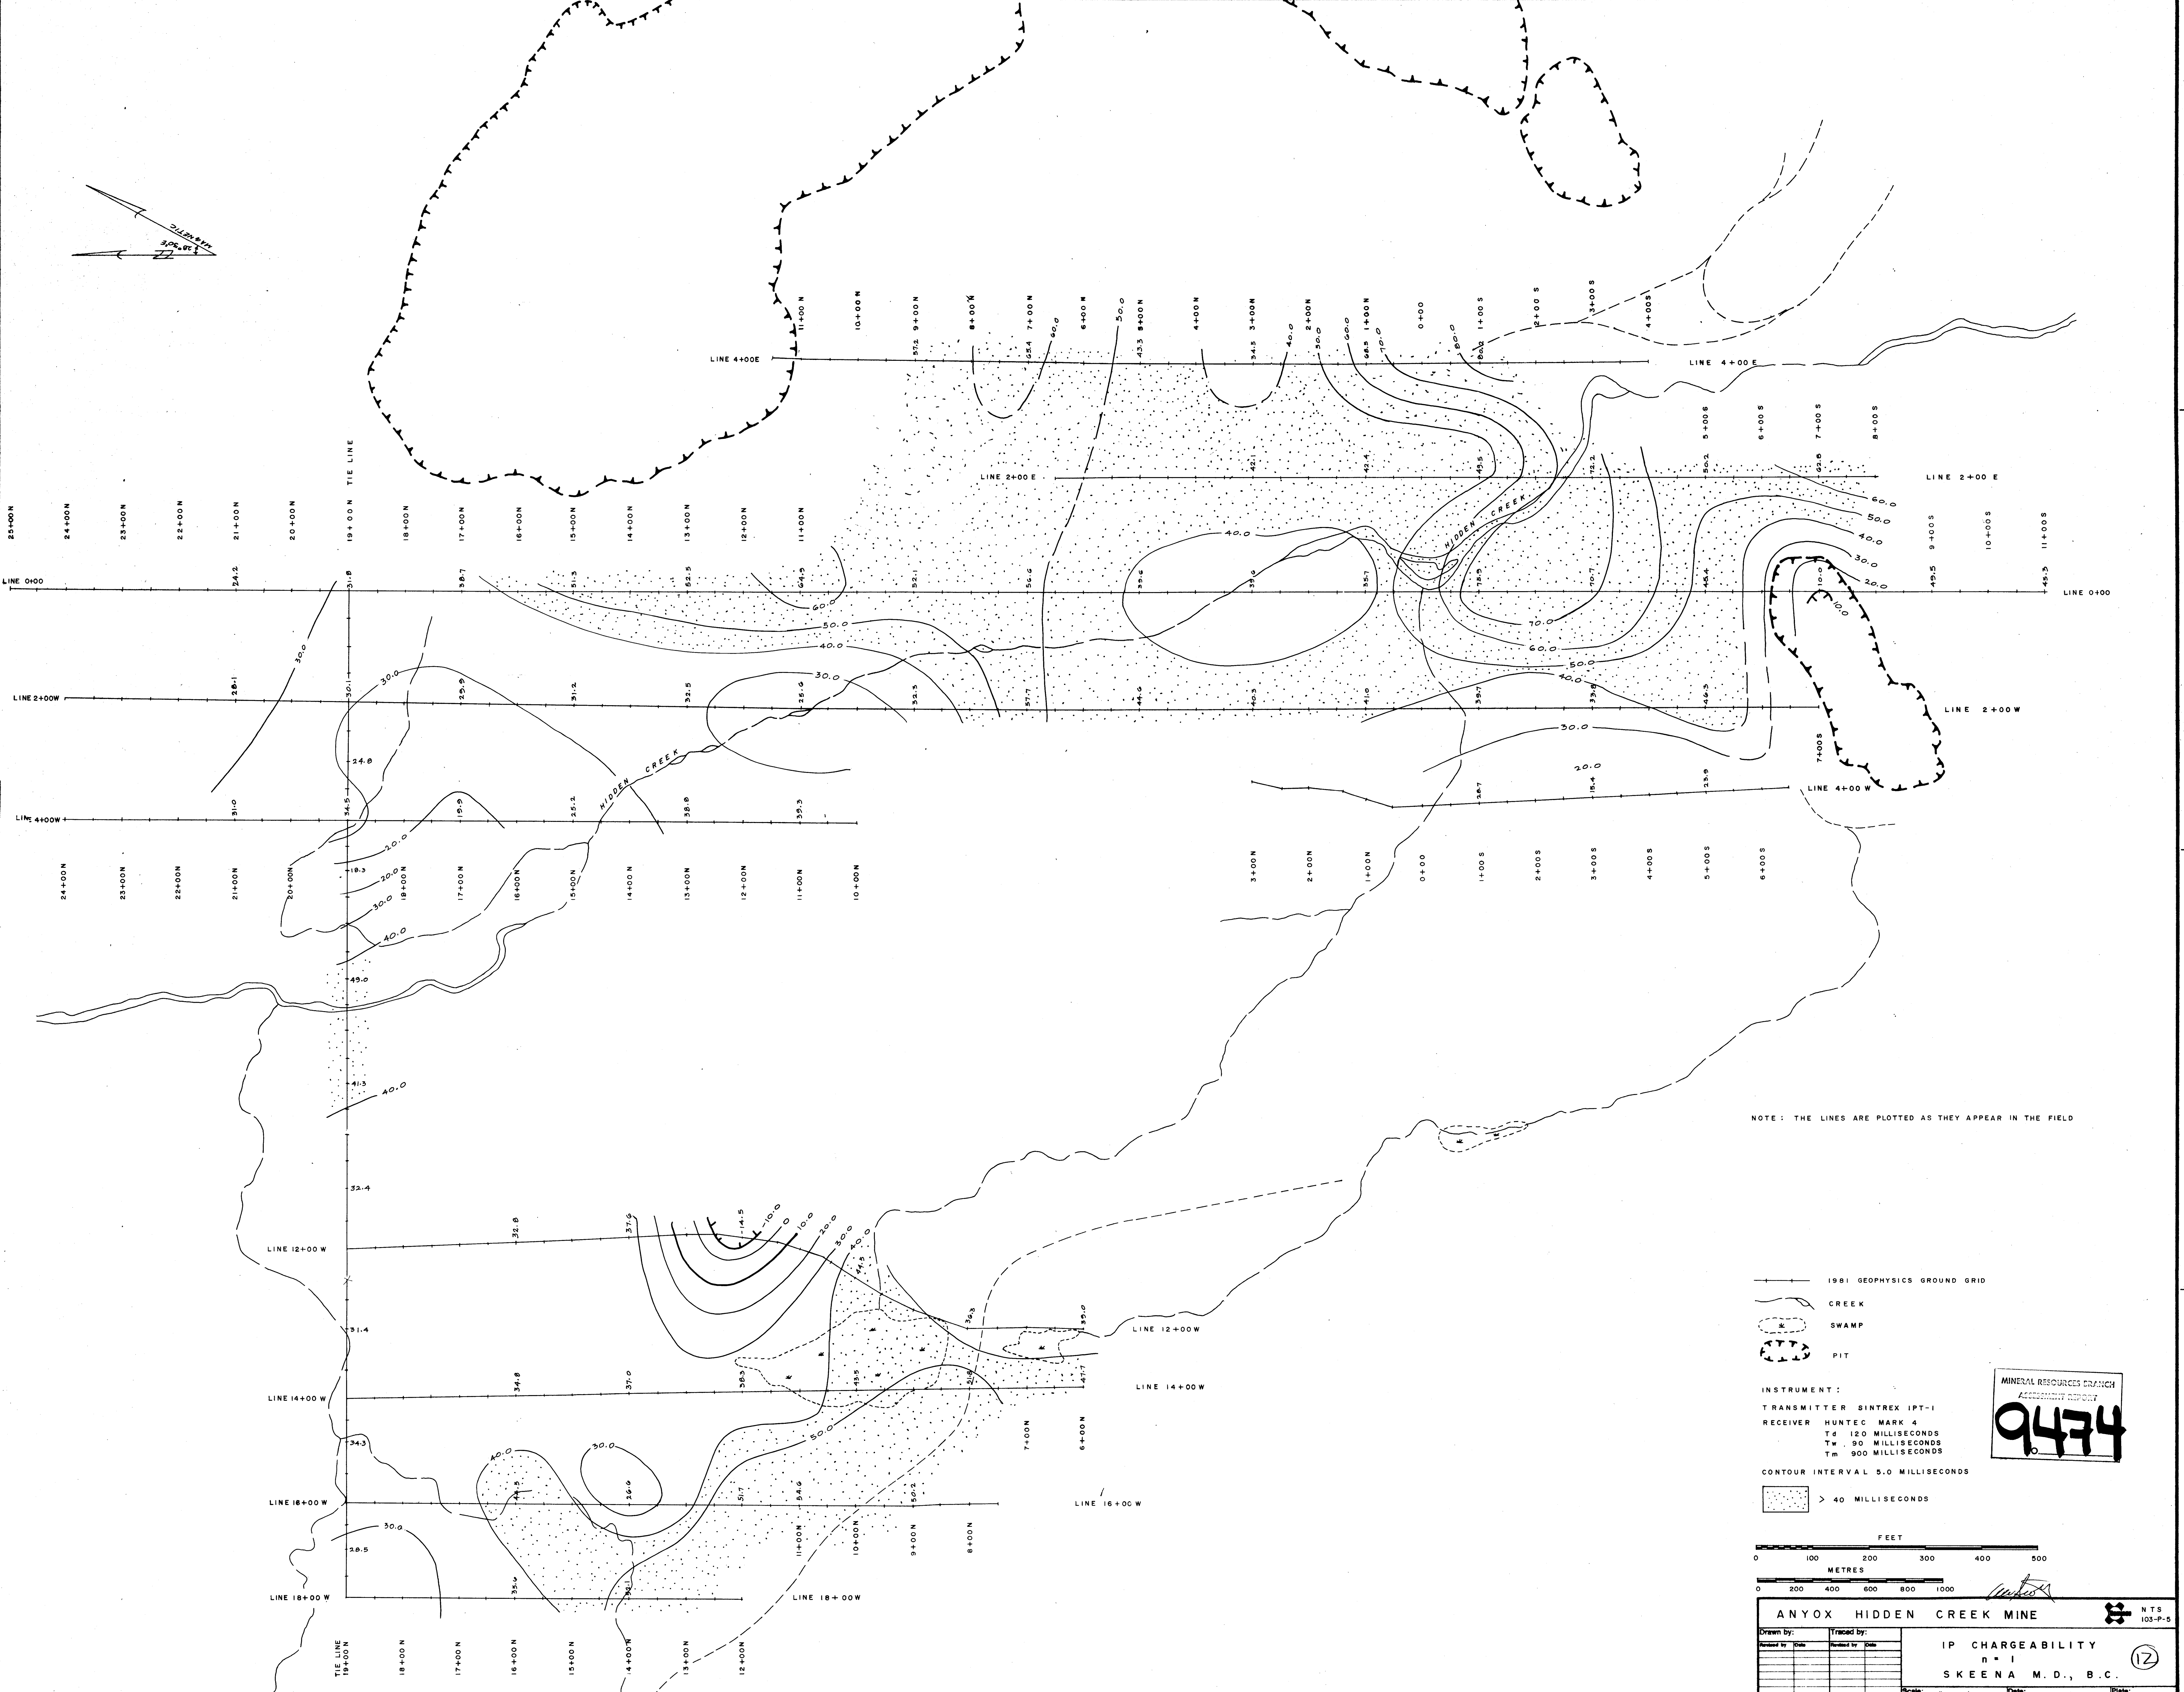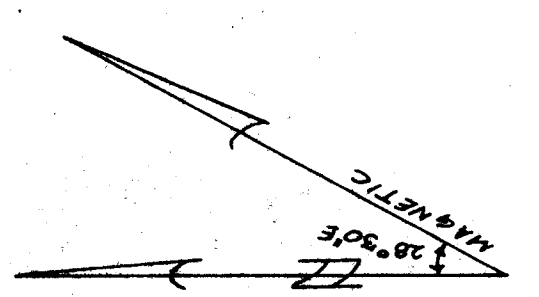


NOTE: THE LINES ARE PLOTTED AS THEY APPEAR IN THE FIELD

- 1981 GEOPHYSICS GROUND GRID
- CREEK
- SWAMP
- PIT



INSTRUMENT:  
 TRANSMITTER SINTREX IPT-1  
 RECEIVER HUNTEC MARK 4  
 Td 120 MILLISECONDS  
 Tw 90 MILLISECONDS  
 Tm 900 MILLISECONDS

CONTOUR INTERVAL 5.0 MILLISECONDS  
 > 40 MILLISECONDS

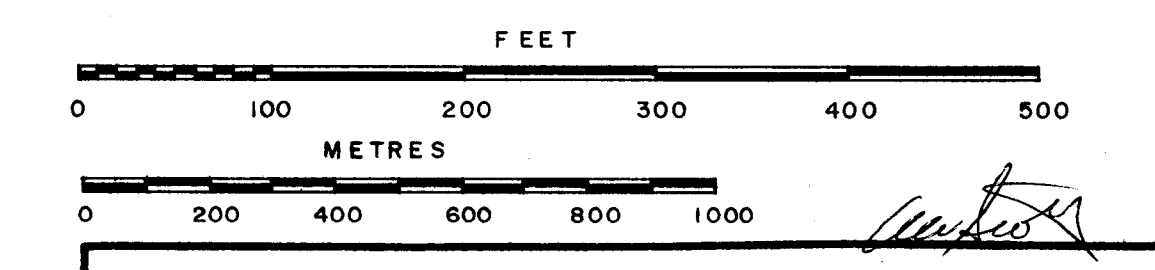

MINERAL RESOURCES BRANCH  
 ASSESSMENT REPORT  
**9474**

ANYOX HIDDEN CREEK MINE		NTS 103-P-5	
Drawn by:	Traced by:	IP CHARGEABILITY	
Checked by:	Reviewed by:	n = 1	
		SKEENA M.D., B.C.	
		Scale: 1" = 100'	Date: AUGUST 1981
			Plate: 213-81-3

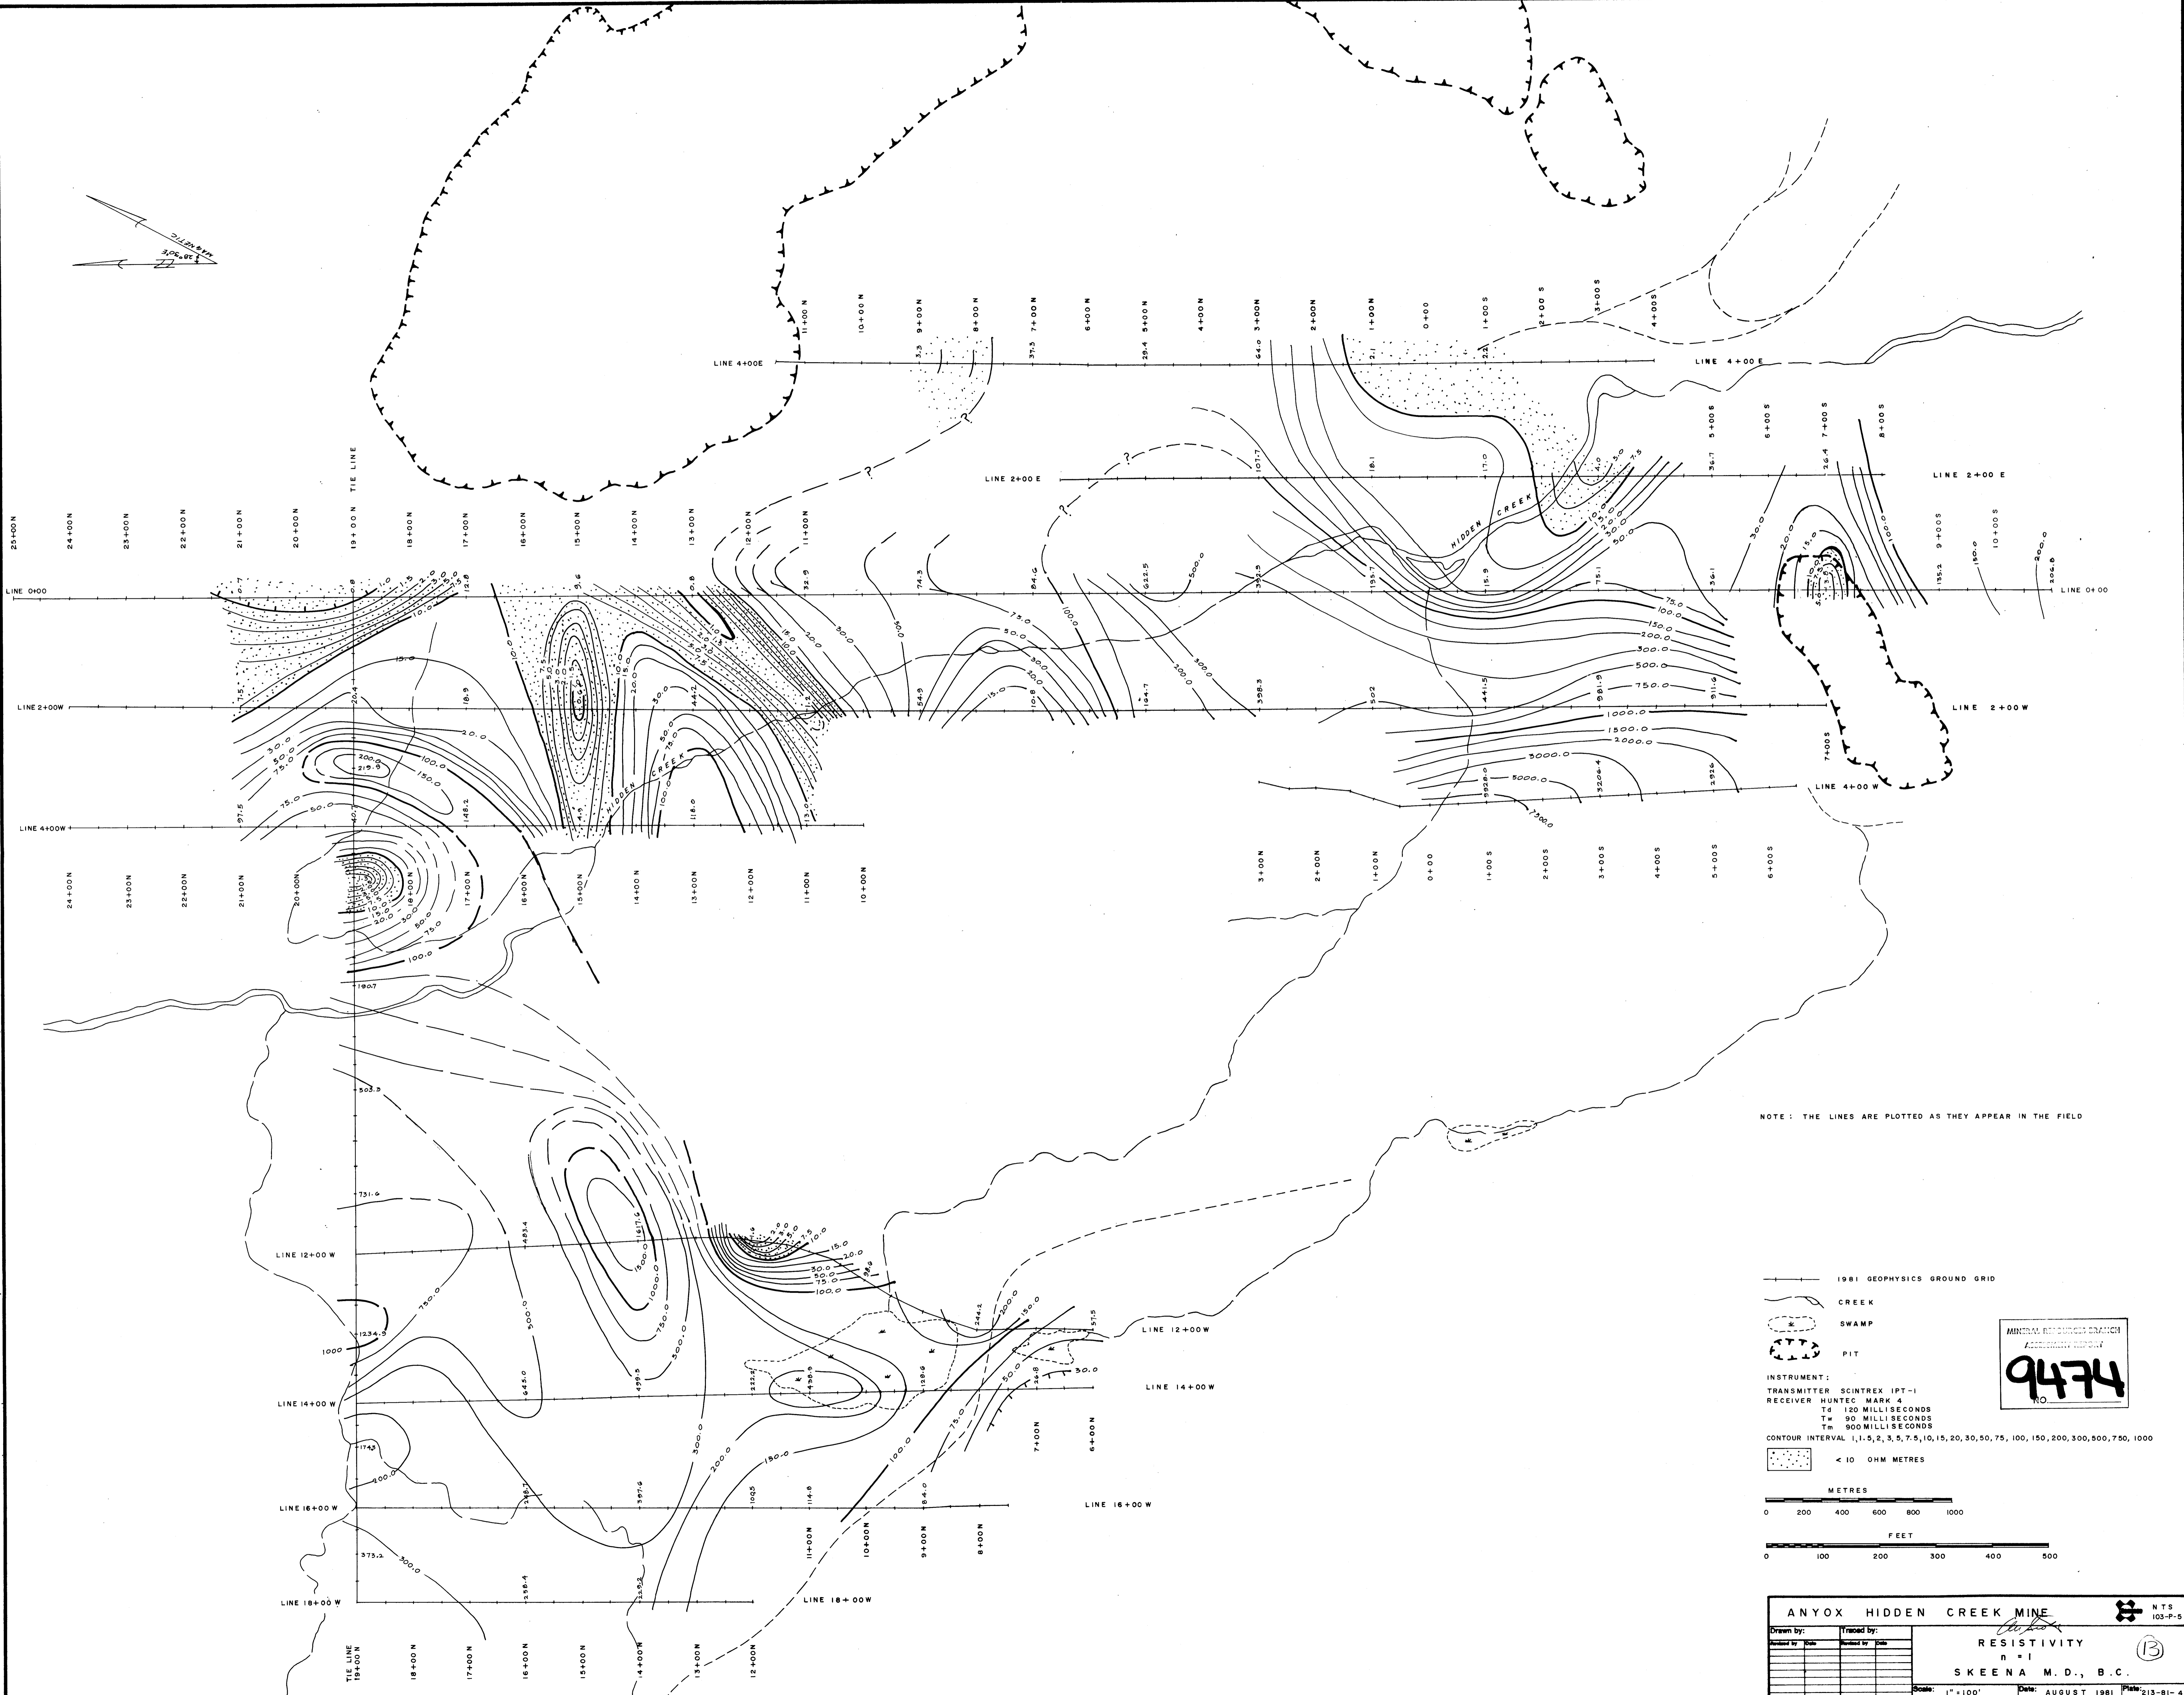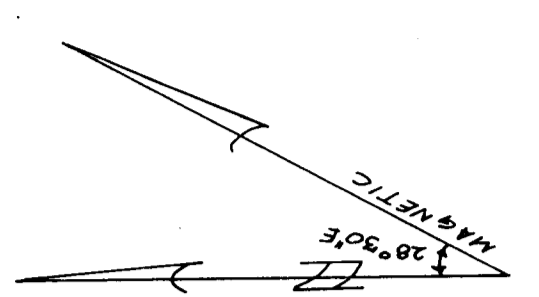

NOTE: THE LINES ARE PLOTTED AS THEY APPEAR IN THE FIELD

1981 GEOPHYSICS GROUND GRID

CREEK

SWAMP

PIT

MINERAL RESOURCES BRANCH  
**7479**  
 NO.

INSTRUMENT:  
 TRANSMITTER SCINTREX IPT-1  
 RECEIVER HUNTEC MARK 4  
 Td 120 MILLISECONDS  
 Tw 90 MILLISECONDS  
 Tm 900 MILLISECONDS

CONTOUR INTERVAL 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30, 50, 75, 100, 150, 200, 300, 500, 750, 1000

< 10 OHM METRES

METRES

0 200 400 600 800 1000

FEET

0 100 200 300 400 500



**ANYOX HIDDEN CREEK MINE** N T S 103-P-5

Drawn by: [Signature] [Signature]  
 Checked by: [Signature] [Signature]

RESISTIVITY  
 n = 1

SKEENA M. D., B. C.

Scale: 1" = 100' Date: AUGUST 1981 Plate: 213-81-4

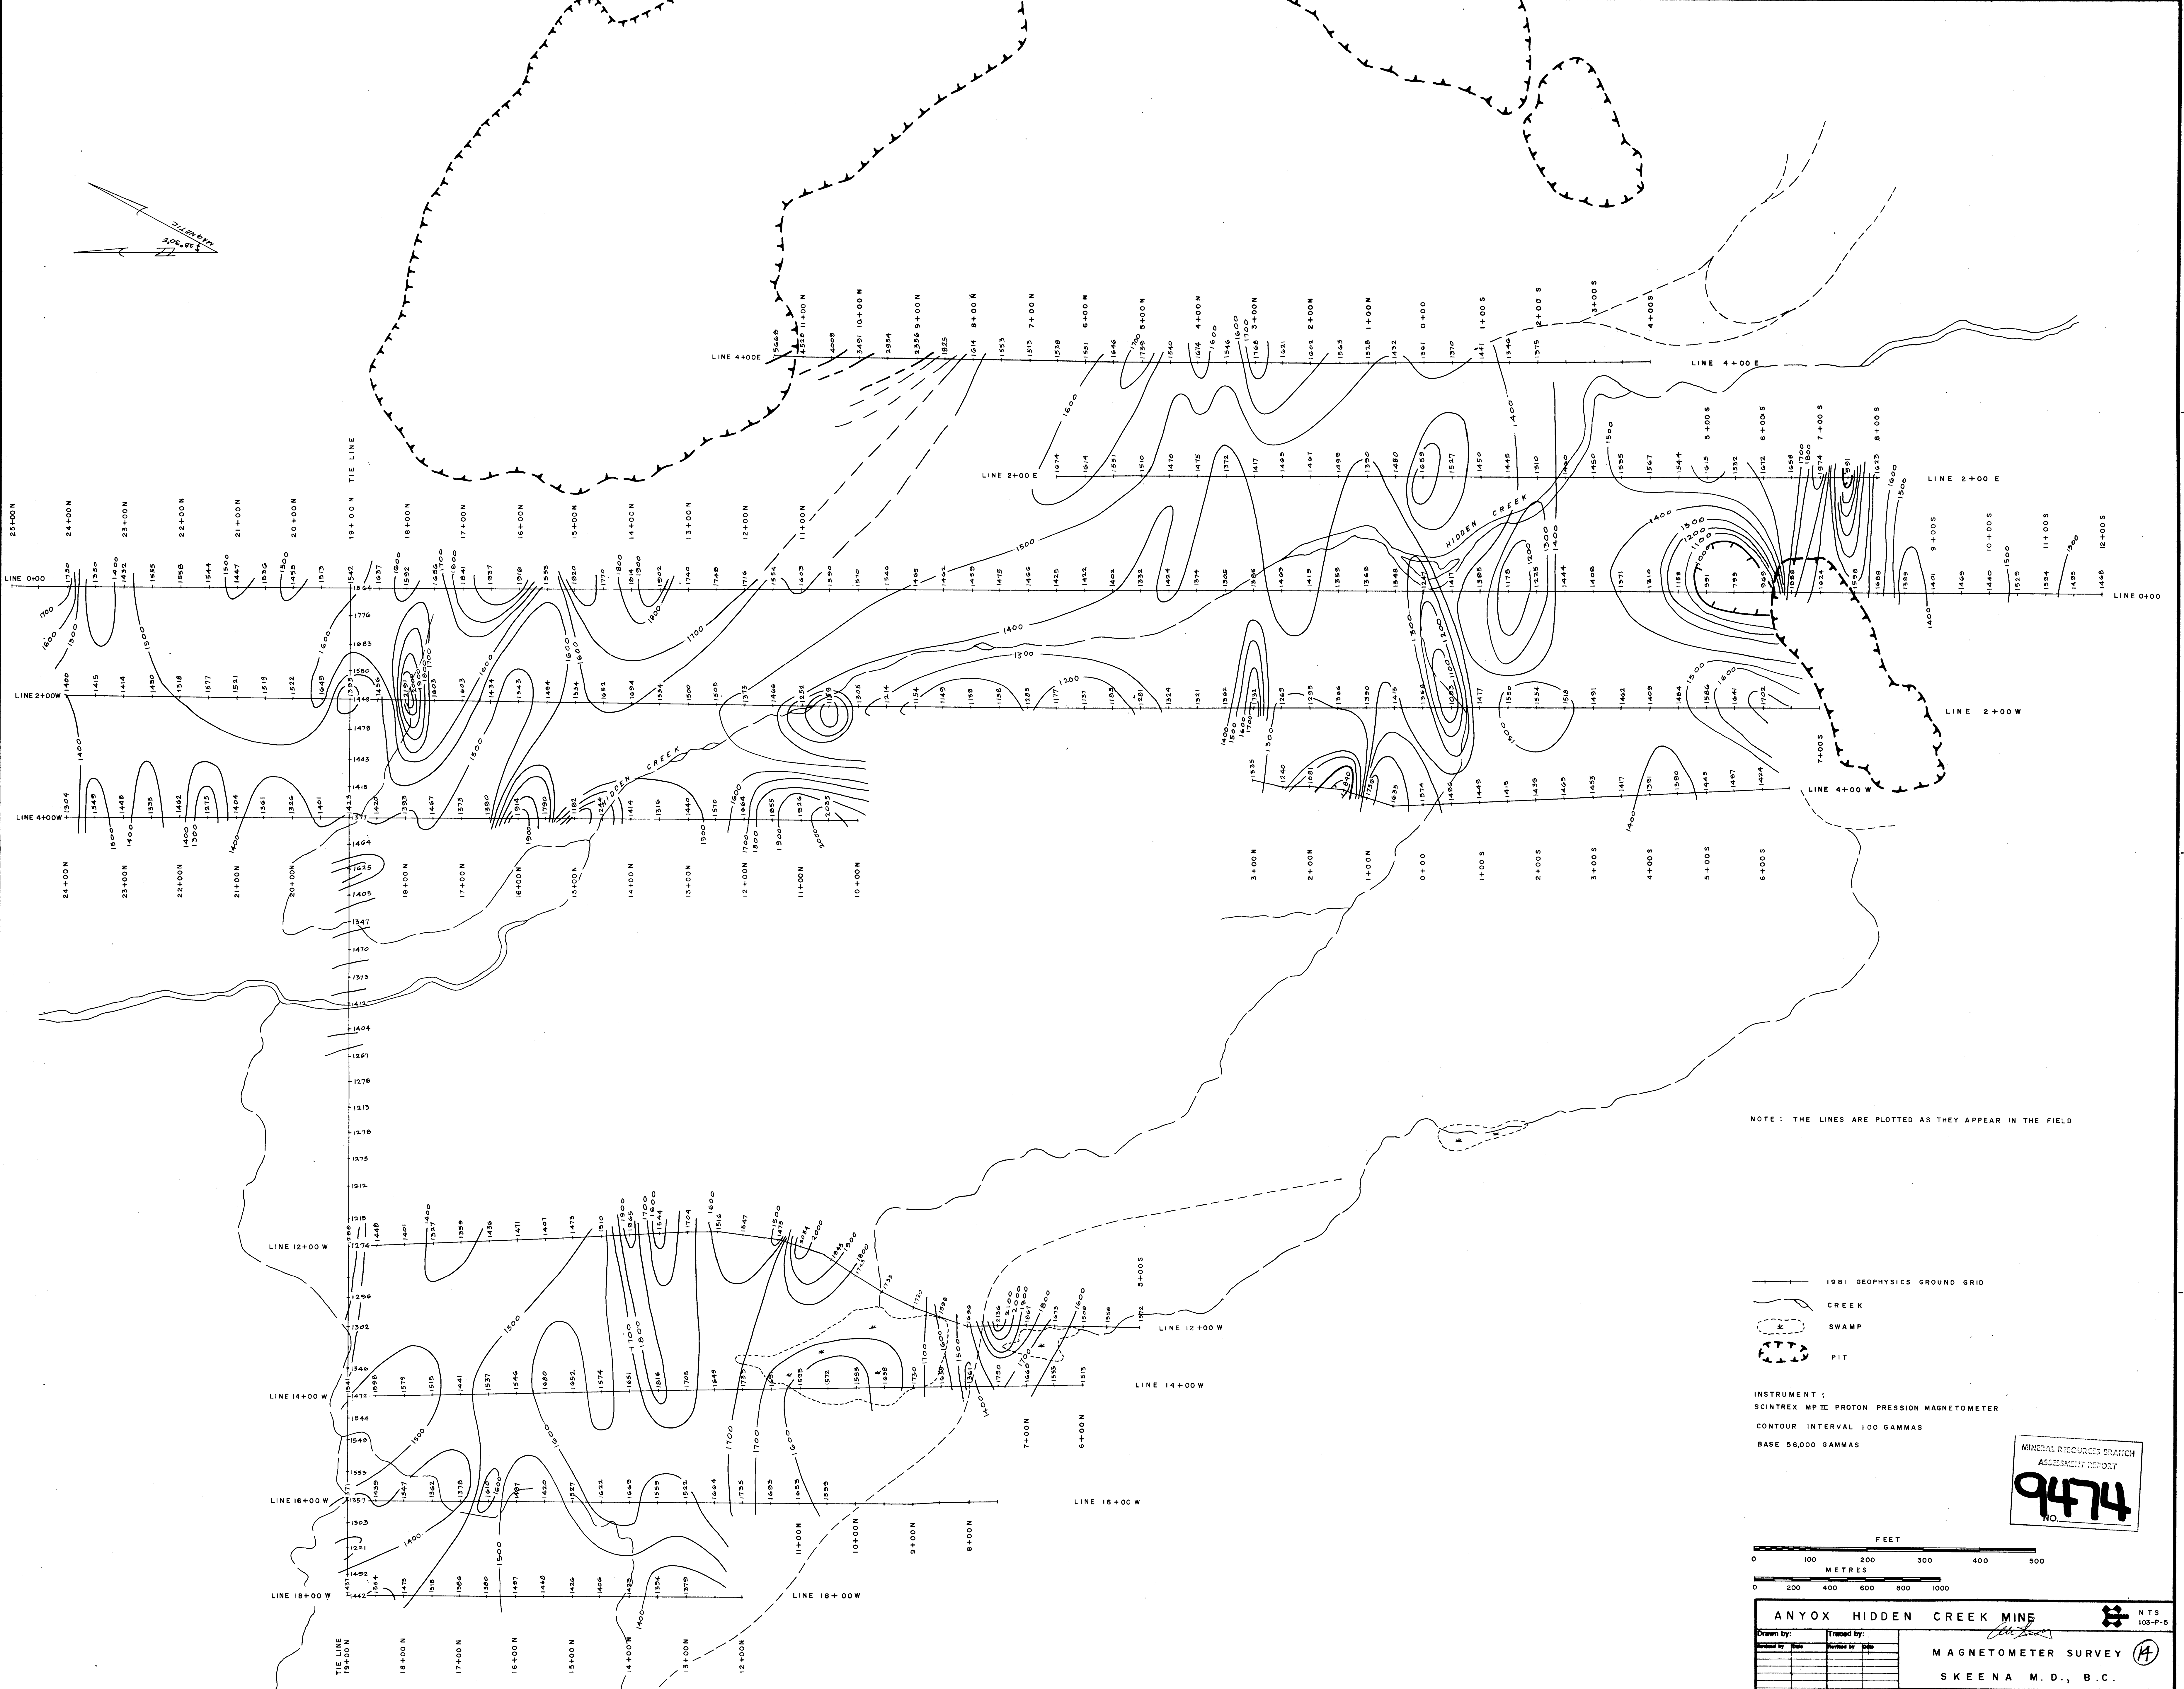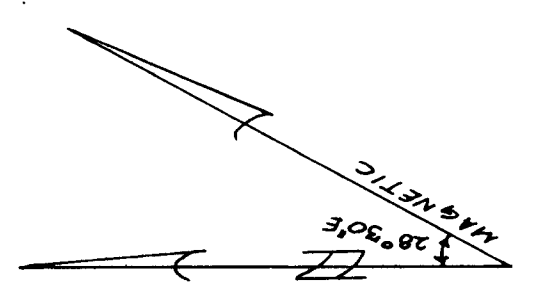


NOTE: THE LINES ARE PLOTTED AS THEY APPEAR IN THE FIELD

- 1981 GEOPHYSICS GROUND GRID
- CREEK
- SWAMP
- PIT

INSTRUMENT :  
SCINTREX MP II PROTON PRESSION MAGNETOMETER  
CONTOUR INTERVAL 100 GAMMAS  
BASE 56,000 GAMMAS

MINERAL RESOURCES BRANCH  
ASSESSMENT REPORT  
**9474**  
NO.

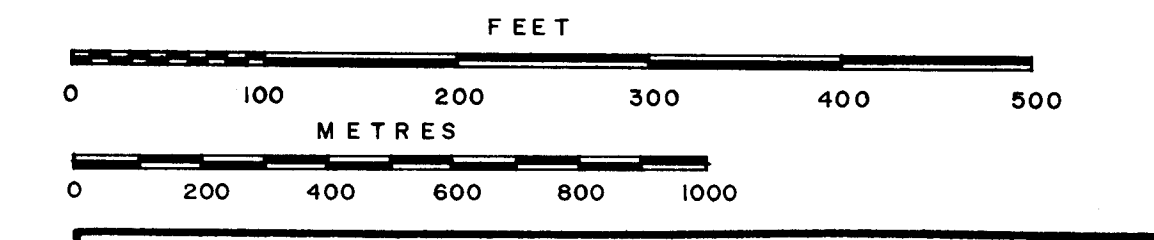

ANYOX HIDDEN CREEK MINE		NTS 103-P-5
Drawn by:	Traced by:	
Checked by:	Reviewed by:	MAGNETOMETER SURVEY (14) SKEENA M. D., B. C.
Scale: 1" = 100'	Date: AUGUST 1981	