

87-440 - 16/70

GEOLOGICAL, GEOPHYSICAL AND GEOCHEMICAL REPORT  
ON THE CHRISTMAS #1-8 MINERAL CLAIMS  
CANIM LAKE AREA, BRITISH COLUMBIA  
CLINTON MINING DIVISION  
NTS 92P/15W  
LATITUDE 51°53'N LONGITUDE 120°46'W  
VOLUME II OF II

7/88

For

MING MINES LIMITED

By

E&B EXPLORATIONS INC.  
1440 - 800 West Pender Street  
Vancouver, B.C.  
V6C 2V6

Field Work Periods:

April 13 to April 19, 1987  
and  
May 8 to May 25, 1987

Written by: David A. Thompson, B.Sc., Project Geologist

Date of Report: June 8, 1987

16,170

GEOLOGICAL BRANCH  
ASSESSMENT REPORT

FILMED

VOLUME II OF II

APPENDIX I - CHRISTMAS LAKE GEOPHYSICAL INTERPRETATION OF INDUCED POLARIZATION SURVEY

BY: E.R. ROCKEL  
Interpretex Resources Ltd.

Dated: June 11, 1987

TABLE OF CONTENTS

1. SUMMARY
2. SURVEY SPECIFICATIONS
3. DATA
4. INTERPRETATION
5. RECOMMENDATION

CERTIFICATE  
PERSONNEL  
EQUIPMENT SPECIFICATIONS  
INDUCED POLARIZATION DATA CALCULATION WORKSHEETS  
ILLUSTRATIONS

<u>Title</u>	<u>Scale</u>
North Grid - Geophysical Interpretation Map	1:5000
- Apparent Resistivity Fraser Filter Contours	1:5000
- Apparent Chargeability Fraser Filter Contours	1:5000
- I.P. Pseudosections - 81+00W	1:2500
82+00W	1:2500
83+00W	1:2500
84+00W	1:2500
85+00W	1:2500
86+00W	1:2500
87+00W	1:2500
South Grid - Geophysical Interpretation Map	1:5000
- Apparent Resistivity Fraser Filter Contours	1:5000
- Apparent Chargeability Fraser Filter Contours	1:5000
- I.P. Pseudosections - 94+00W	1:2500
95+00W	1:2500
96+00W	1:2500
97+00W	1:2500
98+00W	1:2500
99+00W	1:2500
100+00W	1:2500
101+00W	1:2500
102+00W	1:2500
103+00W	1:2500

APPENDIX I  
CHRISTMAS LAKE GEOPHYSICAL INTERPRETATION  
OF INDUCED POLARIZATION SURVEY

Dated: June 11, 1987

By: E.R. Rockel  
Interpretex Resources Ltd.

CHRISTMAS LAKE GEOPHYSICAL INTERPRETATION  
OF  
INDUCED POLARIZATION SURVEY

1. SUMMARY

The present induced polarization surveys have delineated areas in both grids which are believed to contain significant amounts of disseminated sulphide mineralization. Results from the surveys indicate that mineralization is more intense in the south grid than in the north grid.

Mineralization in both grids appears to continue off the present survey area. Additional induced polarization survey is recommended east and west of the north grid present I.P. coverage and east of the south grid present I.P. coverage. Locations for drilling present anomalous zones are suggested in Section 5. RECOMMENDATIONS, of this report.

2. SURVEY SPECIFICATIONS

2.1 Survey Parameters

- survey line separation - 100 meters for north and south grids
- survey station spacing - 50 meters for north and south grids
- horizontal control - lines were surveyed by compass and hip chain with estimated slope corrections
  - semi-recoverable stations were located using felt pen markings on flagged pickets
- baseline direction - north grid : east-west
  - south grid : east-west
- survey lines were perpendicular to the base lines
- induced polarization and resistivity survey was carried out in the north grid on lines 8100W to 8700W and in the south grid from 9400W to 10300W
- survey totals - north grid: 8.4 Km.
  - south grid: 13.65 Km.
  - total 22.05 Km.

2.2 Equipment Parameters

- Huntex Mk II 7.5 kilowatt transmitter
- Huntex Mk IV time domain receiver
- Interpretex Resources Ltd. 7.5 Kw. engine alternator system
- apparent chargeability measured in milliseconds
- primary voltage measured in millivolts
- apparent resistivity determined in ohm-meters
- dipole spacing  $a = 50$  meters,  $n = 1$  to 6
- pole-dipole method with pole northerly and dipole southerly

2.3 Equipment Specifications

- see appendix

### 3. DATA

#### 3.1 Calculations

Apparent resistivity values were calculated using the formula;  
$$Pa = 2n(n + 1)PI*a*(V/i)$$

where: n = "n" value of 1 to 6  
PI = 3.14  
a = electrode separation (meters)  
V = observed voltage (millivolts)  
i = observed current (amps)  
\* = "multiplied by"

Metal Factor values were computed using the formula;  
$$MF = (Ma/Pa)*1000$$

where: Ma = apparent chargeability  
Pa = apparent resistivity  
\* = "multiplied by"

#### 3.2 Presentation

- apparent chargeability Fraser Filter values and apparent resistivity Fraser Filter values are presented as contours at a scale of approximately 1:5000
- IP data and calculated values are presented in an appendix of this report as "Induced Polarization Data Calculation Worksheets"
- IP data are presented as contoured pseudosections on pseudosection maps at a scale of 1:2500
- IP anomalies are presented on the pseudosection maps and Geophysical Interpretation Maps as rectangles.

### 4. INTERPRETATION

#### 4.1 Discussion of Results

On this project topography was mainly flat on the north grid and moderately hilly on the south grid. There was no topographic effect evident in the resistivity readings. Induced polarization readings were stable throughout both survey areas. Chargeability readings ranged from less than 10 milliseconds to greater than 60 milliseconds with a general background in the area appearing to be between 20 and 30 milliseconds. Although values within the range of 15 to 20 may be construed as anomalous and may constitute mineralization within bedrock, anomalous threshold has been set at 25 milliseconds with additional thresholds at 12.5 millisecond intervals in order to properly outline higher apparent chargeability levels within anomalous areas. Apparent resistivity values ranged from under 400 ohm-meters to over 7,000 ohm-meters.

Little use was made of metal factor values in the present interpretation because of the obvious relationship between apparent chargeability anomalies and apparent resistivity values. Metal factor calculations

are designed to enhance the inverse relationship between apparent chargeability and apparent resistivity. In this case both the inverse and direct relationships were important and could be identified.

#### 4.2 Conclusions

Geophysical surveys have delineated areas which are believed to contain anomalous amounts of disseminated sulphides in both the north and south grids.

##### 4.2.1 North Grid

I.P. results from the north grid show a consistently high background chargeability except on the extremities of the present survey lines. Superimposed on the background is a main region of high apparent chargeability values on all lines ranging between approximately 7100N and 7600N. The relationship between chargeability and resistivity is variable on this grid such that apparent chargeability anomalies seem to correlate with both low and high apparent resistivity zones. This probably suggests a somewhat variable geological environment, possibly differing rock types or alteration zones.

Fraser Filter contours of apparent chargeability values show two general peaks within the main region of anomalous apparent chargeability readings. Review of total field magnetic contours from a 1985 geophysical survey (1.) over the same grid provides support for a possible fault which may explain what appears to be a slight offset of the main high chargeability zone. The Fraser Filter apparent chargeability map shows the west half of the zone possibly shifted north relative to the east half.

The generally high background apparent chargeability values mentioned above may reflect a widespread low concentration of mineralization within bedrock, probably disseminated sulphides such as pyrite. The main region of high apparent chargeability values is believed to represent an increase in the concentration of disseminated sulphide mineralization. This main region of mineralization is believed to continue off the present survey area both to the east and west. Within the present grid the main mineralized region is shown to be located approximately within the following boundaries:

- line 8200W - 7250N to 7350N
- line 8300W - 7350N to 7400N
- line 8500W - 7350N to 7525N
- line 8600W - 7250N to 7500N
- line 8700W - 7250N to 7500N.

Ref. (1.) Rockel E.R., October, 1985

##### 4.2.2 South Grid

An overall view of the I.P. survey over the south grid shows generally higher apparent chargeability values than the north grid. A main region of high apparent chargeability can be seen associated with an area of slightly lower apparent resistivity situated roughly on a southeast

trending topographic high. Much of the area is anomalous, however most of the highest apparent chargeability values and the largest chargeable zone occurs near the top of the northeastern flank of the topographic high. It appears probable that significant anomalous chargeability continues to the east of line 9400W off the present survey area in the vicinity of 4500N to 4900N.

I.P. results suggest that the survey area contains a general background mineralization within bedrock, probably disseminated sulphides such as pyrite. High apparent chargeability anomalous zones are believed to reflect significant increases in the concentration of disseminated sulphide mineralization in those zones. The most intense mineralization is believed to be located in the vicinity of 4900N on line 9500W and at approximately 4650N on line 10300W, with a general core mineralized zone approximately within the following boundaries:

- line 9400W - 4550N to 4900N
- line 9500W - 4750N to 5000N
- line 9600W - 4750N to 5075N
- line 9700W - 4800N to 5050N
- line 9800W - 4900N to 5050N
- line 9900W - 4900N to 5050N
- line 1000W - 4875N to 4975N.

Apparent resistivity data indicate that most of the chargeable mineralization appears to be associated with a slightly lower resistive rock than surrounding country rock. Exceptions are strong apparent chargeability anomalies on lines 10200W and 10300W which are associated with relatively highly resistive rock, possibly indicating silicification or a different rock type in these areas.

## 5. RECOMMENDATIONS

### 5.1 North Grid

Additional induced polarization survey is recommended on both sides of the main anomalous region interpreted as disseminated sulphide mineralization in order to define the extent of possible mineralization both to the east and west. This will provide a more accurate estimate of the amount of drilling required to properly explore the mineralized zone and eliminate the possibility of missing other, perhaps more intensely mineralized regions, outside the area presently surveyed.

The main region of mineralization interpreted from present I.P. results should be tested by drilling. The following locations are recommended in order of priority for drilling based on geophysical results. The order of priority for drilling the suggested locations may be modified with the help of geochemical and geological information.

Recommended locations for drilling are:

- line 8200W - 7300N - shallow target
- line 8300W - 7400N - moderate to deep target

line 8600W - 7350W - shallow to moderate target  
line 8700W - 7300N - shallow to moderate target.

References to estimates of depth are:

shallow - of the order of 0 to 50 meters  
moderate - " " " " 50 to 100 meters  
deep - " " " " 100 to 150 meters.

## 5.2 South Grid

Additional induced polarization survey is also recommended on the south grid in order to outline the extent and magnitude of the interpreted zone of significant mineralization east of line 9400W. At least two additional lines should be surveyed in an attempt to close off the anomalous zone.

Numerous locations could be recommended for drilling, however only locations which are believed to represent the best six targets over a wide area will be suggested. Priorities for the six targets are similar from a geophysical point of view and therefore the order in which they are drilled should be determined by the geologist. Additional drilling should be determined by the geologist based on results obtained from the six holes drilled, the present data and additional geochemical and geological information.

The six recommended drill targets are:

line 9400W - 4600N - shallow to moderate target  
line 9500W - 4900N - shallow to moderate target  
line 9700W - 4950N - moderate to deep target  
line 9900W - 4950N - moderate target  
line 10200W - 5250N - deep target  
line 10300W - 4650N - shallow target.

References to estimates of depth are:

shallow - of the order of 0 to 50 meters  
moderate - " " " " 50 to 100 meters  
deep - " " " " 100 to 150 meters.




## REFERENCES

1. Rockel, E.R., October, 1985. Report on Electromagnetic and Total Field Magnetic Surveys on the Christmas Properties, Vancouver, B.C., unpublished.
2. Sumner, J.S., 1976. Principals of Induced Polarization for Geophysical Exploration, Elsevier North-Holland Inc., New York, N.Y.
3. Telford, W.M., 1976. Applied Geophysics, Cambridge University Press, Cambridge, England.

Respectfully Submitted

INTERPRETEX RESOURCES LTD.  
Vancouver, British Columbia

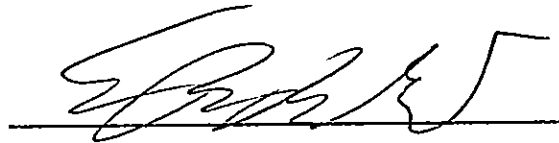

E.R. ROCKEL

Consulting Geophysicist

<p><b>PERMIT TO PRACTICE</b> <b>INTERPRETEX RESOURCES LTD.</b></p> <p>Signature _____</p> <p>Date _____</p> <p><b>PERMIT NUMBER: P 3100</b></p> <p>The Association of Professional Engineers, Geologists and Geophysicists of Alberta</p>
---


CERTIFICATE

I, Edwin Ross Rockel, Geophysicist of Vancouver, British Columbia, Canada, hereby certify that:

1. I received a B.Sc. degree in Geophysics from the University of British Columbia in 1966.
2. I have been practising my profession since graduation.
3. I am a Professional Geophysicist registered in the Province of Alberta.
4. I am a Professional Engineer registered in the Province of Saskatchewan.
5. I hold no direct or indirect interest in, nor expect to receive any benefits from, the mineral property or properties described in this report.
6. This report may be used for the development of the property, provided that no portion will be used out of context in such a manner as to convey meanings different from that set out in the whole.
7. Consent is hereby given to the company for which this report was prepared to reproduce the report or any part of it for the purposes of development of the property, or facts relating to the raising of funds by way of a prospectus and/or statement of material facts.

Date: June 11, 1987

Signed: \_\_\_\_\_

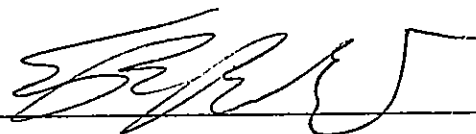

Vancouver,  
British Columbia

Edwin Ross Rockel  
B.Sc., P.Geoph., P. Eng.

## PERSONNEL

The following personnel worked on the property and/or were engaged in supervision for all or part of the days noted (includes mobilization and demobilization):

<u>Name</u>	<u>Position</u>	<u>Dates</u>
E.R. Rockel Richmond, B.C.	Consulting Geophysicist	May 8 - 14, 1987
T.R. Matich Coquitlam, B.C.	Geophysicist	May 8 - 25, 1987
R. Nishimura Calgary, Alberta	Geophysicist	May 8 - 25, 1987
J.A. Martin Vancouver, B.C.	Geophysical Technician	May 8 - 25, 1987
K. Kitchenham Vancouver, B.C.	Geophysical Assistant	May 8 - 25, 1987
L. Graham Richmond, B.C.	Geophysical Assistant	May 8 - 25, 1987

The following personnel were involved in data preparation or reporting of the project for part or all of the days noted:

<u>Name</u>	<u>Position</u>	<u>Dates</u>
E.R. Rockel Richmond, B.C.	Consulting Geophysicist	June 3 - 5 & 8 - 10, 1986

EQUIPMENT SPECIFICATIONS

Huntec "M-4" Induced Polarization Receiver

Huntec "M-2" 7.5 Kw. Induced Polarization Transmitter

Interpretex Resources Ltd. 7.5 Kilowatt Engine Driven  
Alternator

# M-4 SERIES M-4 Induced Polarization Receiver

## DESCRIPTION


The Hunttec M-4 is a microprocessor based receiver for time and frequency domain IP and complex resistivity measurement. It is:

**Easy to operate.** One switch starts a measurement, of up to 33 quantities simultaneously. The optional Cassette DataLogger records them all in seconds. Calibration, gain setting and SP buckout are all automatic.

**Reliable.** Using advanced digital signal processing techniques, the M-4 delivers consistently accurate data even in noisy, highly conductive areas. For mechanical reliability it is packaged in a rugged aluminum case for backpack or hand carrying.

**Versatile.** The operator may adjust delay and integration times, operating frequency and other measurement parameters to adapt to a wide range of survey conditions and requirements. An independent reference channel facilitates drillhole and underground work, and guarantees transmitter-receiver synchronization in high-noise conditions.

**Highly accurate.** With a frequency bandwidth of 100 Hz and noise-cancelling digital signal stacking, the M-4 delivers very precise results. The details are summarized in a table overleaf.

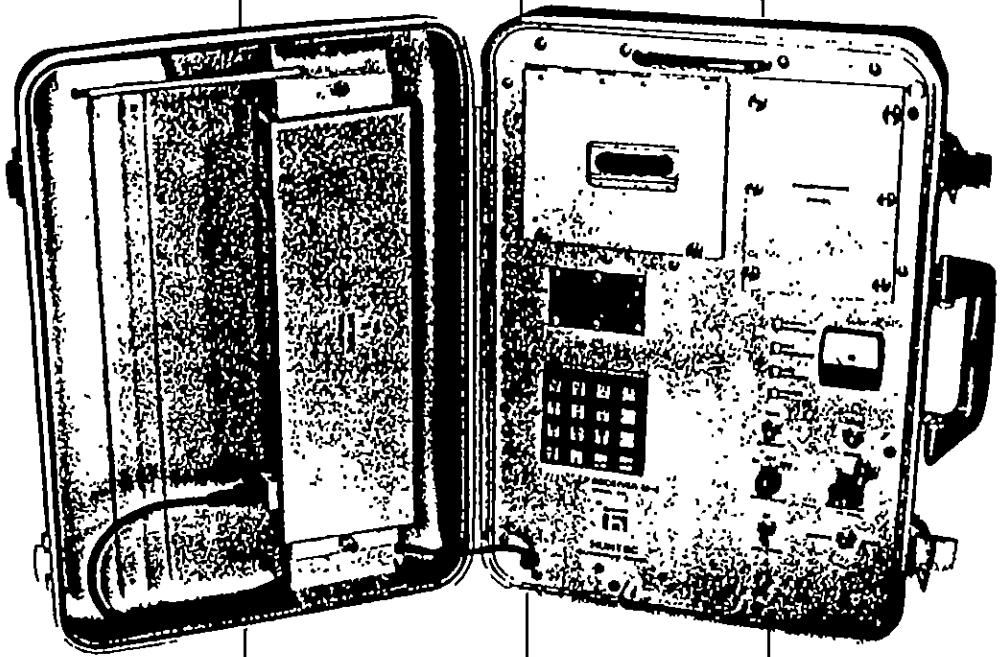

**Sensitive.** The same features that make the M-4 accurate allow detection of very weak signals. The Hunttec receiver requires lower transmitter power than any other, for a given set of operating conditions. Automatic correction for drifts in self-potential and gain allow long stacking times for significant signal-to-noise improvements.


**Intelligent.** Under the control of a powerful 16-bit microprocessor, the M-4 calibrates and tests itself between measurements. Coded error messages, flashed onto the display, inform the operator of any malfunction.

The M-4 Receiver is complemented by Hunttec's new M-4 transmitters, which offer precisely timed constant-current output and both time and frequency domain waveforms, compatible with the receiver's accuracy and multi-mode measurement capabilities. The RL-2 Reference Isolator connects any IP transmitter to the receiver's reference channel.

Contact Hunttec for more information on the benefits offered by the M-4 product line.

## FEATURES

- Time and Frequency domain IP and Complex Resistivity operation.
- Simultaneous Time domain and Complex Resistivity measurement.
- Automatic calibration
  - gain setting
  - SP cancellation
  - fault diagnosis
  - filter tuning.
- Independent reference channel for drill-hole and underground work.
- 42 quantities, displayable on large 3 1/2 digit low-temperature liquid-crystal read-out.
- Analogue meter for source resistance measurement.
- 10<sup>9</sup> ohms differential input resistance
- 8 hours continuous operation with replaceable, rechargeable nickel-cadmium battery pack (2 supplied).
- Optional Cassette DataLogger fits inside case, has read-after-write error checking. Up to 350 stations per tape.
- Conveniently packaged for backpacking or hand carrying
- 100 Hz bandwidth, fine time-resolution
- Advanced digital signal stacking
- Delivers reliable, accurate data in noisy, highly conductive areas

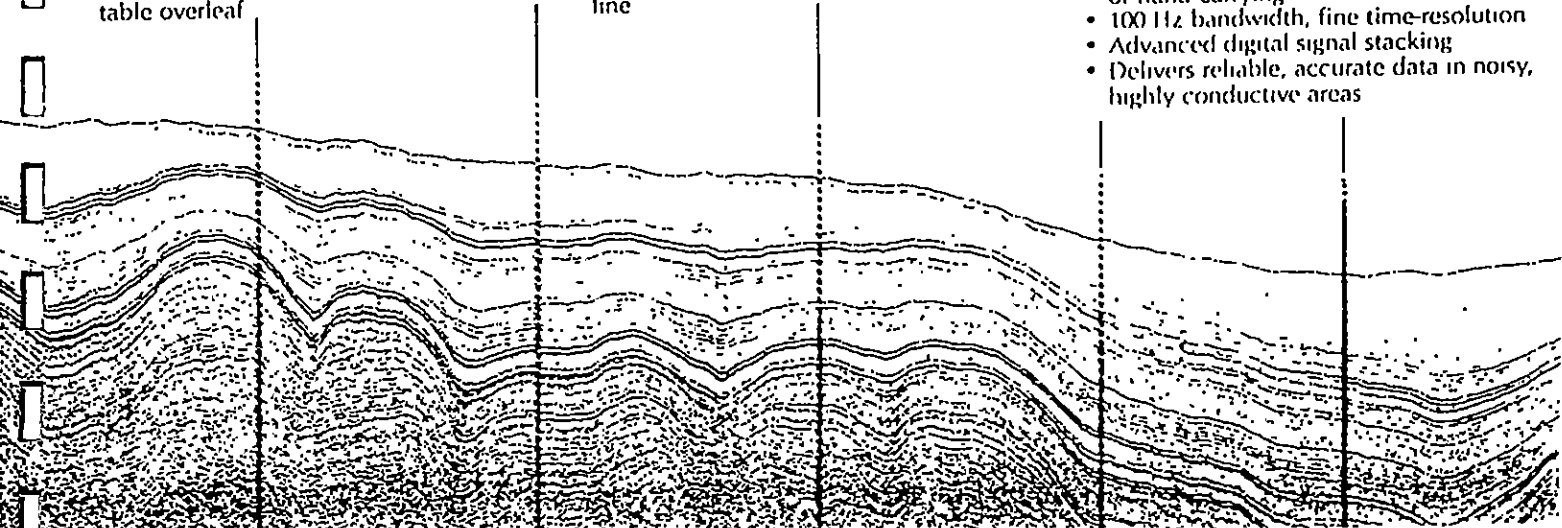

## SPECIFICATIONS

### INPUTS

#### Signal Channel

Range:  $5 \times 10^{-5}$  to 10 volts. Automatic ranging. Overload indication  
 Resistance: Greater than  $10^9$  ohms differential  
 Bandwidth: 100 Hz  
 Cancellation: -5 to +5 volts (automatic)  
 Protection: Low-leakage diode clamps, gas discharge surge arrestors, replaceable fuses.

#### Reference Channel

Level: 500 mV minimum, 10 volts peak maximum, overload indication  
 Resistance:  $2 \times 10^5$  ohms differential

### CONTROLS AND FUNCTIONS

#### Operating Controls

Keypad: 16 keys, calculator format, function associated with each key.

Reference Registers: Keypad may be used to store up to ten  $3\frac{1}{2}$  digit numeric values with floating decimal point to represent station number, line number, operator, time, date, weather, transmitter current, etc. for recording on cassette.

#### Programming Controls

Sub-panel: All programming controls are on a covered sub-panel.

Knobwheel Switches:

Select delay time  $t_D$  in milliseconds chargeability window  $t_p$  in milliseconds; operating frequency; PFE frequency ratio.

#### Displayable Quantities

Time domain: Primary voltage; self-potential; chargeability (total or each of 10 windows of equal width); phases of odd harmonics 3 to 15; amplitudes of odd harmonics 1 to 15; cycle count; repeating display of polarization potential and total chargeability.

Freq. domain: Primary amplitude; Percent Frequency Effect; self-potential; cycle count.

Complex Resistivity: Phases of odd harmonics 3 to 15; amplitudes of odd harmonics 1 to 15; fundamental phase (with ref. input); cycle count.

Any mode: Battery voltage, Frequency error.

### OUTPUTS

#### Displays

Digital Display:  $3\frac{1}{2}$  digit, low-temperature liquid crystal display. Indicates measurement results and diagnostic error messages.

Analogue Meter: Ohms scale for source resistance; also gives qualitative indication of signal-to-noise ratio.

### CASSETTE DATALOGGER (OPTIONAL)

Description: Accommodated within M-4 chassis. If not acquired with receiver, may be retrofitted by user at any time. Two recording modes:

Partial: All sub-panel settings, measurement results, and contents of reference registers are recorded (2 seconds recording time).

Full: As in partial mode, but also recorded is one cycle of averaged signal waveform (28 seconds recording time). If external reference is used, one cycle of reference waveform is also recorded (60 seconds recording time) Extra memory and software available to average and store the reference waveform for advanced offline resistivity computation.

Format: ANSI/ECMA/ISO standard for saturation recording: 80 bytes/record, all data recorded in ASCII code.

Verification: Read-after-write data verification (automatic).

### MECHANICAL

M-4 Receiver with battery pack: 45 cm x 33 cm x 14 cm, 10.0 kg.

M-4 Receiver with battery pack and Cassette DataLogger: Dimensions as above, 11.0 kg.  
 Replaceable Battery pack: 33 cm x 11 cm x 4.5 cm, 3 kg

### ENVIRONMENTAL

Temperature: Operation:  $-20^\circ\text{C}$  to  $+55^\circ\text{C}$   
 Storage:  $-40^\circ\text{C}$  to  $+70^\circ\text{C}$ .  
 Humidity: Moisture-proof, operable in light drizzle  
 Altitude: -1,525 m to +4,775 m  
 Shock, Vibration: Suitable for transport in bush vehicles.

### OUTPUT ACCURACY AND SENSITIVITY

	PHASES	AMPLITUDES	Vp	SP	CHARGEABILITY	PFE
UNITS	milliradians	volts	volts	volts	seconds	%
ACCURACY	2milli-radians(1)	1% to 40Hz 2% to 80Hz	$\pm 1\%$	$\pm 1\%$	0.1%(2)	0.1%(3) full scale
SENSITIVITY	0.01 milliradians	$10^{-6}$ volts	$10^{-3}$ volts	$10^{-3}$ volts	$10^{-6}$ seconds	0.001% full scale

(1) Frequency domain mode: at harmonic frequencies up to 15 Hz, increases to not more than 5 milliradians at 80 Hz.

Time domain mode: at harmonic frequencies up to 7.5 Hz, increases to not more than 5 milliradians at 30 Hz.

(2) of total OFF time

(3) Full scale defined as 100% PFE.


Cassette Data: recorded in ASCII, 9 digits with decimal point fixed for four decimal digits.

Display Data:  $3\frac{1}{2}$  digits, floating decimal point.

Resolution of averaged waveform limited by A/D converter to one part in 4096 x (square root of cycle count).

Resolution of reference waveform (not averaged) limited by available memory to one part in 256. Additional memory and averaging software available as option.

### CHARGEABILITY WINDOWS

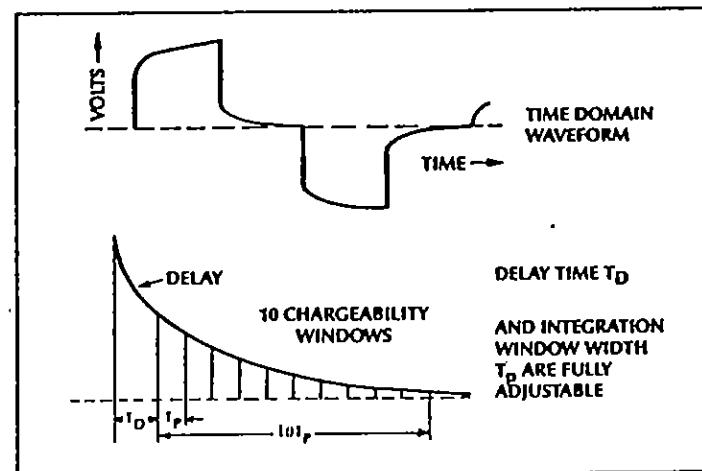

### HUNTEC

1750 Brimley Road, Scarborough  
 Ontario, Canada M1P 4X7

Phone: (416) 299-4100 Telex: 06-963640

HUNTEC (70) LIMITED  
1750 BRIMLEY ROAD  
SCARBOROUGH, ONTARIO  
M1P 4X7

7.5 Kw INDUCED POLARIZATION TRANSMITTER

SPECIFICATIONS

Output: 100 to 3250 volts in 10 steps. 16 amps maximum.

Input: 3 phase 400 Hz. 120/208 volts.

Cycling Rates: 2 sec. ON, 2 sec. OFF, or to suit customer requirements.  
SCR current on/off switching.

Temperature Range:  $-34^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$

Current Output Meter: 2 ranges; 0 to 10 amp and 0 to 20 amp. .

Ground Resistance Meter: 2 ranges; 0 to 10k ohms and 0 to 100k ohms.

Input Voltmeter: 0 to 150 volts A.C.

Dummy Load: 2 level; 2Kw and 6Kw. Switched in during OFF time to smooth generator load.

Over/Under Voltage Protection: Automatic shutdown for excessive input voltage changes.

Construction: Welded aluminum frame. All solid state circuits on removable printed circuit boards.

Size: 53.0 x 43.0 x 43.0 centimeters.

Weight: 34 kilograms.



INTERPRETEX RESOURCES LTD.  
BOX 48239 BENTALL P.O.  
VANCOUVER, B.C.  
V7X 1A1

7.5 KILOWATT ENGINE DRIVEN ALTERNATOR

SPECIFICATIONS

Output: 120 volts A.C. 400 Hz. 3 phase 18 KVA maximum.

Engine: 100 H.P. liquid cooled four cylinder Capri car engine mounted in a utility trailer.

Fuel: Regular grade gasoline, tank capacity 50 liters provides 4 to 6 hours continuous operation depending on load.

Alternator: Bendix Aviation AC Generator Type 28E01 belt driven, forced air cooled. External voltage regulator.

Construction: Steel frame utility trailer with plywood structure. System permanently mounted and self contained.

Speed Regulation: Pierce long range unuversal engine governor.

Size: Approx. 4 meters x 1.5 meters x 1.5 meters (top down)  
x 1.8 meters (top extended)

INDUCED POLARIZATION DATA CALCULATION WORKSHEETS

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

LINE : 81+00W

FILE NAME : 81W

IPFF81W

Fraser Filter

Pl. loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	2940	0.4	19.8	4618	4	7962.5	17.1	2714	7
7950	7937.5	2	682	0.4	16.2	3214	5				
7950	7912.5	3	230	0.4	13.2	2168	6				
7950	7887.5	4	143	0.4	15.2	2246	7				
7950	7862.5	5	100	0.4	18.2	2356	8				
7950	7837.5	6	51	0.4	19.8	1682	12				
7900	7912.5	1	2650	0.4	16.1	4163	4	7912.5	15.9	2555	7
7900	7887.5	2	580	0.4	12.3	2733	5				
7900	7862.5	3	290	0.4	13.6	2733	5				
7900	7837.5	4	185	0.4	16.6	2906	6				
7900	7812.5	5	86	0.4	17.1	2026	8				
7900	7787.5	6	57	0.4	16.5	1880	9				
7850	7862.5	1	1965	0.4	9.6	3087	3	7862.5	14.5	2389	6
7850	7837.5	2	576	0.4	10.4	2714	4				
7850	7812.5	3	338	0.4	12.9	3186	4				
7850	7787.5	4	140	0.4	13.7	2199	6				
7850	7762.5	5	84	0.4	12.9	1979	7				
7850	7737.5	6	59	0.4	15.5	1946	8				
7800	7812.5	1	1637	0.6	8.6	1714	5	7812.5	14.4	2229	7
7800	7787.5	2	902	0.6	10.3	2834	4				
7800	7762.5	3	343	0.6	11.7	2155	5				
7800	7737.5	4	183	0.6	11.3	1916	6				
7800	7712.5	5	112	0.6	13.9	1759	8				
7800	7687.5	6	86	0.6	21.5	1891	11				
7750	7762.5	1	1225	0.4	11.1	1924	6	7762.5	14.7	2161	7
7750	7737.5	2	419	0.4	9.8	1974	5				
7750	7712.5	3	191	0.4	9.2	1800	5				
7750	7687.5	4	113	0.4	11.8	1775	7				
7750	7662.5	5	90	0.4	19.0	2121	9				
7750	7637.5	6	88	0.4	21.9	2903	8				
7700	7712.5	1	921	0.4	9.4	1447	6	7712.5	14.9	1942	8
7700	7687.5	2	291	0.4	7.9	1371	6				
7700	7662.5	3	154	0.4	10.8	1451	7				
7700	7637.5	4	110	0.4	18.1	1728	10				
7700	7612.5	5	95	0.4	21.1	2238	9				
7700	7587.5	6	77	0.4	20.6	2540	8				
7650	7662.5	1	796	0.4	6.9	1250	6	7662.5	16.1	1912	8
7650	7637.5	2	295	0.4	9.7	1390	7				
7650	7612.5	3	175	0.4	17.1	1649	10				
7650	7587.5	4	144	0.4	19.6	2262	9				
7650	7562.5	5	115	0.4	20.0	2710	7				
7650	7537.5	6	48	0.4	32.5	1583	21				
7600	7612.5	1	1561	0.5	8.6	1962	4	7612.5	19.1	2030	10
7600	7587.5	2	565	0.5	15.7	2130	7				
7600	7562.5	3	344	0.5	18.8	2594	7				

7600	7537.5	4	230	0.5	19.8	2890	7				
7600	7512.5	5	86	0.5	31.8	1621	20				
7600	7487.5	6	56	0.5	32.6	1478	22				
7550	7562.5	1	2000	0.5	17.9	2513	7	7562.5	23.4	2272	11
7550	7537.5	2	879	0.5	20.8	3314	6				
7550	7512.5	3	505	0.5	21.6	3808	6				
7550	7487.5	4	171	0.5	32.7	2149	15				
7550	7462.5	5	107	0.5	33.1	2017	16				
7550	7437.5	6	60	0.5	35.7	1583	23				
7500	7512.5	1	2950	0.5	22.4	3707	6	7512.5	27.0	2551	12
7500	7487.5	2	1244	0.5	22.9	4690	5				
7500	7462.5	3	351	0.5	33.6	2646	13				
7500	7437.5	4	189	0.5	33.3	2375	14				
7500	7412.5	5	112	0.5	35.7	2111	17				
7500	7387.5	6	89	0.5	37.5	2349	16				
7450	7462.5	1	3002	0.5	27.0	3772	7	7462.5	30.7	2473	14
7450	7437.5	2	700	0.5	37.1	2639	14				
7450	7412.5	3	327	0.5	36.5	2466	15				
7450	7387.5	4	181	0.5	37.5	2275	16				
7450	7362.5	5	133	0.5	39.0	2507	16				
7450	7337.5	6	65	0.5	23.9	1715	14				
7400	7412.5	1	2350	0.5	37.0	2953	13	7412.5	34.1	2262	16
7400	7387.5	2	743	0.5	38.4	2801	14				
7400	7362.5	3	380	0.5	39.1	2865	14				
7400	7337.5	4	257	0.5	41.1	3230	13				
7400	7312.5	5	119	0.5	25.4	2243	11				
7400	7287.5	6	72	0.5	22.9	1900	12				
7350	7362.5	1	3110	0.8	38.8	2443	16	7362.5	33.3	2371	14
7350	7337.5	2	1241	0.8	37.2	2924	13				
7350	7312.5	3	740	0.8	40.6	3487	12				
7350	7287.5	4	315	0.8	24.7	2474	10				
7350	7262.5	5	178	0.8	23.2	2097	11				
7350	7237.5	6	149	0.8	23.5	2458	10				
7300	7312.5	1	2450	0.7	39.8	2199	18	7312.5	32.0	2338	14
7300	7287.5	2	1031	0.7	43.1	2776	16				
7300	7262.5	3	381	0.7	27.8	2052	14				
7300	7237.5	4	205	0.7	25.6	1840	14				
7300	7212.5	5	160	0.7	25.5	2154	12				
7300	7187.5	6	99	0.7	22.8	1866	12				
7250	7262.5	1	3430	0.7	37.2	3079	12	7262.5	29.5	2296	13
7250	7237.5	2	767	0.7	27.7	2065	13				
7250	7212.5	3	328	0.7	26.1	1766	15				
7250	7187.5	4	237	0.7	26.7	2127	13				
7250	7162.5	5	148	0.7	25.8	1993	13				
7250	7137.5	6	108	0.7	29.8	2036	15				
7200	7212.5	1	1181	0.4	29.4	1855	16	7212.5	26.7	2069	13
7200	7187.5	2	377	0.4	27.5	1777	15				
7200	7162.5	3	240	0.4	28.5	2262	13				
7200	7137.5	4	136	0.4	28.0	2136	13				
7200	7112.5	5	94	0.4	32.4	2215	15				
7200	7087.5	6	73	0.4	33.0	2408	14				
7150	7162.5	1	1559	0.8	21.7	1224	18	7162.5	27.1	2030	13
7150	7137.5	2	816	0.8	24.9	1923	13				
7150	7112.5	3	406	0.8	26.2	1913	14				
7150	7087.5	4	260	0.8	31.3	2042	15				
7150	7062.5	5	189	0.8	32.4	2227	15				

7150	7037.5	6	137	0.8	31.6	2260	14				
7100	7112.5	1	927	0.5	18.2	1165	16	7112.5	26.9	2021	13
7100	7087.5	2	414	0.5	19.2	1561	12				
7100	7062.5	3	253	0.5	26.2	1908	14				
7100	7037.5	4	176	0.6	28.3	1843	15				
7100	7012.5	5	125	0.6	26.2	1963	13				
7100	6987.5	6	90	0.6	25.2	1979	13				
7050	7062.5	1	663	0.5	16.0	833	19	7062.5	26.4	1868	14
7050	7037.5	2	314	0.5	21.8	1184	18				
7050	7012.5	3	205	0.5	25.2	1546	16				
7050	6987.5	4	136	0.5	25.1	1709	15				
7050	6962.5	5	92	0.5	22.1	1734	13				
7000	7012.5	1	896	0.8	18.2	704	26	7012.5	26.3	1755	16
7000	6987.5	2	458	0.8	22.2	1079	21				
7000	6962.5	3	279	0.8	22.5	1315	17				
7000	6937.5	4	183	0.8	20.0	1437	14				
6950	6962.5	1	494	0.5	19.8	621	32	6962.5	24.9	1611	17
6950	6937.5	2	243	0.5	20.9	916	23				
6950	6912.5	3	149	0.5	18.7	1123	17				
6900	6912.5	1	380	0.4	19.7	597	33	6912.5	22.8	1450	17
6900	6887.5	2	195	0.4	18.5	919	20				
6850	6862.5	1	711	0.8	15.0	558	27	6862.5	19.9	1292	17

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

IPFF82W

LINE : 82+00W

FILE NAME : 82W

: - Fraser Filter - :  
: :  
: :

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amos)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	2350	0.4	20.4	3691	6	7962.5	17.6	3284	7
7950	7937.5	2	1002	0.4	18.2	4722	4				
7950	7912.5	3	285	0.4	18.6	2686	7				
7950	7887.5	4	343	0.4	16.4	5388	3				
7950	7862.5	5	75	0.4	17.5	1767	10				
7950	7837.5	6	44	0.4	14.7	1451	10				
7900	7912.5	1	3170	0.5	18.1	3984	5	7912.5	17.3	2927	7
7900	7887.5	2	628	0.5	14.9	2368	6				
7900	7862.5	3	649	0.5	16.3	4893	3				
7900	7837.5	4	131	0.5	16.6	1646	10				
7900	7812.5	5	71	0.5	19.0	1338	14				
7900	7787.5	6	74	0.5	19.8	1953	10				
7850	7862.5	1	1583	0.4	13.0	2487	5	7862.5	17.2	2638	8
7850	7837.5	2	1302	0.4	13.8	6136	2				
7850	7812.5	3	225	0.5	17.2	1696	10				
7850	7787.5	4	118	0.5	17.8	1483	12				
7850	7762.5	5	109	0.5	25.7	2055	13				
7850	7737.5	6	84	0.5	16.7	2217	8				
7800	7812.5	1	1500	0.5	12.9	1885	7	7812.5	16.7	2521	9
7800	7787.5	2	1215	0.5	13.9	4580	3				
7800	7762.5	3	200	0.5	15.0	1508	10				
7800	7737.5	4	104	0.5	17.5	1307	13				
7800	7712.5	5	99	0.5	14.7	1866	8				
7800	7687.5	6	84	0.5	15.7	2217	7				
7750	7762.5	1	3150	0.4	10.8	4948	2	7762.5	16.2	2192	9
7750	7737.5	2	405	0.4	12.1	1909	6				
7750	7712.5	3	177	0.4	14.5	1668	9				
7750	7687.5	4	157	0.4	12.2	2466	5				
7750	7662.5	5	123	0.4	13.7	2898	5				
7750	7637.5	6	87	0.4	18.9	2870	7				
7700	7712.5	1	637	0.4	9.8	1001	10	7712.5	16.2	1851	9
7700	7687.5	2	204	0.4	12.8	961	13				
7700	7662.5	3	160	0.4	10.6	1508	7				
7700	7637.5	4	115	0.4	12.2	1806	7				
7700	7612.5	5	83	0.4	17.0	1956	9				
7700	7587.5	6	74	0.4	29.4	2441	12				
7650	7662.5	1	727	0.5	10.8	914	12	7662.5	16.7	2090	8
7650	7637.5	2	457	0.5	8.7	1723	5				
7650	7612.5	3	317	0.5	10.5	2390	4				
7650	7587.5	4	209	0.5	15.9	2626	6				
7650	7562.5	5	177	0.5	29.7	3336	9				
7650	7537.5	6	103	0.5	24.5	2718	9				
7600	7612.5	1	992	0.8	9.3	779	12	7612.5	17.8	2103	9
7600	7587.5	2	578	0.8	10.3	1362	8				
7600	7562.5	3	349	0.8	15.6	1645	9				

7600	7537.5	4	287	0.8	27.3	2254	12				
7600	7512.5	5	152	0.8	27.8	1791	16				
7600	7487.5	6	78	0.8	32.2	1286	25				
7550	7562.5	1	1002	0.4	12.7	1574	8	7562.5	21.3	2128	11
7550	7537.5	2	391	0.4	17.2	1843	9				
7550	7512.5	3	276	0.4	28.4	2601	11				
7550	7487.5	4	133	0.4	28.4	2089	14				
7550	7462.5	5	64	0.4	30.3	1508	20				
7550	7437.5	6	56	0.5	29.5	1478	20				
7500	7512.5	1	2640	0.6	16.9	2765	6	7512.5	25.8	2238	13
7500	7487.5	2	1209	0.6	27.0	3798	7				
7500	7462.5	3	439	0.6	27.8	2758	10				
7500	7437.5	4	163	0.6	29.3	1707	17				
7500	7412.5	5	128	0.6	27.0	2011	13				
7500	7387.5	6	69	0.6	41.5	1517	27				
7450	7462.5	1	3010	0.4	28.5	4728	6	7462.5	29.9	2357	14
7450	7437.5	2	731	0.4	31.6	3445	9				
7450	7412.5	3	210	0.4	32.1	1979	16				
7450	7387.5	4	149	0.4	27.0	2340	12				
7450	7362.5	5	75	0.4	41.1	1767	23				
7450	7337.5	6	59	0.4	28.2	1946	14				
7400	7412.5	1	5200	0.7	33.8	4668	7	7412.5	31.1	2304	15
7400	7387.5	2	968	0.7	33.4	2607	13				
7400	7362.5	3	570	0.7	28.0	3070	9				
7400	7337.5	4	257	0.7	42.3	2307	18				
7400	7312.5	5	183	0.7	27.9	2464	11				
7400	7287.5	6	155	0.7	28.5	2922	10				
7350	7362.5	1	1972	0.4	43.8	3098	14	7362.5	33.6	2376	15
7350	7337.5	2	866	0.4	41.2	4081	10				
7350	7312.5	3	326	0.4	49.8	3072	16				
7350	7287.5	4	210	0.4	34.1	3299	10				
7350	7262.5	5	162	0.4	33.8	3817	9				
7350	7237.5	6	49	0.4	25.4	1616	16				
7300	7312.5	1	3250	0.7	65.3	2917	22	7312.5	35.9	2774	14
7300	7287.5	2	1053	0.7	50.7	2836	18				
7300	7262.5	3	590	0.8	35.4	2780	13				
7300	7237.5	4	407	0.8	36.4	3197	11				
7300	7212.5	5	290	0.8	31.2	3416	9				
7300	7187.5	6	327	0.8	28.7	5393	5				
7250	7262.5	1	2250	0.5	43.9	2827	16	7262.5	34.8	2893	13
7250	7237.5	2	914	0.5	30.8	3446	9				
7250	7212.5	3	486	0.5	35.9	3664	10				
7250	7187.5	4	122	0.5	27.3	1533	18				
7250	7162.5	5	225	0.5	31.0	4241	7				
7250	7137.5	6	102	0.5	27.8	2692	10				
7200	7212.5	1	2200	0.4	24.7	3456	7	7212.5	30.3	3121	11
7200	7187.5	2	832	0.4	33.9	3921	9				
7200	7162.5	3	173	0.4	26.7	1630	16				
7200	7137.5	4	284	0.4	31.5	4461	7				
7200	7112.5	5	122	0.4	28.0	2875	10				
7200	7087.5	6	84	0.4	29.6	2771	11				
7150	7162.5	1	1770	0.4	38.3	2780	14	7162.5	31.4	3021	12
7150	7137.5	2	285	0.4	31.1	1343	23				
7150	7112.5	3	435	0.4	35.6	4100	9				
7150	7087.5	4	167	0.4	32.0	2623	12				
7150	7062.5	5	109	0.4	33.7	2568	13				

7150	7037.5	6	57	0.4	33.4	1880	18				
7100	7112.5	1	781	0.5	27.3	981	28	7112.5	30.4	2344	19
7100	7087.5	2	1018	0.6	33.1	3198	10				
7100	7062.5	3	363	0.6	31.3	2281	14				
7100	7037.5	4	224	0.6	33.6	2346	14				
7100	7012.5	5	161	0.6	30.7	2529	12				
7100	6987.5	6	121	0.6	29.2	2661	11				
7050	7062.5	1	1855	0.4	22.7	2914	8	7062.5	30.1	2603	14
7050	7037.5	2	505	0.4	24.9	2380	10				
7050	7012.5	3	265	0.4	29.2	2498	12				
7050	6987.5	4	122	0.4	30.9	1916	16				
7050	6962.5	5	68	0.4	28.6	1602	18				
7050	6937.5	6	48	0.4	27.2	1583	17				
7000	7012.5	1	1006	0.6	18.7	1053	18	7012.5	28.6	2043	15
7000	6987.5	2	451	0.6	24.8	1417	18				
7000	6962.5	3	149	0.6	27.7	936	30				
7000	6937.5	4	108	0.6	26.4	1131	23				
7000	6912.5	5	71	0.6	25.0	1115	22				
6950	6962.5	1	1161	0.5	20.3	1459	14	6962.5	27.9	1805	17
6950	6937.5	2	382	0.5	24.5	1440	17				
6950	6912.5	3	174	0.5	24.2	1312	18				
6950	6887.5	4	105	0.5	23.1	1319	18				
6900	6912.5	1	721	0.4	18.2	1133	16	6912.5	26.0	1532	18
6900	6887.5	2	271	0.4	20.3	1277	16				
6900	6862.5	3	152	0.5	20.0	1146	17				
6850	6862.5	1	950	0.6	16.0	995	16	6862.5	23.4	1388	18
6850	6837.5	2	360	0.6	17.9	1131	16				
6800	6812.5	1	453	0.5	14.7	569	26	6812.5	21.3	1144	19



INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

IPFF83W

LINE : 83+00W

FILE NAME : 83W

! - Fraser Filter - !  
!  
!

P1 loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	3760	0.4	24.2	5906	4	7962.5	24.6	3257	10
7950	7937.5	2	941	0.4	29.7	4434	7				
7950	7912.5	3	308	0.4	28.1	2903	10				
7950	7887.5	4	210	0.4	19.7	3299	6				
7950	7862.5	5	60	0.4	25.4	1414	18				
7950	7837.5	6	48	0.4	20.4	1583	13				
7900	7912.5	1	2830	0.5	23.4	3556	7	7912.5	22.7	2429	11
7900	7887.5	2	689	0.5	25.8	2597	10				
7900	7862.5	3	410	0.5	18.2	3091	6				
7900	7837.5	4	101	0.5	21.7	1269	17				
7900	7812.5	5	75	0.5	18.4	1414	13				
7900	7787.5	6	44	0.5	19.2	1161	17				
7850	7862.5	1	1777	0.4	25.9	2791	9	7862.5	21.3	1990	13
7850	7837.5	2	758	0.4	17.2	3572	5				
7850	7812.5	3	153	0.4	19.4	1442	13				
7850	7787.5	4	94	0.4	16.4	1477	11				
7850	7762.5	5	46	0.4	22.8	1084	21				
7850	7737.5	6	34	0.6	20.6	748	28				
7800	7812.5	1	3190	0.5	22.7	4009	6	7812.5	20.3	1861	13
7800	7787.5	2	417	0.5	21.3	1572	14				
7800	7762.5	3	252	0.6	19.7	1583	12				
7800	7737.5	4	121	0.6	18.3	1267	14				
7800	7712.5	5	84	0.6	22.1	1319	17				
7800	7687.5	6	100	0.6	21.6	2199	10				
7750	7762.5	1	778	0.4	18.7	1222	15	7762.5	20.2	1449	15
7750	7737.5	2	345	0.4	18.3	1626	11				
7750	7712.5	3	142	0.4	17.1	1338	13				
7750	7687.5	4	90	0.4	20.7	1414	15				
7750	7662.5	5	102	0.4	20.8	2403	9				
7750	7637.5	6									
7700	7712.5	1	1533	0.6	20.2	1605	13	7712.5	19.9	1552	14
7700	7687.5	2	406	0.6	15.7	1275	12				
7700	7662.5	3	217	0.6	18.4	1363	13				
7700	7637.5	4	225	0.7	18.9	2020	9				
7700	7612.5	5	170	0.7	21.2	2289	9				
7700	7587.5	6	99	0.7	28.0	1866	15				
7650	7662.5	1	1125	0.5	28.2	1414	20	7662.5	22.0	1676	14
7650	7637.5	2	341	0.5	22.9	1286	18				
7650	7612.5	3	281	0.5	21.0	2119	10				
7650	7587.5	4	201	0.5	23.6	2526	9				
7650	7562.5	5	115	0.5	29.7	2168	14				
7650	7537.5	6	86	0.5	29.0	2269	13				
7600	7612.5	1	920	0.5	20.5	1156	18	7612.5	24.2	1872	14
7600	7587.5	2	519	0.5	20.3	1957	10				
7600	7562.5	3	330	0.5	23.5	2488	9				

7600	7537.5	4	176	0.5	28.8	2212	13				
7600	7512.5	5	106	0.5	30.7	1998	15				
7600	7487.5	6	62	0.5	41.2	1636	25				
7550	7562.5	1	1452	0.5	17.3	1825	9	7562.5	26.8	2155	13
7550	7537.5	2	662	0.5	21.6	2496	9				
7550	7512.5	3	318	0.5	27.8	2398	12				
7550	7487.5	4	180	0.5	31.1	2262	14				
7550	7462.5	5	101	0.5	40.5	1904	21				
7550	7437.5	6	78	0.5	39.1	2058	19				
7500	7512.5	1	1578	0.5	18.2	1983	9	7512.5	28.7	2043	14
7500	7487.5	2	627	0.5	26.2	2364	11				
7500	7462.5	3	322	0.6	30.4	2023	15				
7500	7437.5	4	175	0.6	40.4	1833	22				
7500	7412.5	5	129	0.6	39.0	2026	19				
7500	7387.5	6	96	0.6	32.8	2111	16				
7450	7462.5	1	1400	0.5	19.8	1759	11	7462.5	34.1	2061	17
7450	7437.5	2	557	0.5	26.8	2100	13				
7450	7412.5	3	285	0.5	31.6	2149	15				
7450	7387.5	4	167	0.5	50.6	2099	24				
7450	7362.5	5	128	0.5	33.2	2413	14				
7450	7337.5	6	62	0.5	60.3	1636	37				
7400	7412.5	1	1297	0.4	21.6	2037	11	7412.5	34.8	2184	17
7400	7387.5	2	488	0.4	34.4	2300	15				
7400	7362.5	3	288	0.4	34.9	2714	13				
7400	7337.5	4	179	0.4	30.7	2812	11				
7400	7312.5	5	91	0.4	22.9	2144	11				
7400	7287.5	6	101	0.4	30.3	3332	9				
7350	7362.5	1	1652	0.4	31.2	2595	12	7362.5	35.4	2351	16
7350	7337.5	2	758	0.6	32.5	2381	14				
7350	7312.5	3	402	0.6	29.0	2526	11				
7350	7287.5	4	189	0.6	21.6	1979	11				
7350	7262.5	5	198	0.6	30.0	3110	10				
7350	7237.5	6	164	0.6	36.5	3607	10				
7300	7312.5	1	1867	0.4	43.5	2933	15	7312.5	34.4	2542	14
7300	7287.5	2	516	0.4	33.3	2432	14				
7300	7262.5	3	182	0.4	21.5	1715	13				
7300	7237.5	4	184	0.4	33.4	2890	12				
7300	7212.5	5	136	0.4	35.0	3204	11				
7300	7187.5	6	99	0.4	32.3	3266	10				
7250	7262.5	1	2150	0.6	41.1	2251	18	7262.5	33.2	2651	13
7250	7237.5	2	521	0.6	26.6	1637	16				
7250	7212.5	3	486	0.6	38.2	3054	13				
7250	7187.5	4	310	0.6	37.0	3246	11				
7250	7162.5	5	215	0.6	34.4	3377	10				
7250	7137.5	6	133	0.6	36.1	2925	12				
7200	7212.5	1	928	0.5	31.0	1166	27	7212.5	33.7	2622	14
7200	7187.5	2	678	0.5	40.2	2556	16				
7200	7162.5	3	340	0.5	41.2	2564	16				
7200	7137.5	4	220	0.5	37.3	2765	13				
7200	7112.5	5	133	0.5	35.9	2507	14				
7200	7087.5	6	90	0.5	27.0	2375	11				
7150	7162.5	1	2110	0.5	34.4	2652	13	7162.5	34.5	2882	12
7150	7137.5	2	697	0.5	40.0	2628	15				
7150	7112.5	3	379	0.5	37.6	2858	13				
7150	7087.5	4	221	0.5	31.9	2777	11				
7150	7062.5	5	130	0.5	12.2	2450	5				

7150	7037.5	6	90	0.5	44.4	2375	19				
7100	7112.5	1	1321	0.4	33.5	2075	16	7112.5	33.7	2649	13
7100	7087.5	2	520	0.4	35.1	2450	14				
7100	7062.5	3	252	0.4	36.1	2375	15				
7100	7037.5	4	175	0.4	29.3	2749	11				
7100	7012.5	5	86	0.4	45.1	2026	22				
7100	6987.5	6	31	0.4	9.0	1023	9				
7050	7062.5	1	2240	0.5	37.5	2815	13	7062.5	31.5	2473	13
7050	7037.5	2	736	0.5	38.6	2775	14				
7050	7012.5	3	296	0.5	13.7	2232	6				
7050	6987.5	4	180	0.5	48.9	2262	22				
7050	6962.5	5	57	0.5	6.6	1074	6				
7000	7012.5	1	2530	0.4	44.3	3974	11	7012.5	30.5	2426	12
7000	6987.5	2	680	0.4	23.9	3204	7				
7000	6962.5	3	357	0.4	63.4	3365	19				
7000	6937.5	4	96	0.5	2.8	1206	2				
6950	6962.5	1	1712	0.4	31.1	2689	12	6962.5	27.9	2266	12
6950	6937.5	2	776	0.4	30.9	3657	8				
6950	6912.5	3	138	0.4	30.5	1301	23				
6900	6912.5	1	2870	0.4	23.0	4508	5	6912.5	30.1	2217	14
6900	6887.5	2	337	0.4	26.8	1588	17				
6850	6862.5	1	865	0.4	17.6	1359	13	6862.5	15.6	1258	12

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

LINE : 84+00W

FILE NAME : 84W

IPFF84W

;- Fraser Filter -;  
|  
|

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	1021	0.4	15.4	1604	10	7962.5	22.1	1756	13
7950	7937.5	2	513	0.4	19.3	2417	8				
7950	7912.5	3	198	0.4	23.4	1866	13				
7950	7887.5	4	109	0.4	26.9	1712	16				
7950	7862.5	5	56	0.4	29.7	1319	23				
7950	7837.5	6	49	0.4	17.6	1616	11				
7900	7912.5	1	1367	0.4	12.6	2147	6	7912.5	22.8	1647	15
7900	7887.5	2	365	0.4	18.6	1720	11				
7900	7862.5	3	157	0.4	25.0	1480	17				
7900	7837.5	4	68	0.4	27.7	1068	26				
7900	7812.5	5	63	0.4	23.1	1484	16				
7900	7787.5	6	39	0.4	27.4	1286	21				
7850	7862.5	1	1187	0.5	14.3	1492	10	7862.5	23.9	1459	17
7850	7837.5	2	350	0.5	20.9	1319	16				
7850	7812.5	3	140	0.5	25.4	1056	24				
7850	7787.5	4	118	0.5	15.5	1483	10				
7850	7762.5	5	73	0.5	27.3	1376	20				
7850	7737.5	6	61	0.5	35.5	1610	22				
7800	7812.5	1	840	0.4	18.5	1319	14	7812.5	24.8	1372	19
7800	7787.5	2	206	0.4	25.5	971	26				
7800	7762.5	3	149	0.4	14.1	1404	10				
7800	7737.5	4	87	0.4	24.3	1367	18				
7800	7712.5	5	65	0.4	34.7	1532	23				
7800	7687.5	6	39	0.4	28.1	1286	22				
7750	7762.5	1	1141	1.0	25.6	717	36	7762.5	24.8	1359	19
7750	7737.5	2	676	1.0	15.1	1274	12				
7750	7712.5	3	344	1.0	24.7	1297	19				
7750	7687.5	4	250	1.0	33.3	1571	21				
7750	7662.5	5	147	1.0	27.6	1385	20				
7750	7637.5	6	158	1.0	14.4	2085	7				
7700	7712.5	1	1719	0.6	32.4	1800	18	7712.5	26.3	1679	17
7700	7687.5	2	416	0.6	47.0	1307	36				
7700	7662.5	3	384	0.6	40.1	2413	17				
7700	7637.5	4	209	0.6	23.0	2189	11				
7700	7612.5	5	217	0.6	16.0	3409	5				
7700	7587.5	6	95	0.6	30.8	2089	15				
7650	7662.5	1	778	0.3	41.9	1629	26	7662.5	30.9	1764	19
7650	7637.5	2	411	0.3	41.8	2582	16				
7650	7612.5	3	176	0.4	36.8	1659	22				
7650	7587.5	4	117	0.4	29.5	1838	16				
7650	7562.5	5	67	0.4	31.0	1579	20				
7650	7537.5	6	47	0.4	32.7	1550	21				
7600	7612.5	1	1222	0.3	41.9	2559	16	7612.5	31.2	2017	16
7600	7587.5	2	336	0.3	37.8	2111	18				
7600	7562.5	3	185	0.3	34.6	2325	15				

7600	7537.5	4	126	0.3	21.1	2639	8				
7600	7512.5	5	67	0.3	31.3	2105	15				
7600	7487.5	6	42	0.3	32.3	1847	17				
7550	7562.5	1	1948	0.7	43.9	1749	25	7562.5	30.4	1937	17
7550	7537.5	2	832	0.7	31.6	2240	14				
7550	7512.5	3	322	0.7	35.6	1734	21				
7550	7487.5	4	180	0.7	35.5	1616	22				
7550	7462.5	5	89	0.7	31.8	1198	27				
7550	7437.5	6	93	0.6	32.3	2045	16				
7500	7512.5	1	1261	0.3	41.2	2641	16	7512.5	31.3	2074	16
7500	7487.5	2	357	0.3	39.1	2243	17				
7500	7462.5	3	186	0.3	37.9	2337	16				
7500	7437.5	4	83	0.3	34.5	1738	20				
7500	7412.5	5	86	0.3	33.7	2702	12				
7500	7387.5	6	36	0.3	29.4	1583	19				
7450	7462.5	1	1909	0.5	36.9	2399	15	7462.5	32.9	2004	17
7450	7437.5	2	672	0.5	38.0	2533	15				
7450	7412.5	3	240	0.5	34.7	1810	19				
7450	7387.5	4	222	0.5	35.3	2790	13				
7450	7362.5	5	84	0.5	27.8	1583	18				
7450	7337.5	6	74	0.5	28.4	1953	15				
7400	7412.5	1	2170	0.5	38.7	2727	14	7412.5	32.6	2053	17
7400	7387.5	2	507	0.5	35.1	1911	18				
7400	7362.5	3	394	0.5	35.7	2971	12				
7400	7337.5	4	128	0.5	26.6	1608	17				
7400	7312.5	5	99	0.5	28.6	1866	15				
7400	7287.5	6	100	0.5	24.1	2639	9				
7350	7362.5	1	1445	0.5	35.0	1816	19	7362.5	31.4	2092	16
7350	7337.5	2	805	0.5	38.5	3035	13				
7350	7312.5	3	287	0.5	29.3	2164	14				
7350	7287.5	4	152	0.5	29.8	1910	16				
7350	7262.5	5	142	0.5	25.6	2677	10				
7350	7237.5	6									
7300	7312.5	1	1997	0.4	35.9	3137	11	7312.5	31.1	2352	14
7300	7287.5	2	348	0.4	25.8	1640	16				
7300	7262.5	3	195	0.4	29.3	1838	16				
7300	7237.5	4	176	0.5	26.1	2212	12				
7300	7212.5	5	133	0.4	37.4	3134	12				
7300	7187.5	6	108	0.4	43.3	3563	12				
7250	7262.5	1	1021	0.5	22.6	1283	18	7262.5	30.5	2133	15
7250	7237.5	2	421	0.6	27.7	1323	21				
7250	7212.5	3	358	0.7	25.1	1928	13				
7250	7187.5	4	255	0.7	35.6	2289	16				
7250	7162.5	5	202	0.7	44.8	2720	16				
7250	7137.5	6	146	0.7	42.8	2752	16				
7200	7212.5	1	1079	0.7	20.9	969	22	7212.5	31.9	2278	14
7200	7187.5	2	642	0.7	21.9	1729	13				
7200	7162.5	3	413	0.7	32.8	2224	15				
7200	7137.5	4	296	0.7	42.6	2657	16				
7200	7112.5	5	202	0.7	41.2	2720	15				
7200	7087.5	6	149	0.8	29.4	2458	12				
7150	7162.5	1	1352	0.8	15.1	1062	14	7162.5	32.2	2373	14
7150	7137.5	2	735	0.8	27.7	1732	16				
7150	7112.5	3	475	0.9	38.8	1990	20				
7150	7087.5	4	310	0.9	37.7	2164	17				
7150	7062.5	5	219	0.9	26.9	2293	12				

7150	7037.5	6	172	0.9	25.7	2522	10				
7100	7112.5	1	1215	0.7	21.8	1091	20	7112.5	32.3	2211	14
7100	7087.5	2	619	0.7	34.2	1667	21				
7100	7062.5	3	371	0.7	34.1	1998	17				
7100	7037.5	4	239	0.8	24.1	1877	13				
7100	7012.5	5	183	0.8	23.0	2156	11				
7100	6987.5	6	147	0.8	33.4	2425	14				
7050	7062.5	1	1105	0.4	31.8	1736	18	7062.5	32.7	2394	14
7050	7037.5	2	455	0.4	31.4	2144	15				
7050	7012.5	3	260	0.4	21.0	2450	9				
7050	6987.5	4	180	0.4	19.1	2827	7				
7050	6962.5	5	117	0.4	29.5	2757	11				
7000	7012.5	1	1271	0.4	26.9	1996	13	7012.5	29.7	2356	13
7000	6987.5	2	406	0.4	28.2	1913	15				
7000	6962.5	3	256	0.4	23.7	2413	10				
7000	6937.5	4	162	0.4	37.2	2545	15				
6950	6962.5	1	970	0.4	40.6	1524	27	6962.5	28.9	2285	13
6950	6937.5	2	422	0.4	33.0	1989	17				
6950	6912.5	3	226	0.4	39.0	2130	18				
6900	6912.5	1	1060	0.4	38.0	1665	23	6912.5	29.6	2407	13
6900	6887.5	2	646	0.4	23.7	3044	8				
6850	6862.5	1	1702	0.5	37.2	2139	17	6862.5	33.3	2506	14

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

LINE : 85+00W

FILE NAME : 85W

IPFF85W

: - Fraser Filter - :  
: :  
: :

Pl loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	574	0.7	13.7	515	27	7962.5	19.7	1056	21
7950	7937.5	2	285	0.7	18.9	767	25				
7950	7912.5	3	180	0.8	25.1	848	30				
7950	7887.5	4	158	0.8	21.9	1241	18				
7950	7862.5	5	117	0.8	23.8	1378	17				
7950	7837.5	6	96	0.8	14.8	1583	9				
7900	7912.5	1	560	0.5	14.0	704	20	7912.5	20.5	1170	19
7900	7887.5	2	272	0.5	23.8	1025	23				
7900	7862.5	3	207	0.6	24.1	1301	19				
7900	7837.5	4	127	0.6	24.3	1330	18				
7900	7812.5	5	103	0.6	15.5	1618	10				
7900	7787.5	6	49	0.6	18.9	1078	18				
7850	7862.5	1	393	0.4	22.4	617	36	7862.5	21.7	1171	20
7850	7837.5	2	246	0.5	24.3	927	26				
7850	7812.5	3	136	0.5	25.1	1025	24				
7850	7787.5	4	104	0.5	15.8	1307	12				
7850	7762.5	5	47	0.5	19.2	886	22				
7850	7737.5	6	53	0.5	26.3	1399	19				
7800	7812.5	1	584	0.5	25.0	734	34	7812.5	21.1	1215	19
7800	7787.5	2	249	0.5	28.2	939	30				
7800	7762.5	3	161	0.5	17.2	1214	14				
7800	7737.5	4	70	0.5	19.5	880	22				
7800	7712.5	5	77	0.5	28.3	1451	19				
7800	7687.5	6	60	0.5	7.9	1583	5				
7750	7762.5	1	736	0.5	27.4	925	30	7762.5	22.1	1290	18
7750	7737.5	2	315	0.4	18.5	1484	12				
7750	7712.5	3	115	0.4	20.4	1084	19				
7750	7687.5	4	108	0.4	31.5	1696	19				
7750	7662.5	5	73	0.4	29.5	1720	17				
7750	7637.5	6	37	0.4	29.4	1221	24				
7700	7712.5	1	1131	0.6	28.2	1184	24	7712.5	23.1	1300	19
7700	7687.5	2	256	0.6	25.1	804	31				
7700	7662.5	3	200	0.6	34.2	1257	27				
7700	7637.5	4	134	0.6	31.7	1403	23				
7700	7612.5	5	61	0.6	31.2	958	33				
7700	7587.5	6	68	0.6	22.3	1495	15				
7650	7662.5	1	842	0.4	36.3	1323	27	7662.5	28.4	1332	22
7650	7637.5	2	387	0.4	44.5	1824	24				
7650	7612.5	3	206	0.5	40.5	1553	26				
7650	7587.5	4	82	0.5	38.2	1030	37				
7650	7562.5	5	101	0.5	28.3	1904	15				
7650	7537.5	6	54	0.5	32.7	1425	23				
7600	7612.5	1	2170	0.6	39.4	2272	17	7612.5	32.1	1570	21
7600	7587.5	2	749	0.6	41.1	2353	17				
7600	7562.5	3	319	0.7	37.9	1718	22				

7600	7537.5	4	172	0.7	28.6	1544	19				
7600	7512.5	5	125	0.7	33.8	1683	20				
7600	7487.5	6	78	0.7	37.1	1470	25				
7550	7562.5	1	1404	0.4	43.7	2205	20	7562.5	33.2	1648	21
7550	7537.5	2	418	0.4	42.0	1970	21				
7550	7512.5	3	206	0.4	31.6	1942	16				
7550	7487.5	4	138	0.5	36.0	1734	21				
7550	7462.5	5	90	0.5	39.2	1696	23				
7550	7437.5	6	76	0.5	35.5	2006	18				
7500	7512.5	1	1712	0.5	47.5	2151	22	7512.5	35.1	1718	21
7500	7487.5	2	512	0.5	36.0	1930	19				
7500	7462.5	3	276	0.5	40.1	2081	19				
7500	7437.5	4	165	0.5	42.3	2073	20				
7500	7412.5	5	132	0.5	39.9	2488	16				
7500	7387.5	6	59	0.5	27.1	1557	17				
7450	7462.5	1	1327	0.5	40.0	1668	24	7462.5	35.2	1885	19
7450	7437.5	2	611	0.5	41.9	2303	18				
7450	7412.5	3	337	0.5	45.2	2541	18				
7450	7387.5	4	255	0.5	42.2	3204	13				
7450	7362.5	5	109	0.6	29.3	1712	17				
7450	7337.5	6	51	0.6	30.9	1122	28				
7400	7412.5	1	1526	0.4	40.9	2397	17	7412.5	37.0	1970	20
7400	7387.5	2	612	0.5	45.5	2307	20				
7400	7362.5	3	412	0.5	42.9	3106	14				
7400	7337.5	4	164	0.5	29.9	2061	15				
7400	7312.5	5	70	0.5	32.2	1319	24				
7400	7287.5	6	57	0.7	32.8	1074	31				
7350	7362.5	1	2740	0.7	41.0	2459	17	7362.5	35.8	2140	19
7350	7337.5	2	1248	0.8	41.4	2941	14				
7350	7312.5	3	424	0.8	28.1	1998	14				
7350	7287.5	4	162	0.8	31.2	1272	25				
7350	7262.5	5	127	0.8	29.5	1496	20				
7350	7237.5	6	191	0.5	28.6	5040	6				
7300	7312.5	1	2470	0.5	40.3	3104	13	7312.5	33.4	2147	18
7300	7287.5	2	579	0.6	28.9	1819	16				
7300	7262.5	3	189	0.6	31.6	1188	27				
7300	7237.5	4	134	0.6	30.1	1403	21				
7300	7212.5	5	188	0.6	29.9	2953	10				
7300	7187.5	6	101	0.6	38.3	2221	17				
7250	7262.5	1	1297	0.4	26.2	2037	13	7262.5	30.4	2036	17
7250	7237.5	2	735	0.5	27.1	2771	10				
7250	7212.5	3	185	0.5	29.5	1395	21				
7250	7187.5	4	229	0.5	30.4	2878	11				
7250	7162.5	5	136	0.5	35.8	2564	14				
7250	7137.5	6	109	0.5	31.2	2876	11				
7200	7212.5	1	780	0.5	25.1	980	26	7212.5	30.8	2168	17
7200	7187.5	2	389	0.6	27.2	1222	22				
7200	7162.5	3	430	0.6	28.0	2702	10				
7200	7137.5	4	275	0.6	31.3	2880	11				
7200	7112.5	5	232	0.6	32.7	3644	9				
7200	7087.5	6	115	0.6	32.9	2529	13				
7150	7162.5	1	549	0.6	19.7	575	34	7162.5	29.7	2347	15
7150	7137.5	2	452	0.4	22.9	2130	11				
7150	7112.5	3	249	0.4	27.1	2347	12				
7150	7087.5	4	192	0.4	28.0	3016	9				
7150	7062.5	5	95	0.4	30.0	2238	13				



7150	7037.5	6	64	0.4	28.5	2111	13				
7100	7112.5	1	1469	0.6	15.3	1538	10	7112.5	28.9	2651	12
7100	7087.5	2	1076	0.6	14.1	3380	4				
7100	7062.5	3	447	0.6	24.3	2809	9				
7100	7037.5	4	184	0.6	27.1	1927	14				
7100	7012.5	5	112	0.6	27.9	1759	16				
7100	6987.5	6	97	0.6	42.0	2133	20				
7050	7062.5	1	1356	0.6	13.7	1420	10	7062.5	28.6	2381	13
7050	7037.5	2	745	0.6	18.4	2340	8				
7050	7012.5	3	278	0.6	23.2	1747	13				
7050	6987.5	4	163	0.6	24.8	1707	15				
7050	6962.5	5	126	0.6	39.7	1979	20				
7000	7012.5	1	4000	0.8	12.4	3142	4	7012.5	27.8	2301	13
7000	6987.5	2	883	0.9	17.7	1849	10				
7000	6962.5	3	396	0.9	21.6	1659	13				
7000	6937.5	4	279	0.9	37.6	1948	19				
6950	6962.5	1	1212	0.4	13.2	1904	7	6962.5	28.1	1974	14
6950	6937.5	2	403	0.4	19.1	1899	10				
6950	6912.5	3	235	0.4	36.5	2215	16				
6900	6912.5	1	1724	0.9	15.3	1204	13	6912.5	29.8	1834	16
6900	6887.5	2	747	0.9	34.9	1565	22				
6850	6862.5	1	1095	0.6	31.3	1147	27	6862.5	37.0	1831	21

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

LINE : 86+00W

FILE NAME : 86W

IPFF86W

- Fraser Filter -  
|

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	751	1.2	13.0	393	33	7962.5	14.6	905	20
7950	7937.5	2	377	1.2	12.6	592	21				
7950	7912.5	3	297	1.2	15.8	933	17				
7950	7887.5	4	162	1.2	15.9	848	19				
7950	7862.5	5	74	1.2	12.2	581	21				
7950	7837.5	6	158	1.0	18.1	2085	9				
7900	7912.5	1	642	1.0	13.5	403	33	7912.5	15.5	882	21
7900	7887.5	2	400	1.0	16.2	754	21				
7900	7862.5	3	191	1.0	17.0	720	24				
7900	7837.5	4	82	1.0	13.0	515	25				
7900	7812.5	5	177	1.0	19.3	1668	12				
7900	7787.5	6	46	1.0	17.1	607	28				
7850	7862.5	1	694	0.9	16.6	485	34	7862.5	17.0	871	23
7850	7837.5	2	255	0.9	18.2	534	34				
7850	7812.5	3	99	0.9	14.2	415	34				
7850	7787.5	4	199	0.9	19.8	1389	14				
7850	7762.5	5	50	0.9	17.9	524	34				
7850	7737.5	6	69	0.9	23.0	1012	23				
7800	7812.5	1	847	1.0	17.3	532	33	7812.5	18.5	937	24
7800	7787.5	2	220	1.0	14.8	415	36				
7800	7762.5	3	350	1.0	20.5	1357	15				
7800	7737.5	4	79	1.0	19.2	496	39				
7800	7712.5	5	108	1.0	24.5	1018	24				
7800	7687.5	6	163	1.0	30.1	2151	14				
7750	7762.5	1	784	1.0	13.8	493	28	7762.5	20.2	1075	23
7750	7737.5	2	765	1.0	19.8	1442	14				
7750	7712.5	3	139	1.0	19.9	524	38				
7750	7687.5	4	175	1.0	25.5	1100	23				
7750	7662.5	5	246	1.0	30.2	2318	13				
7750	7637.5	6	106	1.0	31.2	1399	22				
7700	7712.5	1	1280	0.6	17.5	1340	13	7712.5	23.3	1313	21
7700	7687.5	2	155	0.6	17.8	487	37				
7700	7662.5	3	177	0.6	25.1	1112	23				
7700	7637.5	4	238	0.6	30.7	2492	12				
7700	7612.5	5	96	0.6	31.6	1508	21				
7700	7587.5	6	70	0.6	30.4	1539	20				
7650	7662.5	1	491	1.0	16.4	309	53	7662.5	25.7	1194	26
7650	7637.5	2	455	1.0	23.7	858	28				
7650	7612.5	3	524	1.0	29.8	1975	15				
7650	7587.5	4	203	1.0	31.6	1275	25				
7650	7562.5	5	137	1.0	30.3	1291	23				
7650	7537.5	6	81	1.0	33.1	1069	31				
7600	7612.5	1	1133	0.4	23.6	1780	13	7612.5	29.8	1684	20
7600	7587.5	2	748	0.4	31.7	3525	9				
7600	7562.5	3	223	0.4	35.2	2102	17				

7600	7537.5	4	131	0.4	34.1	2058	17				
7600	7512.5	5	68	0.4	36.1	1602	23				
7600	7487.5	6	66	0.4	34.0	2177	16				
7550	7562.5	1	2460	0.8	28.2	1932	15	7562.5	32.4	1805	20
7550	7537.5	2	635	0.8	33.9	1496	23				
7550	7512.5	3	358	0.9	33.5	1500	22				
7550	7487.5	4	170	0.9	35.8	1187	30				
7550	7462.5	5	188	0.9	35.3	1969	18				
7550	7437.5	6	102	1.0	34.3	1346	25				
7500	7512.5	1	1085	0.4	34.9	1704	20	7512.5	34.2	1591	22
7500	7487.5	2	389	0.4	34.8	1833	19				
7500	7462.5	3	146	0.4	37.1	1376	27				
7500	7437.5	4	131	0.4	36.7	2058	18				
7500	7412.5	5	68	0.4	37.1	1602	23				
7500	7387.5	6	40	0.4	36.9	1319	28				
7450	7462.5	1	1990	0.4	36.9	3126	12	7462.5	35.8	1797	21
7450	7437.5	2	420	0.4	41.7	1979	21				
7450	7412.5	3	314	0.4	40.5	2959	14				
7450	7387.5	4	145	0.4	40.9	2278	18				
7450	7362.5	5	79	0.4	39.2	1861	21				
7450	7337.5	6	49	0.4	33.7	1616	21				
7400	7412.5	1	1851	0.6	41.2	1938	21	7412.5	37.5	1846	22
7400	7387.5	2	1069	0.7	41.0	2879	14				
7400	7362.5	3	438	0.7	42.0	2359	18				
7400	7337.5	4	220	0.7	40.8	1975	21				
7400	7312.5	5	167	0.7	32.9	2248	15				
7400	7287.5	6	59	0.8	37.1	973	38				
7350	7362.5	1	2590	0.5	39.8	3255	12	7362.5	37.6	1990	21
7350	7337.5	2	709	0.5	43.5	2673	16				
7350	7312.5	3	291	0.6	43.0	1828	24				
7350	7287.5	4	149	0.6	36.7	1560	24				
7350	7262.5	5	59	0.6	38.0	927	41				
7350	7237.5	6	88	0.6	26.3	1935	14				
7300	7312.5	1	3336	0.8	39.7	2620	15	7312.5	37.2	1821	23
7300	7287.5	2	969	0.9	43.7	2029	22				
7300	7262.5	3	387	0.9	38.3	1621	24				
7300	7237.5	4	131	0.9	39.6	915	43				
7300	7212.5	5	183	0.9	28.2	1916	15				
7300	7187.5	6	180	0.9	28.3	2639	11				
7250	7262.5	1	2150	0.5	36.0	2702	13	7262.5	35.3	1935	22
7250	7237.5	2	567	0.5	34.3	2138	16				
7250	7212.5	3	142	0.5	36.4	1071	34				
7250	7187.5	4	169	0.5	28.2	2124	13				
7250	7162.5	5	165	0.5	32.6	3110	10				
7250	7137.5	6	156	0.5	30.5	4117	7				
7200	7212.5	1	1502	0.5	34.4	1887	18	7212.5	32.1	2119	19
7200	7187.5	2	290	0.5	18.4	1093	17				
7200	7162.5	3	275	0.5	28.2	2073	14				
7200	7137.5	4	242	0.5	30.8	3041	10				
7200	7112.5	5	227	0.5	29.8	4279	7				
7200	7087.5	6	122	0.5	31.3	3220	10				
7150	7162.5	1	639	0.6	24.0	669	36	7162.5	30.1	2265	18
7150	7137.5	2	505	0.6	25.5	1587	16				
7150	7112.5	3	465	0.6	30.5	2922	10				
7150	7087.5	4	330	0.6	28.3	3456	8				
7150	7062.5	5	177	0.6	29.7	2780	11				

7150	7037.5	6	124	0.6	30.5	2727	11				
7100	7112.5	1	1617	0.7	18.3	1451	13	7112.5	27.4	2633	11
7100	7087.5	2	965	0.7	22.7	2599	9				
7100	7062.5	3	703	0.8	23.8	3313	7				
7100	7037.5	4	345	0.8	22.9	2710	8				
7100	7012.5	5	145	0.8	27.1	1708	16				
7100	6987.5	6	96	0.8	22.1	1583	14				
7050	7062.5	1	1637	0.5	16.3	2057	8	7062.5	26.1	2740	10
7050	7037.5	2	925	0.6	19.8	2906	7				
7050	7012.5	3	422	0.6	21.8	2652	8				
7050	6987.5	4	168	0.7	23.4	1508	16				
7050	6962.5	5	110	0.7	19.1	1481	13				
7000	7012.5	1	1807	0.5	13.3	2271	6	7012.5	23.5	2574	10
7000	6987.5	2	631	0.5	14.8	2379	6				
7000	6962.5	3	231	0.5	20.5	1742	12				
7000	6937.5	4	120	0.5	14.7	1508	10				
6950	6962.5	1	2350	0.8	11.9	1846	6	6962.5	21.0	2077	10
6950	6937.5	2	725	0.8	14.0	1708	8				
6950	6912.5	3	339	0.8	11.0	1597	7				
6900	6912.5	1	878	0.4	9.6	1379	7	6912.5	18.1	1673	11
6900	6887.5	2	311	0.4	7.2	1466	5				
6850	6862.5	1	847	0.5	5.1	1064	5	6862.5	13.2	1450	9

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS NORTH

LINE : 87+00W

FILE NAME : 87W

IPFF87W

Fraser Filter

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
7950	7962.5	1	821	1.6	6.6	322	20	7962.5	12.9	869	16
7950	7937.5	2	507	1.7	9.1	562	16				
7950	7912.5	3	539	1.7	14.8	1195	12				
7950	7887.5	4	348	1.7	15.5	1286	12				
7950	7862.5	5	163	1.7	18.1	904	20				
7950	7837.5	6	122	1.7	13.2	947	14				
7900	7912.5	1	551	1.0	8.2	346	24	7912.5	15.5	894	18
7900	7887.5	2	492	1.0	13.7	927	15				
7900	7862.5	3	300	1.0	14.7	1131	13				
7900	7837.5	4	124	1.0	25.2	779	32				
7900	7812.5	5	97	1.0	18.7	914	20				
7900	7787.5	6	64	1.0	19.4	844	23				
7850	7862.5	1	758	0.9	11.8	529	22	7862.5	18.4	889	22
7850	7837.5	2	409	0.9	13.9	857	16				
7850	7812.5	3	157	0.9	16.2	658	25				
7850	7787.5	4	114	0.9	14.0	796	18				
7850	7762.5	5	74	0.9	20.4	775	26				
7850	7737.5	6	54	0.9	46.2	792	58				
7800	7812.5	1	1087	1.0	10.9	683	16	7812.5	18.5	881	22
7800	7787.5	2	318	1.0	12.7	599	21				
7800	7762.5	3	191	1.0	15.2	720	21				
7800	7737.5	4	115	1.0	19.7	723	27				
7800	7712.5	5	137	1.0	27.3	1291	21				
7800	7687.5	6	88	1.0	12.1	1161	10				
7750	7762.5	1	858	0.9	12.8	599	21	7762.5	20.0	969	22
7750	7737.5	2	389	0.9	15.7	815	19				
7750	7712.5	3	209	0.9	20.8	875	24				
7750	7687.5	4	235	0.9	21.6	1641	13				
7750	7662.5	5	130	0.9	24.0	1361	18				
7750	7637.5	6	149	0.9	27.1	2184	12				
7700	7712.5	1	1268	1.1	13.3	724	18	7712.5	22.2	1185	21
7700	7687.5	2	494	1.1	20.3	847	24				
7700	7662.5	3	497	1.1	21.9	1703	13				
7700	7637.5	4	251	1.1	24.7	1434	17				
7700	7612.5	5	267	1.1	28.1	2288	12				
7700	7587.5	6	171	1.1	41.6	2051	20				
7650	7662.5	1	971	1.0	18.2	610	30	7662.5	25.6	1450	20
7650	7637.5	2	836	1.1	25.1	1433	18				
7650	7612.5	3	440	1.1	20.6	1508	14				
7650	7587.5	4	444	1.2	24.7	2325	11				
7650	7562.5	5	282	1.2	40.6	2215	18				
7650	7537.5	6	218	1.2	33.6	2397	14				
7600	7612.5	1	1429	0.9	19.2	998	19	7612.5	28.4	1714	18
7600	7587.5	2	603	0.9	19.6	1263	16				
7600	7562.5	3	483	0.9	35.5	2023	18				

7600	7537.5	4	351	0.9	27.4	2450	11				
7600	7512.5	5	188	0.9	31.6	1969	16				
7600	7487.5	6	103	0.9	44.4	1510	29				
7550	7562.5	1	1489	1.1	17.7	851	21	7562.5	30.0	1845	17
7550	7537.5	2	1012	1.1	28.6	1734	16				
7550	7512.5	3	551	1.1	37.2	1888	20				
7550	7487.5	4	316	1.1	39.9	1805	22				
7550	7462.5	5	181	1.1	39.8	1551	26				
7550	7437.5	6	231	1.1	31.3	2771	11				
7500	7512.5	1	2060	0.6	25.1	2157	12	7512.5	34.0	2089	17
7500	7487.5	2	838	0.6	28.0	2633	11				
7500	7462.5	3	393	0.6	36.0	2469	15				
7500	7437.5	4	192	0.6	35.5	2011	18				
7500	7412.5	5	118	0.6	34.5	1854	19				
7500	7387.5	6	72	0.6	44.0	1583	28				
7450	7462.5	1	2320	0.5	23.4	2915	8	7462.5	34.9	2086	18
7450	7437.5	2	811	0.5	30.1	3057	10				
7450	7412.5	3	343	0.6	32.5	2155	15				
7450	7387.5	4	136	0.6	44.1	1424	31				
7450	7362.5	5	103	0.6	31.8	1618	20				
7450	7337.5	6	67	0.6	26.6	1473	18				
7400	7412.5	1	4940	0.7	29.1	4434	7	7412.5	35.8	2160	19
7400	7387.5	2	1449	0.7	32.7	3902	8				
7400	7362.5	3	453	0.8	40.3	2135	19				
7400	7337.5	4	271	0.8	41.5	2128	19				
7400	7312.5	5	165	0.8	33.8	1944	17				
7400	7287.5	6	71	0.8	39.2	1171	33				
7350	7362.5	1	2240	0.4	31.8	3519	9	7362.5	36.5	1969	21
7350	7337.5	2	398	0.4	41.6	1876	22				
7350	7312.5	3	215	0.4	43.5	2026	21				
7350	7287.5	4	119	0.4	35.7	1869	19				
7350	7262.5	5	46	0.4	42.2	1084	39				
7350	7237.5	6	53	0.4	20.5	1748	12				
7300	7312.5	1	2470	0.9	36.7	1724	21	7312.5	36.2	1796	21
7300	7287.5	2	985	0.9	40.7	2063	20				
7300	7262.5	3	532	0.9	36.9	2228	17				
7300	7237.5	4	189	0.9	36.5	1319	28				
7300	7212.5	5	128	0.9	28.2	1340	21				
7300	7187.5	6	159	0.9	31.4	2331	13				
7250	7262.5	1	2780	0.6	47.3	2911	16	7262.5	35.7	1972	20
7250	7237.5	2	997	0.7	35.8	2685	13				
7250	7212.5	3	289	0.7	34.3	1556	22				
7250	7187.5	4	165	0.7	34.5	1481	23				
7250	7162.5	5	194	0.7	31.0	2612	12				
7250	7137.5	6	225	0.7	33.4	4241	8				
7200	7212.5	1	3000	0.6	27.5	3142	9	7212.5	32.8	2205	18
7200	7187.5	2	589	0.7	32.0	1586	20				
7200	7162.5	3	293	0.7	33.1	1578	21				
7200	7137.5	4	300	0.7	30.1	2693	11				
7200	7112.5	5	321	0.7	33.1	4322	8				
7200	7087.5	6	237	0.8	32.5	3909	8				
7150	7162.5	1	1700	0.8	24.5	1335	18	7162.5	31.4	2355	17
7150	7137.5	2	1237	0.8	25.7	2915	9				
7150	7112.5	3	542	0.8	27.6	2554	11				
7150	7087.5	4	522	0.8	31.4	4100	8				
7150	7062.5	5	353	0.8	31.7	4159	8				

7150	7037.5	6	86	0.8	26.0	1418	18				
7100	7112.5	1	1291	0.6	22.1	1352	16	7112.5	28.9	2744	12
7100	7087.5	2	760	0.6	23.6	2388	10				
7100	7062.5	3	675	0.6	27.5	4241	6				
7100	7037.5	4	431	0.6	28.0	4513	6				
7100	7012.5	5	100	0.6	26.7	1571	17				
7100	6987.5	6	98	0.6	27.8	2155	13				
7050	7062.5	1	1339	0.5	18.8	1683	11	7062.5	28.0	3012	11
7050	7037.5	2	982	0.5	23.7	3702	6				
7050	7012.5	3	550	0.5	25.2	4147	6				
7050	6987.5	4	116	0.5	24.7	1458	17				
7050	6962.5	5	108	0.5	25.1	2036	12				
7000	7012.5	1	2120	0.5	17.5	2664	7	7012.5	26.5	3045	10
7000	6987.5	2	1029	0.6	21.1	3233	7				
7000	6962.5	3	209	0.6	21.3	1313	16				
7000	6937.5	4	156	0.6	20.9	1634	13				
6950	6962.5	1	3160	0.6	16.2	3309	5	6962.5	24.0	2518	11
6950	6937.5	2	434	0.6	17.5	1363	13				
6950	6912.5	3	246	0.6	15.8	1546	10				
6900	6912.5	1	1376	0.4	13.2	2161	6	6912.5	21.0	1723	13
6900	6887.5	2	487	0.4	11.7	2295	5				
6850	6862.5	1	1385	0.5	9.5	1740	5	6862.5	18.5	1901	10

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 94+00 W

FILE NAME : 94W

1PFF94W

: - Fraser Filter - :  
: :  
: :

PI loc. (northing)	Plot Pt. (northing)	N	V <sub>0</sub> (mV)	I (amps)	M <sub>a</sub> (mSec.)	P <sub>a</sub> (ohm-m.)	MF	Plot Pt. (northing)	M <sub>a</sub> (mSec.)	P <sub>a</sub> (ohm-m.)	MF
5250	5262.5	1	1029	1.3	13.6	497	27	5262.5	26.6	1235	22
5250	5237.5	2	938	1.3	20.9	1360	15				
5250	5212.5	3	513	1.3	28.3	1488	19				
5250	5187.5	4	251	1.3	25.3	1213	21				
5250	5162.5	5	190	1.3	30.2	1377	22				
5250	5137.5	6	145	1.3	41.0	1472	28				
5200	5212.5	1	1448	0.8	16.6	1137	15	5212.5	27.8	1346	20
5200	5187.5	2	590	0.8	26.5	1390	19				
5200	5162.5	3	251	0.8	22.4	1183	19				
5200	5137.5	4	177	0.8	28.2	1390	20				
5200	5112.5	5	127	0.8	39.4	1496	26				
5200	5087.5	6	79	0.8	26.7	1303	20				
5150	5162.5	1	1852	0.9	29.8	1293	23	5162.5	29.4	1327	22
5150	5137.5	2	524	0.9	23.5	1097	21				
5150	5112.5	3	345	0.9	26.4	1445	18				
5150	5087.5	4	211	0.9	38.8	1473	26				
5150	5062.5	5	123	0.9	26.0	1288	20				
5150	5037.5	6	68	0.9	28.6	997	29				
5100	5112.5	1	2290	0.6	32.2	2398	13	5112.5	32.1	1537	22
5100	5087.5	2	846	0.7	33.3	2278	15				
5100	5062.5	3	462	0.7	46.1	2488	19				
5100	5037.5	4	231	0.7	33.1	2073	16				
5100	5012.5	5	106	0.7	33.9	1427	24				
5100	4987.5	6	77	0.8	42.0	1270	33				
5050	5062.5	1	2610	0.7	32.0	2343	14	5062.5	35.4	1681	22
5050	5037.5	2	1104	0.7	47.3	2973	16				
5050	5012.5	3	454	0.8	35.4	2139	17				
5050	4987.5	4	188	0.8	36.5	1477	25				
5050	4962.5	5	121	0.8	46.0	1425	32				
5050	4937.5	6	90	0.8	37.0	1484	25				
5000	5012.5	1	3580	0.6	54.2	3749	14	5012.5	39.8	1863	23
5000	4987.5	2	1040	0.7	42.1	2801	15				
5000	4962.5	3	366	0.8	41.4	1725	24				
5000	4937.5	4	226	0.8	49.7	1775	28				
5000	4912.5	5	163	0.8	40.0	1920	21				
5000	4887.5	6	143	0.8	50.6	2359	21				
4950	4962.5	1	2730	0.8	46.0	2144	21	4962.5	40.1	1857	23
4950	4937.5	2	765	0.9	44.7	1602	28				
4950	4912.5	3	433	0.9	52.8	1814	29				
4950	4887.5	4	294	0.9	42.2	2053	21				
4950	4862.5	5	242	0.9	52.4	2534	21				
4950	4837.5	6	257	1.0	34.6	3391	10				
4900	4912.5	1	991	0.4	49.3	1557	32	4912.5	44.2	2079	23
4900	4887.5	2	448	0.4	57.4	2111	27				
4900	4862.5	3	264	0.4	46.6	2488	19				



4900	4837.5	4	191	0.4	55.1	3000	18				
4900	4812.5	5	187	0.4	38.4	4406	9				
4900	4787.5	6	86	0.4	48.4	2837	17				
4850	4862.5	1	1276	0.5	54.9	1603	34	4862.5	46.5	2329	22
4850	4837.5	2	607	0.5	43.8	2288	19				
4850	4812.5	3	371	0.5	47.5	2797	17				
4850	4787.5	4	325	0.6	40.6	3403	12				
4850	4762.5	5	141	0.6	47.1	2215	21				
4850	4737.5	6	79	0.6	49.6	1737	29				
4800	4812.5	1	988	0.4	40.1	1552	26	4812.5	44.9	2465	20
4800	4787.5	2	447	0.4	44.9	2106	21				
4800	4762.5	3	357	0.4	38.9	3365	12				
4800	4737.5	4	146	0.4	45.9	2293	20				
4800	4712.5	5	77	0.4	44.7	1814	25				
4800	4687.5	6	52	0.4	54.7	1715	32				
4750	4762.5	1	1243	0.5	46.1	1562	30	4762.5	46.5	2452	21
4750	4737.5	2	796	0.5	40.5	3001	13				
4750	4712.5	3	293	0.5	48.0	2209	22				
4750	4687.5	4	128	0.5	47.6	1608	30				
4750	4662.5	5	60	0.4	55.1	1414	39				
4750	4637.5	6	52	0.4	44.9	1715	26				
4700	4712.5	1	2770	0.6	37.4	2901	13	4712.5	45.6	2402	22
4700	4687.5	2	671	0.6	47.5	2108	23				
4700	4662.5	3	266	0.6	49.6	1671	30				
4700	4637.5	4	149	0.6	55.4	1560	36				
4700	4612.5	5	123	0.6	45.4	1932	23				
4700	4587.5	6	143	0.6	42.5	3145	14				
4650	4662.5	1	1765	0.2	47.4	5545	9	4662.5	48.9	2423	23
4650	4637.5	2	420	0.2	53.1	3958	13				
4650	4612.5	3	180	0.3	58.5	2262	26				
4650	4587.5	4	128	0.3	48.7	2681	18				
4650	4562.5	5	122	0.3	45.6	3833	12				
4650	4537.5	6	60	0.3	47.9	2639	18				
4600	4612.5	1	2820	0.5	45.1	3544	13	4612.5	48.1	2726	21
4600	4587.5	2	810	0.5	52.1	3054	17				
4600	4562.5	3	500	0.5	44.1	3770	12				
4600	4537.5	4	463	0.5	42.2	5818	7				
4600	4512.5	5	206	0.5	45.7	3883	12				
4600	4487.5	6	132	0.5	36.7	3483	11				
4550	4562.5	1	1861	0.5	48.1	2339	21	4562.5	46.2	3004	18
4550	4537.5	2	885	0.5	41.5	3336	12				
4550	4512.5	3	647	0.5	40.1	4878	8				
4550	4487.5	4	264	0.5	44.2	3318	13				
4550	4462.5	5	156	0.5	35.6	2941	12				
4550	4437.5	6	102	0.4	40.6	3365	12				
4500	4512.5	1	1902	0.4	46.7	2988	16	4512.5	43.1	3377	14
4500	4487.5	2	1161	0.5	43.1	4377	10				
4500	4462.5	3	414	0.5	41.3	3121	13				
4500	4437.5	4	210	0.4	42.2	3299	13				
4500	4412.5	5	128	0.4	42.1	3016	14				
4450	4462.5	1	2400	0.3	48.7	5027	10	4462.5	43.0	3709	12
4450	4437.5	2	582	0.3	45.6	3657	12				
4450	4412.5	3	279	0.3	45.9	3506	13				
4450	4387.5	4	165	0.3	44.6	3456	13				

4400	4412.5	1	2720	0.4	38.9	4273	9	4412.5	42.3	3470	12
4400	4387.5	2	919	0.4	40.9	4331	9				
4400	4362.5	3	399	0.4	42.8	3760	11				

4350	4362.5	1	5820	0.6	27.9	6095	5	4362.5	39.8	3777	11
4350	4337.5	2	1366	0.6	38.0	4291	9				

4300	4312.5	1	2080	0.2	28.1	6535	4	4312.5	39.4	4070	11
------	--------	---	------	-----	------	------	---	--------	------	------	----

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 95+00 W

FILE NAME : 95W

1PFF95W

;- Fraser Filter -  
;

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	1860	0.6	46.0	1948	24	5612.5	38.6	1636	25
5600	5587.5	2	389	0.6	36.9	1222	30				
5600	5562.5	3	302	0.6	40.2	1898	21				
5600	5537.5	4	180	0.6	39.4	1885	21				
5600	5512.5	5	69	0.6	37.5	1084	35				
5600	5487.5	6	81	0.6	31.3	1781	18				
5550	5562.5	1	880	0.4	26.7	1382	19	5562.5	33.6	1822	21
5550	5537.5	2	485	0.4	32.9	2286	14				
5550	5512.5	3	166	0.4	31.4	1565	20				
5550	5487.5	4	83	0.4	31.7	1304	24				
5550	5462.5	5	84	0.4	29.4	1979	15				
5550	5437.5	6	111	0.4	32.0	3662	9				
5500	5512.5	1	3430	1.6	23.4	1347	17	5512.5	31.5	1816	19
5500	5487.5	2	969	1.6	24.0	1142	21				
5500	5462.5	3	421	1.6	25.2	992	25				
5500	5437.5	4	387	1.6	25.0	1520	16				
5500	5412.5	5	477	1.6	28.7	2810	10				
5500	5387.5	6	241	1.6	40.0	1987	20				
5450	5462.5	1	1858	1.5	16.7	778	21	5462.5	29.6	1715	19
5450	5437.5	2	644	1.5	19.2	809	24				
5450	5412.5	3	535	1.5	21.1	1345	16				
5450	5387.5	4	607	1.5	25.6	2543	10				
5450	5362.5	5	290	1.5	37.7	1822	21				
5450	5337.5	6	212	1.5	36.6	1865	20				
5400	5412.5	1	1582	1.6	12.0	621	19	5412.5	28.6	1761	18
5400	5387.5	2	1056	1.6	15.7	1244	13				
5400	5362.5	3	1027	1.6	21.4	2420	9				
5400	5337.5	4	455	1.6	34.5	1787	19				
5400	5312.5	5	311	1.6	33.7	1832	18				
5400	5287.5	6	219	1.6	34.1	1806	19				
5350	5362.5	1	1480	1.4	12.3	664	19	5362.5	29.3	1831	17
5350	5337.5	2	1221	1.4	18.4	1644	11				
5350	5312.5	3	511	1.4	32.3	1376	23				
5350	5287.5	4	328	1.4	32.1	1472	22				
5350	5262.5	5	227	1.4	32.9	1528	22				
5350	5237.5	6	144	1.4	39.8	1357	29				
5300	5312.5	1	2580	1.8	15.3	901	17	5312.5	31.7	1738	20
5300	5287.5	2	931	1.8	30.0	975	31				
5300	5262.5	3	556	1.9	30.8	1103	28				
5300	5237.5	4	371	1.9	31.8	1227	26				
5300	5212.5	5	229	1.9	38.8	1136	34				
5300	5187.5	6	189	2.0	39.2	1247	31				
5250	5262.5	1	1849	0.8	28.6	1452	20	5262.5	35.2	1514	24
5250	5237.5	2	726	0.8	31.1	1711	18				
5250	5212.5	3	375	0.9	33.4	1571	21				

5250	5187.5	4	192	0.9	41.5	1340	31				
5250	5162.5	5	141	0.9	41.0	1477	28				
5250	5137.5	6	117	0.9	38.6	1715	23				
5200	5212.5	1	2670	0.6	31.8	2796	11	5212.5	36.5	1828	22
5200	5187.5	2	965	0.6	35.7	3032	12				
5200	5162.5	3	377	0.6	45.3	2369	19				
5200	5137.5	4	237	0.6	44.8	2482	18				
5200	5112.5	5	168	0.6	41.1	2639	16				
5200	5087.5	6	122	0.6	33.0	2683	12				
5150	5162.5	1	3590	0.8	34.3	2820	12	5162.5	39.2	2077	22
5150	5137.5	2	1140	0.9	47.1	2388	20				
5150	5112.5	3	919	0.9	39.9	3849	10				
5150	5087.5	4	432	0.9	44.4	3016	15				
5150	5062.5	5	290	1.0	37.1	2733	14				
5150	5037.5	6	91	1.0	50.0	1201	42				
5100	5112.5	1	2610	0.7	39.6	2343	17	5112.5	41.8	2196	23
5100	5087.5	2	1184	0.8	43.3	2790	16				
5100	5062.5	3	721	0.8	40.9	3398	12				
5100	5037.5	4	438	0.8	35.3	3440	10				
5100	5012.5	5	127	0.8	49.5	1496	33				
5100	4987.5	6	70	0.9	47.9	1026	47				
5050	5062.5	1	2500	0.5	42.4	3142	13	5062.5	42.6	2425	22
5050	5037.5	2	1132	0.5	38.8	4268	9				
5050	5012.5	3	566	0.5	35.3	4268	8				
5050	4987.5	4	151	0.6	50.5	1581	32				
5050	4962.5	5	78	0.6	46.8	1225	38				
5050	4937.5	6	57	0.6	53.8	1253	43				
5000	5012.5	1	2220	0.3	36.4	4650	8	5012.5	43.9	2536	23
5000	4987.5	2	764	0.3	36.5	4800	8				
5000	4962.5	3	183	0.3	51.4	2300	22				
5000	4937.5	4	86	0.3	50.5	1801	28				
5000	4912.5	5	54	0.3	56.8	1696	33				
5000	4887.5	6	47	0.3	47.8	2067	23				
4950	4962.5	1	1476	0.3	37.1	3091	12	4962.5	46.3	2319	25
4950	4937.5	2	307	0.3	52.9	1929	27				
4950	4912.5	3	132	0.3	50.3	1659	30				
4950	4887.5	4	77	0.3	57.2	1613	35				
4950	4862.5	5	65	0.3	48.9	2042	24				
4950	4837.5	6	109	0.3	43.5	4794	9				
4900	4912.5	1	1332	0.5	56.1	1674	34	4912.5	50.9	1945	30
4900	4887.5	2	448	0.5	52.2	1689	31				
4900	4862.5	3	225	0.6	59.1	1414	42				
4900	4837.5	4	164	0.6	50.7	1717	30				
4900	4812.5	5	261	0.6	44.9	4100	11				
4900	4787.5	6	117	0.6	48.1	2573	19				
4850	4862.5	1	1145	0.4	44.7	1799	25	4862.5	48.9	2299	26
4850	4837.5	2	390	0.4	52.3	1838	28				
4850	4812.5	3	233	0.4	46.0	2196	21				
4850	4787.5	4	339	0.4	40.1	5325	8				
4850	4762.5	5	141	0.4	44.6	3322	13				
4850	4737.5	6	95	0.4	39.9	3134	13				
4800	4812.5	1	701	0.4	54.3	1101	49	4812.5	48.3	2487	24
4800	4787.5	2	313	0.4	47.5	1475	32				
4800	4762.5	3	415	0.4	46.5	3911	12				
4800	4737.5	4	155	0.4	46.4	2435	19				
4800	4712.5	5	94	0.4	41.4	2215	19				

4800	4687.5	6	61	0.4	44.0	2012	22				
4750	4762.5	1	552	0.3	49.9	1156	43	4762.5	45.2	2655	20
4750	4737.5	2	571	0.4	40.3	2691	15				
4750	4712.5	3	193	0.4	46.8	1819	26				
4750	4687.5	4	132	0.4	41.7	2073	20				
4750	4662.5	5	83	0.4	44.3	1956	23				
4750	4637.5	6	83	0.4	45.2	2738	17				
4700	4712.5	1	1488	0.4	46.8	2337	20	4712.5	44.3	2717	19
4700	4687.5	2	340	0.5	51.2	1282	40				
4700	4662.5	3	195	0.5	45.6	1470	31				
4700	4637.5	4	121	0.5	47.1	1521	31				
4700	4612.5	5	114	0.5	47.5	2149	22				
4700	4587.5	6	121	0.5	34.3	3193	11				
4650	4662.5	1	1358	0.6	49.1	1422	35	4662.5	44.6	2199	22
4650	4637.5	2	472	0.6	45.4	1483	31				
4650	4612.5	3	236	0.6	47.0	1483	32				
4650	4587.5	4	210	0.6	48.1	2199	22				
4650	4562.5	5	201	0.6	34.5	3157	11				
4650	4537.5	6	116	0.6	43.4	2551	17				
4600	4612.5	1	1763	0.4	48.0	2769	17	4612.5	43.2	2674	19
4600	4587.5	2	621	0.4	46.2	2926	16				
4600	4562.5	3	441	0.4	46.4	4156	11				
4600	4537.5	4	374	0.4	33.4	5875	6				
4600	4512.5	5	204	0.5	42.5	3845	11				
4600	4487.5	6	123	0.5	40.5	3246	12				
4550	4562.5	1	2860	0.6	50.7	2995	17	4562.5	43.5	3078	16
4550	4537.5	2	1241	0.6	50.8	3899	13				
4550	4512.5	3	647	0.5	37.3	4878	8				
4550	4487.5	4	292	0.5	46.3	3669	13				
4550	4462.5	5	162	0.5	43.1	3054	14				
4550	4437.5	6	95	0.4	40.7	3134	13				
4500	4512.5	1	6820	0.5	40.8	8570	5	4512.5	42.0	3964	12
4500	4487.5	2	1930	0.5	34.9	7276	5				
4500	4462.5	3	676	0.5	45.2	5097	9				
4500	4437.5	4	333	0.6	44.9	3736	12				
4500	4412.5	5	182	0.6	40.4	2859	14				
4450	4462.5	1	4380	0.4	29.8	6880	4	4462.5	40.1	4186	11
4450	4437.5	2	1073	0.4	43.9	5056	9				
4450	4412.5	3	452	0.4	45.1	4260	11				
4450	4387.5	4	228	0.4	41.0	3581	11				
4400	4412.5	1	2530	0.4	41.6	3974	10	4412.5	42.9	3680	12
4400	4387.5	2	794	0.4	44.4	3742	12				
4400	4362.5	3	361	0.4	40.5	3402	12				
4350	4362.5	1	1259	0.2	36.9	3955	9	4362.5	41.0	3533	12
4350	4337.5	2	413	0.2	34.0	3892	9				
4300	4312.5	1	1823	0.6	32.8	1909	17	4312.5	38.2	3130	13

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 96+00 W

FILE NAME : 96W

IPFF96W

: - Fraser Filter - :  
: :  
:

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	1731	0.8	32.3	1360	24	5612.5	31.1	2822	13
5600	5587.5	2	876	0.8	28.9	2064	14				
5600	5562.5	3	429	0.8	28.2	2022	14				
5600	5537.5	4	242	0.8	27.3	1901	14				
5600	5512.5	5	314	0.8	30.2	3699	8				
5600	5487.5	6	357	0.8	39.8	5888	7				
5550	5562.5	1	1115	0.8	19.4	876	22	5562.5	27.9	2413	14
5550	5537.5	2	478	0.8	19.9	1126	18	-			
5550	5512.5	3	240	0.8	19.6	1131	17				
5550	5487.5	4	296	0.9	23.8	2066	12				
5550	5462.5	5	334	0.9	34.8	3498	10				
5550	5437.5	6	172	1.0	34.9	2269	15				
5500	5512.5	1	1358	1.2	14.0	711	20	5512.5	27.2	2276	14
5500	5487.5	2	555	1.4	14.3	747	19				
5500	5462.5	3	635	1.4	19.1	1710	11				
5500	5437.5	4	701	1.4	31.2	3146	10				
5500	5412.5	5	343	1.5	32.0	2155	15				
5500	5387.5	6	236	1.5	38.3	2076	18				
5450	5462.5	1	288	0.4	9.9	452	22	5462.5	27.8	2247	14
5450	5437.5	2	272	0.4	15.8	1282	12				
5450	5412.5	3	278	0.4	28.5	2620	11				
5450	5387.5	4	127	0.4	29.3	1995	15				
5450	5362.5	5	83	0.4	36.0	1956	18				
5450	5337.5	6	56	0.4	36.0	1847	19				
5400	5412.5	1	875	0.8	11.0	687	16	5412.5	30.1	2210	16
5400	5387.5	2	779	0.8	25.7	1835	14				
5400	5362.5	3	314	0.8	27.9	1480	19				
5400	5337.5	4	198	0.9	34.8	1382	25				
5400	5312.5	5	128	0.9	34.8	1340	26				
5400	5287.5	6	87	0.9	38.0	1275	30				
5350	5362.5	1	1581	0.9	23.6	1104	21	5362.5	33.0	1974	20
5350	5337.5	2	508	0.9	26.7	1064	25				
5350	5312.5	3	296	1.0	33.8	1116	30				
5350	5287.5	4	184	1.0	33.1	1156	29				
5350	5262.5	5	126	1.2	41.1	990	42				
5350	5237.5	6	115	1.2	32.5	1264	26				
5300	5312.5	1	1531	0.7	32.0	1374	23	5312.5	34.3	1503	24
5300	5287.5	2	527	0.7	37.3	1419	26				
5300	5262.5	3	260	0.7	35.7	1400	25				
5300	5237.5	4	151	0.8	38.5	1186	32				
5300	5212.5	5	116	0.8	34.3	1367	25				
5300	5187.5	6	88	0.8	33.5	1451	23				
5250	5262.5	1	1369	0.4	41.5	2150	19	5262.5	37.1	1570	25
5250	5237.5	2	400	0.4	40.2	1885	21				
5250	5212.5	3	191	0.4	44.0	1800	24				

5250	5187.5	4	125	0.4	39.1	1963	20				
5250	5162.5	5	83	0.4	37.7	1956	19				
5250	5137.5	6	60	0.4	39.2	1979	20				
5200	5212.5	1	1280	0.4	40.4	2011	20	5212.5	38.6	1704	24
5200	5187.5	2	484	0.4	44.8	2281	20				
5200	5162.5	3	282	0.5	39.8	2126	19				
5200	5137.5	4	176	0.5	39.1	2212	18				
5200	5112.5	5	117	0.5	42.6	2205	19				
5200	5087.5	6	79	0.5	46.3	2085	22				
5150	5162.5	1	1575	0.6	49.5	1649	30	5162.5	41.5	1822	24
5150	5137.5	2	679	0.6	42.7	2133	20				
5150	5112.5	3	367	0.6	42.8	2306	19				
5150	5087.5	4	224	0.6	46.8	2346	20				
5150	5062.5	5	143	0.6	49.9	2246	22				
5150	5037.5	6	76	0.7	48.9	1433	34				
5100	5112.5	1	2060	0.5	38.5	2589	15	5112.5	43.3	1947	26
5100	5087.5	2	775	0.6	43.2	2435	18				
5100	5062.5	3	386	0.6	49.0	2425	20				
5100	5037.5	4	214	0.6	52.0	2241	23				
5100	5012.5	5	104	0.6	51.5	1634	32				
5100	4987.5	6	22	0.6	59.6	484	123				
5050	5062.5	1	2570	0.5	28.7	3230	9	5062.5	45.6	2023	31
5050	5037.5	2	901	0.5	41.5	3397	12				
5050	5012.5	3	388	0.5	49.8	2925	17				
5050	4987.5	4	165	0.5	50.7	2073	24				
5050	4962.5	5	33	0.6	57.8	518	112				
5050	4937.5	6	41	0.6	47.2	902	52				
5000	5012.5	1	4770	0.6	32.3	4995	6	5012.5	48.1	2109	35
5000	4987.5	2	1360	0.6	43.9	4273	10				
5000	4962.5	3	478	0.7	47.1	2574	18				
5000	4937.5	4	82	0.7	56.4	736	77				
5000	4912.5	5	87	0.7	48.6	1171	41				
5000	4887.5	6	87	0.7	49.3	1640	30				
4950	4962.5	1	2020	0.5	37.1	2538	15	4962.5	49.1	1697	42
4950	4937.5	2	510	0.5	44.1	1923	23				
4950	4912.5	3	75	0.5	54.7	565	97				
4950	4887.5	4	74	0.5	44.5	930	48				
4950	4862.5	5	69	0.5	47.3	1301	36				
4950	4837.5	6	55	0.5	44.2	1451	30				
4900	4912.5	1	1513	0.5	45.6	1901	24	4912.5	49.1	1318	50
4900	4887.5	2	168	0.6	55.4	528	105				
4900	4862.5	3	138	0.6	45.2	867	52				
4900	4837.5	4	122	0.6	46.8	1278	37				
4900	4812.5	5	90	0.6	44.6	1414	32				
4900	4787.5	6	107	0.6	42.3	2353	18				
4850	4862.5	1	383	0.4	60.8	602	101	4862.5	49.5	1362	53
4850	4837.5	2	208	0.4	44.9	980	46				
4850	4812.5	3	154	0.3	48.3	1935	25				
4850	4787.5	4	104	0.3	45.8	2178	21				
4850	4762.5	5	116	0.3	45.3	3644	12				
4850	4737.5	6	71	0.3	49.6	3123	16				
4800	4812.5	1	551	0.6	41.0	577	71	4812.5	45.4	1571	35
4800	4787.5	2	289	0.6	44.6	908	49				
4800	4762.5	3	164	0.6	46.3	1030	45				
4800	4737.5	4	174	0.6	43.1	1822	24				
4800	4712.5	5	106	0.6	44.8	1665	27				

4800	4687.5	6	83	0.6	40.7	1825	22				
4750	4762.5	1	532	0.4	45.3	836	54	4762.5	45.2	1753	30
4750	4737.5	2	204	0.4	45.7	961	48				
4750	4712.5	3	191	0.4	45.3	1800	25				
4750	4687.5	4	112	0.4	50.2	1759	29				
4750	4662.5	5	84	0.4	40.8	1979	21				
4750	4637.5	6	58	0.4	38.1	1913	20				
4700	4712.5	1	931	0.4	52.5	1462	36	4712.5	44.3	2109	24
4700	4687.5	2	440	0.4	44.6	2073	22				
4700	4662.5	3	212	0.4	51.8	1998	26				
4700	4637.5	4	147	0.4	41.3	2309	18				
4700	4612.5	5	97	0.4	37.5	2286	16				
4700	4587.5	6	159	0.4	36.6	5245	7				
4650	4662.5	1	1006	0.6	47.8	1053	45	4662.5	43.2	2205	23
4650	4637.5	2	375	0.6	52.8	1178	45				
4650	4612.5	3	235	0.7	42.5	1266	34				
4650	4587.5	4	148	0.7	38.6	1328	29				
4650	4562.5	5	232	0.7	37.6	3124	12				
4650	4537.5	6	136	0.7	35.7	2564	14				
4600	4612.5	1	764	0.6	54.1	800	68	4612.5	42.5	2102	25
4600	4587.5	2	332	0.6	43.0	1043	41				
4600	4562.5	3	193	0.6	39.8	1213	33				
4600	4537.5	4	258	0.6	41.2	2702	15				
4600	4512.5	5	141	0.6	35.6	2215	16				
4600	4487.5	6	119	0.6	40.8	2617	16				
4550	4562.5	1	1222	0.6	42.2	1280	33	4562.5	39.3	2224	21
4550	4537.5	2	462	0.6	41.4	1451	29				
4550	4512.5	3	534	0.6	40.9	3355	12				
4550	4487.5	4	253	0.6	37.4	2649	14				
4550	4462.5	5	173	0.6	42.6	2717	16				
4550	4437.5	6	74	0.6	30.0	1627	18				
4500	4512.5	1	2060	0.4	49.7	3236	15	4512.5	39.7	2928	16
4500	4487.5	2	1331	0.4	46.7	6272	7				
4500	4462.5	3	468	0.4	42.0	4411	10				
4500	4437.5	4	307	0.4	47.4	4822	10				
4500	4412.5	5	119	0.4	33.9	2804	12				
4450	4462.5	1	5560	0.3	41.2	11645	4	4462.5	39.6	4169	11
4450	4437.5	2	964	0.3	40.3	6057	7				
4450	4412.5	3	501	0.3	48.7	6296	8				
4450	4387.5	4	187	0.3	33.9	3917	9				
4400	4412.5	1	2160	0.3	39.3	4524	9	4412.5	39.5	3676	12
4400	4387.5	2	770	0.3	50.5	4838	10				
4400	4362.5	3	245	0.3	34.7	3079	11				
4350	4362.5	1	3960	0.3	46.3	8294	6	4362.5	40.3	4118	11
4350	4337.5	2	682	0.3	34.4	4285	8				
4300	4312.5	1	2770	0.4	33.2	4351	8	4312.5	33.4	3344	11



INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

IPFF97W

LINE : 97+00 W

FILE NAME : 97W

! - Fraser Filter - !  
!  
!

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	2040	1.4	24.1	916	26	5612.5	25.2	1595	20
5600	5587.5	2	660	1.4	26.0	889	29				
5600	5562.5	3	298	1.4	22.6	802	28				
5600	5537.5	4	229	1.4	19.0	1028	18				
5600	5512.5	5	371	1.4	29.0	2498	12				
5600	5487.5	6	365	1.4	30.6	3440	9				
5550	5562.5	1	1015	0.9	17.0	709	24	5562.5	24.3	1789	17
5550	5537.5	2	343	0.9	15.2	718	21				
5550	5512.5	3	236	0.9	12.3	989	12				
5550	5487.5	4	456	0.9	20.9	3183	7				
5550	5462.5	5	284	0.9	43.8	2974	15				
5550	5437.5	6	167	0.9	30.8	2448	13				
5500	5512.5	1	533	0.8	10.6	419	25	5512.5	25.4	1934	15
5500	5487.5	2	290	0.8	8.0	683	12				
5500	5462.5	3	517	0.8	18.7	2436	8				
5500	5437.5	4	308	0.8	40.2	2419	17				
5500	5412.5	5	243	0.8	39.1	2863	14				
5500	5387.5	6	128	0.8	40.6	2111	19				
5450	5462.5	1	359	0.5	5.0	451	11	5462.5	27.6	2074	14
5450	5437.5	2	515	0.5	15.2	1942	8				
5450	5412.5	3	286	0.5	37.1	2156	17				
5450	5387.5	4	155	0.5	26.1	1948	13				
5450	5362.5	5	111	0.5	41.2	2092	20				
5450	5337.5	6	63	0.5	39.5	1663	24				
5400	5412.5	1	889	0.5	12.7	1117	11	5412.5	32.0	2115	16
5400	5387.5	2	424	0.6	35.1	1332	26				
5400	5362.5	3	218	0.6	23.9	1370	17				
5400	5337.5	4	151	0.6	37.2	1581	24				
5400	5312.5	5	86	0.6	37.7	1351	28				
5400	5287.5	6	63	0.6	40.2	1385	29				
5350	5362.5	1	1640	0.9	35.4	1145	31	5362.5	35.7	1798	23
5350	5337.5	2	530	0.9	22.7	1110	20				
5350	5312.5	3	331	0.9	34.8	1386	25				
5350	5287.5	4	-174	1.0	35.6	1093	33				
5350	5262.5	5	124	1.0	38.2	1169	33				
5350	5237.5	6	55	1.0	40.2	726	55				
5300	5312.5	1	855	0.4	38.2	1343	28	5312.5	36.2	1580	25
5300	5287.5	2	368	0.4	42.8	1734	25				
5300	5262.5	3	163	0.4	40.1	1536	26				
5300	5237.5	4	93	0.4	40.3	1461	28				
5300	5212.5	5	38	0.4	42.4	895	47				
5300	5187.5	6	58	0.4	28.0	1913	15				
5250	5262.5	1	3660	1.1	57.2	2091	27	5262.5	41.0	1572	29
5250	5237.5	2	1024	1.1	50.1	1755	29				
5250	5212.5	3	486	1.1	50.4	1666	30				

5250	5187.5	4	180	1.2	50.0	942	53				
5250	5162.5	5	262	1.2	34.7	2058	17				
5250	5137.5	6	218	1.2	40.0	2397	17				
5200	5212.5	1	1936	0.8	46.1	1521	30	5212.5	41.0	1561	30
5200	5187.5	2	691	0.9	47.1	1447	33				
5200	5162.5	3	228	0.9	47.8	955	50				
5200	5137.5	4	313	0.9	31.6	2185	14				
5200	5112.5	5	250	0.9	38.2	2618	15				
5200	5087.5	6	140	0.9	43.4	2053	21				
5150	5162.5	1	2060	0.9	51.7	1438	36	5162.5	42.2	1676	30
5150	5137.5	2	518	1.0	50.1	976	51				
5150	5112.5	3	613	1.0	32.9	2311	14				
5150	5087.5	4	447	1.0	40.5	2809	14				
5150	5062.5	5	239	1.1	46.6	2048	23				
5150	5037.5	6	146	1.1	51.4	1751	29				
5100	5112.5	1	1476	0.3	49.5	3091	16	5112.5	43.4	1913	29
5100	5087.5	2	402	0.3	39.1	2526	15				
5100	5062.5	3	224	0.3	40.6	2815	14				
5100	5037.5	4	111	0.3	47.8	2325	21				
5100	5012.5	5	62	0.3	52.7	1948	27				
5100	4987.5	6	19	0.3	63.0	836	75				
5050	5062.5	1	2270	0.4	26.4	3566	7	5062.5	42.7	2287	23
5050	5037.5	2	846	0.4	35.5	3987	9				
5050	5012.5	3	342	0.4	43.3	3223	13				
5050	4987.5	4	160	0.4	50.9	2513	20				
5050	4962.5	5	42	0.4	64.4	990	65				
5050	4937.5	6	35	0.4	46.2	1155	40				
5000	5012.5	1	1153	0.3	55.1	2415	23	5012.5	49.0	2083	32
5000	4987.5	2	468	0.3	45.7	2941	16				
5000	4962.5	3	183	0.3	52.4	2300	23				
5000	4937.5	4	49	0.3	63.4	1026	62				
5000	4912.5	5	27	0.3	50.4	848	59				
5000	4887.5	6	17	0.3	57.4	748	77				
4950	4962.5	1	1915	0.3	36.2	4011	9	4962.5	49.8	1866	36
4950	4937.5	2	549	0.3	42.2	3449	12				
4950	4912.5	3	135	0.4	53.8	1272	42				
4950	4887.5	4	69	0.4	41.7	1084	38				
4950	4862.5	5	42	0.4	49.0	990	50				
4950	4837.5	6	51	0.4	43.5	1682	26				
4900	4912.5	1	1454	0.3	41.3	3045	14	4912.5	49.6	1703	37
4900	4887.5	2	304	0.3	51.3	1910	27				
4900	4862.5	3	132	0.3	38.5	1659	23				
4900	4837.5	4	68	0.3	46.6	1424	33				
4900	4812.5	5	102	0.4	42.1	2403	18				
4900	4787.5	6	83	0.4	39.2	2738	14				
4850	4862.5	1	1154	0.5	57.0	1450	39	4862.5	48.3	1540	38
4850	4837.5	2	365	0.5	41.2	1376	30				
4850	4812.5	3	160	0.5	48.9	1206	41				
4850	4787.5	4	165	0.5	44.1	2073	21				
4850	4762.5	5	128	0.5	35.8	2413	15				
4850	4737.5	6	116	0.5	36.5	3061	12				
4800	4812.5	1	1565	0.8	32.9	1229	27	4812.5	43.4	1780	30
4800	4787.5	2	435	0.8	48.0	1025	47				
4800	4762.5	3	423	0.8	44.2	1993	22				
4800	4737.5	4	298	0.8	34.8	2340	15				
4800	4712.5	5	257	0.8	40.9	3028	14				

4800	4687.5	6	176	0.8	48.6	2903	17				
4750	4762.5	1	1390	0.3	51.9	2911	18	4762.5	44.6	2160	25
4750	4737.5	2	255	0.3	46.4	1602	29				
4750	4712.5	3	237	0.3	48.7	2978	16				
4750	4687.5	4	113	0.3	43.6	2367	18				
4750	4662.5	5	72	0.3	49.8	2262	22				
4750	4637.5	6	73	0.3	36.8	3211	11				
4700	4712.5	1	1074	0.4	43.3	1687	26	4712.5	41.7	2494	18
4700	4687.5	2	403	0.4	35.3	1899	19				
4700	4662.5	3	262	0.4	41.2	2469	17				
4700	4637.5	4	143	0.4	49.3	2246	22				
4700	4612.5	5	138	0.4	37.8	3252	12				
4700	4587.5	6	114	0.4	33.6	3760	9				
4650	4662.5	1	957	0.2	40.3	3007	13	4662.5	41.5	2833	15
4650	4637.5	2	347	0.2	44.5	3270	14				
4650	4612.5	3	126	0.2	53.9	2375	23				
4650	4587.5	4	99	0.2	40.4	3110	13				
4650	4562.5	5	76	0.2	35.9	3581	10				
4650	4537.5	6	49	0.2	44.0	3233	14				
4600	4612.5	1	3200	0.4	30.5	5027	6	4612.5	42.3	3052	15
4600	4587.5	2	504	0.4	53.1	2375	22				
4600	4562.5	3	333	0.5	41.8	2511	17				
4600	4537.5	4	242	0.5	36.8	3041	12				
4600	4512.5	5	158	0.5	44.3	2978	15				
4600	4487.5	6	153	0.5	45.6	4038	11				
4550	4562.5	1	1550	0.4	46.5	2435	19	4562.5	42.0	2967	15
4550	4537.5	2	567	0.4	38.2	2672	14				
4550	4512.5	3	324	0.4	34.6	3054	11				
4550	4487.5	4	189	0.4	43.1	2969	15				
4550	4462.5	5	161	0.4	43.0	3793	11				
4550	4437.5	6	76	0.4	24.0	2507	10				
4500	4512.5	1	1503	0.3	42.1	3148	13	4512.5	38.8	3386	12
4500	4487.5	2	630	0.3	38.0	3958	10				
4500	4462.5	3	322	0.3	44.9	4046	11				
4500	4437.5	4	253	0.3	45.9	5299	9				
4500	4412.5	5	113	0.3	25.1	3550	7				
4450	4462.5	1	1696	0.3	43.2	3552	12	4462.5	40.5	3729	11
4450	4437.5	2	572	0.3	49.8	3594	14				
4450	4412.5	3	373	0.3	50.4	4687	11				
4450	4387.5	4	262	0.3	46.1	5487	8				
4400	4412.5	1	2620	0.4	40.5	4115	10	4412.5	41.1	3902	11
4400	4387.5	2	997	0.4	46.4	4698	10				
4400	4362.5	3	375	0.4	24.0	3534	7				
4350	4362.5	1	4370	0.7	46.6	3923	12	4362.5	34.9	4076	9
4350	4337.5	2	1232	0.7	21.9	3318	7				
4300	4312.5	1	1781	0.4	26.0	2798	9	4312.5	23.9	3532	8

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 98+00 W

FILE NAME : 98W

IPFF98W

;- Fraser Filter - ;  
; ;

P1 loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	918	1.0	18.9	577	33	5612.5	24.2	1574	18
5600	5587.5	2	503	1.0	20.5	948	22				
5600	5562.5	3	297	1.0	19.9	1120	18				
5600	5537.5	4	272	1.0	23.6	1709	14				
5600	5512.5	5	289	1.0	27.0	2724	10				
5600	5487.5	6	233	1.3	35.2	2365	15				
5550	5562.5	1	1192	1.3	13.8	576	24	5562.5	24.8	1768	16
5550	5537.5	2	599	1.3	14.4	869	17				
5550	5512.5	3	513	1.3	16.7	1488	11				
5550	5487.5	4	515	1.3	22.7	2489	9				
5550	5462.5	5	401	1.3	31.9	2907	11				
5550	5437.5	6	222	1.3	47.2	2253	21				
5500	5512.5	1	1292	1.3	9.4	624	15	5512.5	27.0	1892	15
5500	5487.5	2	903	1.4	14.7	1216	12				
5500	5462.5	3	813	1.4	19.1	2189	9				
5500	5437.5	4	604	1.4	29.0	2711	11				
5500	5412.5	5	320	1.4	46.1	2154	21				
5500	5387.5	6	165	1.4	48.0	1555	31				
5450	5462.5	1	1820	1.1	11.4	1040	11	5462.5	30.2	2013	16
5450	5437.5	2	1145	1.1	15.5	1962	8				
5450	5412.5	3	748	1.1	26.5	2564	10				
5450	5387.5	4	359	1.1	45.0	2051	22				
5450	5362.5	5	172	1.1	47.7	1474	32				
5450	5337.5	6	146	1.4	37.0	1376	27				
5400	5412.5	1	2850	1.2	12.2	1492	8	5412.5	34.1	2000	19
5400	5387.5	2	1439	1.3	24.0	2087	12				
5400	5362.5	3	609	1.3	45.0	1766	25				
5400	5337.5	4	268	1.3	46.6	1295	36				
5400	5312.5	5	211	1.3	37.0	1530	24				
5400	5287.5	6	104	1.3	39.0	1056	37				
5350	5362.5	1	3850	1.4	20.3	1728	12	5362.5	39.2	1781	25
5350	5337.5	2	1286	1.4	45.7	1731	26				
5350	5312.5	3	491	1.4	48.2	1322	36				
5350	5287.5	4	352	1.4	37.9	1580	24				
5350	5262.5	5	163	1.4	40.6	1097	37				
5350	5237.5	6	85	1.4	44.5	801	56				
5300	5312.5	1	3270	1.0	43.4	2055	21	5312.5	43.4	1568	30
5300	5287.5	2	904	1.0	51.5	1704	30				
5300	5262.5	3	528	1.0	39.9	1991	20				
5300	5237.5	4	222	1.0	43.0	1395	31				
5300	5212.5	5	104	1.0	46.4	980	47				
5300	5187.5	6	134	1.0	32.4	1768	18				
5250	5262.5	1	1390	0.4	47.4	2183	22	5262.5	41.8	1625	29
5250	5237.5	2	541	0.4	36.9	2549	14				
5250	5212.5	3	198	0.4	40.5	1866	22				

5250	5187.5	4	81	0.4	45.7	1272	36				
5250	5162.5	5	99	0.4	32.5	2333	14				
5250	5137.5	6	91	0.4	35.7	3002	12				
5200	5212.5	1	1295	0.4	39.9	2034	20	5212.5	39.8	1719	27
5200	5187.5	2	355	0.4	42.5	1673	25				
5200	5162.5	3	124	0.4	47.8	1169	41				
5200	5137.5	4	140	0.4	34.4	2199	16				
5200	5112.5	5	126	0.4	37.1	2969	12				
5200	5087.5	6	44	0.4	46.0	1451	32				
5150	5162.5	1	1098	0.5	49.4	1380	36	5162.5	42.4	1641	31
5150	5137.5	2	261	0.6	51.8	820	63				
5150	5112.5	3	272	0.6	37.6	1709	22				
5150	5087.5	4	234	0.6	41.0	2450	17				
5150	5062.5	5	75	0.6	49.6	1178	42				
5150	5037.5	6	86	0.6	52.1	1891	28				
5100	5112.5	1	1785	1.3	48.6	863	56	5112.5	43.1	1716	30
5100	5087.5	2	1232	1.4	36.7	1659	22				
5100	5062.5	3	945	1.4	41.1	2545	16				
5100	5037.5	4	272	1.4	49.3	1221	40				
5100	5012.5	5	303	1.4	51.3	2040	25				
5100	4987.5	6	194	1.5	42.6	1707	25				
5050	5062.5	1	1037	0.4	39.7	1629	24	5062.5	42.5	1982	23
5050	5037.5	2	548	0.4	43.8	2582	17				
5050	5012.5	3	131	0.4	50.8	1235	41				
5050	4987.5	4	139	0.4	52.0	2183	24				
5050	4962.5	5	83	0.4	43.8	1956	22				
5050	4937.5	6	58	0.4	43.2	1913	23				
5000	5012.5	1	2050	0.6	49.6	2147	23	5012.5	46.6	1929	27
5000	4987.5	2	331	0.6	54.0	1040	52				
5000	4962.5	3	316	0.6	53.2	1985	27				
5000	4937.5	4	178	0.6	45.2	1864	24				
5000	4912.5	5	118	0.6	45.1	1854	24				
5000	4887.5	6	59	0.6	51.5	1297	40				
4950	4962.5	1	1147	0.8	50.3	901	56	4962.5	47.8	1626	32
4950	4937.5	2	866	0.8	48.0	2040	24				
4950	4912.5	3	390	0.8	41.1	1838	22				
4950	4887.5	4	242	0.8	41.1	1901	22				
4950	4862.5	5	110	0.9	48.6	1192	41				
4950	4837.5	6	89	0.8	45.2	1468	31				
4900	4912.5	1	1536	0.5	43.9	1930	23	4912.5	45.5	1837	26
4900	4887.5	2	501	0.5	37.7	1889	20				
4900	4862.5	3	275	0.5	38.4	2073	19				
4900	4837.5	4	93	0.4	47.1	1461	32				
4900	4812.5	5	63	0.4	45.3	1484	31				
4900	4787.5	6	79	0.4	38.2	2606	15				
4850	4862.5	1	966	0.4	47.0	1517	31	4862.5	43.7	1762	26
4850	4837.5	2	445	0.4	44.2	2097	21				
4850	4812.5	3	164	0.5	52.3	1237	42				
4850	4787.5	4	107	0.5	48.1	1345	36				
4850	4762.5	5	137	0.5	39.7	2582	15				
4850	4737.5	6	65	0.5	32.3	1715	19				
4800	4812.5	1	1149	0.3	48.7	2406	20	4812.5	44.5	1874	26
4800	4787.5	2	272	0.3	56.4	1709	33				
4800	4762.5	3	131	0.3	51.6	1646	31				
4800	4737.5	4	139	0.3	42.4	2911	15				
4800	4712.5	5	59	0.3	34.9	1854	19				

4800	4687.5	6	59	0.3	40.7	2595	16				
4750	4762.5	1	1559	0.3	49.3	3265	15	4762.5	44.3	2074	24
4750	4737.5	2	384	0.3	47.4	2413	20				
4750	4712.5	3	296	0.3	40.1	3720	11				
4750	4687.5	4	100	0.3	35.5	2094	17				
4750	4662.5	5	81	0.3	38.3	2545	15				
4750	4637.5	6	55	0.3	45.5	2419	19				
4700	4712.5	1	1467	0.5	44.4	1843	24	4712.5	41.0	2233	20
4700	4687.5	2	809	0.5	37.9	3050	12				
4700	4662.5	3	231	0.5	33.8	1742	19				
4700	4637.5	4	188	0.5	38.3	2362	16				
4700	4612.5	5	117	0.5	44.2	2205	20				
4700	4587.5	6	87	0.5	37.7	2296	16				
4650	4662.5	1	1516	0.3	36.5	3175	11	4662.5	38.5	2462	16
4650	4637.5	2	261	0.3	34.5	1640	21				
4650	4612.5	3	180	0.3	37.7	2262	17				
4650	4587.5	4	98	0.3	44.9	2053	22				
4650	4562.5	5	68	0.3	39.1	2136	18				
4650	4537.5	6	85	0.3	36.9	3738	10				
4600	4612.5	1	728	0.2	38.0	2287	17	4612.5	38.6	2373	17
4600	4587.5	2	358	0.3	36.1	2699	13				
4600	4562.5	3	146	0.3	45.7	2202	21				
4600	4537.5	4	85	0.3	40.5	2136	19				
4600	4512.5	5	99	0.3	37.7	3732	10				
4600	4487.5	6	59	0.3	39.2	3114	13				
4550	4562.5	1	2920	0.3	29.5	7339	4	4562.5	39.1	3150	14
4550	4537.5	2	492	0.3	38.7	3710	10				
4550	4512.5	3	197	0.3	39.8	2971	13				
4550	4487.5	4	204	0.3	35.5	5127	7				
4550	4462.5	5	112	0.3	36.8	4222	9				
4550	4437.5	6	84	0.3	38.7	4296	9				
4500	4512.5	1	2210	0.6	34.5	2314	15	4512.5	38.8	3133	14
4500	4487.5	2	676	0.6	33.7	2124	16				
4500	4462.5	3	672	0.6	33.8	4222	8				
4500	4437.5	4	353	0.6	36.2	3697	10				
4500	4412.5	5	251	0.6	37.2	3943	9				
4450	4462.5	1	2700	0.6	37.2	2827	13	4462.5	37.3	3541	11
4450	4437.5	2	1558	0.6	35.8	4895	7				
4450	4412.5	3	669	0.6	36.7	4203	9				
4450	4387.5	4	388	0.6	39.6	4063	10				
4400	4412.5	1	7220	0.6	34.0	7561	4	4412.5	37.0	4592	9
4400	4387.5	2	2080	0.6	36.0	6535	6				
4400	4362.5	3	880	0.6	41.0	5529	7				
4350	4362.5	1	4600	0.4	27.0	7226	4	4362.5	36.9	4797	8
4350	4337.5	2	1261	0.4	37.2	5942	6				
4300	4312.5	1	5570	0.5	33.0	6999	5	4312.5	37.8	5129	8

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 99+00 W

FILE NAME : 99W

1PFF99W

Fraser Filter

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	1879	1.3	15.1	908	17	5612.5	35.5	1210	29
5600	5587.5	2	496	1.1	32.3	850	38				
5600	5562.5	3	346	1.1	19.1	1186	16				
5600	5537.5	4	235	1.1	56.0	1342	42				
5600	5512.5	5	151	1.1	40.1	1294	31				
5600	5487.5	6	140	1.1	50.5	1679	30				
5550	5562.5	1	1523	1.0	24.4	957	25	5562.5	32.2	1382	24
5550	5537.5	2	671	1.1	22.4	1150	19				
5550	5512.5	3	405	1.0	23.9	1527	16				
5550	5487.5	4	245	1.0	23.8	1539	15				
5550	5462.5	5	164	1.0	28.0	1546	18				
5550	5437.5	6	162	1.0	33.7	2138	16				
5500	5512.5	1	1185	0.4	25.2	1861	14	5512.5	31.7	1862	19
5500	5487.5	2	521	0.4	24.5	2455	10				
5500	5462.5	3	260	0.4	25.8	2450	11				
5500	5437.5	4	147	0.4	27.8	2309	12				
5500	5412.5	5	135	0.4	33.4	3181	11				
5500	5387.5	6	69	0.4	41.9	2276	18				
5450	5462.5	1	3100	0.9	24.5	2164	11	5462.5	34.3	2023	19
5450	5437.5	2	1107	0.9	29.0	2318	13				
5450	5412.5	3	511	0.9	30.3	2140	14				
5450	5387.5	4	417	0.9	35.4	2911	12				
5450	5362.5	5	193	1.0	43.5	1819	24				
5450	5337.5	6	101	1.0	45.7	1333	34				
5400	5412.5	1	2660	0.5	30.2	3343	9	5412.5	36.0	2206	18
5400	5387.5	2	830	0.6	29.0	2608	11				
5400	5362.5	3	566	0.6	35.4	3556	10				
5400	5337.5	4	225	0.6	44.2	2356	19				
5400	5312.5	5	108	0.6	46.3	1696	27				
5400	5287.5	6	74	0.6	45.0	1627	28				
5350	5362.5	1	1795	0.4	25.7	2820	9	5362.5	38.6	2283	20
5350	5337.5	2	909	0.4	32.9	4284	8				
5350	5312.5	3	302	0.4	42.7	2846	15				
5350	5287.5	4	128	0.4	46.3	2011	23				
5350	5262.5	5	77	0.4	43.7	1814	24				
5350	5237.5	6	30	0.4	49.5	990	50				
5300	5312.5	1	2270	0.4	23.6	3566	7	5312.5	41.0	2247	23
5300	5287.5	2	602	0.4	37.3	2837	13				
5300	5262.5	3	216	0.4	42.9	2036	21				
5300	5237.5	4	116	0.4	43.9	1822	24				
5300	5212.5	5	43	0.4	49.6	1013	49				
5300	5187.5	6	57	0.7	44.2	1074	41				
5250	5262.5	1	3410	1.0	33.3	2143	16	5262.5	43.5	1802	28
5250	5237.5	2	976	1.0	41.7	1840	23				
5250	5212.5	3	450	1.0	43.2	1696	25				

5250	5187.5	4	151	1.0	50.6	949	53				
5250	5162.5	5	131	1.1	45.1	1122	40				
5250	5137.5	6	212	1.1	33.3	2543	13				
5200	5212.5	1	1729	0.6	35.9	1811	20	5212.5	43.7	1597	31
5200	5187.5	2	560	0.6	39.7	1759	23				
5200	5162.5	3	162	0.6	49.8	1018	49				
5200	5137.5	4	135	0.7	44.5	1212	37				
5200	5112.5	5	209	0.7	32.9	2814	12				
5200	5087.5	6	72	0.7	43.1	1357	32				
5150	5162.5	1	701	0.4	38.8	1101	35	5162.5	44.0	1475	35
5150	5137.5	2	152	0.4	51.6	716	72				
5150	5112.5	3	113	0.4	46.2	1065	43				
5150	5087.5	4	162	0.4	34.0	2545	13				
5150	5062.5	5	53	0.4	44.8	1249	36				
5150	5037.5	6	45	0.4	49.8	1484	34				
5100	5112.5	1	851	1.1	53.6	486	110	5112.5	45.4	1400	41
5100	5087.5	2	517	1.1	48.2	886	54				
5100	5062.5	3	682	1.1	35.1	2337	15				
5100	5037.5	4	210	1.1	45.5	1200	38				
5100	5012.5	5	194	1.1	50.7	1662	31				
5100	4987.5	6	140	1.1	50.6	1679	30				
5050	5062.5	1	497	0.4	46.4	781	59	5062.5	44.3	1635	32
5050	5037.5	2	495	0.4	37.7	2333	16				
5050	5012.5	3	132	0.4	48.0	1244	39				
5050	4987.5	4	108	0.4	50.8	1696	30				
5050	4962.5	5	75	0.4	52.8	1767	30				
5050	4937.5	6	69	0.4	47.0	2276	21				
5000	5012.5	1	716	0.3	37.0	1500	25	5012.5	45.0	1803	28
5000	4987.5	2	145	0.3	49.5	911	54				
5000	4962.5	3	119	0.3	53.3	1495	36				
5000	4937.5	4	74	0.3	54.4	1550	35				
5000	4912.5	5	66	0.3	45.3	2073	22				
5000	4887.5	6	49	0.3	48.5	2155	23				
4950	4962.5	1	668	0.7	49.8	600	83	4962.5	48.9	1551	35
4950	4937.5	2	440	0.7	52.9	1185	45				
4950	4912.5	3	253	0.7	53.8	1363	39				
4950	4887.5	4	216	0.7	45.3	1939	23				
4950	4862.5	5	158	0.7	48.6	2127	23				
4950	4837.5	6	94	0.8	42.4	1550	27				
4900	4912.5	1	1745	0.6	37.7	1827	21	4912.5	46.7	1830	27
4900	4887.5	2	523	0.6	44.8	1643	27				
4900	4862.5	3	402	0.7	37.0	2165	17				
4900	4837.5	4	259	0.7	41.8	2325	18				
4900	4812.5	5	135	0.7	38.5	1818	21				
4900	4787.5	6	140	0.7	33.8	2639	13				
4850	4862.5	1	586	0.4	42.8	920	46	4862.5	43.6	1822	25
4850	4837.5	2	322	0.4	38.2	1517	25				
4850	4812.5	3	187	0.4	43.1	1762	24				
4850	4787.5	4	92	0.4	39.7	1445	27				
4850	4762.5	5	90	0.4	35.3	2121	17				
4850	4737.5	6	43	0.4	31.3	1418	22				
4800	4812.5	1	1375	0.6	43.1	1440	30	4812.5	41.1	1835	23
4800	4787.5	2	507	0.6	46.5	1593	29				
4800	4762.5	3	211	0.6	42.1	1326	32				
4800	4737.5	4	177	0.6	39.1	1854	21				
4800	4712.5	5	93	0.6	33.7	1461	23				



4800	4687.5	6	70	0.6	42.0	1539	27				
4750	4762.5	1	1047	0.4	49.1	1645	30	4762.5	41.2	1746	24
4750	4737.5	2	310	0.4	44.1	1461	30				
4750	4712.5	3	204	0.4	41.0	1923	21				
4750	4687.5	4	92	0.4	35.6	1445	25				
4750	4662.5	5	64	0.4	43.4	1508	29				
4750	4637.5	6	47	0.4	44.9	1550	29				
4700	4712.5	1	2280	0.5	38.8	2865	14	4712.5	39.4	1776	23
4700	4687.5	2	599	0.5	41.9	2258	19				
4700	4662.5	3	204	0.5	35.8	1538	23				
4700	4637.5	4	121	0.5	43.1	1521	28				
4700	4612.5	5	82	0.5	43.9	1546	28				
4700	4587.5	6	95	0.5	36.9	2507	15				
4650	4662.5	1	1641	0.4	44.4	2578	17	4662.5	39.6	1891	22
4650	4637.5	2	341	0.4	38.3	1607	24				
4650	4612.5	3	166	0.4	44.3	1565	28				
4650	4587.5	4	128	0.4	43.1	2011	21				
4650	4562.5	5	94	0.4	38.0	2215	17				
4650	4537.5	6	88	0.4	41.2	2903	14				
4600	4612.5	1	1742	0.6	32.8	1824	18	4612.5	39.2	1828	23
4600	4587.5	2	511	0.6	40.8	1605	25				
4600	4562.5	3	202	0.6	40.2	1269	32				
4600	4537.5	4	195	0.6	34.7	2042	17				
4600	4512.5	5	140	0.5	38.2	2639	14				
4600	4487.5	6	101	0.5	40.4	2665	15				
4550	4562.5	1	3220	0.4	30.2	5058	6	4562.5	38.7	2354	19
4550	4537.5	2	513	0.4	29.1	2417	12				
4550	4512.5	3	367	0.4	28.0	3459	8				
4550	4487.5	4	231	0.4	31.8	3629	9				
4550	4462.5	5	159	0.4	35.2	3746	9				
4550	4437.5	6	62	0.4	43.8	2045	21				
4500	4512.5	1	2210	0.6	23.2	2314	10	4512.5	35.8	2557	16
4500	4487.5	2	1110	0.6	23.6	3487	7				
4500	4462.5	3	542	0.6	27.5	3405	8				
4500	4437.5	4	335	0.6	31.4	3508	9				
4500	4412.5	5	113	0.6	40.9	1775	23				
4450	4462.5	1	1986	0.2	26.6	6239	4	4462.5	34.5	3264	13
4450	4437.5	2	666	0.2	29.2	6277	5				
4450	4412.5	3	341	0.3	32.6	4285	8				
4450	4387.5	4	92	0.3	41.3	1927	21				
4400	4412.5	1	3550	0.5	31.0	4461	7	4412.5	35.9	3344	13
4400	4387.5	2	1315	0.5	32.8	4957	7				
4400	4362.5	3	256	0.5	41.5	1930	22				
4350	4362.5	1	6660	0.4	17.3	10462	2	4362.5	35.2	3618	14
4350	4337.5	2	662	0.5	30.4	2496	12				
4300	4312.5	1	2280	0.4	24.1	3581	7	4312.5	37.0	2292	18

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

IPFF100W

LINE : 100+00 W

FILE NAME : 100W

;- Fraser Filter - ;  
|  
|

P1 loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	1033	0.8	15.7	811	19	5612.5	24.5	1517	17
5600	5587.5	2	512	0.8	26.3	1206	22				
5600	5562.5	3	300	0.8	30.8	1414	22				
5600	5537.5	4	222	0.8	28.3	1744	16				
5600	5512.5	5	186	0.9	25.0	1948	13				
5600	5487.5	6	135	0.9	20.9	1979	11				
5550	5562.5	1	937	0.2	28.5	2944	10	5562.5	26.7	2855	12
5550	5537.5	2	359	0.2	31.2	3383	9				
5550	5512.5	3	196	0.2	27.3	3695	7				
5550	5487.5	4	143	0.2	24.9	4492	6				
5550	5462.5	5	93	0.2	19.7	4383	4				
5550	5437.5	6	64	0.2	30.9	4222	7				
5500	5512.5	1	3880	0.9	34.1	2709	13	5512.5	27.8	3091	10
5500	5487.5	2	1389	1.0	28.7	2618	11				
5500	5462.5	3	967	1.0	27.3	3646	7				
5500	5437.5	4	581	1.0	21.7	3651	6				
5500	5412.5	5	375	1.0	32.0	3534	9				
5500	5387.5	6	224	1.0	34.3	2956	12				
5450	5462.5	1	1915	0.5	32.3	2406	13	5462.5	28.9	3307	10
5450	5437.5	2	1066	0.5	31.0	4019	8				
5450	5412.5	3	557	0.5	25.3	4200	6				
5450	5387.5	4	323	0.5	34.9	4059	9				
5450	5362.5	5	180	0.5	37.1	3393	11				
5450	5337.5	6	98	0.5	39.3	2586	15				
5400	5412.5	1	2940	0.5	34.9	3695	9	5412.5	31.9	3355	11
5400	5387.5	2	1127	0.5	29.1	4249	7				
5400	5362.5	3	565	0.6	37.5	3550	11				
5400	5337.5	4	289	0.6	39.7	3026	13				
5400	5312.5	5	144	0.6	44.0	2262	19				
5400	5287.5	6	57	0.6	49.1	1253	39				
5350	5362.5	1	4080	0.6	26.6	4273	6	5362.5	35.4	3136	15
5350	5337.5	2	1291	0.6	35.9	4056	9				
5350	5312.5	3	531	0.6	39.5	3336	12				
5350	5287.5	4	229	0.6	43.6	2398	18				
5350	5262.5	5	80	0.6	49.4	1257	39				
5350	5237.5	6	56	0.6	51.9	1232	42				
5300	5312.5	1	1796	0.2	27.6	5642	5	5312.5	39.7	2957	18
5300	5287.5	2	538	0.2	35.2	5071	7				
5300	5262.5	3	178	0.2	40.9	3355	12				
5300	5237.5	4	56	0.2	44.7	1759	25				
5300	5212.5	5	38	0.2	48.0	1791	27				
5300	5187.5	6	41	0.4	37.7	1352	28				
5250	5262.5	1	2750	0.5	33.1	3456	10	5262.5	41.5	2330	22
5250	5237.5	2	676	0.5	39.2	2548	15				
5250	5212.5	3	182	0.5	36.0	1372	26				

5250	5187.5	4	102	0.5	52.7	1282	41				
5250	5162.5	5	71	0.5	46.6	1338	35				
5250	5137.5	6	72	0.5	29.5	1900	16				
5200	5212.5	1	2070	0.4	39.4	3252	12	5212.5	43.3	1874	26
5200	5187.5	2	325	0.4	39.6	1532	26				
5200	5162.5	3	159	0.4	53.7	1499	36				
5200	5137.5	4	101	0.4	48.2	1587	30				
5200	5112.5	5	102	0.5	32.6	1923	17				
5200	5087.5	6									
5150	5162.5	1	1589	1.1	42.9	908	47	5162.5	43.4	1510	30
5150	5137.5	2	390	0.5	42.3	1470	29				
5150	5112.5	3	187	0.5	44.7	1410	32				
5150	5087.5	4	174	0.6	33.0	1822	18				
5150	5062.5	5	108	0.6	42.6	1696	25				
5150	5037.5	6	83	0.6	43.6	1825	24				
5100	5112.5	1	1805	0.8	47.0	1418	33	5112.5	43.8	1610	28
5100	5087.5	2	523	0.8	49.3	1232	40				
5100	5062.5	3	405	0.8	36.2	1909	19				
5100	5037.5	4	229	0.8	45.5	1799	25				
5100	5012.5	5	166	0.8	45.3	1956	23				
5100	4987.5	6	107	0.8	46.2	1765	26				
5050	5062.5	1	829	0.3	54.6	1736	31	5062.5	43.5	1776	25
5050	5037.5	2	398	0.3	42.0	2501	17				
5050	5012.5	3	161	0.3	49.4	2023	24				
5050	4987.5	4	101	0.3	48.7	2115	23				
5050	4962.5	5	58	0.3	48.8	1822	27				
5050	4937.5	6	41	0.3	45.7	1803	25				
5000	5012.5	1	2060	0.4	43.6	3236	13	5012.5	43.9	2043	22
5000	4987.5	2	549	0.4	50.3	2587	19				
5000	4962.5	3	288	0.5	50.4	2171	23				
5000	4937.5	4	147	0.5	50.0	1847	27				
5000	4912.5	5	95	0.5	47.0	1791	26				
5000	4887.5	6	90	0.5	47.1	2375	20				
4950	4962.5	1	1387	0.3	49.7	2905	17	4962.5	45.5	2110	21
4950	4937.5	2	447	0.3	52.6	2809	19				
4950	4912.5	3	182	0.3	51.2	2287	22				
4950	4887.5	4	103	0.3	47.9	2157	22				
4950	4862.5	5	89	0.3	49.1	2796	18				
4950	4837.5	6	86	0.3	44.5	3782	12				
4900	4912.5	1	2420	0.6	49.0	2534	19	4912.5	46.9	2353	21
4900	4887.5	2	649	0.6	51.5	2039	25				
4900	4862.5	3	311	0.6	44.6	1954	23				
4900	4837.5	4	243	0.6	45.3	2545	18				
4900	4812.5	5	216	0.6	41.4	3393	12				
4900	4787.5	6	166	0.6	35.3	3651	10				
4850	4862.5	1	1371	0.4	45.6	2154	21	4862.5	44.9	2428	20
4850	4837.5	2	468	0.4	44.2	2205	20				
4850	4812.5	3	287	0.4	45.8	2705	17				
4850	4787.5	4	213	0.4	42.2	3346	13				
4850	4762.5	5	145	0.4	35.4	3416	10				
4850	4737.5	6	35	0.4	34.2	1155	30				
4800	4812.5	1	2000	0.6	38.4	2094	18	4812.5	42.1	2566	18
4800	4787.5	2	884	0.6	43.7	2777	16				
4800	4762.5	3	517	0.6	42.2	3248	13				
4800	4737.5	4	328	0.6	36.1	3435	11				
4800	4712.5	5	73	0.6	34.4	1147	30				

4800	4687.5	6	96	0.6	40.3	2111	19				
4750	4762.5	1	2450	0.6	33.1	2566	13	4762.5	40.2	2613	17
4750	4737.5	2	825	0.6	39.7	2592	15				
4750	4712.5	3	445	0.6	41.2	2796	15				
4750	4687.5	4	90	0.6	34.3	942	36				
4750	4662.5	5	116	0.6	41.0	1822	23				
4750	4637.5	6	103	0.6	37.1	2265	16				
4700	4712.5	1	1304	0.4	36.1	2048	18	4712.5	38.0	2425	19
4700	4687.5	2	513	0.4	33.2	2417	14				
4700	4662.5	3	86	0.4	32.9	811	41				
4700	4637.5	4	112	0.4	40.0	1759	23				
4700	4612.5	5	90	0.4	35.1	2121	17				
4700	4587.5	6	81	0.4	40.8	2672	15				
4650	4662.5	1	1515	0.5	32.7	1904	17	4662.5	36.7	2190	19
4650	4637.5	2	765	0.5	29.6	2884	10				
4650	4612.5	3	222	0.5	38.5	1674	23				
4650	4587.5	4	158	0.5	35.2	1985	18				
4650	4562.5	5	139	0.5	39.6	2620	15				
4650	4537.5	6	91	0.5	42.2	2401	18				
4600	4612.5	1	700	0.6	26.2	733	36	4612.5	36.6	1951	21
4600	4587.5	2	593	0.6	31.9	1853	17				
4600	4562.5	3	324	0.6	30.0	2036	15				
4600	4537.5	4	258	0.6	35.2	2702	13				
4600	4512.5	5	149	0.6	38.2	2340	16				
4600	4487.5	6	133	0.6	50.3	2925	17				
4550	4562.5	1	6560	1.0	19.5	4122	5	4562.5	35.8	2396	16
4550	4537.5	2	1373	1.0	21.0	2588	8				
4550	4512.5	3	884	1.1	26.5	3030	9				
4550	4487.5	4	440	1.1	30.1	2513	12				
4550	4462.5	5	344	1.1	42.6	2947	14				
4550	4437.5	6	151	1.1	35.8	1811	20				
4500	4512.5	1	1188	0.3	20.3	2488	8	4512.5	33.0	2467	14
4500	4487.5	2	506	0.3	26.2	3179	8				
4500	4462.5	3	192	0.3	28.6	2413	12				
4500	4437.5	4	126	0.3	41.6	2639	16				
4500	4412.5	5	53	0.3	36.0	1665	22				
4450	4462.5	1	1964	0.3	27.1	4113	7	4462.5	33.9	2642	14
4450	4437.5	2	433	0.3	27.7	2721	10				
4450	4412.5	3	242	0.3	40.4	3041	13				
4450	4387.5	4	87	0.3	35.7	1822	20				
4400	4412.5	1	1601	0.2	28.9	5030	6	4412.5	34.3	2671	15
4400	4387.5	2	391	0.2	38.9	3685	11				
4400	4362.5	3	112	0.2	31.8	2111	15				
4350	4362.5	1	614	0.3	31.9	1286	25	4362.5	34.5	2363	17
4350	4337.5	2	328	0.3	29.4	2061	14				
4300	4312.5	1	1103	0.3	30.3	2310	13	4312.5	28.4	1963	17

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 101+00 W

FILE NAME : 101W

IPFF101W

Fraser Filter

P1 loc.	Plot Pt.	N	Vp	I	Ma	Pa	Plot Pt.	Ma	Pa	MF
(northing)	(northing)		(mV)	(amps)	(mSec.)	(ohm-m.)	(northing)	(mSec.)	(ohm-m.)	
5600	5612.5	1	1793	0.4	27.7	2816	10 5612.5	25.0	3006	10
5600	5587.5	2	661	0.5	22.0	2492	9			
5600	5562.5	3	411	0.5	29.4	3099	9			
5600	5537.5	4	160	0.5	31.9	2011	16			
5600	5512.5	5	120	0.5	22.3	2262	10			
5600	5487.5	6	203	0.5	16.9	5357	3			
5550	5562.5	1	1881	0.5	17.8	2364	8 5562.5	23.5	3101	9
5550	5537.5	2	921	0.6	26.2	2893	9			
5550	5512.5	3	309	0.6	30.1	1942	16			
5550	5487.5	4	215	0.6	20.2	2251	9			
5550	5462.5	5	360	0.6	16.2	5655	3			
5550	5437.5	6	201	0.7	25.2	3789	7			
5500	5512.5	1	3590	0.4	32.9	5639	6 5512.5	27.3	3823	9
5500	5487.5	2	726	0.5	38.3	2737	14			
5500	5462.5	3	375	0.5	28.9	2827	10			
5500	5437.5	4	554	0.5	25.4	6962	4			
5500	5412.5	5	284	0.5	32.2	5353	6			
5500	5387.5	6	173	0.5	34.1	4565	7			
5450	5462.5	1	2200	0.4	35.5	3456	10 5462.5	29.1	4002	9
5450	5437.5	2	713	0.4	30.6	3360	9			
5450	5412.5	3	905	0.5	25.2	6824	4			
5450	5387.5	4	432	0.5	33.9	5429	6			
5450	5362.5	5	244	0.5	35.1	4599	8			
5450	5337.5	6	101	0.5	42.2	2665	16			
5400	5412.5	1	2430	0.6	33.8	2545	13 5412.5	30.9	4248	9
5400	5387.5	2	1911	0.6	29.0	6004	5			
5400	5362.5	3	798	0.6	33.4	5014	7			
5400	5337.5	4	378	0.5	41.2	4750	9			
5400	5312.5	5	129	0.5	45.5	2432	19			
5400	5287.5	6	88	0.5	46.2	2322	20			
5350	5362.5	1	2820	0.4	25.5	4430	6 5362.5	34.2	4314	10
5350	5337.5	2	996	0.4	30.9	4694	7			
5350	5312.5	3	377	0.4	41.5	3553	12			
5350	5287.5	4	119	0.4	45.6	1869	24			
5350	5262.5	5	62	0.3	46.3	1948	24			
5350	5237.5	6	36	0.2	45.8	2375	19			
5300	5312.5	1	4600	0.7	21.6	4129	5 5312.5	38.5	3380	14
5300	5287.5	2	1402	0.7	36.0	3775	10			
5300	5262.5	3	453	0.8	41.3	2135	19			
5300	5237.5	4	245	0.8	41.3	1924	21			
5300	5212.5	5	149	0.8	43.9	1755	25			
5300	5187.5	6	115	0.8	45.0	1897	24			
5250	5262.5	1	3540	0.4	32.4	5561	6 5262.5	40.2	2929	16
5250	5237.5	2	733	0.4	37.7	3454	11			
5250	5212.5	3	302	0.4	35.4	2846	12			

5250	5187.5	4	153	0.4	38.4	2403	16				
5250	5162.5	5	103	0.4	39.9	2427	16				
5250	5137.5	6	68	0.4	30.1	2243	13				
5200	5212.5	1	2030	0.5	41.6	2551	16	5212.5	40.4	2339	18
5200	5187.5	2	657	0.5	36.1	2477	15				
5200	5162.5	3	301	0.5	40.2	2269	18				
5200	5137.5	4	187	0.5	40.3	2350	17				
5200	5112.5	5	113	0.5	30.5	2130	14				
5200	5087.5	6	100	0.5	34.5	2639	13				
5150	5162.5	1	2010	0.7	35.3	1804	20	5162.5	38.6	2238	18
5150	5137.5	2	521	0.5	39.5	1964	20				
5150	5112.5	3	294	0.5	40.7	2217	18				
5150	5087.5	4	178	0.5	31.5	2237	14				
5150	5062.5	5	155	0.5	39.8	2922	14				
5150	5037.5	6	70	0.5	30.1	1847	16				
5100	5112.5	1	1450	0.6	39.6	1518	26	5112.5	38.4	2085	19
5100	5087.5	2	468	0.5	42.7	1764	24				
5100	5062.5	3	252	0.6	35.8	1583	23				
5100	5037.5	4	213	0.6	42.3	2231	19				
5100	5012.5	5	94	0.6	33.4	1477	23				
5100	4987.5	6	70	0.6	41.9	1539	27				
5050	5062.5	1	2440	0.5	44.6	3066	15	5062.5	39.4	2152	19
5050	5037.5	2	589	0.5	42.6	2220	19				
5050	5012.5	3	392	0.5	41.7	2737	15				
5050	4987.5	4	145	0.5	46.9	1822	26				
5050	4962.5	5	100	0.5	46.7	1885	25				
5050	4937.5	6	74	0.5	46.8	1953	24				
5000	5012.5	1	2300	0.4	38.0	3613	11	5012.5	40.0	2382	18
5000	4987.5	2	1046	0.4	40.0	4929	8				
5000	4962.5	3	315	0.5	45.9	2375	19				
5000	4937.5	4	189	0.5	47.7	2375	20				
5000	4912.5	5	122	0.5	48.9	2300	21				
5000	4887.5	6	112	0.5	44.4	2956	15				
4950	4962.5	1	4210	0.4	33.2	6613	5	4962.5	42.8	2838	17
4950	4937.5	2	742	0.4	42.7	3497	12				
4950	4912.5	3	348	0.4	46.3	3280	14				
4950	4887.5	4	189	0.4	50.0	2969	17				
4950	4862.5	5	151	0.4	46.1	3558	13				
4950	4837.5	6	112	0.4	48.7	3695	13				
4900	4912.5	1	3790	0.4	24.8	5953	4	4912.5	42.8	3039	16
4900	4887.5	2	1083	0.4	36.6	5104	7				
4900	4862.5	3	397	0.4	43.8	3742	12				
4900	4837.5	4	259	0.4	41.5	4068	10				
4900	4812.5	5	161	0.4	45.1	3793	12				
4900	4787.5	6	110	0.4	41.2	3629	11				
4850	4862.5	1	7150	0.4	23.7	11231	2	4862.5	42.9	4301	13
4850	4837.5	2	1551	0.4	37.7	7309	5				
4850	4812.5	3	817	0.4	37.2	7700	5				
4850	4787.5	4	430	0.4	42.6	6754	6				
4850	4762.5	5	256	0.4	40.0	6032	7				
4850	4737.5	6	135	0.4	45.0	4453	10				
4800	4812.5	1	4260	0.3	28.3	8922	3	4812.5	42.3	4790	11
4800	4787.5	2	1295	0.3	32.9	8137	4				
4800	4762.5	3	538	0.3	39.8	6761	6				
4800	4737.5	4	256	0.3	39.5	5362	7				
4800	4712.5	5	120	0.3	45.7	3770	12				

4800	4687.5	6	62	0.3	43.7	2727	16				
4750	4762.5	1	9500	0.7	23.5	8527	3	4762.5	40.8	4911	10
4750	4737.5	2	2240	0.6	33.5	7037	5				
4750	4712.5	3	366	0.3	38.7	4599	8				
4750	4687.5	4	92	0.2	43.0	2890	15				
4750	4662.5	5	69	0.2	42.3	3252	13				
4750	4637.5	6	52	0.2	41.9	3431	12				
4700	4712.5	1	3900	0.3	23.7	8168	3	4712.5	39.7	4651	10
4700	4687.5	2	708	0.2	30.4	6673	5				
4700	4662.5	3	267	0.2	40.4	5033	8				
4700	4637.5	4	119	0.2	38.8	3738	10				
4700	4612.5	5	80	0.2	40.0	3770	11				
4700	4587.5	6	32	0.2	30.2	2111	14				
4650	4662.5	1	1571	0.2	26.0	4935	5	4662.5	38.4	3958	11
4650	4637.5	2	488	0.2	36.0	4599	8				
4650	4612.5	3	165	0.2	37.3	3110	12				
4650	4587.5	4	72	0.2	45.6	2262	20				
4650	4562.5	5	59	0.2	22.6	2780	8				
4650	4537.5	6									
4600	4612.5	1	4790	1.0	31.3	3010	10	4612.5	38.7	3154	13
4600	4587.5	2	1497	1.0	32.5	2822	12				
4600	4562.5	3	838	1.0	32.0	3159	10				
4600	4537.5	4	224	1.0	31.0	1407	22				
4600	4512.5	5	272	1.0	39.5	2564	15				
4600	4487.5	6	166	1.0	54.3	2190	25				
4550	4562.5	1	3100	0.6	26.4	3246	8	4562.5	37.1	2865	14
4550	4537.5	2	1341	0.6	27.0	4213	6				
4550	4512.5	3	315	0.6	25.2	1979	13				
4550	4487.5	4	313	0.6	36.8	3278	11				
4550	4462.5	5	184	0.6	51.9	2890	18				
4550	4437.5	6	108	0.6	42.0	2375	18				
4500	4512.5	1	4890	0.7	22.5	4389	5	4512.5	36.5	2802	14
4500	4487.5	2	886	0.8	23.0	2088	11				
4500	4462.5	3	688	0.8	34.9	3242	11				
4500	4437.5	4	368	0.8	50.8	2890	18				
4500	4412.5	5	188	0.8	41.7	2215	19				
4450	4462.5	1	2880	1.0	19.2	1810	11	4462.5	33.1	2433	16
4450	4437.5	2	1666	1.1	33.5	2855	12				
4450	4412.5	3	773	1.1	50.0	2649	19				
4450	4387.5	4	357	1.1	42.3	2039	21				
4400	4412.5	1	1245	0.2	28.2	3911	7	4412.5	35.0	2679	15
4400	4387.5	2	420	0.2	47.7	3958	12				
4400	4362.5	3	166	0.2	41.2	3129	13				
4350	4362.5	1	1517	0.6	40.8	1589	26	4362.5	38.5	2497	19
4350	4337.5	2	490	0.6	38.3	1539	25				
4300	4312.5	1	2130	0.6	39.5	2231	18	4312.5	30.6	2255	19

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 102+00 W

FILE NAME : 102W

IPFF102W

:- Fraser Filter - :  
: :  
: :

PI loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	2150	0.5	35.8	2702	13	5612.5	27.4	2916	9
5600	5587.5	2	849	0.5	29.2	3201	9				
5600	5562.5	3	438	0.5	30.9	3302	9				
5600	5537.5	4	209	0.5	25.0	2626	10				
5600	5512.5	5	148	0.5	22.4	2790	8				
5600	5487.5	6	109	0.5	21.2	2876	7				
5550	5562.5	1	2620	0.4	40.7	4115	10	5562.5	29.0	3890	8
5550	5537.5	2	1085	0.4	40.3	5113	8				
5550	5512.5	3	439	0.4	31.8	4137	8				
5550	5487.5	4	264	0.4	27.7	4147	7				
5550	5462.5	5	190	0.4	28.2	4477	6				
5550	5437.5	6	182	0.4	21.5	6004	4				
5500	5512.5	1	2950	0.4	45.3	4634	10	5512.5	29.8	4527	7
5500	5487.5	2	860	0.4	36.4	4053	9				
5500	5462.5	3	446	0.4	32.1	4203	8				
5500	5437.5	4	301	0.4	32.6	4728	7				
5500	5412.5	5	273	0.4	25.3	6432	4				
5500	5387.5	6	254	0.4	26.8	8379	3				
5450	5462.5	1	3000	0.4	41.4	4712	9	5462.5	30.7	4719	7
5450	5437.5	2	1040	0.4	36.5	4901	7				
5450	5412.5	3	482	0.4	38.0	4543	8				
5450	5387.5	4	369	0.4	28.6	5796	5				
5450	5362.5	5	304	0.4	29.6	7163	4				
5450	5337.5	6	90	0.4	47.0	2969	16				
5400	5412.5	1	3390	0.4	31.9	5325	6	5412.5	31.7	5289	7
5400	5387.5	2	1146	0.5	40.7	4320	9				
5400	5362.5	3	772	0.5	31.1	5821	5				
5400	5337.5	4	652	0.5	31.2	8193	4				
5400	5312.5	5	547	0.5	31.0	10311	3				
5400	5287.5	6	91	0.5	50.3	2401	21				
5350	5362.5	1	2870	0.4	33.3	4508	7	5362.5	34.4	5260	8
5350	5337.5	2	1156	0.4	28.1	5448	5				
5350	5312.5	3	818	0.4	29.0	7709	4				
5350	5287.5	4	216	0.4	45.9	3393	14				
5350	5262.5	5	101	0.4	49.0	2380	21				
5350	5237.5	6	79	0.4	54.6	2606	21				
5300	5312.5	1	5240	0.8	22.1	4115	5	5312.5	36.0	5017	10
5300	5287.5	2	2740	0.8	25.6	6456	4				
5300	5262.5	3	647	0.8	41.4	3049	14				
5300	5237.5	4	274	0.8	45.7	2152	21				
5300	5212.5	5	213	0.8	52.3	2509	21				
5300	5187.5	6	126	0.8	40.7	2078	20				
5250	5262.5	1	3980	0.5	18.3	5001	4	5262.5	39.2	4188	14
5250	5237.5	2	779	0.5	37.7	2447	15				
5250	5212.5	3	305	0.6	43.0	1916	22				



5250	5187.5	4	212	0.6	48.0	2220	22				
5250	5162.5	5	128	0.6	38.9	2011	19				
5250	5137.5	6	118	0.6	37.8	2595	15				
5200	5212.5	1	1401	0.4	29.4	2201	13	5212.5	41.6	2785	17
5200	5187.5	2	445	0.4	39.8	2097	19				
5200	5162.5	3	270	0.5	40.0	2036	20				
5200	5137.5	4	156	0.5	36.7	1960	19				
5200	5112.5	5	140	0.5	34.2	2639	13				
5200	5087.5	6	95	0.5	29.8	2507	12				
5150	5162.5	1	1059	0.5	25.3	1331	19	5162.5	39.0	2353	17
5150	5137.5	2	582	0.5	35.8	2194	16				
5150	5112.5	3	294	0.5	33.1	2217	15				
5150	5087.5	4	242	0.5	31.9	3041	10				
5150	5062.5	5	160	0.5	27.0	3016	9				
5150	5037.5	6	133	0.5	25.4	3510	7				
5100	5112.5	1	1206	0.4	41.7	1894	22	5112.5	36.1	2439	15
5100	5087.5	2	446	0.4	35.8	2102	17				
5100	5062.5	3	332	0.5	32.7	2503	13				
5100	5037.5	4	190	0.5	28.9	2388	12				
5100	5012.5	5	152	0.5	27.0	2865	9				
5100	4987.5	6	88	0.5	26.6	2322	11				
5050	5062.5	1	1707	0.5	37.9	2145	18	5062.5	33.2	2511	14
5050	5037.5	2	709	0.5	39.5	2673	15				
5050	5012.5	3	339	0.5	33.0	2556	13				
5050	4987.5	4	243	0.5	31.0	3054	10				
5050	4962.5	5	131	0.5	38.6	2469	16				
5050	4937.5	6	79	0.5	30.0	2085	14				
5000	5012.5	1	2878	0.4	50.3	4521	11	5012.5	34.9	2920	12
5000	4987.5	2	740	0.4	39.8	3487	11				
5000	4962.5	3	427	0.4	36.8	4024	9				
5000	4937.5	4	205	0.4	44.2	3220	14				
5000	4912.5	5	114	0.4	38.9	2686	14				
5000	4887.5	6	96	0.4	50.4	3167	16				
4950	4962.5	1	1891	0.5	34.5	2376	15	4962.5	35.8	3021	12
4950	4937.5	2	1255	0.5	35.9	4731	8				
4950	4912.5	3	527	0.5	43.7	3973	11				
4950	4887.5	4	269	0.6	35.5	2817	13				
4950	4862.5	5	213	0.6	49.9	3346	15				
4950	4837.5	6	129	0.6	45.5	2837	16				
4900	4912.5	1	5160	0.6	27.0	5404	5	4912.5	37.2	3466	11
4900	4887.5	2	980	0.6	29.5	3079	10				
4900	4862.5	3	682	0.6	30.6	4285	7				
4900	4837.5	4	485	0.6	46.2	5079	9				
4900	4812.5	5	278	0.7	39.9	3743	11				
4900	4787.5	6	217	0.7	48.8	4090	12				
4850	4862.5	1	3060	0.5	29.7	3845	8	4862.5	38.7	3588	11
4850	4837.5	2	1094	0.5	25.7	4124	6				
4850	4812.5	3	732	0.5	34.1	5519	6				
4850	4787.5	4	374	0.5	43.6	4700	9				
4850	4762.5	5	234	0.5	39.4	4411	9				
4850	4737.5	6	161	0.6	41.2	3541	12				
4800	4812.5	1	2290	0.5	41.2	2878	14	4812.5	39.0	4049	10
4800	4787.5	2	1619	0.5	26.2	6103	4				
4800	4762.5	3	692	0.5	36.2	5218	7				
4800	4737.5	4	370	0.5	35.4	4650	8				
4800	4712.5	5	306	0.5	37.8	5768	7				

4800	4687.5	6	151	0.5	42.4	3985	11				
4750	4762.5	1	4900	0.4	30.4	7697	4	4762.5	40.2	4617	10
4750	4737.5	2	1306	0.4	38.6	6154	6				
4750	4712.5	3	505	0.4	35.5	4760	7				
4750	4687.5	4	356	0.4	37.8	5592	7				
4750	4662.5	5	158	0.4	43.3	3723	12				
4750	4637.5	6	87	0.4	42.1	2870	15				
4700	4712.5	1	5060	0.4	33.6	7948	4	4712.5	39.6	4436	10
4700	4687.5	2	1133	0.4	31.7	5339	6				
4700	4662.5	3	658	0.4	34.1	6202	5				
4700	4637.5	4	265	0.5	41.0	3330	12				
4700	4612.5	5	137	0.5	39.4	2582	15				
4700	4587.5	6	65	0.5	43.9	1715	26				
4650	4662.5	1	2340	0.3	37.1	4901	8	4662.5	40.0	4019	12
4650	4637.5	2	903	0.3	36.5	5674	6				
4650	4612.5	3	313	0.3	42.4	3933	11				
4650	4587.5	4	146	0.3	41.2	3058	13				
4650	4562.5	5	63	0.3	45.0	1979	23				
4650	4537.5	6	52	0.3	43.8	2287	19				
4600	4612.5	1	4570	0.7	40.3	4102	10	4612.5	42.0	3384	15
4600	4587.5	2	1108	0.7	46.5	2984	16				
4600	4562.5	3	392	0.6	44.6	2463	18				
4600	4537.5	4	144	0.6	47.6	1508	32				
4600	4512.5	5	104	0.6	46.9	1634	29				
4600	4487.5	6	81	0.5	44.3	2138	21				
4550	4562.5	1	2100	0.4	42.0	3299	13	4562.5	43.7	2551	19
4550	4537.5	2	607	0.4	41.3	2860	14				
4550	4512.5	3	198	0.4	45.9	1866	25				
4550	4487.5	4	136	0.4	47.1	2136	22				
4550	4462.5	5	86	0.4	44.0	2026	22				
4550	4437.5	6	36	0.4	42.1	1188	35				
4500	4512.5	1	1728	0.4	35.7	2714	13	4512.5	43.7	2125	22
4500	4487.5	2	377	0.4	43.6	1777	25				
4500	4462.5	3	278	0.4	46.7	2620	18				
4500	4437.5	4	108	0.4	43.8	1696	26				
4500	4412.5	5	44	0.3	44.0	1382	32				
4450	4462.5	1	1174	0.4	31.5	1844	17	4462.5	44.2	1873	24
4450	4437.5	2	407	0.4	48.4	1918	25				
4450	4412.5	3	195	0.4	43.1	1838	23				
4450	4387.5	4	138	0.4	44.5	2168	21				
4400	4412.5	1	1322	0.6	45.9	1384	33	4412.5	44.6	1841	25
4400	4387.5	2	429	0.6	42.8	1348	32				
4400	4362.5	3	294	0.6	42.1	1847	23				
4350	4362.5	1	2310	1.3	44.7	1116	40	4362.5	43.7	1683	27
4350	4337.5	2	1217	1.3	45.3	1765	26				
4300	4312.5	1	1418	0.4	36.2	2227	16	4312.5	42.4	1763	25

INTERPRETEX RESOURCES LTD.

INDUCED POLARIZATION & RESISTIVITY SURVEY

POLE-DIPOLE ARRAY (pole northerly, dipole southerly)

ELECTRODE PARAMETERS - a = 50 meters, N = 1, 2, 3, 4, 5, & 6

GRID : CHRISTMAS CLAIMS SOUTH

LINE : 103+00 W

FILE NAME : 103W


IPFF103W

! - Fraser Filter - !  
!  
!

P1 loc. (northing)	Plot Pt. (northing)	N	Vp (mV)	I (amps)	Ma (mSec.)	Pa (ohm-m.)	MF	Plot Pt. (northing)	Ma (mSec.)	Pa (ohm-m.)	MF
5600	5612.5	1	1833	0.2	45.4	5759	8	5612.5	41.2	5267	9
5600	5587.5	2	588	0.2	49.2	5542	9				
5600	5562.5	3	145	0.2	44.4	2733	16				
5600	5537.5	4	118	0.2	46.9	3707	13				
5600	5512.5	5	150	0.2	31.4	7069	4				
5600	5487.5	6	103	0.2	30.1	6795	4				
5550	5562.5	1	2520	0.4	49.2	3958	12	5562.5	40.3	4635	11
5550	5537.5	2	497	0.5	46.7	1874	25				
5550	5512.5	3	372	0.5	49.2	2805	18				
5550	5487.5	4	440	0.5	33.7	5529	6				
5550	5462.5	5	281	0.5	32.9	5297	6				
5550	5437.5	6	215	0.5	29.1	5674	5				
5500	5512.5	1	3430	1.0	40.3	2155	19	5512.5	36.4	4999	10
5500	5487.5	2	2130	1.1	45.5	3650	12				
5500	5462.5	3	2190	1.2	31.0	6880	5				
5500	5437.5	4	940	1.0	31.0	5906	5				
5500	5412.5	5	588	0.9	28.4	6158	5				
5500	5387.5	6	531	0.8	25.7	8758	3				
5450	5462.5	1	2270	0.3	56.8	4754	12	5462.5	36.2	6066	7
5450	5437.5	2	1334	0.3	48.0	8382	6				
5450	5412.5	3	564	0.3	37.7	7087	5				
5450	5387.5	4	327	0.3	32.3	6849	5				
5450	5362.5	5	291	0.3	29.6	9142	3				
5450	5337.5	6	108	0.3	32.3	4750	7				
5400	5412.5	1	5100	0.5	39.4	6409	6	5412.5	33.2	6277	6
5400	5387.5	2	1752	0.6	39.5	5504	7				
5400	5362.5	3	906	0.6	34.0	5693	6				
5400	5337.5	4	556	0.5	30.4	6987	4				
5400	5312.5	5	170	0.4	28.6	4006	7				
5400	5287.5	6	81	0.4	38.8	2672	15				
5350	5362.5	1	3190	0.7	38.3	2863	13	5362.5	34.3	5300	8
5350	5337.5	2	1638	0.8	37.4	3859	10				
5350	5312.5	3	1262	0.8	32.4	5947	5				
5350	5287.5	4	412	0.8	33.2	3236	10				
5350	5262.5	5	207	0.8	39.8	2439	16				
5350	5237.5	6	102	0.8	58.1	1682	35				
5300	5312.5	1	3260	0.4	33.7	5121	7	5312.5	35.2	4805	10
5300	5287.5	2	1499	0.4	31.0	7064	4				
5300	5262.5	3	396	0.4	30.1	3732	8				
5300	5237.5	4	183	0.4	37.0	2875	13				
5300	5212.5	5	84	0.4	55.2	1979	28				
5300	5187.5	6	69	0.4	42.0	2276	18				
5250	5262.5	1	4230	0.5	27.5	5316	5	5262.5	36.2	4159	12
5250	5237.5	2	848	0.5	26.5	3197	8				
5250	5212.5	3	551	0.5	28.3	4154	7				

5250	5187.5	4	147	0.5	52.6	1847	28				
5250	5162.5	5	115	0.5	39.5	2168	18				
5250	5137.5	6	118	0.5	41.8	3114	13				
5200	5212.5	1	3150	0.7	22.8	2827	8	5212.5	37.8	2813	15
5200	5187.5	2	1001	0.7	31.0	2695	12				
5200	5162.5	3	338	0.7	45.7	1820	25				
5200	5137.5	4	234	0.7	39.0	2100	19				
5200	5112.5	5	226	0.7	38.1	3043	13				
5200	5087.5	6	130	0.7	32.9	2450	13				
5150	5162.5	1	5380	1.3	21.7	2600	8	5162.5	38.6	2539	17
5150	5137.5	2	1325	1.3	39.2	1921	20				
5150	5112.5	3	729	1.3	34.1	2114	16				
5150	5087.5	4	657	1.4	34.6	2949	12				
5150	5062.5	5	385	1.4	31.6	2592	12				
5150	5037.5	6	407	1.4	30.2	3836	8				
5100	5112.5	1	2590	0.7	36.5	2325	16	5112.5	38.4	2488	17
5100	5087.5	2	717	0.7	32.9	1931	17				
5100	5062.5	3	516	0.7	33.8	2779	12				
5100	5037.5	4	272	0.7	31.2	2441	13				
5100	5012.5	5	268	0.7	30.1	3608	8				
5100	4987.5	6	174	0.7	27.0	3280	8				
5050	5062.5	1	1165	0.5	30.3	1464	21	5062.5	33.3	2702	13
5050	5037.5	2	713	0.6	34.3	2240	15				
5050	5012.5	3	355	0.6	32.2	2231	14				
5050	4987.5	4	337	0.6	31.1	3529	9				
5050	4962.5	5	208	0.6	27.3	3267	8				
5050	4937.5	6	151	0.6	26.3	3321	8				
5000	5012.5	1	3320	0.5	46.5	4172	11	5012.5	34.4	3059	12
5000	4987.5	2	845	0.5	43.4	3186	14				
5000	4962.5	3	544	0.5	39.4	4102	10				
5000	4937.5	4	297	0.6	36.8	3110	12				
5000	4912.5	5	162	0.6	37.8	2545	15				
5000	4887.5	6	111	0.6	36.1	2441	15				
4950	4962.5	1	1083	0.2	43.5	3402	13	4962.5	35.7	3483	11
4950	4937.5	2	674	0.2	41.5	6352	7				
4950	4912.5	3	285	0.2	41.9	5372	8				
4950	4887.5	4	134	0.2	41.1	4210	10				
4950	4862.5	5	80	0.2	38.4	3770	10				
4950	4837.5	6	62	0.2	50.7	4090	12				
4900	4912.5	1	5180	0.4	35.7	8137	4	4912.5	36.6	4244	9
4900	4887.5	2	1545	0.4	35.1	7281	5				
4900	4862.5	3	566	0.4	39.4	5334	7				
4900	4837.5	4	349	0.5	27.2	4386	6				
4900	4812.5	5	216	0.5	46.3	4072	11				
4900	4787.5	6	117	0.5	48.6	3088	16				
4850	4862.5	1	3280	0.4	32.2	5152	6	4862.5	37.2	4100	10
4850	4837.5	2	994	0.4	31.8	4684	7				
4850	4812.5	3	491	0.4	33.0	4628	7				
4850	4787.5	4	234	0.4	64.4	3676	18				
4850	4762.5	5	188	0.4	16.2	4430	4				
4850	4737.5	6	120	0.4	44.3	3958	11				
4800	4812.5	1	4950	0.4	30.4	7775	4	4812.5	39.4	4316	10
4800	4787.5	2	1472	0.4	32.8	6937	5				
4800	4762.5	3	694	0.5	40.7	5233	8				
4800	4737.5	4	250	0.5	50	3142	16				
4800	4712.5	5	229	0.5	43.5	4317	10				



4800	4687.5	6	174	0.5	49.1	4592	11				
4750	4762.5	1	4200	0.4	27.8	6597	4	4762.5	40.8	4512	10
4750	4737.5	2	1497	0.4	36.1	7054	5				
4750	4712.5	3	439	0.5	48.7	3310	15				
4750	4687.5	4	375	0.5	41.8	4712	9				
4750	4662.5	5	261	0.5	42.4	4920	9				
4750	4637.5	6	205	0.5	38.7	5410	7				
4700	4712.5	1	5200	0.7	33.3	4668	7	4712.5	42.3	4230	11
4700	4687.5	2	1052	0.7	48.6	2833	17				
4700	4662.5	3	765	0.7	44.2	4120	11				
4700	4637.5	4	457	0.7	41.5	4102	10				
4700	4612.5	5	230	0.7	38.6	3097	12				
4700	4587.5	6	213	0.7	21.2	4015	5				
4650	4662.5	1	1331	0.2	49.6	4181	12	4662.5	39.6	4165	10
4650	4637.5	2	518	0.2	73.0	4882	15				
4650	4612.5	3	312	0.2	8.8	5881	1				
4650	4587.5	4	176	0.2	11.6	5529	2				
4650	4562.5	5	79	0.2	27.8	3723	7				
4650	4537.5	6	49	0.2	42.5	3233	13				
4600	4612.5	1	2150	0.5	50.7	2702	19	4612.5	38.9	3902	10
4600	4587.5	2	880	0.5	42.5	3318	13				
4600	4562.5	3	450	0.5	40.5	3393	12				
4600	4537.5	4	209	0.5	30.5	2626	12				
4600	4512.5	5	126	0.5	45.5	2375	19				
4600	4487.5	6	47	0.6		1034					
4550	4562.5	1	1112	0.4	59.8	1747	34	4562.5	36.3	3408	13
4550	4537.5	2	598	0.4	36.7	2818	13				
4550	4512.5	3	324	0.4	25.0	3054	8				
4550	4487.5	4	145	0.4	48.5	2278	21				
4550	4462.5	5	55	0.4	42.6	1296	33				
4550	4437.5	6	95	0.4	32.9	3134	10				
4500	4512.5	1	1846	0.5	48.3	2320	21	4512.5	36.5	2833	15
4500	4487.5	2	556	0.5	37.3	2096	18				
4500	4462.5	3	269	0.5	53.1	2028	26				
4500	4437.5	4	84	0.5	29.5	1056	28				
4500	4412.5	5	114	0.5	42.4	2149	20				
4450	4462.5	1	1103	0.5	48.1	1386	35	4462.5	39.3	2256	20
4450	4437.5	2	412	0.5	58.4	1553	38				
4450	4412.5	3	158	0.5	35.4	1191	30				
4450	4387.5	4	190	0.5	47.4	2388	20				
4400	4412.5	1	1676	0.6	55.7	1755	32	4412.5	44.1	1938	24
4400	4387.5	2	360	0.6	37.0	1131	33				
4400	4362.5	3	393	0.6	46.3	2469	19				
4350	4362.5	1	1294	0.6	28.5	1355	21	4362.5	35.0	1793	21
4350	4337.5	2	938	0.7	43.1	2526	17				
4300	4312.5	1	1779	0.8	43.9	1397	31	4312.5	42.7	2344	20

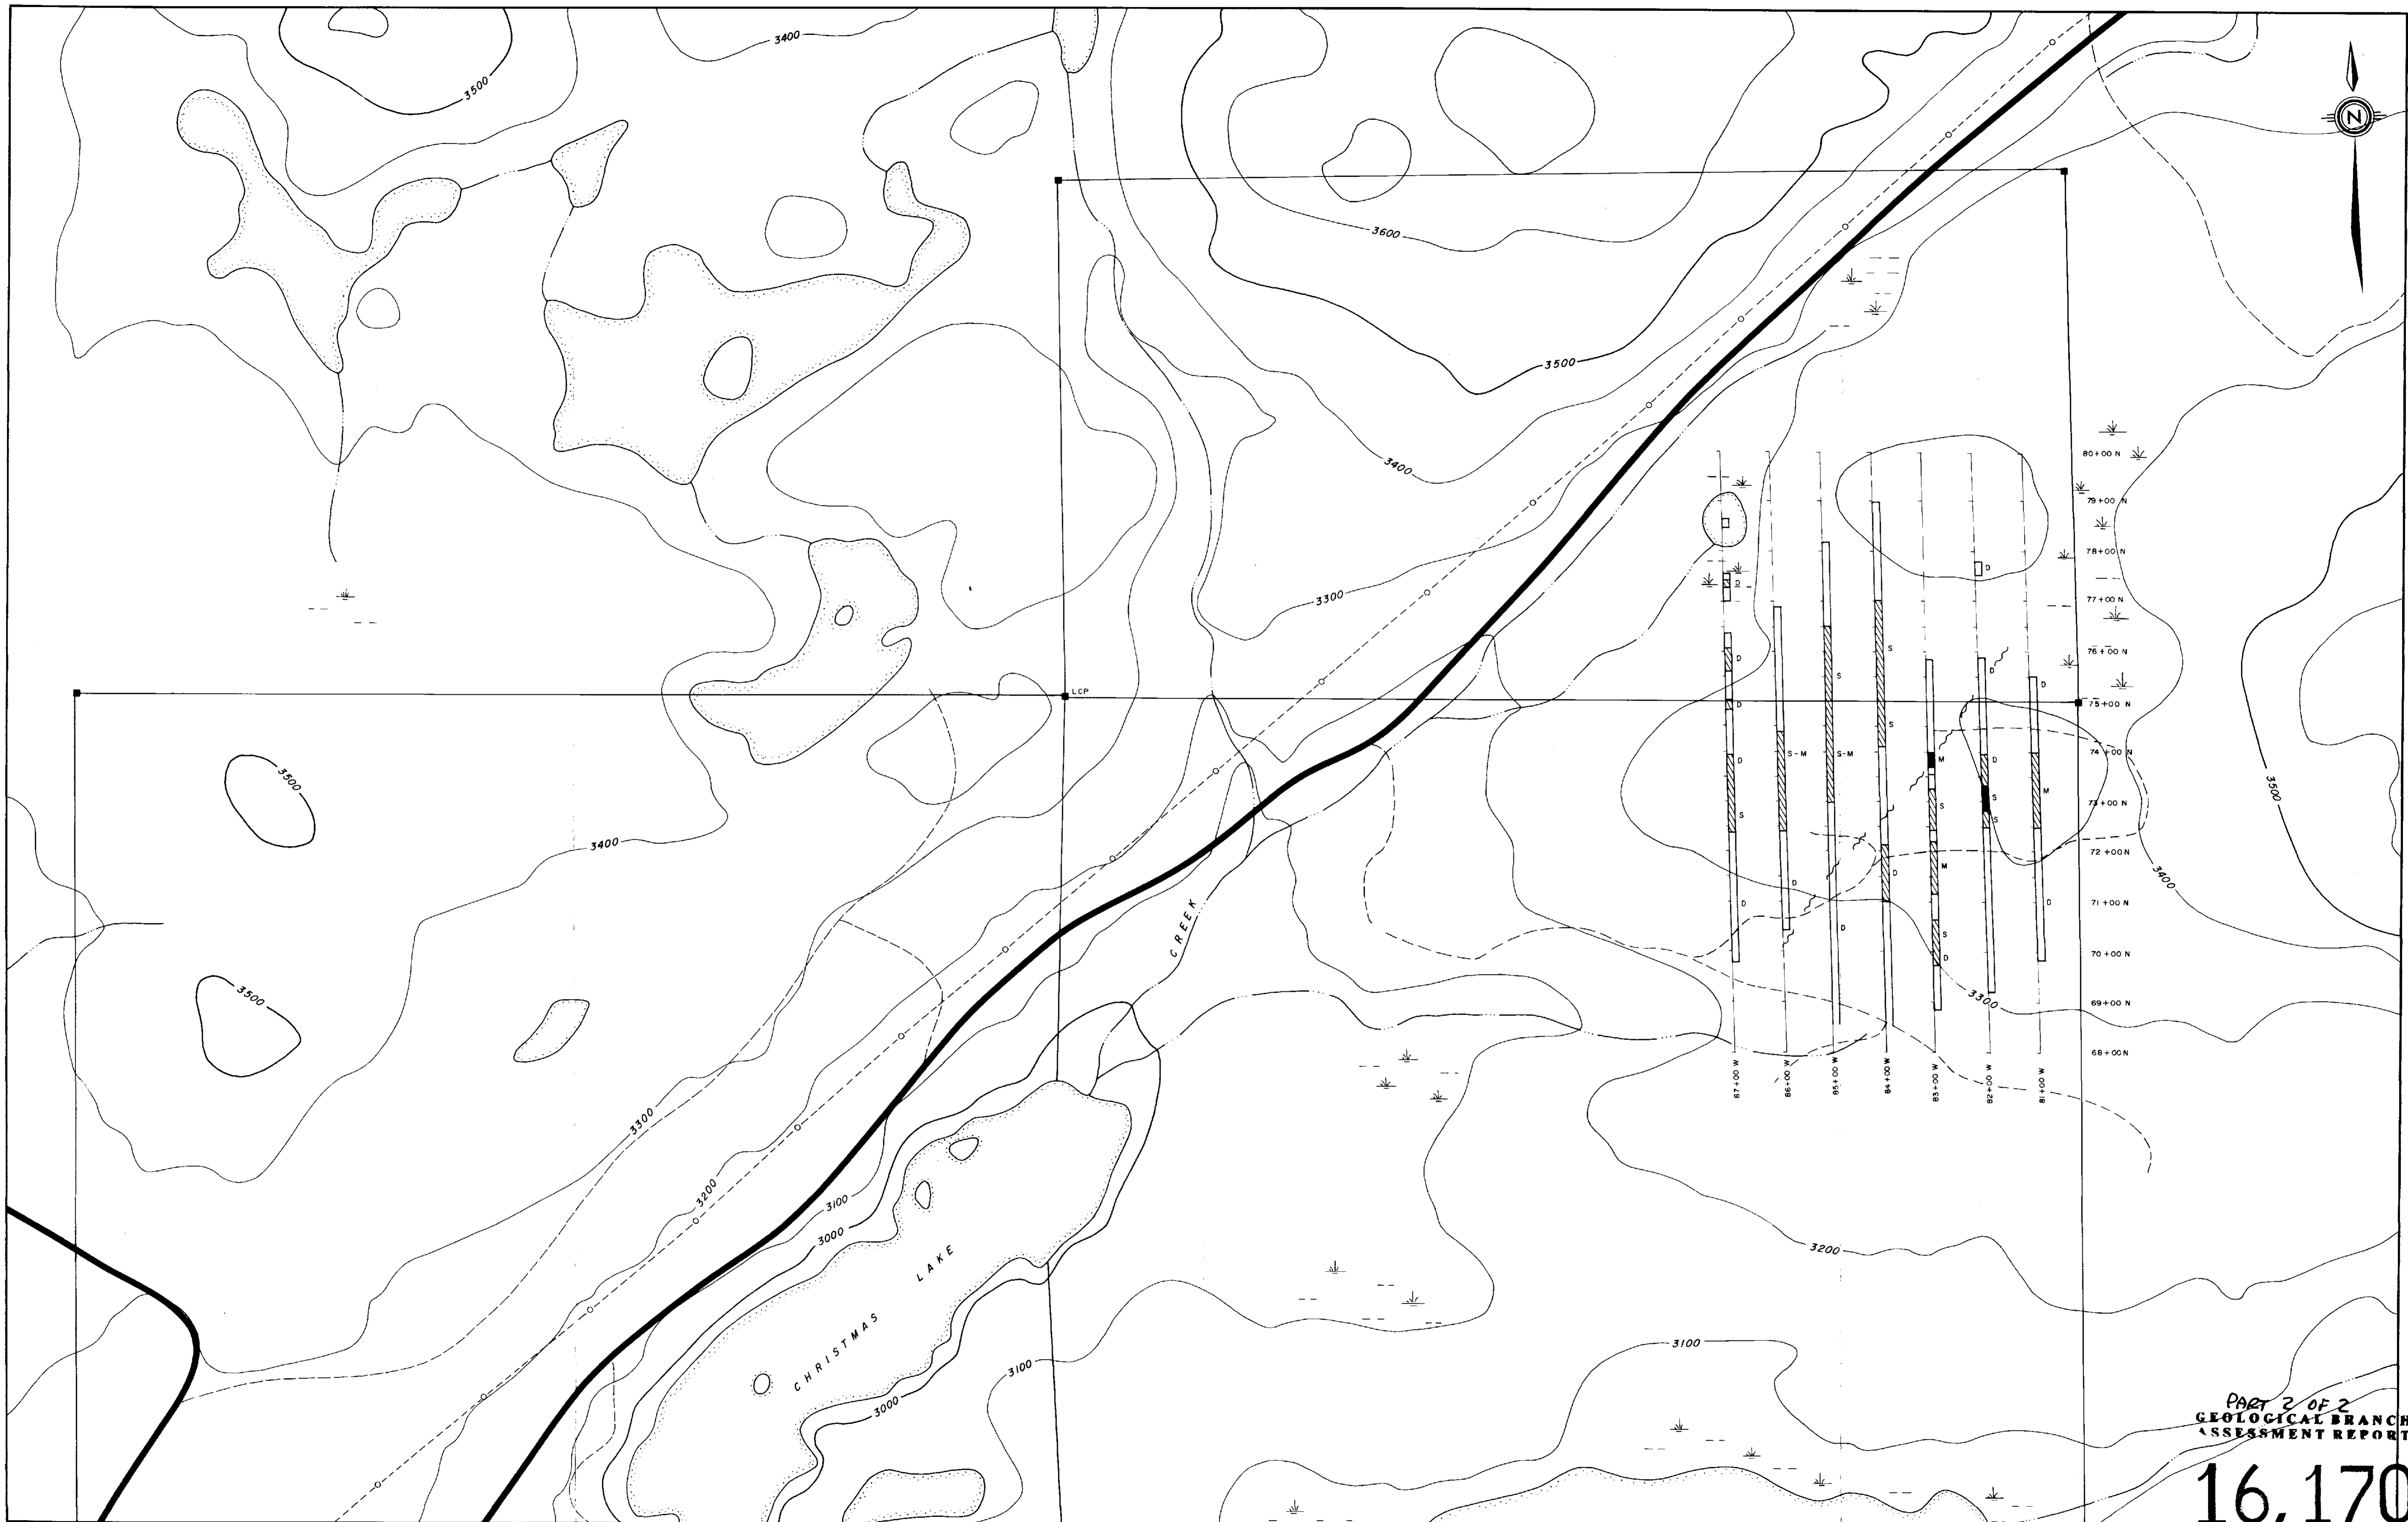

PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT

16,170

Legend	
	Ma GREATER THAN 50 mS
	Ma 37.6 mS TO 50 mS
	Ma 25 mS TO 37.5 mS
D, M, S	Depth: Estimate (Deep, Moderate, Shallow)

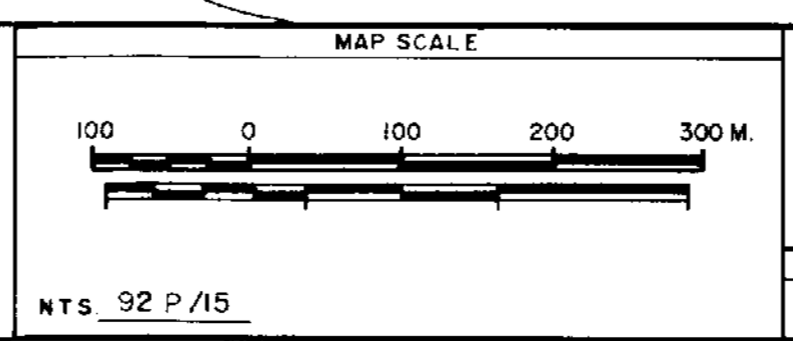


No.	Date	MADE BY	DESCRIPTION
1			
2			
3			
4			
5			

DATE	DRAWN BY	CHECKED	APPROVED
JULY 85			




CHRISTMAS LAKE PROJECT		
MING MINES LIMITED (NORTH GRID)		
GEOLOGICAL INTERPRETATION MAP		
MAP INDEX NUMBER	SCALE	DRAWING NUMBER
	1:5,000	

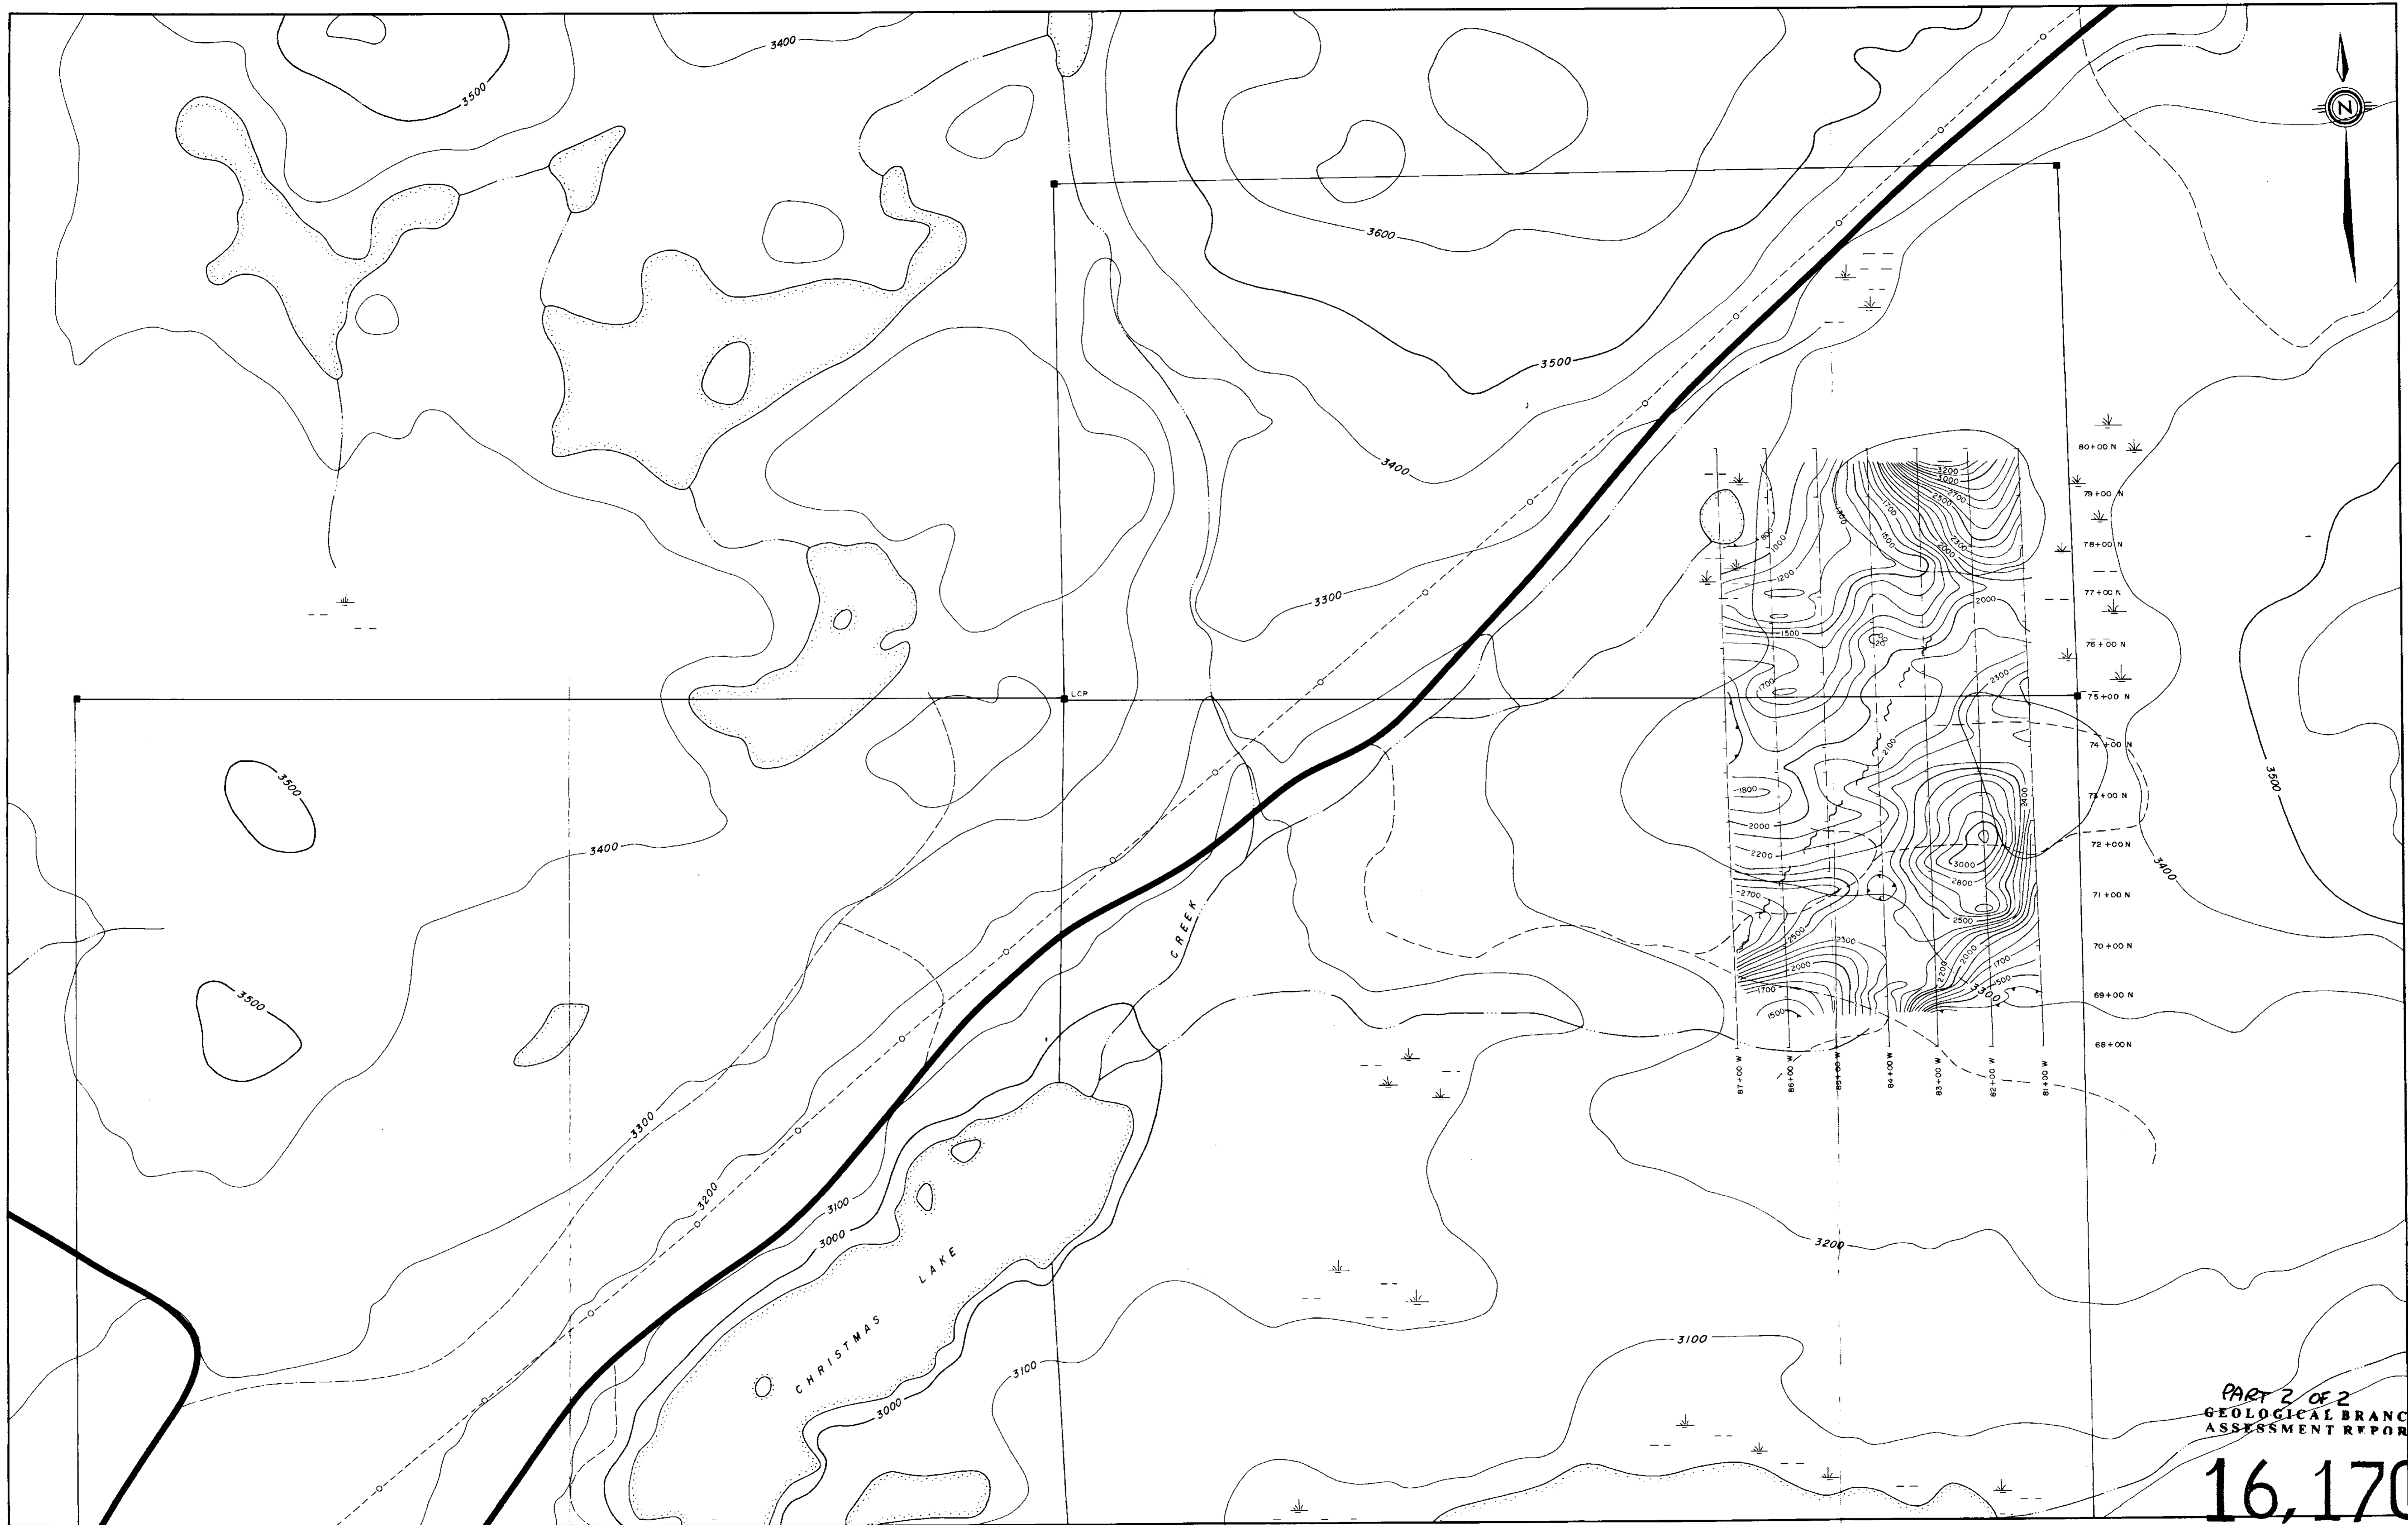

PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT




16,170

<p><b>Legend</b></p> <p>— 2500 — 500 ohm-metre contours</p> <p>— 2600 — 100 ohm-metre contours</p>		<p>MAP SCALE</p> <p>NTS 92 P/15</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No</th> <th>Date</th> <th>MADE BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td></tr> </tbody> </table>	No	Date	MADE BY	DESCRIPTION	1				2				3				4				5				<p><b>E &amp; B Explorations Inc.</b></p>	<p><b>CHRISTMAS LAKE PROJECT</b></p> <p>MING MINES LIMITED (NORTH GRID)</p> <p>APPARENT RESISTIVITY FRASER FILTER CONTOURS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>MAP INDEX NUMBER</td> <td>SCALE</td> <td>DRAWING NUMBER</td> </tr> <tr> <td></td> <td>1: 5,000</td> <td></td> </tr> </table>	MAP INDEX NUMBER	SCALE	DRAWING NUMBER		1: 5,000	
No	Date	MADE BY	DESCRIPTION																																
1																																			
2																																			
3																																			
4																																			
5																																			
MAP INDEX NUMBER	SCALE	DRAWING NUMBER																																	
	1: 5,000																																		
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DATE</th> <th>DRAWN BY</th> <th>CHECKED</th> <th>APPROVED</th> </tr> </thead> <tbody> <tr> <td>JULY 85</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		DATE	DRAWN BY	CHECKED	APPROVED	JULY 85				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>OFFICE</th> <th>DEPARTMENT</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>		OFFICE	DEPARTMENT																				
DATE	DRAWN BY	CHECKED	APPROVED																																
JULY 85																																			
OFFICE	DEPARTMENT																																		

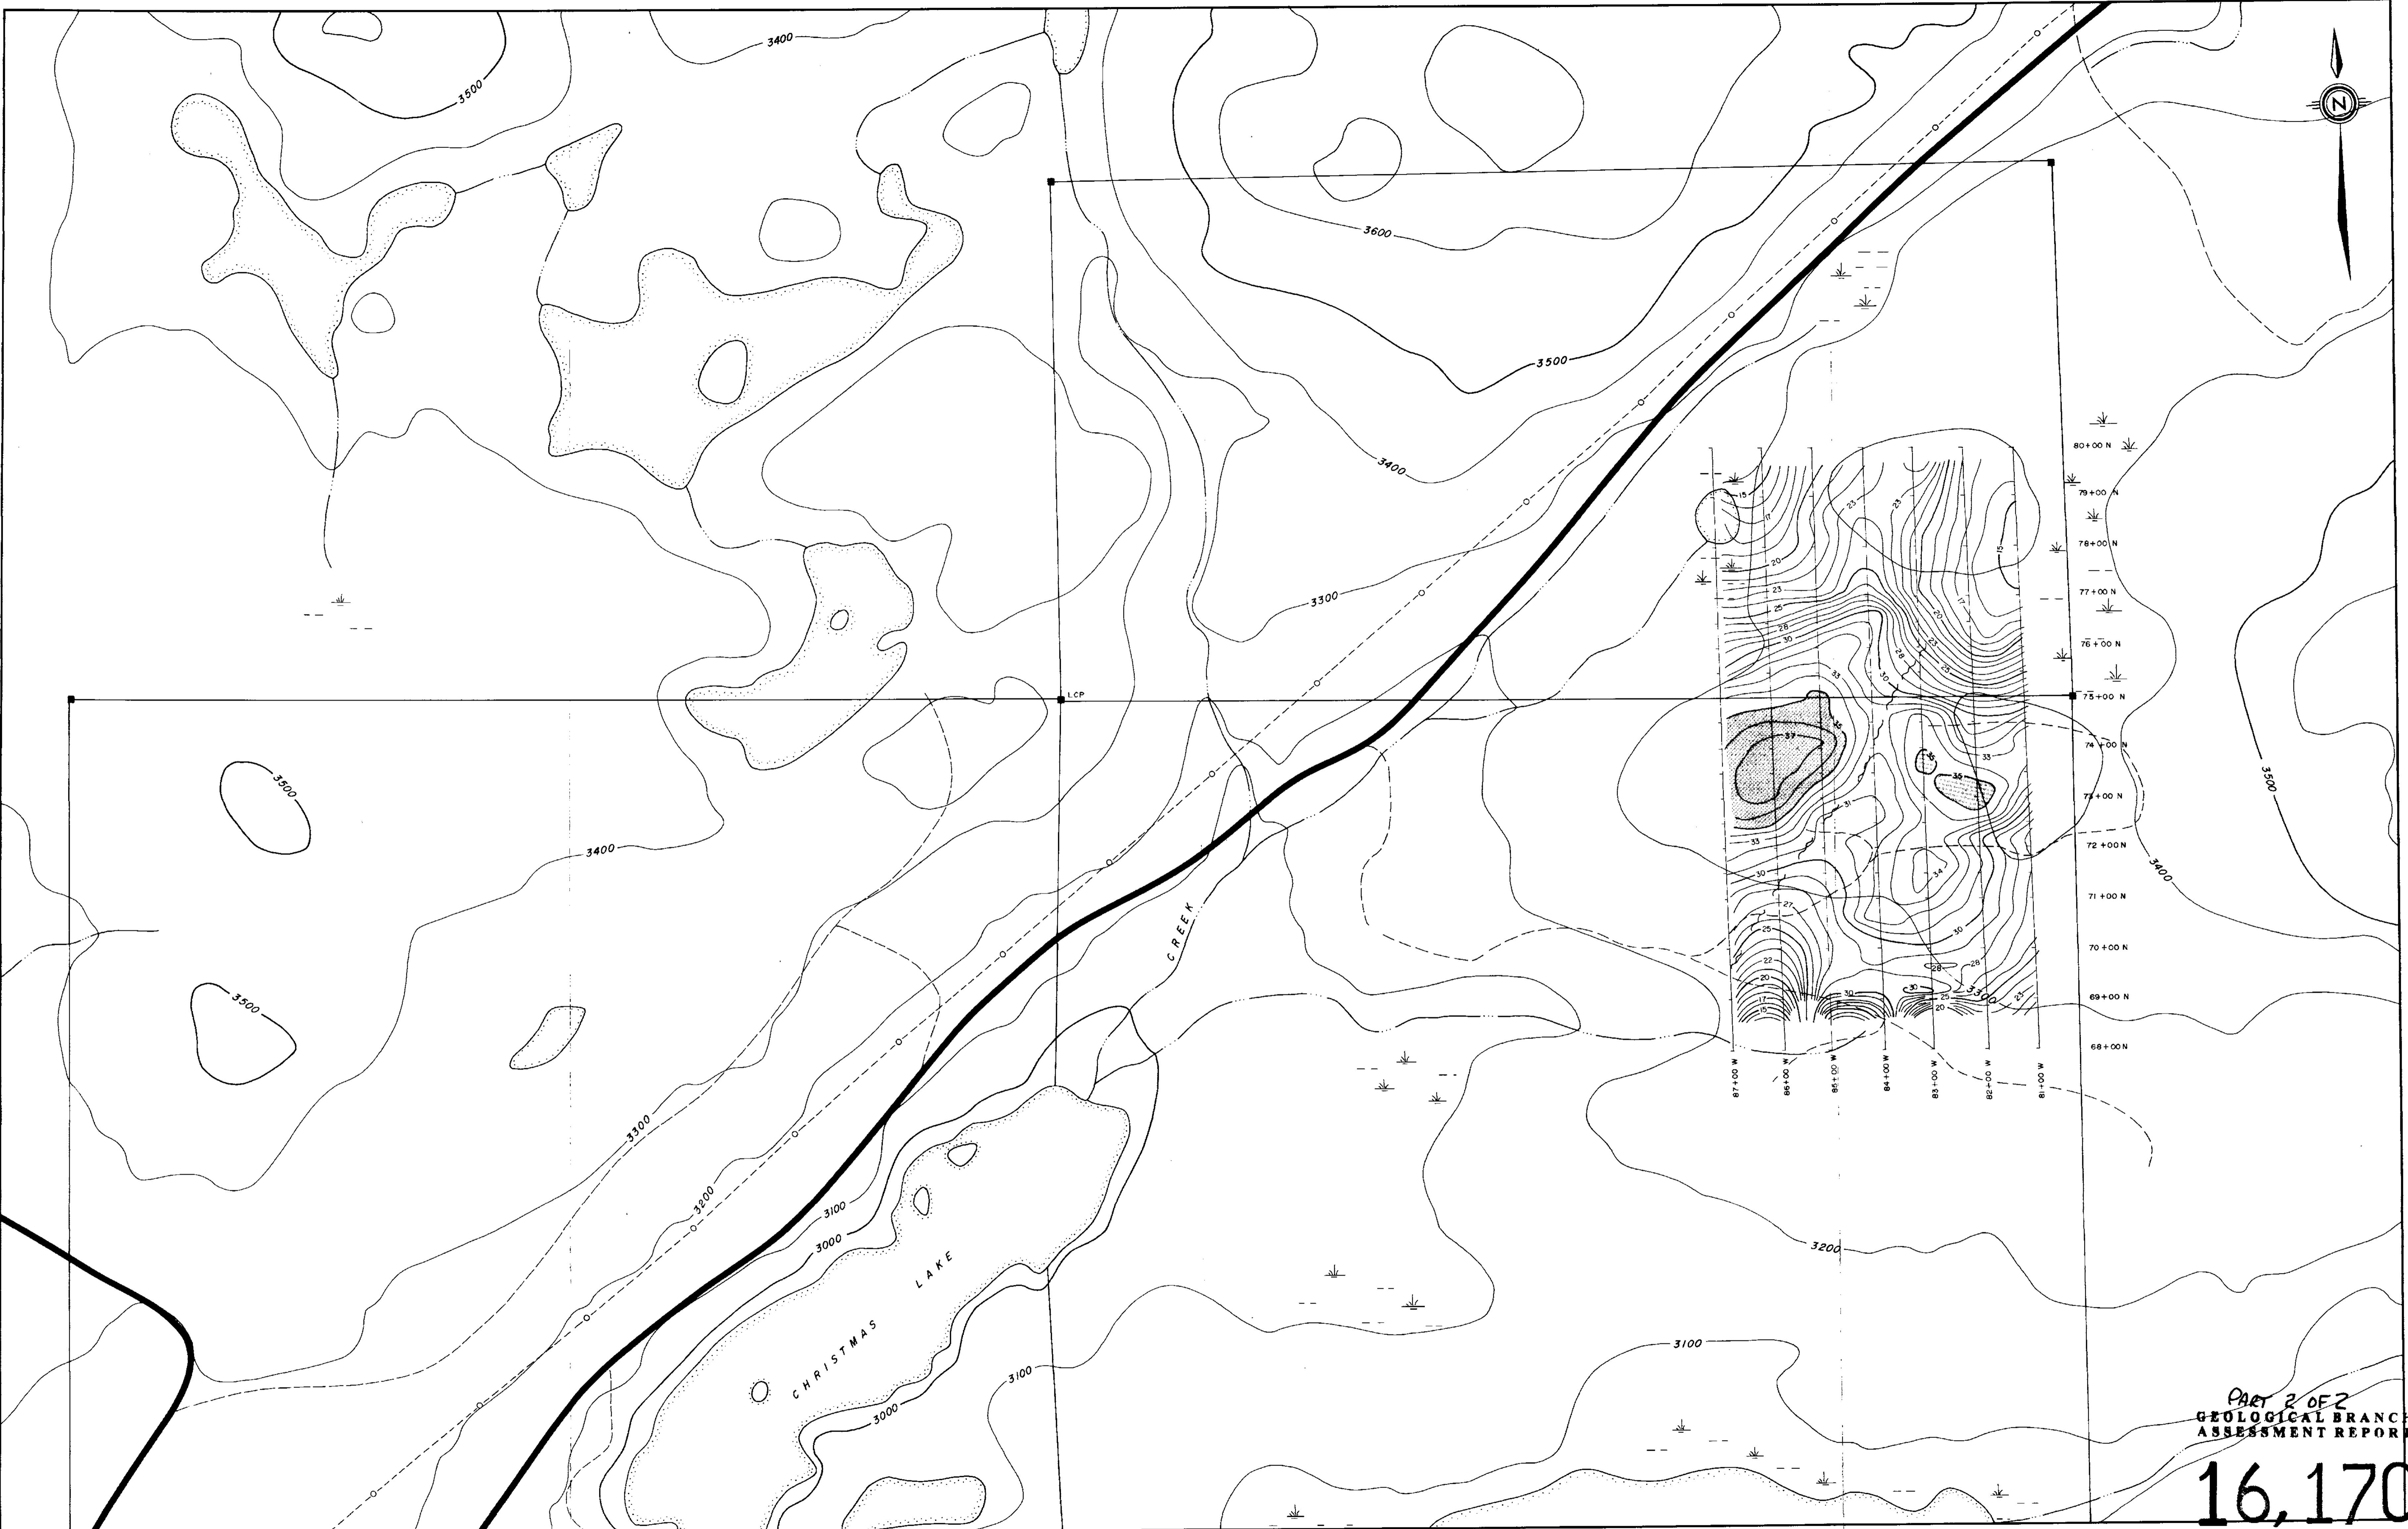



PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT

16,170
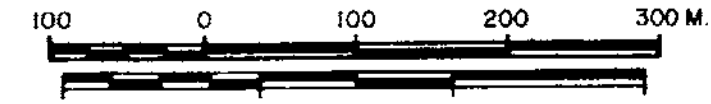
<p><b>Legend</b></p> <p>— 35 — 5 millisecond contours</p> <p>— 36 — 1 millisecond contours</p>		<p>MAP SCALE</p>  <p>0 100 200 300 M</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No</th> <th>Date</th> <th>MADE BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DATE</th> <th>DRAWN BY</th> <th>CHECKED</th> <th>APPROVED</th> </tr> </thead> <tbody> <tr> <td>JULY 85</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	No	Date	MADE BY	DESCRIPTION	1				2				3				4				5				DATE	DRAWN BY	CHECKED	APPROVED	JULY 85				 <p><b>E &amp; B Explorations Inc.</b></p>	<p style="text-align: center;"><b>CHRISTMAS LAKE PROJECT</b></p> <p style="text-align: center;"><b>MING MINES LIMITED</b> (NORTH GRID)</p> <p style="text-align: center;">APPARENT CHARGEABILITY FRASER FILTER CONTOURS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>MAP INDEX NUMBER</td> <td>SCALE</td> <td>DRAWING NUMBER</td> </tr> <tr> <td></td> <td>1 : 5,000</td> <td></td> </tr> </table>	MAP INDEX NUMBER	SCALE	DRAWING NUMBER		1 : 5,000	
No	Date	MADE BY	DESCRIPTION																																								
1																																											
2																																											
3																																											
4																																											
5																																											
DATE	DRAWN BY	CHECKED	APPROVED																																								
JULY 85																																											
MAP INDEX NUMBER	SCALE	DRAWING NUMBER																																									
	1 : 5,000																																										

NTS\_92 P/15





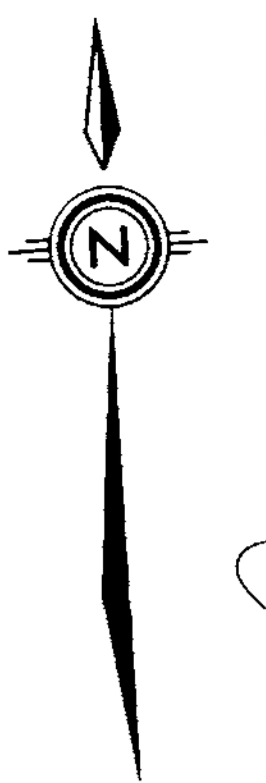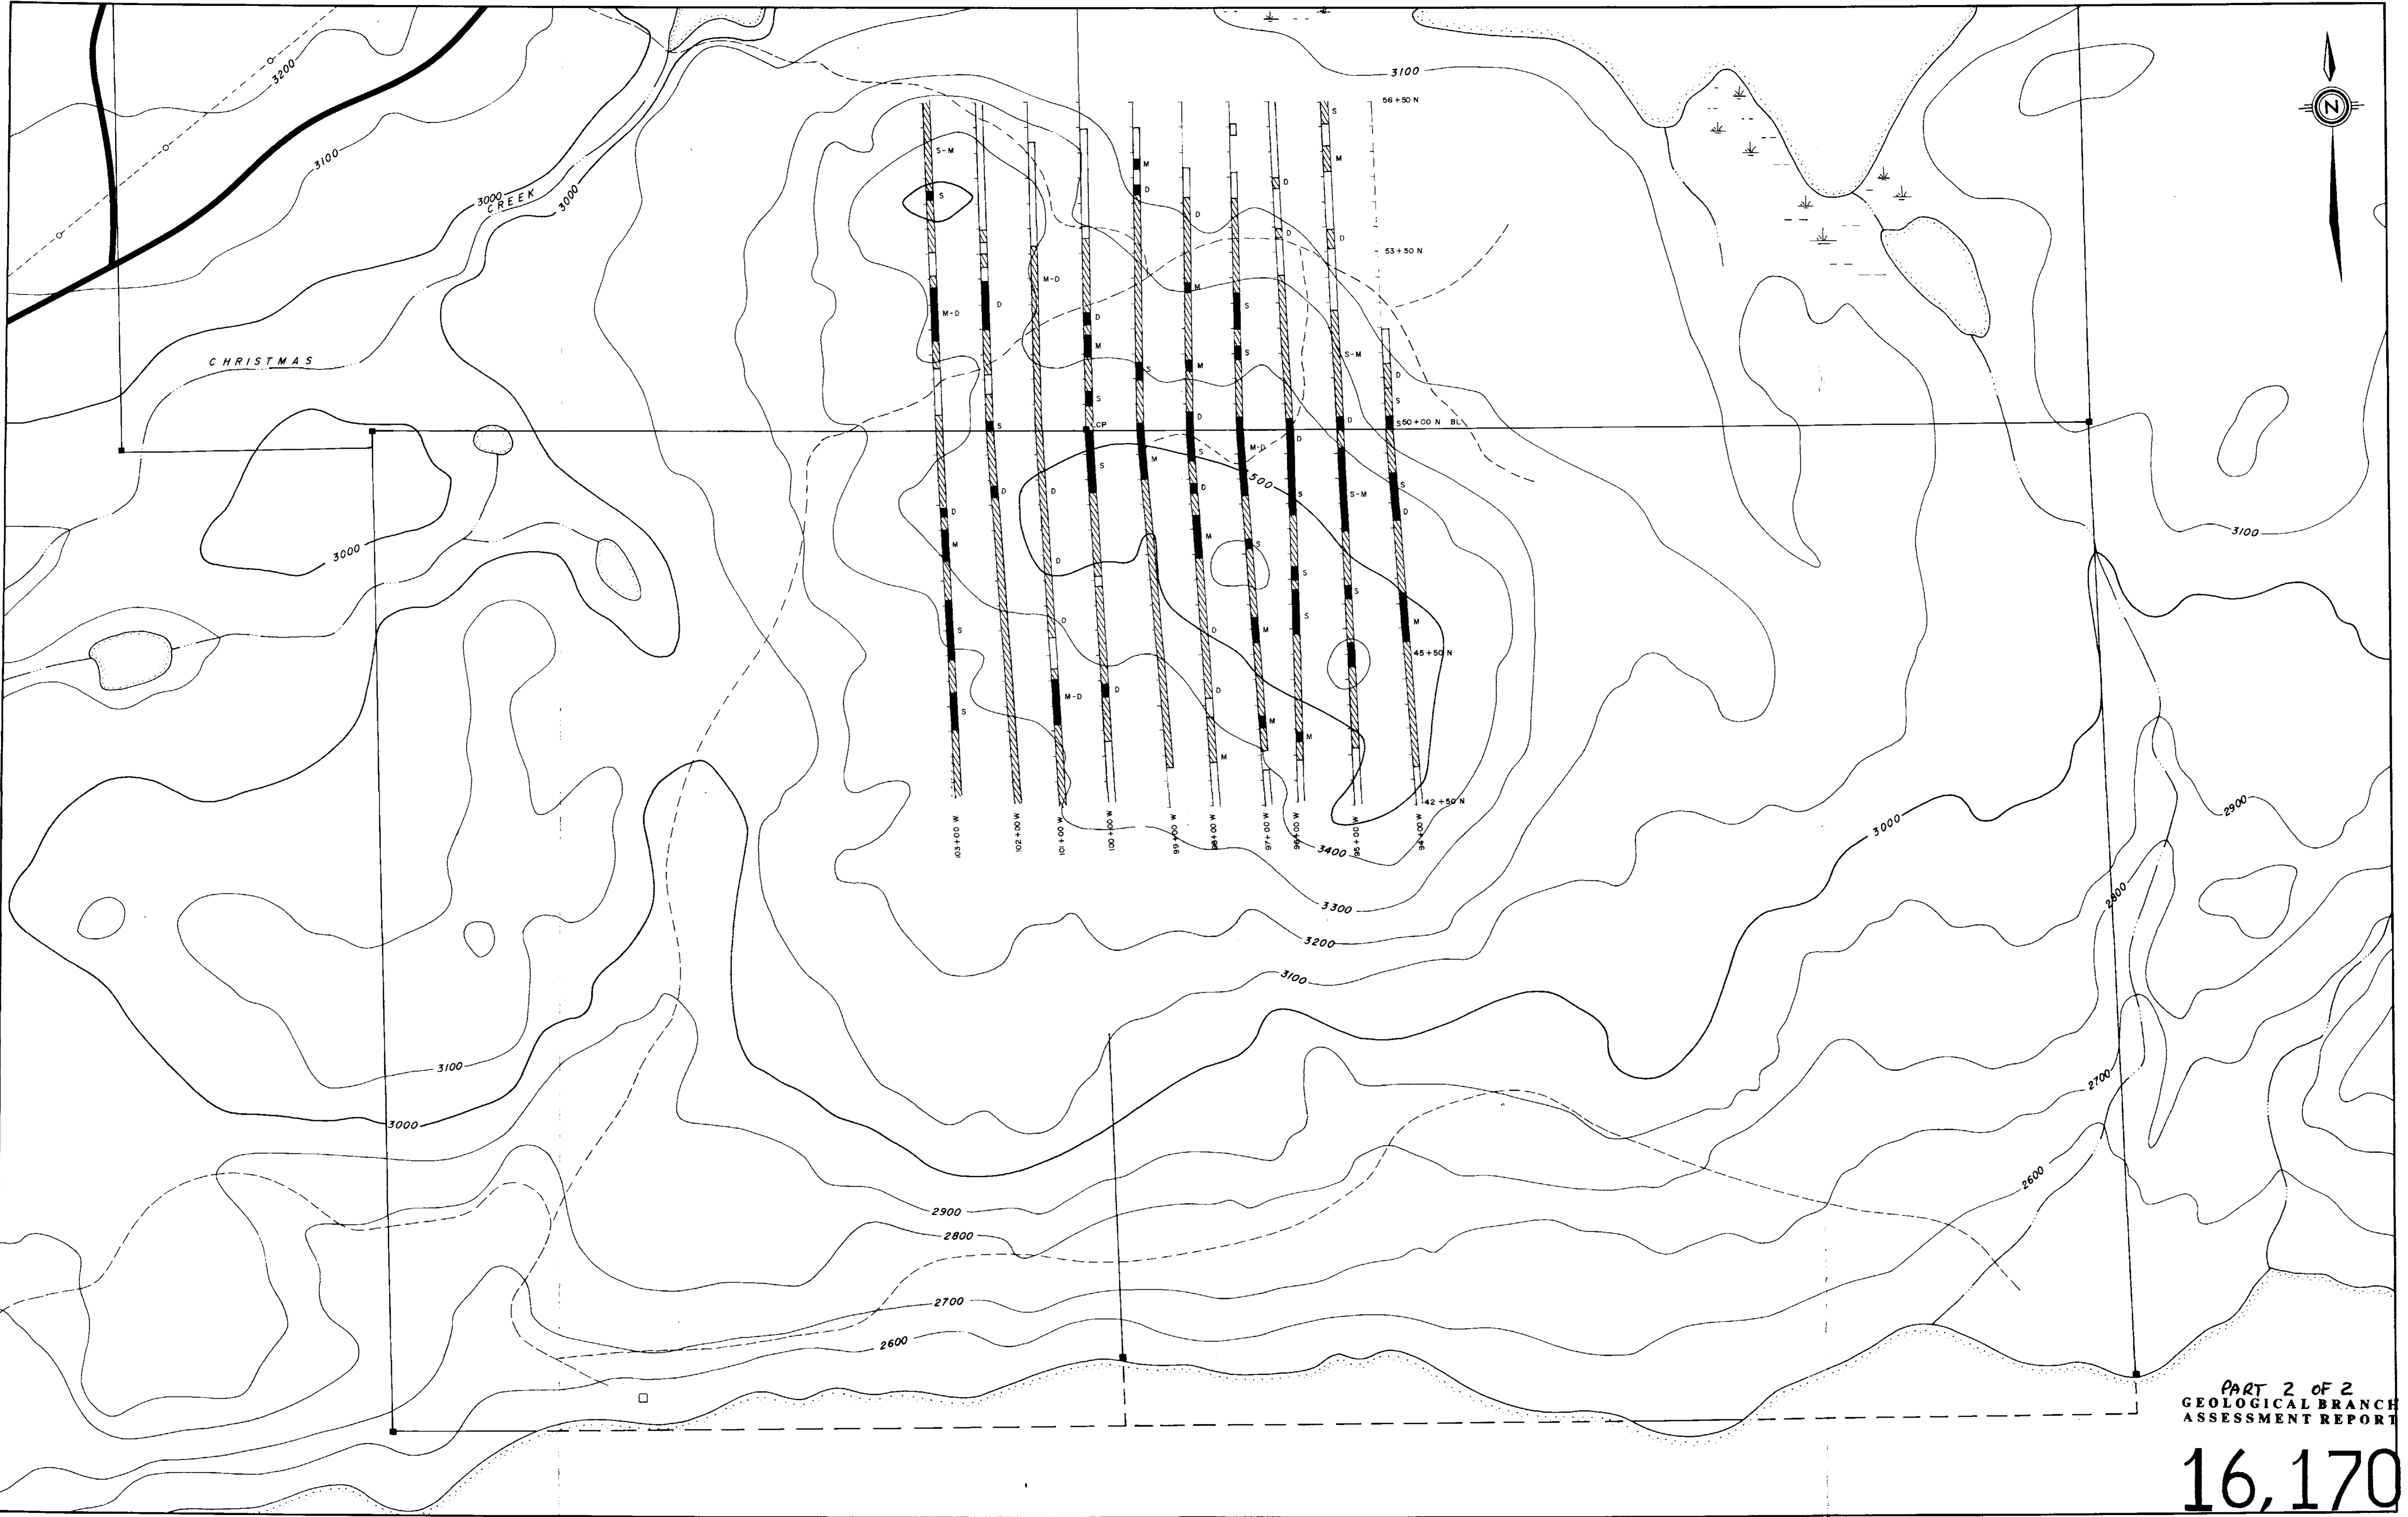

PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT


16,170

**Legend**  
 — Ma GREATER THAN 50 mS  
 ▨ Ma 37.6 mS TO 50 mS  
 — Ma 25 mS TO 37.5 mS  
 D, M, S Depth Estimate (Deep, Moderate, Shallow)

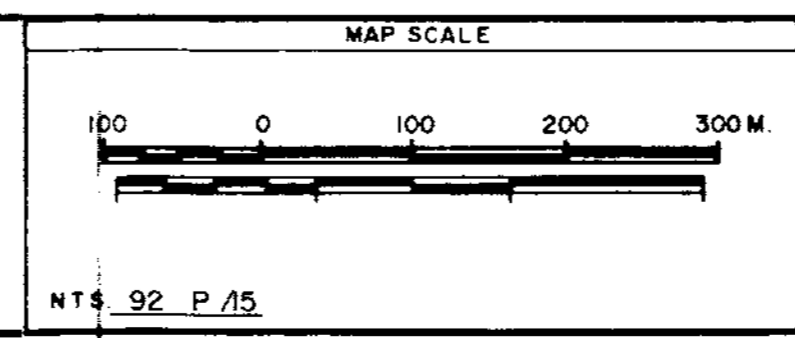


REVISED	DATE	MADE BY	DESCRIPTION
1			
2			
3			
4			
5			

DATE	DRAWN BY	CHECKED	APPROVED
JULY 85			

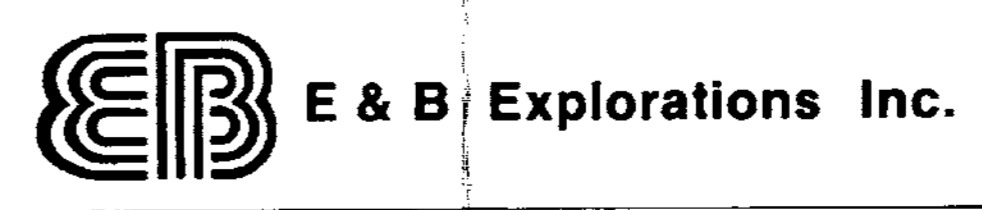


CHRISTMAS LAKE PROJECT			
MING MINES LIMITED (SOUTH GRID)			
GEOLOGICAL INTERPRETATION MAP			
MAP INDEX NUMBER	SCALE	DRAWING NUMBER	
	1:5000		

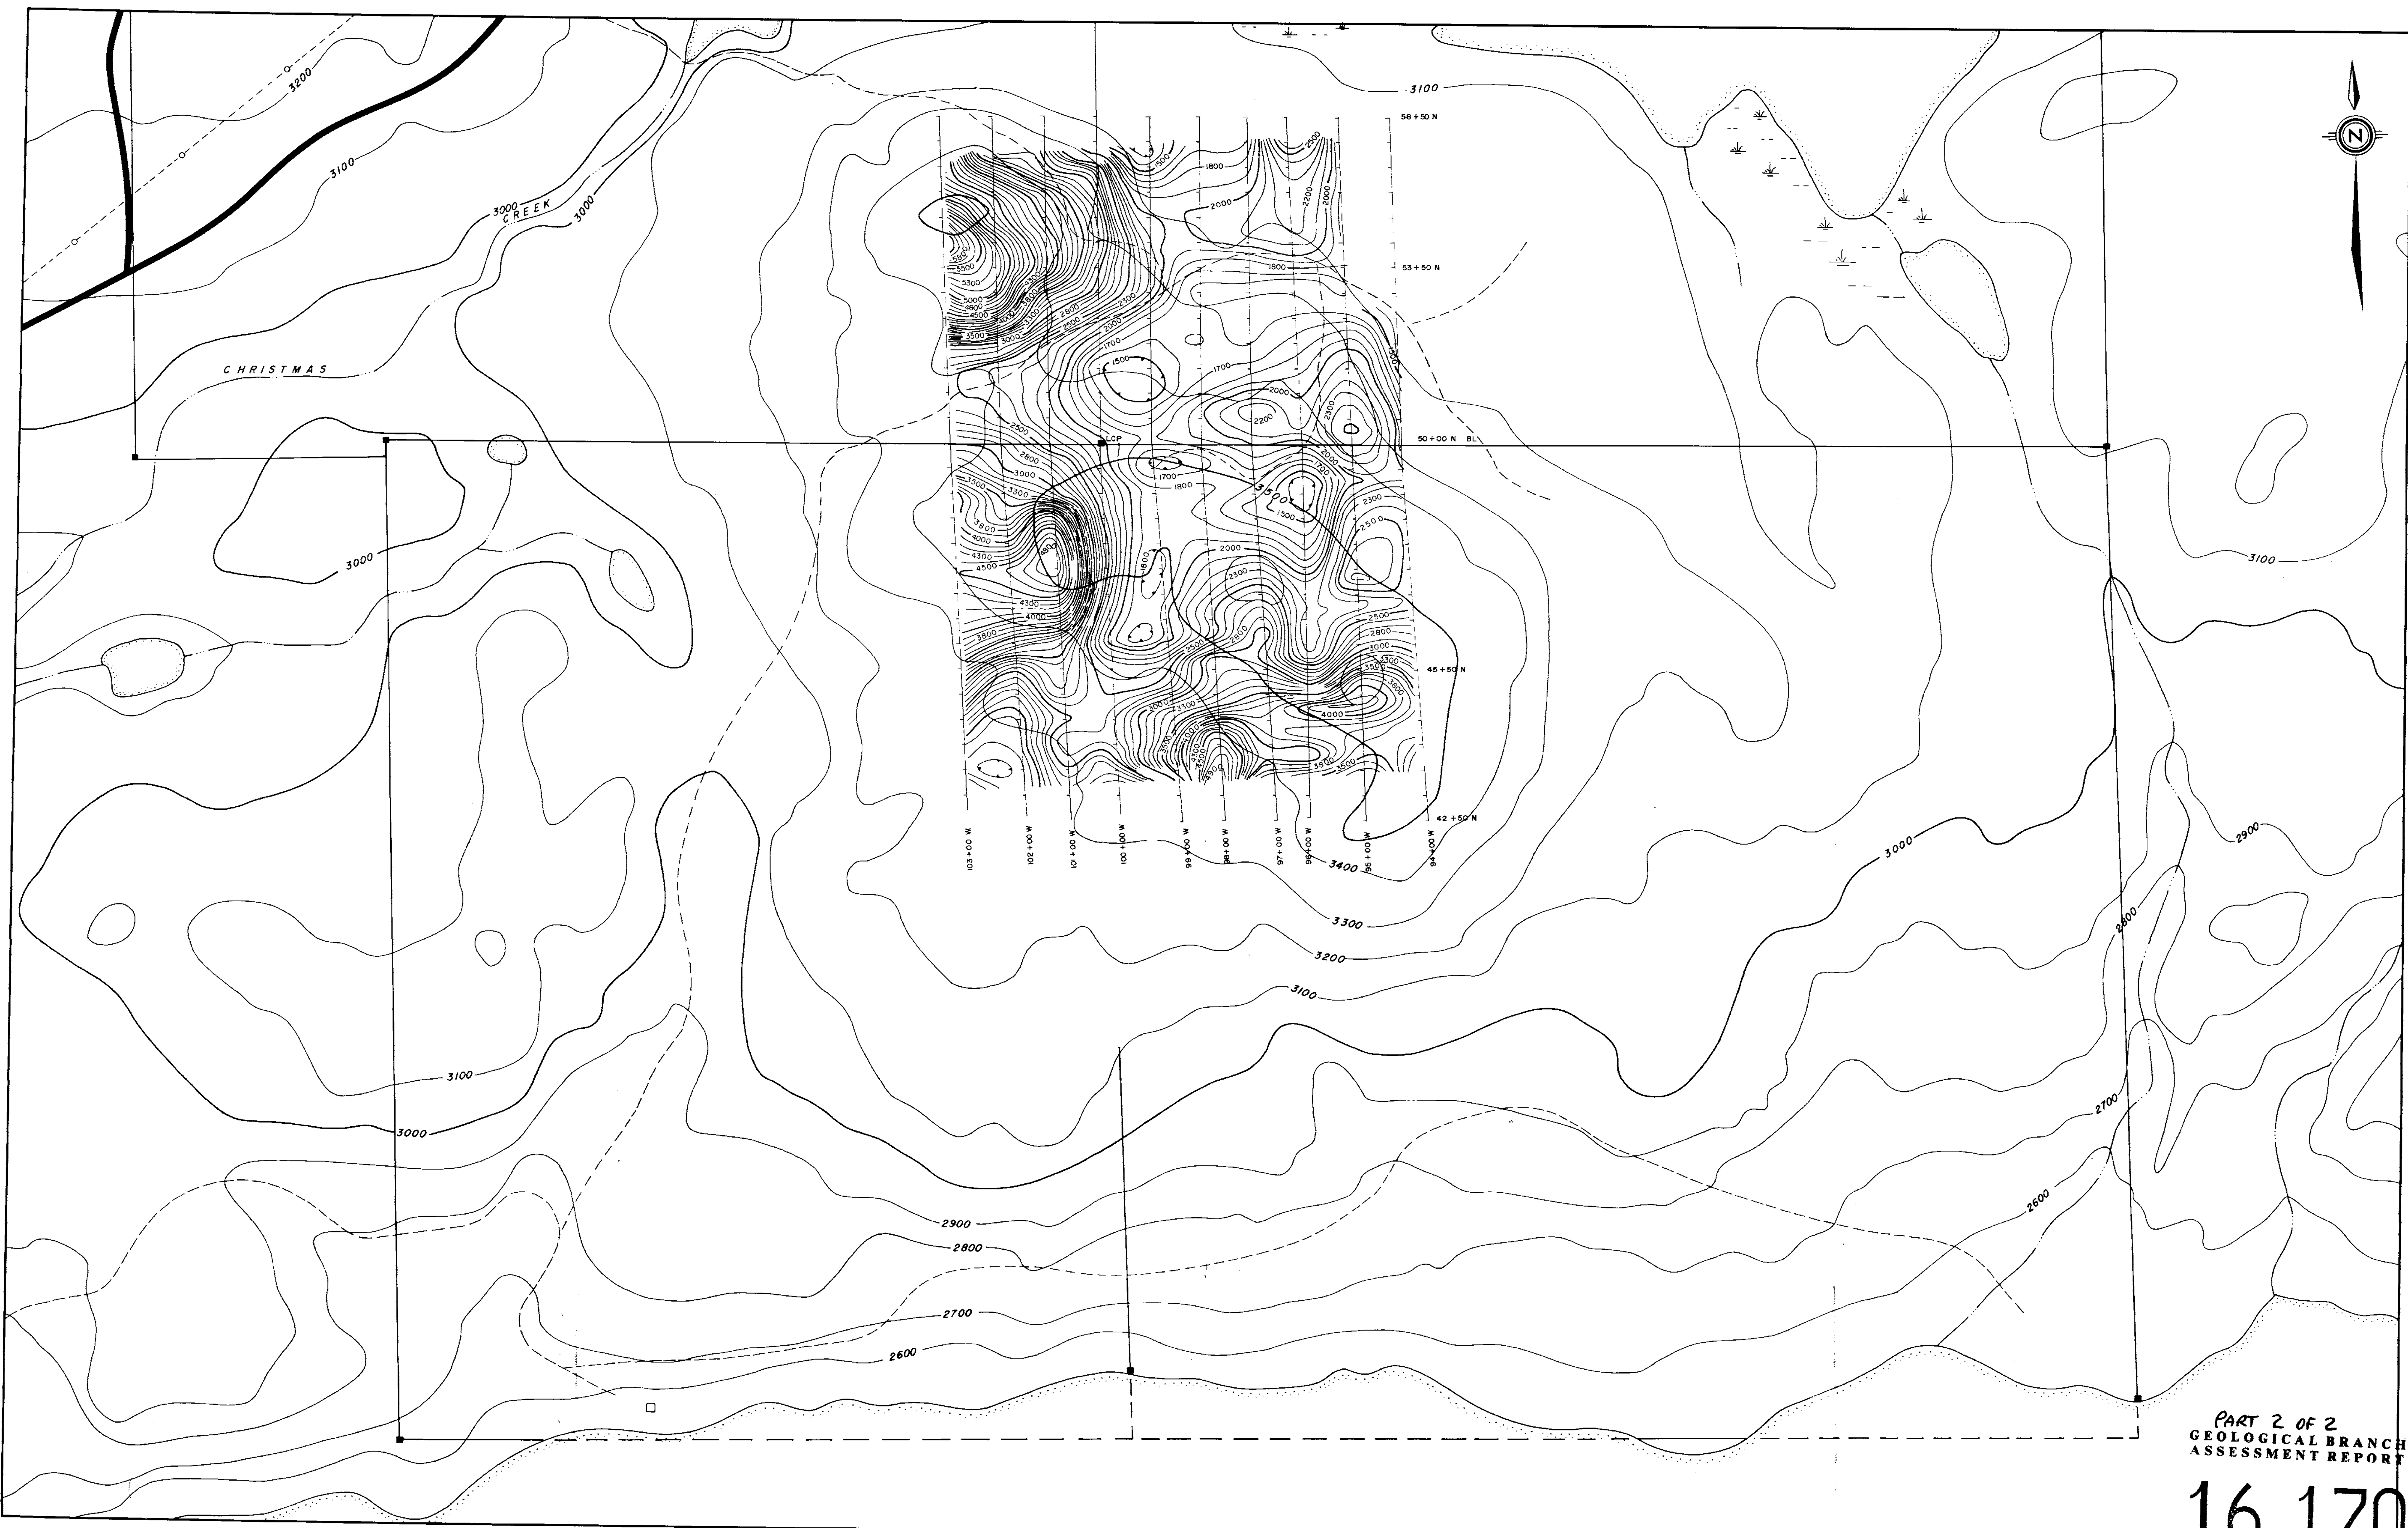

PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT

16,170

<p><b>Legend</b></p> <p>— 2500 — 500 ohm-metre contours</p> <p>— 2600 — 100 ohm-metre contours</p>		<p>MAP SCALE</p> <p>100 0 100 200 300 M</p>	<table border="1" style="font-size: small;"> <thead> <tr> <th>No</th> <th>Date</th> <th>MADE BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td></tr> </tbody> </table>	No	Date	MADE BY	DESCRIPTION	1				2				3				4				5				<table border="1" style="font-size: small;"> <thead> <tr> <th>DATE</th> <th>DRAWN BY</th> <th>CHECKED</th> <th>APPROVED</th> </tr> </thead> <tbody> <tr> <td>JULY 85</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	DATE	DRAWN BY	CHECKED	APPROVED	JULY 85				<p><b>E &amp; B Explorations Inc.</b></p>	<p>CHRISTMAS LAKE PROJECT</p> <p><b>MING MINES LIMITED</b> (SOUTH GRID)</p> <p>APPARENT RESISTIVITY FRASER FILTER CONTOURS</p>
No	Date	MADE BY	DESCRIPTION																																			
1																																						
2																																						
3																																						
4																																						
5																																						
DATE	DRAWN BY	CHECKED	APPROVED																																			
JULY 85																																						
		<p>NTS_92_P/15</p>		<p>OFFICE</p>		<p>DEPARTMENT</p>																																
				<p>MAP INDEX NUMBER</p>		<p>SCALE</p> <p>1: 5000</p>																																
				<p>DRAWING NUMBER</p>																																		

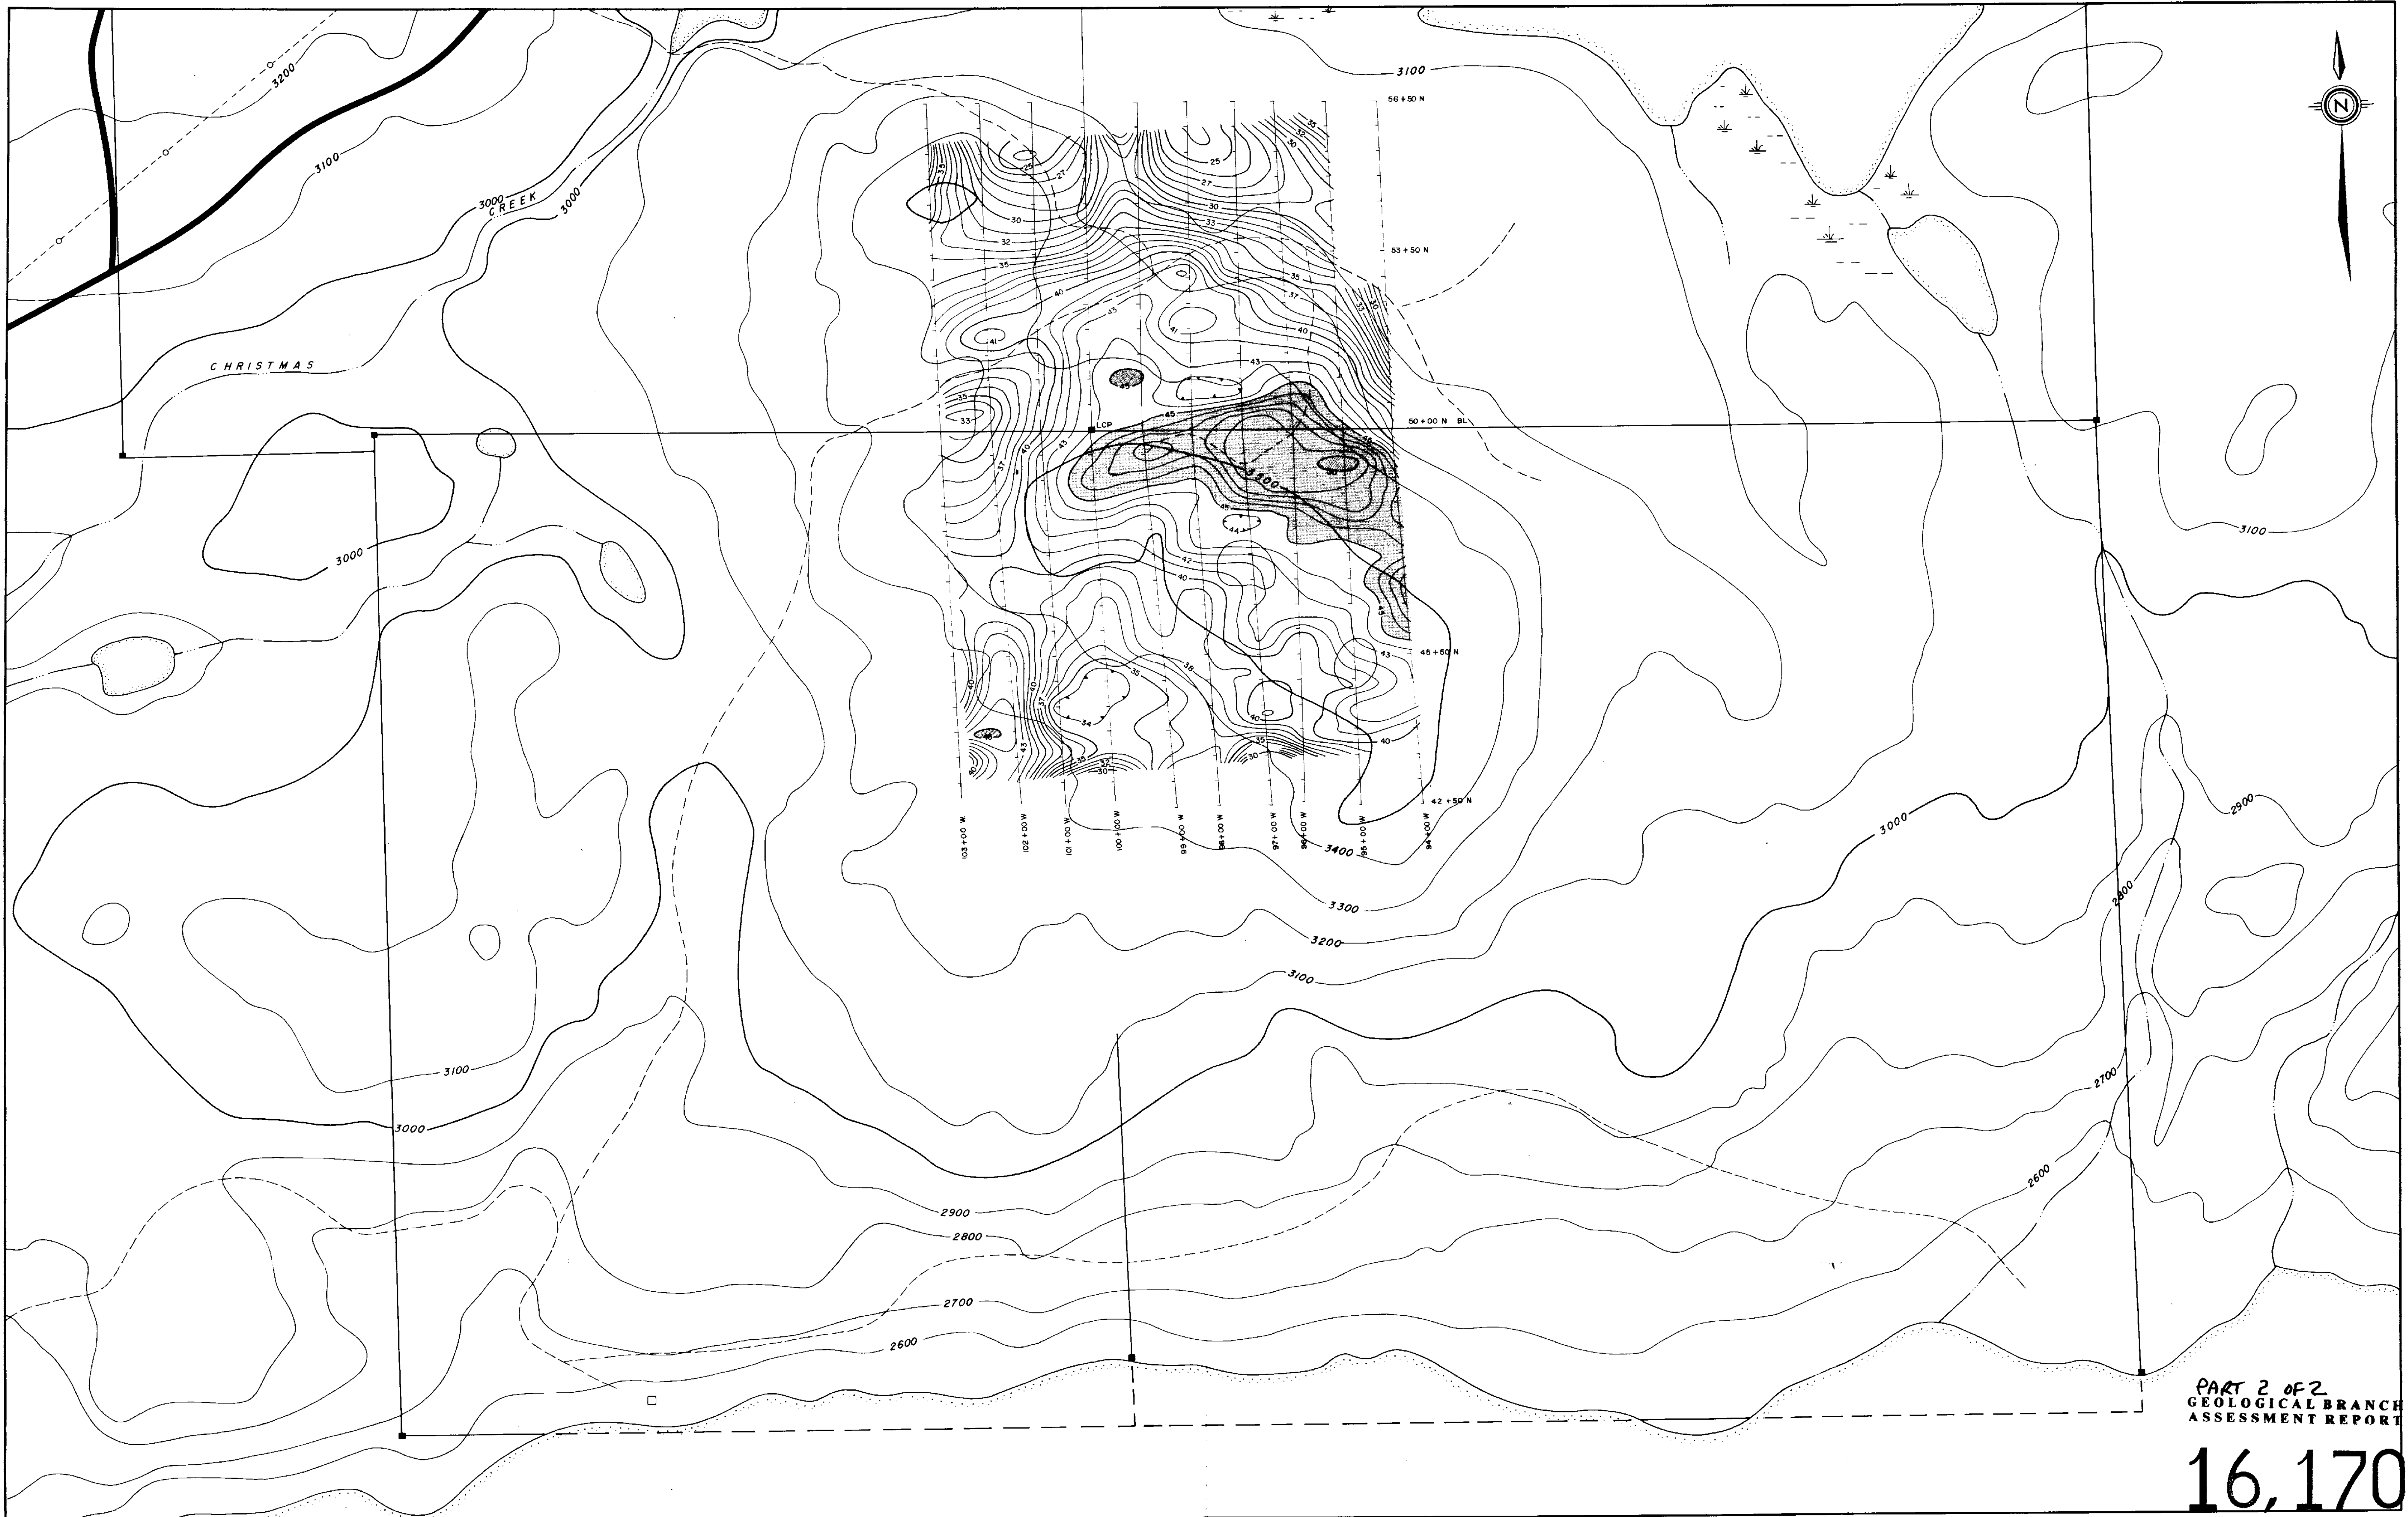

PART 2 OF 2  
GEOLOGICAL BRANCH  
ASSESSMENT REPORT

16,170

<p><b>Legend</b></p> <p>— 35 — 5 millisecond contours</p> <p>— 36 — 1 millisecond contours</p>		<p>MAP SCALE</p> <p>NTS - B2 - P.15</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No</th> <th>Date</th> <th>MADE BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DATE</th> <th>DRAWN BY</th> <th>CHECKED</th> <th>APPROVED</th> </tr> </thead> <tbody> <tr> <td>JULY 85</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	No	Date	MADE BY	DESCRIPTION	1				2				3				4				5				DATE	DRAWN BY	CHECKED	APPROVED	JULY 85				<p><b>E &amp; B Explorations Inc.</b></p>	<p style="text-align: center;"><b>CHRISTMAS LAKE PROJECT</b></p> <p style="text-align: center;">MING MINES LIMITED (SOUTH GRID)</p> <p style="text-align: center;">APPARENT CHARGEABILITY FRASER FILTER CONTOURS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>MAP INDEX NUMBER</th> <th>SCALE</th> <th>DRAWING NUMBER</th> </tr> </thead> <tbody> <tr> <td></td> <td>1 : 5000</td> <td></td> </tr> </tbody> </table>	MAP INDEX NUMBER	SCALE	DRAWING NUMBER		1 : 5000	
No	Date	MADE BY	DESCRIPTION																																								
1																																											
2																																											
3																																											
4																																											
5																																											
DATE	DRAWN BY	CHECKED	APPROVED																																								
JULY 85																																											
MAP INDEX NUMBER	SCALE	DRAWING NUMBER																																									
	1 : 5000																																										