

LOG NO: 1123	RD.
ACTION:	
FILE NO: 87-783 16471	

8/88

GEOPHYSICAL SURVEY REPORT
on the
Nina 1 to 4 MINERAL CLAIMS
Nina Lake - Germansen Landing Area
Fort St. James, B.C.
Omineca Mining Division

16,471

**GEOLOGICAL BRANCH
ASSESSMENT REPORT**

Lat: N 55 56'
Long: W 124 48'30"

NTS: 93-N-15W

FILMED

Owned by: **Lornex Mining Corporation Ltd.**

Scott Geophysics Ltd.
J.M. Thornton

November, 1987

Scott Geophysics Ltd.

TABLE OF CONTENTS

	PAGE
Summary	1 /
Introduction	1 /
Location and Access	1 /
Claim Status	1 /
Geology	1 /
Previous Work	2 /
Geophysical Surveys	2 /
Equipment Used	2 /
Survey Results	2 /
Discussion of Results	3 /
Conclusions and Recommendations	5 /
Statement of Expenditures	6 /
Statement of Qualifications	7 /

APPENDIX A ✓

Data Listings:
 Field data
 Spectral Parameters

ILLUSTRATIONS

	Scale
Property Location Map	1:10000000 /
Location Map (Claims & Grid)	1: 10000 /
Pseudo-Sections Lines 5+00N to 14+00N (incl)	1: 1250 /

MAPS (in pocket)

✓ Plate I	Resistivity	n=1	1:2500
✓ Plate II	Chargeability	n=1	"
✓ Plate III	Resistivity	n=3	"
✓ Plate IV	Chargeability	n=4	"
✓ Plate V	Geophysics Compilation		"

Summary

An Induced Polarization survey over part of the Nina 1, 2 and 3 Mineral Claims revealed the presence of 3 distinct anomalies. One is co-incident with a VLF conductor discovered in earlier work, extending it more than 100 meters to the northwest. Two other anomalies of somewhat different character were observed, north and northeast of the "Cirque anomaly". Some faulting can be inferred from the data.

Introduction

During the period July 14 - 16, 1987, Induced Polarization and Resistivity surveys were performed by Scott Geophysics Ltd. over portions of the Nina 1, 2 and 3 claims, owned by Lornex Mining Corporation. A total of 5.85 line kilometers were surveyed using an array spacing "a" of 25 meters, gathering data for four "n" separations in the standard pole-dipole configuration.

Location and Access

The Nina property consists of 4 Mineral Claims sharing a common Legal Corner Post. The survey area straddles a ridge; elevations ranging from 1400 to 1800 meters ASL.

The claims are approximately 18 km. northwest of Germansen Landing, and 3 kilometers north of Nina Lake. Traditionally, Nina Lake provided fixed wing access. Currently, access is provided by a good 2 wheel drive road south to Manson Creek and Fort St. James. This road lies approximately 8 km. south of Nina Lake.

Best access to the property is provided by helicopter, either from McKenzie or Germansen Landing.

Claim Status

The property comprises 56 units in the following claims.

NAME	UNITS	ANNIV. DATE	RECORD NO.
Nina 1	20	Aug. 20, 1988	7229(8)
Nina 2	15	July 27, 1988	8580(7)
Nina 3	9	July 27, 1988	8581(7)
Nina 4	12	July 27, 1988	8582(7)

Nina 2-4 were staked in July 1987 on the basis of previous work.

Geology

The property lies on or near the mapped boundary of Triassic volcanics and Upper Paleozoic volcanics. A group of mafic volcanics and clastic sediments, known as the Nina Creek Belt, trend northwest through the Nina 1, 2 and 3 mineral claims.

Scott Geophysics Ltd.



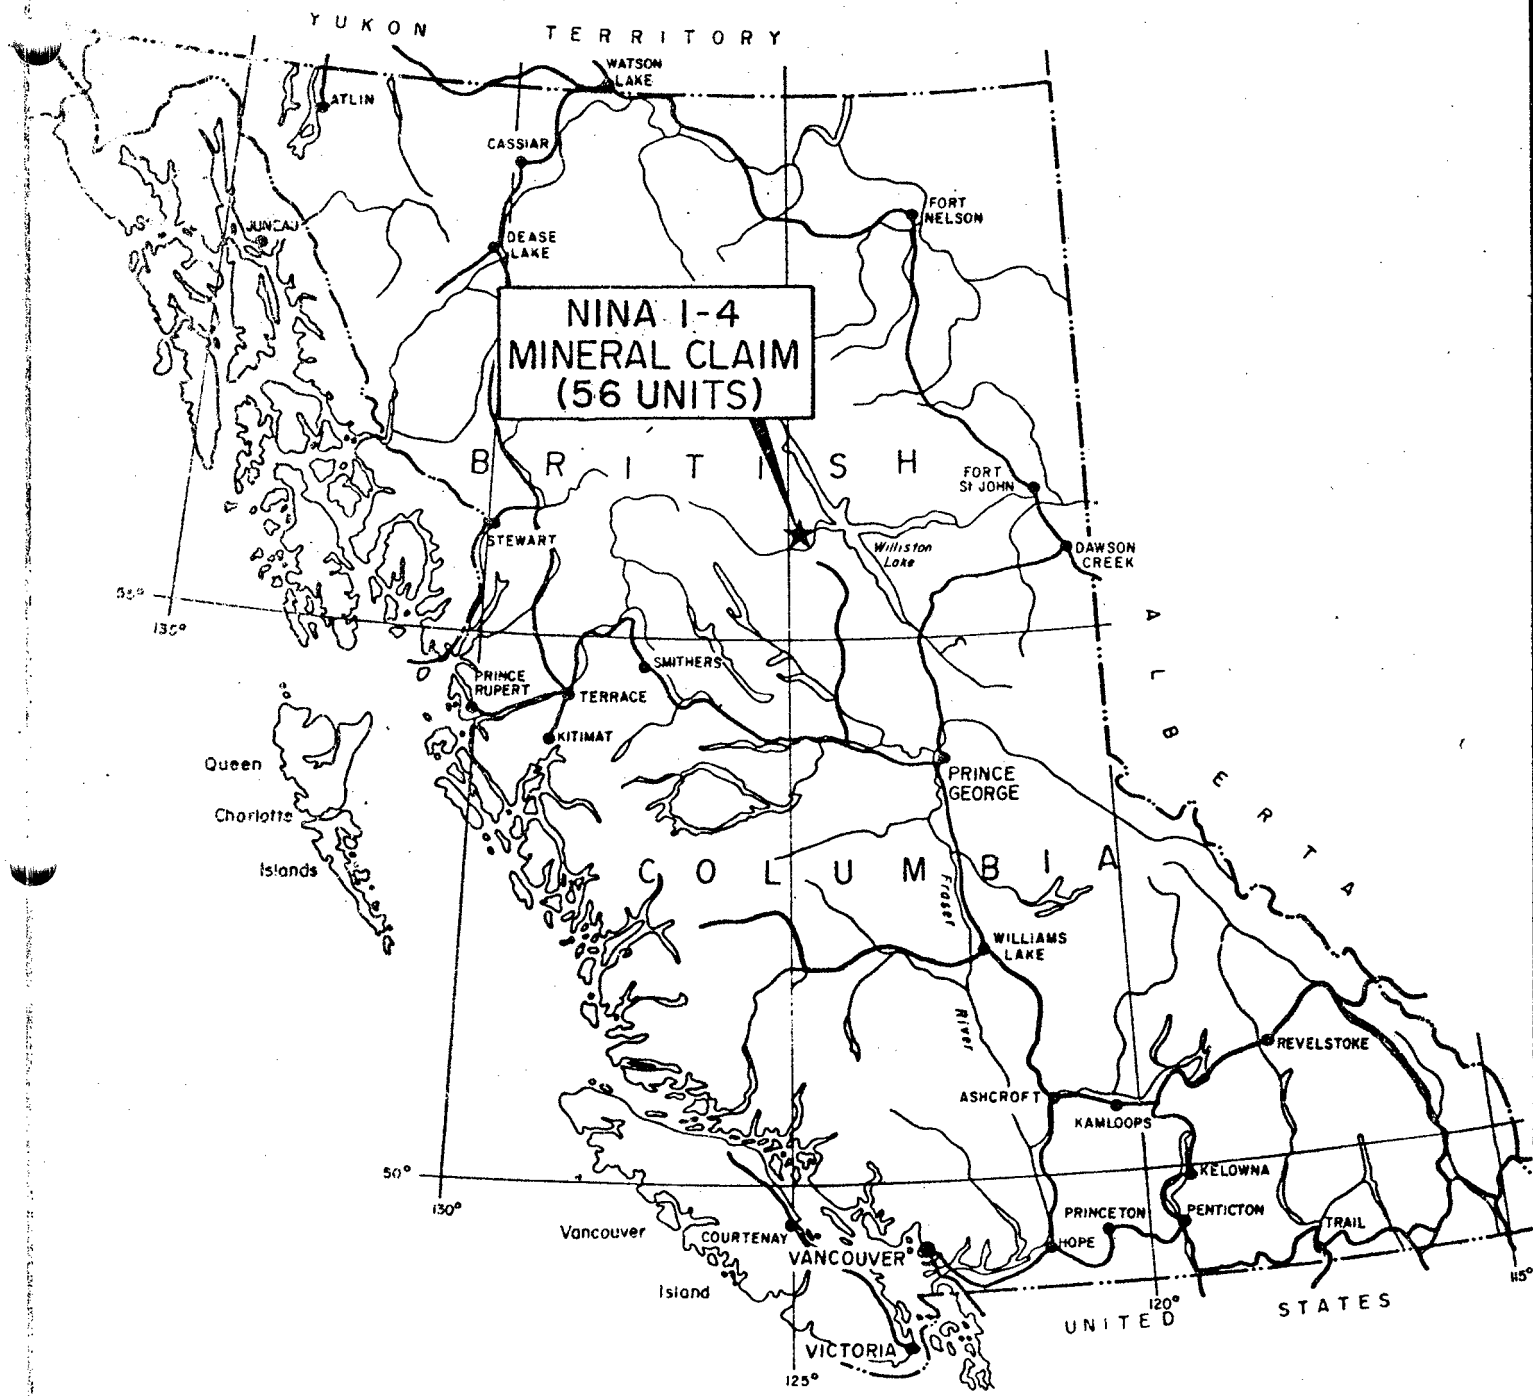




FIGURE I.


PROPERTY LOCATION MAP
LORNE X MINING CORPORATION LTD.
NINA CLAIMS
NOVEMBER 1987.



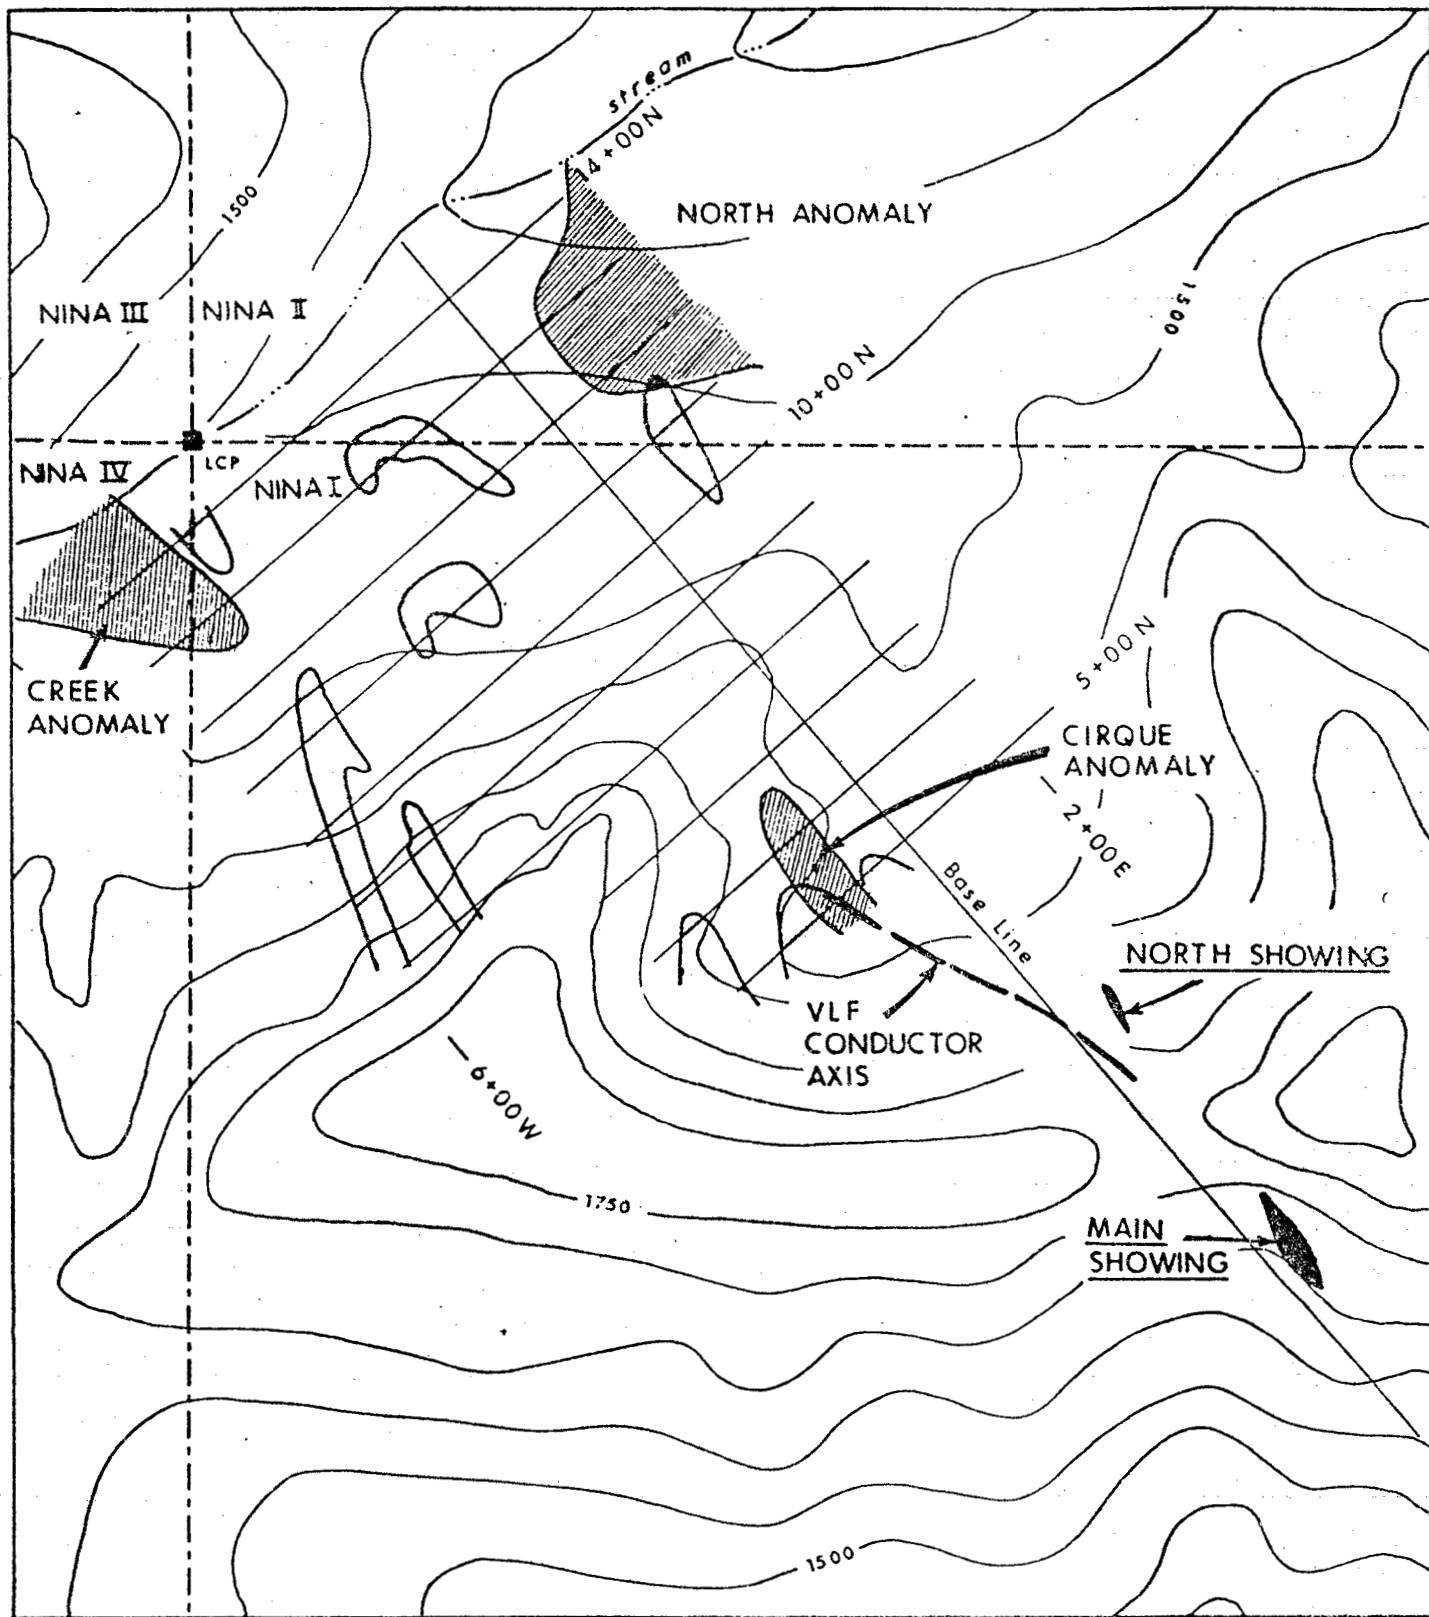

LEGEND

-  >100 ppm Cu in soil
-  I.P. chargeability anomaly



LORNEX MINING CORPORATION LTD.

NINA CLAIMS

STAGE I - COMPILATION

DATE	DRAWN BY	DWG.
NOV. 1987.	R.M.C./J.S.	

Mafic volcanics, tuffaceous sediments and a hydrothermal breccia are the three main lithological units in the area of Nina 1. The whole package appears to dip steeply northeast.

Previous Work

Geological mapping, geochemical soil sampling, and ground magnetometer and VLF surveys were conducted in the vicinity of the known mineralized areas in 1985.

A very strong VLF anomaly was observed trending northwest from the baseline at 1+00N. Another moderately strong VLF anomaly was seen to trend north or northwest at the extreme east end of the survey area. Both of these anomalies appear to be caused by narrow near surface features. There is no evidence of VLF response to the mineralized zones outlined in the 1985 work.

In 1986, a program of trenching, detailed soil sampling and a short IP test survey over the VLF anomaly on line 5+00N anomaly was carried out.

The IP test line over the strong VLF anomaly on Line 5+00N at 125W indicated the presence of a very narrow strongly polarized source. A good resistivity contrast was noted. The response is typical of a narrow massive sulphide vein.

Geophysical Survey

Fifteen lines of Induced Polarization data were gathered using an "a" spacing of 25 meters in a pole-dipole array in order to examine the area northwest of the VLF conductor.

Four "n" separations were read simultaneously. Transmitted waveform was the standard 2 sec. alternating square wave, with the current electrode east of the receiving electrodes for the duration of the survey.

Equipment Used

The survey was performed with a Scintrex IPR-11 receiver and a 2.5 W Scintrex IPC-7 transmitter. The IPR-11 is a micro-processor based IP receiver capable of measuring six dipoles simultaneously. Ten channels (or windows) of chargeability were gathered and stored in the receiver memory along with the SP and resistivity at each dipole.

The chargeability information was processed to provide spectral information. This processing also provides a data quality check.

Survey Results

Data was archived and processed using a Sharp 7000 portable microcomputer using software proprietary to Scott Geophysics Ltd. on a Scott Geophysics Ltd.

dot matrix printer.

Resistivity and chargeability data (M7) were plotted as pseudo-sections at a scale of 1:1250. M7 is the eighth chargeability window (690-1050 msec), which closely approximates the Newmont standard (700-1100 msec).

Spectral Analysis of the IP data was performed. The Cole-Cole parameters, c and τ , were calculated along with a goodness-of-fit. This fit is a measure of the data quality, inasmuch as the data can be seen to conform to pre-established waveforms. Large τ values are indicative of large "grain" size. Table entries of -2000 indicate a value not determined, generally due to extremely low signals in areas of low resistivity.

Data listings are provided in Appendix A.

Contour maps of the resistivity and chargeability data for $n=1$ and $n=3$ were generated and plotted at a scale of 1:2500. (Plates I to IV)

Discussion of Results

Line 5+00N - 6+00N

- Narrow sub-vertical zone of moderate chargeability at 125W on both lines. Resistivity low co-incident. Survey on Line 5+00N is a resurvey of part of the line surveyed in 1986. The older data is more definitive of a narrow dike-like structure, flanked by higher resistivity material. Line 6+00N data is essentially identical to line 5+00N, except that anomaly may be located at 115W.

Line 7+00N

- Anomaly not present at 100W. A weak chargeability high at depth may indicate the presence of the structure but it is either too narrow for the electrode spacing or too poor in polarizable material. The resistivity values are consistent with the adjacent lines. Rocks to the west are essentially barren of polarizable material.

Line 8+00N - 9+00N

- Very low chargeabilities and high resistivities throughout indicate the same rocks as the west end of line 7+00N. Resistivities in the vicinity of 100W are consistent with the low resistivity zone but little polarizable material is evident. A contact at 50-75W on line 9+00W is suggested. Rocks to the east are more resistive and contain slightly more polarizable material.

Line 10+00N

- Distinct layering evident in chargeability data west of the baseline. Increased chargeability between 75W and 25E at depth (50-75 m) similar to line 9+00N. Narrow chargeability high at 120E, due to a vertical dike-like structure.

Line 11+00N

- Low resistivity zone persists from 125W to 75W. Low chargeability at surface, increasing with depth; highest at 120W.

Scott Geophysics Ltd.

Appears to be a flat lying zone of moderate chargeability at limit of survey depth penetration, coming within range at 120W and to near surface at 200E.

Line 12+00N

- Moderate chargeability material flat lying at depth. Contact at 75E suggested in chargeability data. Resistivity data is layered, suggestive of some overburden (clay?) Results on this line may be reflecting the anomalies evident on line 13+00N

Line 13+00N

- Strong chargeability anomaly at depth from 525W - 475W. Smooth appearance suggests wide zone buried 25 - 50 meters; with an accompanying resistivity low. Data suggests horizontal attitude.

Low surface resistivity at 25E, similar to line 12+00N. Increase in chargeability. Probably same contact feature. Strong wide near surface chargeability anomaly at 300E+. Depth to source 15-25 meters. Appears to dip to east but is visible from west as well. Probable that the large separations are influenced by sources on adjacent line.

Resistivity data unhelpful.

Line 14+00N

- Very strong chargeability anomaly at 550W - 500W at some depth, resistivity low accompanying. High resistivity rocks from 500W to 300W. Contact at 300W appears to dip west. Low resistivity rocks at surface from 75W to 50E. Contact to high resistivity / high chargeability rocks at 80E.

Data from line 11+00N and north have a horizontal bias whereas the southern anomalies appear to be sub-vertical.

Plate V is a compilation of the IP data. The VLF anomaly observed in 1985 is reflected in the IP data gathered in 1986 and the present survey.

The current work indicates a narrow sub-vertical structure extending north-west perhaps a little more than 100 meters. This chargeability anomaly is in an extended zone of low resistivity which continues beyond line 10+00N. This resistivity low is flanked on both sides by moderately higher resistivity rocks which seem to terminate in the vicinity of line 10+00N.

Higher resistivity zones are observed on line 14+00N adjacent to high chargeability anomalies. Termination of the high resistivity zones is attributed to cross-cutting faults as shown on Plate V. The low resistivity zone extending north of the IP high on line 5+00N may be due to alteration.

In general, the high resistivities may be attributed to a minor increase in quartz or silicification in the meta-sedimentary package. The level of alteration is not strong. A larger data set is required to confirm that the resistivity changes are due to alteration variations.

Conclusions and Recommendations

The IP survey has delineated several zones of moderately high chargeability flanked by higher resistivity rocks. North of line 11+00N the anomalies appear to be horizontal in nature. The VLF anomaly does not appear to continue much north of 6+00N but a low resistivity zone does continue toward line 10+00N.

The anomalies on lines 13+00N and 14+00N lie at some depth and on the periphery of the survey area. If geological examination is supportive, the survey area should be extended to delineate the IP targets.

These zones appear to be fault bounded, but more data is required to ascertain the probability.

J. M. Thornton

J. M. Thornton

Nov. 13, 1987

Date

Statement of Expenditures

Linecutting:

Van Alphen Exploration Services \$ 2500.00

Transportation:

Okanagan Helicopters (8.5 hours) 5315.56

Geophysical Survey: (incl report preparation)

Scott Geophysics Limited 8713.87

\$ 16529.43
=====

Statement of Qualifications

I, J.M. Thornton, of 3393 Fairmont Road, North Vancouver, B.C. do certify that:

- 1) I have worked as a geophysical technician for the past twenty years.
- 2) I have been engaged in mineral exploration since graduation from BCIT in 1967.
- 3) I have no interest in the property represented in this report, nor do I expect to receive any such interest.



J.M. Thornton

Appendix A

**Induced Polarization Data Listings
Lines 5+00N to 14+00N (incl)**

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-500N.IND

DATA FILE : L-500N.DAT

LINE NO. : 500

Station	Receive Mode	Dipole	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
0	2	1	8.8	7.5	6.5	5.8	4.6	3.4	2.8	2.2	1.7	1.3	882.7	-6.	1319.
		2	9.5	7.9	6.9	6.1	4.8	3.6	2.9	2.2	1.7	1.4	262.2	5.	1176.
		3	8.7	7.5	6.5	5.8	4.6	3.3	2.7	2.0	1.5	1.2	150.5	-3.	1340.
		4	12.8	10.4	9.2	8.2	6.4	4.9	4.0	3.1	2.5	2.0	71.2	6.	1064.
254	2	1	9.1	7.3	6.5	5.8	4.5	3.3	2.7	2.0	1.5	1.2	1091.0	0.	1370.
		2	9.6	7.7	6.8	6.1	4.6	3.4	2.7	2.1	1.7	1.3	424.8	-1.	1600.
		3	11.6	9.5	8.5	7.7	6.1	4.5	3.6	2.8	2.3	1.6	171.7	0.	1290.
		4	29.0	23.2	20.5	18.4	14.5	10.9	8.9	6.9	5.1	4.6	42.4	43.	532.
504	2	1	8.3	6.6	5.7	5.2	4.1	3.0	2.2	1.9	1.7	.9	1244.0	2.	1560.
		2	10.4	8.7	7.7	7.1	5.4	4.1	3.7	2.6	1.3	2.1	411.1	3.	1549.
		3	26.2	21.9	19.2	17.4	13.7	10.3	8.7	6.4	3.8	4.5	65.7	30.	644.
		4	65.0	53.6	47.8	43.8	34.1	25.1	20.1	16.9	15.7	9.8	25.9	-10.	325.
754	2	1	10.8	9.0	7.8	7.3	5.6	4.2	3.4	2.7	2.1	1.7	1033.0	2.	1410.
		2	26.3	21.8	19.1	17.3	13.7	10.2	8.0	6.3	4.8	3.9	174.0	29.	712.
		3	61.8	52.1	46.5	42.3	33.6	25.4	20.5	16.2	12.6	10.3	42.4	-15.	346.
		4	47.3	39.3	34.8	31.8	25.0	18.8	15.3	12.1	9.5	7.6	37.0	-5.	505.
1004	2	1	21.8	18.1	16.1	14.6	11.6	8.7	7.1	5.7	4.3	3.5	452.8	30.	711.
		2	62.6	52.7	46.9	42.6	33.8	25.6	20.4	16.0	13.4	10.8	75.1	-9.	354.
		3	47.8	40.0	35.6	32.4	25.7	19.3	15.7	12.5	9.8	7.9	52.7	-13.	495.
		4	45.0	37.4	33.4	30.4	24.3	18.3	14.9	11.9	9.2	7.6	32.4	-15.	508.
1254	2	1	51.7	43.9	39.2	35.8	28.8	21.8	17.8	14.3	11.0	9.1	164.3	-10.	322.
		2	53.4	44.6	39.8	36.2	28.7	21.5	17.5	13.6	10.8	8.8	63.3	-14.	373.
		3	48.1	40.3	36.0	32.9	25.9	19.5	15.7	12.2	9.8	8.0	34.2	-9.	401.
		4	45.8	37.7	33.5	30.3	24.6	18.7	15.6	12.4	9.4	7.5	17.8	20.	350.
1504	2	1	35.9	30.0	26.7	24.3	19.3	14.6	11.8	9.4	7.3	5.9	68.8	-14.	309.

		2	47.0	38.6	34.6	31.5	24.7	18.6	15.4	12.1	9.6	7.8	28.2	-2.	294.
		3	48.9	36.5	33.0	29.2	23.4	17.2	13.9	10.9	8.4	6.9	11.8	14.	240.
1754	2	1	14.5	12.2	10.9	10.1	7.9	5.9	4.9	4.0	3.0	2.6	465.3	-5.	730.
		2	23.7	19.2	17.0	15.8	12.6	9.7	7.6	5.9	5.0	3.7	98.9	15.	466.
2004	2	1	9.4	7.0	6.4	5.8	4.6	3.5	3.0	2.4	1.9	1.6	997.6	14.	2409.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-600N.IND

DATA FILE : L-600N.DAT

LINE NO. : 600

Station	Receive Mode	Dipole	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
0	2	1	7.7	6.4	5.7	5.1	4.1	3.1	2.5	2.0	1.5	1.3	691.5	-13.	986.
		2	7.1	5.9	4.8	4.5	3.5	2.6	2.1	1.7	1.3	1.1	265.3	11.	1135.
		3	10.0	8.4	7.4	6.6	5.3	4.0	3.2	2.5	1.8	1.3	136.9	-13.	1160.
		4	17.5	14.2	12.8	11.4	9.2	7.1	5.8	4.5	3.6	3.1	58.0	-3.	327.
254	2	1	6.0	5.0	4.4	3.7	2.8	2.1	1.7	1.2	1.0	.7	444.0	12.	1072.
		2	10.6	8.7	7.8	7.1	5.7	4.3	3.1	2.7	2.1	1.7	184.4	-10.	1336.
		3	16.4	13.8	12.3	111.4	9.0	6.7	5.4	4.3	3.3	2.7	68.2	-6.	986.
		4	64.8	54.6	47.9	43.5	33.8	25.5	20.7	16.2	12.5	10.3	18.9	31.	456.
504	2	1	9.7	8.3	7.3	6.6	5.3	3.9	3.3	2.6	2.0	1.7	588.0	-11.	1318.
		2	15.2	13.0	11.5	10.4	8.3	6.2	5.0	4.0	3.0	2.5	155.0	-8.	1042.
		3	66.0	55.6	49.0	44.3	35.2	26.3	21.3	16.8	12.8	10.4	33.4	31.	449.
		4	46.0	38.1	33.2	29.9	24.0	17.0	14.6	11.3	8.9	7.1	14.6	22.	328.
754	2	1	16.5	14.0	12.3	11.2	9.0	6.8	5.6	4.4	3.4	2.8	698.2	-13.	1370.
		2	73.9	62.1	54.8	49.5	39.1	29.2	23.6	18.4	14.1	11.6	81.1	28.	477.
		3	46.6	39.2	34.3	30.9	24.8	18.5	15.1	11.7	8.6	7.7	27.2	24.	319.
		4	41.3	34.7	29.3	23.8	20.6	14.6	13.5	9.9	7.8	5.4	18.9	12.	371.
1004	2	1	76.7	64.8	57.4	52.5	41.4	31.2	25.2	19.9	15.4	12.5	206.7	29.	499.
		2	54.0	45.5	40.0	36.3	28.9	21.3	17.3	13.7	10.5	8.6	42.1	23.	305.
		3	41.9	35.4	31.0	28.2	22.4	16.7	13.5	10.6	8.1	6.6	24.2	9.	350.
		4	38.3	32.0	28.6	26.0	20.5	16.2	13.3	9.9	8.0	6.5	18.5	-11.	446.
1254	2	1	52.7	44.6	39.6	35.7	28.6	21.5	17.5	13.7	10.7	8.8	166.9	26.	327.
		2	50.4	42.5	37.4	33.8	27.0	20.3	16.4	13.0	10.0	8.2	55.2	-3.	325.
		3	44.4	37.7	33.3	30.2	24.2	18.1	14.6	11.7	9.0	7.1	35.5	-2.	417.
		4	39.2	32.9	29.1	26.3	20.7	15.7	13.1	9.8	8.0	6.8	18.2	7.	357.
1504	2	1	12.9	11.3	10.2	9.5	7.9	5.6	3.4	2.3	1.8	1.3	223.9	6.	413.

Index: L-600N.IND

Data : L-600N.DAT

		2	21.6	17.8	15.6	14.4	11.2	8.3	6.8	5.7	3.8	3.4	92.2	-5.	511.
		3	21.3	17.7	15.8	14.3	11.3	8.6	6.9	5.1	4.0	3.4	39.2	13.	433.
1754	2	1	7.6	6.4	5.7	5.2	4.1	3.1	2.5	1.8	1.6	1.3	237.8	0.	497.
		2	9.6	8.1	6.9	6.3	5.0	3.8	3.0	2.7	2.0	1.5	73.7	12.	463.
2004	2	1	4.3	3.6	2.7	2.4	2.4	1.6	1.2	1.1	.8	.7	178.2	11.	690.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-700N.IND

DATA FILE : L-700N.DAT

LINE NO. : 700

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
0	2	1	6.4	5.4	4.9	4.5	3.7	2.9	2.4	1.9	1.5	1.2	546.9	20.	1226.
		2	8.3	6.5	5.8	5.3	4.1	3.0	2.4	1.8	1.3	1.2	257.2	-15.	1730.
		3	8.2	6.8	6.2	5.6	4.4	3.3	2.6	2.0	1.5	1.3	80.8	0.	1085.
		4	18.2	13.8	12.2	11.2	8.9	6.7	5.5	4.2	3.4	2.5	25.8	-5.	579.
254	2	1	7.8	6.4	5.6	5.1	4.1	3.0	2.4	1.9	1.4	1.1	810.0	0.	2119.
		2	7.4	6.1	5.5	5.0	4.0	3.0	2.4	1.9	1.5	1.2	188.4	-2.	1478.
		3	15.2	12.9	11.5	10.6	8.0	5.9	4.8	3.6	2.6	2.5	48.1	-1.	753.
		4	20.9	16.7	15.1	13.5	10.8	8.3	6.3	5.4	4.4	2.9	27.3	-13.	713.
504	2	1	6.7	5.8	5.1	4.6	3.7	2.8	2.3	1.8	1.4	1.1	719.4	0.	1613.
		2	16.0	13.6	11.8	10.5	8.4	6.0	4.9	3.8	2.9	2.3	122.3	-5.	822.
		3	19.3	16.7	14.5	13.1	10.4	7.8	6.3	5.0	3.9	3.1	54.7	-4.	734.
		4	22.3	18.4	16.5	14.1	11.5	8.6	7.3	5.6	4.3	3.5	23.6	27.	528.
754	2	1	10.9	9.1	8.1	7.2	5.8	4.3	3.5	2.7	2.1	1.7	565.6	-1.	1044.
		2	19.4	16.0	14.2	12.7	10.1	7.5	6.0	4.8	3.7	3.0	155.8	-4.	863.
		3	20.3	17.3	15.2	13.6	10.7	7.9	6.4	5.0	3.8	3.1	53.8	30.	594.
		4	24.1	19.4	17.2	15.4	12.1	9.2	7.2	5.8	4.8	3.5	24.0	-7.	442.
1004	2	1	15.2	12.6	11.1	10.0	7.9	5.9	4.8	3.7	2.9	2.4	256.9	-5.	537.
		2	19.3	16.1	13.9	12.5	10.0	7.3	5.9	4.8	3.6	2.9	69.1	25.	434.
		3	20.6	16.7	14.3	12.3	10.5	8.0	6.0	5.6	3.8	3.4	27.7	-2.	347.
		4	21.3	18.3	16.9	18.2	10.9	8.3	7.7	4.8	4.3	3.3	12.9	-5.	270.
1254	2	1	5.8	5.0	4.4	4.0	3.1	2.3	1.9	1.5	1.1	.9	196.2	28.	362.
		2	12.2	10.2	9.0	8.1	6.4	4.7	3.8	3.0	2.2	1.8	57.7	-2.	320.
		3	15.8	13.4	11.8	10.6	8.5	6.1	5.2	4.0	3.0	2.4	23.1	4.	256.
		4	16.0	13.1	11.6	10.5	8.5	6.3	5.2	3.7	2.7	2.2	19.3	-15.	356.
1504	2	1	3.4	3.0	2.6	2.2	1.9	1.5	1.1	.9	.7	.7	171.1	25.	335.

Index: L-700N.IND

Data : L-700N.DAT

		2	8.3	6.8	6.1	5.2	4.2	3.0	2.4	1.9	1.4	1.1	53.7	-1.	316.
		3	8.6	7.2	6.5	5.6	4.6	3.4	2.7	2.0	1.7	1.6	35.3	-7.	415.
		4	11.1	8.9	7.6	6.6	5.5	4.0	3.1	2.6	1.9	1.5	25.9	-5.	508.
1754	2	1	4.1	3.5	3.3	2.7	2.1	1.6	1.1	1.0	.8	.5	143.1	1.	345.
		2	5.6	4.5	3.9	3.5	2.8	2.1	1.8	1.3	.9	.9	64.7	-11.	469.
		3	7.2	7.4	5.6	4.6	3.9	2.9	2.4	1.8	1.3	.9	40.4	5.	583.
		4	8.3	7.6	5.6	4.6	4.0	3.1	2.5	1.9	1.5	1.5	28.0	16.	676.
2004	2	1	5.7	5.4	4.9	4.7	4.2	3.8	3.6	3.5	3.2	2.9	207.1	-11.	406.
		2	6.9	5.9	4.9	4.2	3.3	2.5	2.0	1.6	1.3	.9	101.5	1.	597.
		3	6.6	5.8	4.9	4.3	3.3	2.6	2.1	1.6	1.1	1.2	62.4	-4.	733.
		4	7.5	6.2	5.5	4.8	3.9	2.7	2.4	1.6	1.5	.9	35.9	33.	705.
2254	2	1	5.3	4.3	3.8	3.5	2.8	2.0	1.7	1.2	.8	.8	187.5	8.	490.
		2	7.6	6.1	5.3	5.0	3.8	2.9	2.3	1.9	1.7	1.0	80.7	22.	634.
		3	7.1	5.9	5.1	4.8	3.8	2.7	2.2	1.5	1.5	1.1	42.6	11.	667.
		4	6.1	4.8	4.1	4.0	3.4	2.5	2.1	2.0	1.6	1.1	23.3	-26.	608.
2504	2	1	12.0	10.0	8.9	7.8	6.1	4.5	3.6	2.8	2.2	1.7	480.0	18.	1076.
		2	11.9	9.9	8.8	7.8	6.1	4.5	3.6	2.8	2.1	1.6	140.3	7.	944.
		3	7.4	7.0	5.8	5.1	4.0	2.9	2.3	1.8	1.5	1.1	57.7	-15.	775.
		4	15.2	12.8	11.0	9.7	7.6	5.6	4.4	3.4	2.7	2.1	26.0	21.	582.
2754	2	1	9.7	8.1	7.2	6.5	5.2	3.8	3.2	2.5	1.9	1.6	418.1	13.	1193.
		2	8.5	6.7	5.9	5.2	4.2	3.1	2.6	1.9	1.5	1.2	123.4	-20.	1056.
		3	16.6	13.3	11.7	10.5	8.1	5.5	4.2	3.4	2.4	1.7	42.7	29.	730.
3004	2	1	6.7	5.7	4.9	4.4	3.6	2.6	2.1	1.7	1.3	1.0	509.0	-17.	1141.
		2	16.0	13.2	11.3	10.2	8.0	5.9	4.6	3.6	2.7	2.2	124.7	29.	839.
3254	2	1	12.7	10.4	9.3	8.3	6.6	4.9	4.0	3.1	2.1	1.8	220.1	28.	860.

IFR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-800N.IND

DATA FILE : L-800N.DAT

LINE NO. = 800

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
0	2	1	8.0	7.5	6.9	6.4	5.3	4.0	3.3	2.6	2.0	1.6	301.9	8.	557.
		2	11.9	9.6	8.5	7.7	6.1	4.6	3.8	3.0	2.3	1.9	194.8	4.	1079.
		3	14.0	11.4	10.1	9.3	7.3	5.3	4.2	3.3	2.5	2.3	60.8	-4.	671.
		4	18.3	14.5	12.5	11.3	8.9	6.5	5.3	4.2	3.0	2.4	37.7	-18.	696.
254	2	1	8.7	7.1	6.4	5.8	4.6	3.5	2.8	2.2	1.7	1.4	496.2	7.	1038.
		2	12.6	10.5	9.2	8.2	6.3	4.5	3.6	2.7	2.0	1.6	118.0	-7.	741.
		3	14.0	11.8	10.2	9.0	7.4	5.5	4.5	3.6	2.8	2.3	55.7	-14.	697.
		4	16.3	13.1	11.4	9.9	8.2	6.1	4.9	3.8	2.9	2.4	25.4	-2.	531.
504	2	1	7.1	5.9	5.1	4.8	3.9	2.9	2.2	2.0	1.2	1.2	277.0	-2.	511.
		2	12.7	10.6	9.1	8.1	6.1	4.5	3.9	2.8	3.0	1.9	98.8	-17.	547.
		3	13.8	12.1	10.5	9.4	7.1	4.9	4.3	2.9	2.8	1.9	40.0	3.	442.
		4	18.2	14.0	12.0	10.9	8.9	7.5	5.1	4.7	2.7	3.2	31.0	27.	572.
754	2	1	7.5	6.0	5.4	5.0	3.9	2.9	2.3	1.9	1.5	1.2	277.6	-12.	512.
		2	12.6	10.2	8.9	8.1	6.2	4.4	3.6	2.7	2.1	1.7	77.5	0.	429.
		3	12.5	10.2	9.0	8.4	6.7	5.0	3.4	3.0	2.5	2.2	50.8	38.	561.
		4	15.4	11.9	10.7	9.7	7.6	5.8	4.3	3.7	3.0	2.5	24.8	-7.	458.
1004	2	1	7.7	6.4	5.6	5.2	4.0	3.0	2.4	1.9	1.4	1.2	207.1	7.	382.
		2	10.3	8.4	7.4	6.9	5.4	4.0	3.3	2.7	2.1	1.7	97.1	47.	538.
		3	12.0	10.1	8.9	8.0	6.2	4.4	3.8	2.7	2.6	2.0	40.4	-6.	446.
		4	13.0	10.3	9.3	8.4	6.6	4.8	4.1	3.9	1.9	2.2	29.8	-34.	549.
1254	2	1	6.6	5.8	5.2	4.4	3.8	2.9	2.4	2.0	1.5	1.3	211.1	45.	473.
		2	11.7	9.7	8.6	7.3	5.8	4.1	3.2	2.4	1.9	1.5	59.1	0.	397.
		3	10.1	7.8	6.8	5.6	4.6	3.5	2.5	1.8	1.7	1.3	40.0	-16.	537.
1504	2	1	4.7	4.1	3.5	3.7	3.0	2.1	1.7	1.6	.7	.9	168.4	2.	377.
		2	8.3	6.5	5.2	4.7	3.0	3.1	2.6	1.5	1.8	.9	81.8	0.	551.

		3	8.2	5.4	5.0	4.2	3.1	2.6	2.3	1.9	1.6	1.0	42.1	-16.	565.
1754	2	1	5.0	4.5	3.8	3.5	2.8	2.1	1.7	1.4	1.0	.9	333.2	7.	871.
		2	7.8	6.6	5.5	4.7	3.6	2.8	2.1	1.6	1.3	1.0	119.1	8.	934.
		3	8.9	6.3	5.2	4.6	3.5	2.4	1.9	1.4	.9	.7	33.1	-27.	518.
2004	2	1	5.1	4.4	3.7	3.4	2.7	2.0	1.5	1.2	.9	.7	525.8	5.	1179.
		2	8.9	6.4	5.6	5.3	4.3	2.6	2.7	1.9	1.4	1.3	111.1	9.	747.
		3	6.3	4.3	3.6	3.3	2.4	1.5	1.5	.9	.7	.3	86.9	33.	1167.
2254	2	1	4.9	4.1	3.7	3.2	2.6	2.0	1.5	1.2	.8	.6	219.1	26.	687.
		2	6.1	5.2	4.5	3.9	3.0	2.2	1.8	1.4	1.1	.9	147.2	37.	1386.
		3	6.5	5.0	4.3	3.7	2.9	2.1	1.6	1.2	.8	.8	50.5	-58.	949.
2504	2	1	5.4	4.5	3.8	3.4	2.6	1.9	1.5	1.2	.9	.7	853.8	53.	1787.
		2	6.3	5.1	4.3	4.0	3.2	2.4	1.9	1.5	1.1	.9	200.7	-47.	1260.
		3	8.5	7.1	6.1	5.5	4.3	3.1	2.5	1.9	1.4	1.1	76.3	-23.	956.
		4	14.4	11.8	10.3	9.3	7.2	5.5	4.5	3.5	2.7	2.2	50.7	0.	1060.
2754	2	1	5.2	4.0	3.4	3.2	2.5	1.9	1.5	1.2	.9	.7	616.1	-44.	1289.
		2	10.3	8.3	7.3	6.5	4.9	3.4	2.7	2.0	1.5	1.3	150.7	-24.	946.
		3	14.3	11.8	10.4	9.4	7.4	5.4	3.9	3.3	2.5	2.0	75.3	1.	943.
		4	14.7	12.1	10.6	9.6	7.5	5.8	5.0	3.7	3.0	2.4	44.4	-10.	929.
3004	2	1	6.0	5.0	4.3	3.8	3.1	2.3	1.8	1.4	1.1	.9	277.6	-24.	1060.
		2	14.4	11.9	10.5	9.3	7.4	5.5	4.5	3.4	2.6	2.1	81.8	4.	963.
		3	16.1	13.6	11.8	10.5	8.4	6.1	5.0	3.9	3.0	2.5	40.1	-11.	940.
		4	14.5	11.6	10.3	9.1	7.3	5.4	4.5	3.4	2.6	2.2	27.1	0.	1060.
3254	2	1	12.9	10.6	9.5	8.4	6.7	5.0	4.0	3.2	2.4	2.0	336.8	7.	755.
		2	18.0	14.9	13.2	11.7	9.2	6.8	5.5	4.3	3.3	2.6	134.4	-13.	904.
		3	15.5	12.9	11.4	10.3	8.3	6.2	5.1	4.1	3.2	2.6	80.1	7.	1075.
		4	14.0	11.2	9.8	8.8	6.9	5.0	3.9	3.0	2.2	1.8	54.8	4.	1228.
3504	2	1	12.8	10.8	9.6	8.6	6.8	5.1	4.1	3.2	2.5	2.0	277.9	-2.	671.
		2	14.3	11.6	10.3	9.3	7.3	5.4	4.4	3.4	2.6	2.2	123.9	6.	897.
		3	15.6	12.0	10.5	9.5	7.5	5.6	4.6	3.6	2.7	2.2	72.0	7.	1041.
3754	2	1	6.9	6.1	5.5	5.1	4.0	3.0	2.4	1.9	1.4	1.2	392.0	6.	724.
		2	11.9	9.1	7.8	7.0	5.4	4.0	3.2	2.5	1.9	1.5	170.4	7.	944.
4004	2	1	6.1	4.2	4.0	3.9	2.8	2.2	1.8	1.4	1.1	.9	174.7	8.	600.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-900N.IND

DATA FILE : L-900N.DAT

LINE NO. : 900

Station	Receive Mode	Dipole	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
0	2	1	13.1	11.2	9.9	9.1	7.3	5.5	4.5	3.6	2.8	2.2	1420.0	8.	3180.
		2	3.7	3.2	2.8	2.7	2.2	1.9	1.6	1.7	1.7	1.6	109.7	2.	738.
		3	26.7	22.5	20.0	18.3	14.5	10.8	8.7	6.5	4.8	3.7	86.9	16.	1167.
		4	19.8	14.5	12.2	10.8	8.6	6.2	4.8	3.9	3.0	2.4	40.6	-10.	911.
254	2	1	6.8	5.7	5.1	4.7	3.8	2.9	2.4	1.9	1.5	1.2	675.6	1.	1515.
		2	11.2	9.3	8.2	7.5	6.0	4.5	3.6	2.8	2.1	1.6	148.1	14.	996.
		3	11.4	9.6	8.4	7.4	5.6	4.3	3.8	2.9	1.5	1.4	53.0	-7.	711.
		4	19.6	15.3	13.4	12.6	10.9	7.9	5.6	5.3	5.3	3.7	22.5	-8.	504.
504	2	1	7.6	6.6	5.8	5.2	4.2	3.2	2.6	2.1	1.6	1.3	443.5	15.	870.
		2	11.6	9.8	8.6	7.7	6.1	4.6	3.7	2.9	2.2	1.7	114.6	-11.	674.
		3	12.8	11.1	10.0	9.1	6.8	5.3	3.9	2.9	2.3	1.8	42.5	1.	499.
		4	15.5	13.3	12.2	11.0	8.1	5.6	5.3	4.4	3.1	2.6	32.9	-4.	646.
754	2	1	8.0	6.7	6.2	5.7	4.4	3.4	2.8	2.3	1.9	1.6	280.4	-16.	550.
		2	10.6	8.0	7.0	6.2	5.1	3.5	2.8	2.2	1.1	.8	81.2	14.	478.
		3	12.9	10.2	10.9	9.5	7.4	5.0	4.1	2.6	2.1	2.0	53.1	-3.	624.
1004	2	1	5.3	4.4	3.8	4.0	2.9	2.2	2.0	1.8	1.6	1.2	194.9	4.	407.
		2	11.1	8.0	8.2	7.0	5.4	3.8	2.4	2.0	1.4	1.1	86.3	8.	542.
		3	13.4	10.5	9.5	8.3	6.9	4.9	4.2	3.3	2.6	1.9	47.7	-33.	597.
1254	2	1	3.8	3.4	2.9	2.8	2.2	1.7	1.5	1.3	.9	.7	304.6	6.	597.
		2	8.4	6.7	5.9	5.4	4.3	3.2	2.5	1.8	1.5	1.3	108.4	-30.	638.
		3	10.5	8.6	7.6	6.5	5.2	4.0	3.2	2.5	1.9	1.6	39.8	12.	467.
1504	2	1	2.8	2.3	2.0	1.7	1.5	1.1	1.0	.7	.6	.4	302.9	-25.	731.
		2	7.5	5.6	5.1	4.3	3.7	2.8	2.3	1.6	1.0	1.3	76.3	21.	553.
		3	7.9	5.9	5.8	5.3	3.8	2.8	2.1	1.6	1.2	1.0	35.1	-17.	507.

Index: L-900N.IND

Data : L-900N.DAT

1754	2	1	3.9	3.3	2.9	2.7	2.3	1.8	1.2	1.0	.8	.6	227.6	32.	1020.
		2	6.3	5.0	4.6	4.6	3.3	2.6	2.1	1.6	1.2	1.1	68.8	5.	926.
		3	6.8	4.9	4.6	4.5	3.1	2.2	2.0	1.5	1.1	.8	35.3	13.	940.
2004	2	1	5.7	4.5	4.1	3.7	2.9	2.2	1.7	1.4	1.0	.8	566.3	6.	1270.
		2	6.9	5.3	4.7	4.2	3.3	2.4	1.9	1.5	1.2	.9	212.1	10.	1427.
		3	7.2	5.1	4.8	4.2	3.2	2.3	1.8	1.4	1.1	.9	88.2	-24.	1184.
2254	2	1	4.6	3.7	3.4	3.2	2.4	1.7	1.4	1.1	.9	.8	471.4	14.	986.
		2	6.3	5.1	3.8	3.1	2.7	2.4	1.8	1.4	.7	.4	162.8	7.	1022.
		3	5.4	4.2	3.6	3.2	2.8	1.9	1.5	1.3	.9	.8	75.8	-15.	949.
2504	2	1	5.0	3.3	3.6	3.0	2.4	1.6	1.6	1.1	.8	.7	424.9	7.	889.
		2	5.8	3.6	3.7	3.1	2.6	1.9	1.8	1.3	.6	.7	136.9	-14.	859.
2754	2	1	3.9	3.6	2.7	2.8	2.1	1.8	1.1	1.0	.8	.7	194.6	-14.	760.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-1000N.IND

DATA FILE : L-1000N.DAT

LINE NO. : 1000

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1752	2	1	33.3	28.0	24.6	22.4	17.8	13.3	10.8	8.5	6.5	5.1	214.1	39.	373.
		2	31.4	26.6	23.5	21.4	16.9	12.6	10.0	8.1	6.3	5.4	81.1	-24.	425.
		3	43.1	36.8	32.6	29.7	23.7	17.8	14.5	11.5	9.0	7.4	39.3	8.	410.
		4	26.7	22.5	19.9	18.2	14.5	11.0	8.9	7.0	5.4	4.4	32.7	11.	571.
1502	2	1	31.4	26.3	23.1	20.8	16.6	12.3	10.0	7.9	6.1	4.9	201.8	-29.	333.
		2	44.4	37.7	33.3	30.4	24.1	18.2	14.8	11.7	9.0	7.3	72.7	8.	360.
		3	24.7	21.2	18.5	16.9	13.3	10.0	8.1	6.5	5.1	4.1	52.2	21.	516.
		4	22.5	18.9	16.4	14.8	11.9	9.0	7.4	5.9	4.4	3.7	31.5	-18.	521.
1252	2	1	43.9	36.8	32.8	30.2	24.3	18.0	14.7	10.9	9.1	7.4	134.7	8.	302.
		2	22.8	19.4	17.1	15.1	11.8	9.2	7.6	6.8	4.5	3.8	73.0	19.	491.
		3	18.7	15.9	14.0	12.6	10.0	7.5	6.2	5.0	3.8	3.1	39.4	-13.	528.
		4	23.8	19.4	17.1	15.6	12.5	9.3	7.5	5.6	4.6	3.8	25.8	-18.	579.
1002	2	1	35.6	29.8	26.6	24.4	19.4	14.6	12.0	9.5	7.4	6.0	230.9	14.	315.
		2	27.5	22.9	20.4	18.7	14.8	11.1	9.0	7.1	5.5	4.5	108.3	-12.	443.
		3	26.6	22.1	19.7	18.1	14.4	10.8	8.8	7.0	5.4	4.4	63.1	-11.	515.
		4	33.4	27.6	24.6	22.5	17.9	13.4	11.0	8.7	6.8	5.5	39.2	4.	534.
752	2	1	29.6	25.2	22.3	20.2	16.1	12.2	9.9	7.8	6.1	5.0	138.7	-14.	335.
		2	29.3	24.7	21.8	19.8	15.8	11.9	9.7	7.7	5.9	4.8	63.6	-16.	461.
		3	33.9	29.0	25.7	23.4	18.7	14.1	11.5	9.0	7.0	5.6	34.8	14.	502.
		4	42.1	35.1	31.1	28.6	22.7	17.2	13.8	11.0	8.6	7.0	20.8	-14.	501.
502	2	1	17.3	14.4	12.7	11.7	9.2	6.9	5.6	4.4	3.3	2.7	264.6	-15.	415.
		2	24.8	20.7	18.3	16.7	13.0	9.7	7.8	6.0	4.8	3.8	107.8	10.	507.
		3	31.3	26.5	23.3	21.1	17.1	13.0	10.5	8.3	6.4	5.2	60.6	3.	569.
		4	35.5	29.3	26.3	24.3	18.8	14.0	11.6	9.2	7.2	5.8	37.7	-8.	592.
252	2	1	14.5	11.9	10.8	9.7	7.7	5.8	4.7	3.6	2.9	2.4	231.5	7.	454.

Index: L-1000N.IND

Data : L-1000N.DAT

		2	25.0	20.7	18.6	16.8	13.4	10.0	8.2	6.5	5.0	4.1	85.8	2.	505.
		3	28.0	23.5	21.0	19.0	15.2	11.5	9.4	7.5	5.8	4.6	50.5	-1.	593.
		4	33.0	27.2	24.7	22.0	17.7	13.2	10.7	8.3	6.6	5.4	28.8	-8.	564.
0	2	1	13.0	11.1	10.1	9.4	7.5	5.7	4.8	3.8	3.0	2.4	290.6	4.	760.
		2	23.7	19.9	17.5	15.9	12.5	9.3	7.4	5.9	4.5	3.8	91.3	-4.	717.
		3	26.8	22.5	19.9	18.2	14.4	10.9	8.9	7.6	5.5	4.2	44.1	14.	690.
		4	32.1	25.9	23.8	21.2	16.9	12.5	10.3	6.3	6.0	5.6	15.2	-28.	398.
254	2	1	15.6	13.1	11.7	10.5	8.4	6.4	5.3	4.2	3.3	2.7	390.2	7.	942.
		2	22.2	18.6	16.6	15.0	11.9	8.9	7.2	5.7	4.5	3.6	85.8	-12.	622.
		3	25.6	21.7	19.4	17.6	14.0	10.6	8.6	6.8	5.4	4.4	34.2	-1.	493.
		4	29.2	24.0	21.2	19.0	15.0	11.4	9.3	7.5	5.6	4.8	17.3	8.	417.
504	2	1	11.1	9.6	8.4	7.6	6.3	4.8	3.9	3.1	2.4	2.0	291.0	7.	761.
		2	22.2	19.2	16.9	15.1	11.7	8.8	7.1	5.6	4.4	3.4	63.5	-15.	499.
		3	24.5	19.9	16.8	14.0	12.0	8.3	7.8	5.6	4.7	2.6	26.9	19.	420.
		4	24.7	22.7	20.8	19.9	15.7	12.8	8.2	8.0	5.6	5.9	17.3	-10.	453.
754	2	1	8.4	7.6	6.5	5.9	4.8	3.8	3.2	2.6	2.1	1.7	258.8	-7.	677.
		2	16.0	13.4	11.8	10.7	8.3	6.3	5.1	4.1	3.1	2.7	72.1	45.	566.
		3	22.2	19.1	17.1	15.7	12.3	9.3	7.5	5.9	4.6	3.6	34.6	-35.	542.
		4	23.2	19.0	16.5	15.3	12.2	9.1	7.6	5.8	4.7	3.6	23.1	-5.	604.
1004	2	1	5.1	4.6	4.0	3.6	3.1	2.5	2.1	1.8	1.3	1.2	262.6	51.	824.
		2	15.3	12.9	11.3	10.3	8.2	6.0	4.8	3.6	2.9	2.2	70.4	-34.	663.
		3	14.1	12.1	10.5	9.7	7.7	5.7	4.7	3.7	2.8	2.3	37.2	35.	699.
		4	20.7	17.4	15.1	14.0	11.2	8.4	7.0	5.4	4.1	3.5	19.8	-32.	622.
1254	2	1	8.9	7.4	6.6	6.1	4.9	3.7	3.0	2.4	1.8	1.5	383.6	-24.	1003.
		2	8.6	7.0	6.2	5.6	4.4	3.3	2.6	2.0	1.5	1.2	131.8	31.	1034.
		3	13.5	11.6	10.3	9.4	7.5	5.8	4.7	3.6	2.9	2.4	51.9	-23.	813.
		4	15.1	12.0	10.6	9.8	7.8	5.5	4.5	3.6	2.8	2.1	27.9	11.	729.
1504	2	1	6.5	5.3	4.7	4.3	3.3	2.7	2.1	1.7	1.3	1.0	433.7	32.	1238.
		2	12.7	10.3	9.3	8.7	6.8	4.8	4.0	2.9	2.2	1.7	123.1	-27.	1054.
		3	9.2	7.5	7.0	6.9	5.3	3.9	3.2	2.3	1.8	1.6	52.9	21.	903.
		4	13.4	10.5	9.1	8.2	6.2	4.1	4.3	3.6	2.7	2.0	29.6	-7.	845.
1754	2	1	9.3	7.8	6.8	6.2	4.9	3.7	3.0	2.3	1.8	1.5	396.0	-24.	1130.
		2	8.5	7.1	6.2	5.7	4.5	3.4	2.8	2.2	1.6	1.3	131.3	20.	1124.
		3	11.0	9.6	8.4	7.6	5.9	4.4	3.5	2.7	2.1	1.8	56.4	-1.	964.
		4	11.3	9.2	8.3	7.3	5.7	4.3	3.4	2.8	2.1	1.7	31.8	-3.	908.
2004	2	1	6.6	5.4	4.8	4.5	3.5	2.7	2.2	1.7	1.4	1.1	528.2	27.	1275.
		2	12.5	9.7	8.5	7.8	6.0	4.4	3.5	2.8	2.0	1.7	170.5	-5.	1235.
		3	9.7	7.1	6.4	6.1	4.7	3.5	2.8	2.3	1.4	1.2	82.0	7.	1186.
2254	2	1	5.6	5.1	6.0	5.8	3.1	1.3	1.5	1.7	1.4	1.5	390.2	0.	1113.
		2	7.8	6.3	6.0	5.5	4.4	2.8	2.4	2.0	1.8	1.5	134.7	8.	1153.

Index: L-1000N.IND

Data : L-1000N.DAT

		3	11.5	9.0	8.0	7.1	5.7	4.3	3.5	2.8	2.1	1.7	63.3	-8.	1082.
2504	2	1	6.0	5.0	4.5	4.1	3.2	2.4	1.9	1.5	1.2	.9	650.5	20.	1856.
		2	11.8	9.5	8.3	7.5	5.8	4.3	3.4	2.7	2.1	1.6	168.2	-13.	1440.
		3	10.0	7.6	6.7	6.3	4.6	3.5	2.9	2.2	1.8	1.5	57.3	16.	980.
2754	2	1	7.5	6.2	5.5	4.8	3.8	2.9	2.5	1.7	1.1	1.1	527.1	0.	1655.
		2	10.4	8.5	7.5	6.3	5.1	3.5	2.5	2.5	3.7	1.8	116.1	9.	1093.
3004	2	1	5.8	4.9	4.0	3.8	3.0	2.4	1.9	1.5	1.0	.9	247.2	7.	970.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-1100N.IND

DATA FILE : L-1100N.DAT

LINE NO. : 1100

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
2502	2	1	15.4	12.8	11.5	10.3	8.3	6.2	5.1	4.0	3.1	2.6	360.2	0.	706.
		2	32.5	27.4	24.4	21.9	17.5	13.3	10.8	8.5	6.6	5.4	132.5	20.	780.
		3	43.0	36.5	32.8	29.7	23.9	18.1	14.8	11.8	9.3	7.6	56.7	14.	666.
		4	50.2	42.0	37.8	34.1	27.6	20.9	17.1	13.6	10.6	8.7	35.5	-12.	696.
2252	2	1	15.9	13.3	11.7	10.8	8.5	6.4	5.2	4.1	3.2	2.6	310.1	25.	572.
		2	28.7	24.3	21.5	19.8	15.7	12.0	9.7	7.8	6.1	5.0	110.2	15.	610.
		3	37.4	31.7	28.1	25.9	20.6	15.7	12.8	10.2	7.9	6.4	60.7	-13.	671.
		4	43.0	36.2	32.3	29.6	23.6	18.0	14.7	11.6	9.1	7.5	32.7	-4.	604.
2002	2	1	15.4	12.9	11.5	10.4	8.4	6.3	5.3	4.1	3.2	2.6	285.1	13.	471.
		2	26.3	22.1	19.7	17.8	14.3	10.8	8.6	6.9	5.4	4.4	129.4	-12.	641.
		3	31.8	27.0	24.0	21.8	17.5	13.3	10.9	8.7	6.8	5.5	61.8	-1.	611.
		4	38.9	32.7	29.1	26.4	21.2	16.1	13.4	10.5	8.3	6.8	34.9	8.	576.
1752	2	1	13.8	11.6	10.3	9.2	7.4	5.6	4.5	3.6	2.8	2.3	414.4	-12.	591.
		2	21.6	18.3	16.1	14.7	11.8	8.9	7.2	5.8	4.5	3.6	152.3	2.	652.
		3	29.4	24.9	22.1	20.1	16.1	12.1	9.9	7.8	6.1	5.0	68.6	10.	586.
		4	34.6	29.1	25.9	23.6	19.0	14.4	11.9	9.4	7.3	6.1	41.2	-4.	588.
1502	2	1	10.8	9.1	8.0	7.3	5.8	4.4	3.6	2.8	2.2	1.8	356.6	3.	559.
		2	20.5	17.3	15.1	13.8	11.0	8.2	6.7	5.3	4.1	3.4	131.2	10.	617.
		3	25.1	21.3	18.8	17.2	13.8	10.4	8.5	6.7	5.2	4.3	68.0	0.	639.
		4	30.2	25.3	22.5	20.6	16.6	12.6	10.4	8.3	6.5	5.4	41.4	-5.	650.
1252	2	1	10.9	9.1	8.0	7.1	5.8	4.1	3.3	2.7	2.1	1.7	239.5	8.	470.
		2	15.5	13.0	11.8	10.3	8.4	6.6	5.5	4.2	3.3	2.8	117.0	-1.	688.
		3	21.0	17.1	15.9	14.2	11.4	8.6	7.2	5.7	4.4	3.6	64.1	-2.	752.
		4	26.9	22.4	19.8	18.0	14.5	11.0	8.9	7.1	5.5	4.5	31.6	-11.	619.
1002	2	1	7.4	5.9	5.3	4.9	3.8	2.9	2.4	1.9	1.4	1.2	608.4	0.	707.

Index: L-1100N.INB

Data : L-1100N.DAT

		2	12.8	10.4	9.2	8.4	6.6	4.9	3.9	3.1	2.4	1.9	261.9	-2.	913.
		3	17.2	14.1	12.6	11.7	9.2	6.9	5.7	4.6	3.6	2.9	107.8	-13.	750.
		4	23.9	19.6	17.5	16.1	12.9	9.5	7.8	6.2	4.9	4.0	55.5	19.	646.
752	2	1	6.8	5.7	4.8	4.5	3.4	2.6	2.0	1.6	1.2	1.0	519.1	22.	905.
		2	10.7	8.8	7.8	7.2	5.6	4.2	3.4	2.7	2.1	1.7	171.2	-13.	895.
		3	16.4	13.9	12.0	11.1	8.9	6.6	5.4	4.2	3.3	2.7	73.2	20.	764.
		4	23.0	18.9	17.1	15.7	12.0	9.3	7.5	6.1	4.7	3.1	35.1	3.	612.
502	2	1	6.8	5.5	4.6	4.0	3.3	2.4	2.0	1.5	1.1	.8	345.8	-13.	775.
		2	12.9	10.4	9.2	8.1	6.4	4.8	3.9	2.8	2.3	2.2	123.1	25.	828.
		3	16.9	14.0	12.4	11.0	9.0	6.8	5.5	4.2	3.3	2.8	55.9	11.	750.
		4	21.5	17.7	16.0	14.4	11.6	8.7	7.1	5.7	4.4	3.5	33.2	-5.	743.
252	2	1	7.7	6.4	5.5	4.9	3.9	2.9	2.3	1.8	1.4	1.1	520.0	34.	742.
		2	12.9	10.7	9.5	8.5	6.8	5.0	4.1	3.2	2.5	2.0	195.1	7.	835.
		3	17.5	14.7	12.9	11.7	9.3	7.0	5.7	4.6	3.6	2.8	101.4	1.	860.
		4	24.1	20.2	17.9	16.1	12.9	9.8	7.9	6.2	4.9	3.9	52.5	-9.	750.
0	2	1	9.9	8.1	6.9	6.5	5.0	3.7	3.0	2.3	1.7	1.4	321.5	21.	593.
		2	14.4	11.8	10.3	9.6	7.6	5.6	4.5	3.5	2.8	2.3	161.5	0.	894.
		3	20.4	17.1	15.1	13.8	11.0	8.2	6.7	5.2	4.0	3.2	64.5	-6.	713.
		4	28.8	23.9	20.9	19.3	15.2	11.5	9.4	7.5	5.9	4.8	29.4	3.	543.
254	2	1	10.2	7.9	7.3	6.6	5.1	3.8	3.0	2.4	1.8	1.5	419.4	23.	693.
		2	16.4	13.3	12.0	10.9	8.6	6.4	5.2	4.1	3.2	2.6	135.2	-10.	670.
		3	25.8	21.2	19.1	17.4	13.7	10.3	8.5	6.6	5.1	4.1	53.9	8.	533.
		4	39.0	31.7	28.4	26.1	20.6	15.6	12.7	10.1	8.0	6.3	29.5	-1.	487.
504	2	1	10.3	8.5	7.4	7.0	5.4	4.0	3.3	2.5	2.0	1.6	377.5	-2.	561.
		2	20.8	17.2	15.2	14.0	11.0	8.2	6.6	5.2	4.0	3.2	119.1	4.	531.
		3	33.3	28.1	25.0	22.9	18.1	13.7	11.2	8.8	6.9	5.5	55.8	1.	496.
		4	40.8	33.9	30.2	27.7	21.9	16.7	13.7	10.8	8.4	7.0	36.2	-20.	539.
754	2	1	13.5	11.5	9.8	8.9	7.1	5.2	4.2	3.3	2.5	2.1	407.9	6.	512.
		2	28.3	24.0	21.0	19.1	15.2	11.4	9.3	7.4	5.7	4.5	131.0	2.	493.
		3	36.3	30.8	27.1	24.7	19.8	14.9	12.1	9.6	7.5	6.2	66.8	-20.	502.
		4	41.8	35.3	31.3	28.5	22.8	17.3	14.1	11.2	8.7	7.0	45.0	16.	565.
1004	2	1	23.1	19.6	17.4	15.9	12.9	10.0	8.2	6.8	5.4	4.6	261.3	1.	372.
		2	33.5	28.0	24.7	22.5	17.8	13.4	10.9	8.6	6.7	5.5	108.4	-23.	464.
		3	38.7	32.6	28.9	26.3	21.1	15.8	12.9	10.3	8.0	6.5	63.1	16.	538.
		4	38.6	32.4	28.8	26.2	20.9	15.8	12.9	9.9	7.8	6.4	39.1	12.	558.
1254	2	1	20.9	17.6	15.6	14.0	11.1	8.4	6.7	5.3	4.1	3.4	226.1	-21.	394.
		2	31.8	26.8	23.8	21.6	17.2	13.0	10.5	8.3	6.4	5.1	98.3	16.	515.
		3	34.9	29.8	26.5	23.9	19.0	14.4	11.6	9.2	7.2	5.8	50.7	8.	529.
		4	31.4	26.2	23.1	20.9	16.9	12.6	10.8	8.4	6.4	5.5	23.4	8.	408.
1504	2	1	14.4	12.2	10.7	9.7	7.7	5.8	4.7	3.7	2.9	2.3	290.3	17.	569.

Index: L-1100N.IND

Data : L-1100N.DAT

		2	24.1	20.5	18.0	16.4	12.9	9.8	7.8	6.3	4.9	3.9	110.9	11.	652.
		3	25.7	21.9	19.4	17.7	14.0	10.7	8.7	6.8	5.4	4.4	38.2	7.	448.
		4	25.9	21.7	19.1	17.4	13.8	10.6	8.6	6.9	5.5	4.3	23.3	-5.	456.
1754	2	1	13.8	11.6	10.3	9.2	7.3	5.4	4.3	3.4	2.6	2.1	243.3	9.	694.
		2	19.8	16.7	14.8	13.3	10.6	8.3	7.0	5.3	4.2	3.6	61.6	8.	528.
		3	22.3	19.0	17.0	15.1	12.1	9.2	7.4	5.8	4.5	3.7	27.6	-4.	471.
		4	25.0	21.4	19.1	17.3	13.9	10.6	8.5	6.7	5.2	4.4	17.7	-29.	506.
2004	2	1	13.9	11.7	10.3	9.2	7.3	5.5	4.5	3.6	2.7	2.2	399.4	13.	627.
		2	18.0	15.1	13.3	12.0	9.5	7.2	5.8	4.3	3.4	2.9	127.7	-17.	601.
		3	22.6	19.2	17.0	15.4	12.3	9.3	7.5	6.5	4.9	3.6	62.4	-22.	586.
		4	24.0	20.2	17.9	16.3	13.1	9.8	8.0	6.3	4.9	4.2	35.8	26.	561.
2254	2	1	10.6	8.6	7.8	7.0	5.5	4.1	3.3	2.6	2.0	1.6	309.9	-4.	608.
		2	17.2	14.0	12.7	11.5	9.0	6.8	5.5	4.3	3.3	2.7	101.6	-31.	598.
		3	18.6	15.7	14.0	12.8	10.0	7.5	6.0	4.9	3.8	3.1	44.8	25.	526.
		4	21.7	17.8	15.9	14.5	11.5	8.9	7.2	5.2	4.3	3.5	28.8	-8.	564.
2504	2	1	10.0	8.4	7.4	6.6	5.2	4.0	3.3	2.4	2.3	1.8	454.0	-29.	648.
		2	13.8	11.7	10.4	9.4	7.6	5.6	4.8	4.2	2.3	2.4	133.0	26.	569.
		3	16.1	13.7	12.2	10.9	8.7	6.4	5.4	4.4	3.1	2.7	70.3	-8.	601.
		4	19.0	15.9	14.0	12.5	10.0	7.5	5.8	4.6	3.8	2.8	43.9	10.	627.
2754	2	1	8.1	6.7	6.0	5.4	4.2	3.3	2.7	2.1	1.5	1.4	265.8	27.	695.
		2	12.6	10.4	9.1	8.4	6.4	4.8	3.8	3.1	2.7	1.9	91.4	-9.	718.
		3	14.0	11.8	10.7	9.8	7.7	5.7	4.6	3.8	2.9	2.4	46.6	7.	729.
		4	16.8	13.7	12.2	11.2	8.9	6.9	5.7	4.5	3.6	3.1	27.8	-18.	726.
3004	2	1	8.2	6.9	6.0	5.3	4.4	3.2	2.6	2.0	1.6	1.3	188.2	2.	590.
		2	11.4	9.6	8.4	7.6	6.0	4.5	3.6	2.8	2.1	1.8	69.8	5.	658.
		3	12.1	10.3	9.0	8.2	6.7	5.0	4.1	3.2	2.5	2.1	36.2	-19.	680.
		4	14.8	12.5	11.0	10.1	7.8	6.1	4.7	3.8	2.9	2.2	20.0	8.	627.
3254	2	1	7.1	5.8	5.2	4.8	3.8	2.9	2.4	1.9	1.5	1.2	393.8	11.	772.
		2	10.4	8.5	7.5	6.9	5.3	3.9	3.2	2.5	1.9	1.5	147.9	-23.	870.
		3	11.3	9.4	8.3	7.5	6.0	4.5	3.6	2.8	2.2	1.8	66.6	8.	782.
		4	13.3	11.0	9.9	8.9	7.0	5.2	4.3	3.4	2.6	2.0	44.4	1.	871.
3504	2	1	7.1	5.8	5.0	4.7	3.7	2.7	2.2	1.7	1.3	1.0	319.5	-18.	836.
		2	10.5	8.6	7.3	7.0	5.3	3.8	3.0	2.4	1.7	1.5	111.2	12.	872.
		3	10.8	8.8	7.6	7.0	5.5	4.1	3.4	2.5	1.9	1.5	62.5	5.	979.
		4	12.3	10.2	8.8	8.3	6.4	4.6	3.8	2.9	2.2	1.7	36.2	16.	946.
3754	2	1	7.4	6.1	5.5	4.8	4.1	2.9	2.4	1.8	1.4	1.1	252.7	18.	721.
		2	10.9	9.0	7.9	7.1	5.1	3.8	3.1	2.4	1.8	1.5	115.1	0.	985.
		3	10.2	8.5	7.6	6.7	5.4	4.0	3.2	2.6	2.0	1.6	57.5	18.	982.
		4	12.7	10.6	9.2	8.4	6.7	4.9	4.3	3.3	2.5	2.1	36.1	-1.	1031.
4004	2	1	6.6	5.7	5.0	4.5	3.7	2.9	2.2	1.8	1.4	1.1	377.9	14.	988.

		2	9.8	8.2	7.2	6.4	5.0	3.7	3.0	2.3	1.7	1.3	140.4	16.	1102.
		3	10.2	8.7	7.6	6.9	5.5	4.2	3.3	2.6	2.1	1.6	76.3	1.	1195.
		4	14.5	12.0	10.4	9.4	7.5	5.7	4.5	3.6	2.8	2.2	34.7	12.	907.
4254	2	1	7.1	6.1	5.2	3.9	3.7	2.9	2.3	1.8	1.4	1.2	405.6	23.	979.
		2	10.0	8.2	7.0	7.8	5.4	3.7	3.1	2.4	1.9	1.4	176.9	-3.	1281.
		3	12.5	10.6	9.3	9.4	6.8	5.1	4.0	3.1	2.4	2.0	70.5	13.	1019.
		4	15.2	12.5	11.0	11.0	8.3	5.9	4.8	3.7	2.9	2.4	34.6	-5.	836.
4504	2	1	7.8	6.3	5.7	5.1	4.1	3.1	2.5	2.0	1.5	1.2	431.2	6.	1041.
		2	13.0	10.6	9.4	8.4	6.6	4.8	3.8	3.0	2.3	1.8	138.6	10.	1004.
		3	13.4	11.2	10.0	8.9	7.0	5.2	4.0	3.3	2.6	2.0	59.8	-4.	864.
		4	16.2	13.3	11.8	10.6	8.5	6.4	4.8	4.0	3.2	2.5	33.8	-21.	816.
4754	2	1	9.9	8.4	7.4	6.7	5.3	4.0	3.2	2.6	1.9	1.6	406.3	15.	797.
		2	13.5	11.2	9.8	8.8	6.9	5.0	4.0	3.1	2.4	1.9	145.7	-5.	857.
		3	14.0	11.8	10.4	9.5	7.4	5.6	4.5	3.6	2.8	2.3	72.3	-18.	848.
		4	16.2	13.1	11.7	10.7	8.7	6.5	5.2	4.1	3.0	2.5	43.5	-4.	853.
5004	2	1	10.6	8.5	7.6	7.0	5.4	4.0	3.3	2.5	2.0	1.6	540.7	-1.	848.
		2	13.9	11.3	10.1	9.3	7.2	5.3	4.3	3.4	2.7	2.1	203.9	-22.	960.
		3	15.0	12.0	10.7	10.0	7.8	5.9	4.7	3.7	2.8	2.3	106.2	-3.	990.
		4	15.6	12.5	11.2	10.3	8.1	6.0	4.9	3.8	3.0	2.4	61.5	8.	964.
5254	2	1	9.8	8.7	7.5	6.5	5.3	4.0	3.2	2.6	1.9	1.6	412.0	-18.	808.
		2	13.4	11.6	10.2	8.7	7.1	5.3	4.2	3.3	2.5	2.1	166.7	-4.	981.
		3	13.6	11.6	10.1	8.8	7.1	5.4	4.3	3.5	2.6	2.2	84.2	8.	989.
5504	2	1	10.3	8.7	7.7	6.8	5.4	4.1	3.3	2.6	2.0	1.6	355.4	-3.	743.
		2	12.3	10.1	8.8	7.9	6.3	4.7	3.8	3.0	2.3	1.8	136.3	6.	855.
5754	2	1	10.0	8.4	7.4	6.6	5.3	4.0	3.2	2.5	2.0	1.6	261.5	5.	821.

IFR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-1200N.IND

DATA FILE : L-1200N.DAT

LINE NO. : 1200

Station	Receive Mode	Dipole	M0	M1	M2	M3	M4	M5	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
3252	2	1	67.1	57.3	51.1	46.6	37.5	28.4	23.2	18.4	14.4	11.8	138.7	25.	335.
		2	77.8	66.3	59.1	53.7	43.1	32.7	26.7	21.1	16.5	13.5	67.7	-3.	490.
		3	84.7	72.7	64.8	58.9	47.5	36.1	29.7	23.7	18.5	15.1	29.2	-11.	422.
		4	79.2	67.5	60.0	54.7	44.0	33.4	27.1	21.5	16.9	13.7	21.3	3.	514.
3002	2	1	69.0	59.1	52.8	48.2	38.9	29.6	24.2	19.3	15.0	12.4	191.7	-3.	376.
		2	79.1	67.7	60.4	55.1	44.3	33.7	27.5	21.9	17.1	14.0	64.2	-27.	378.
		3	71.1	60.9	54.3	49.5	39.8	30.3	24.7	19.7	15.4	12.6	41.3	21.	485.
		4	67.0	57.0	50.6	46.2	37.0	28.1	23.0	18.2	14.2	11.5	23.5	-1.	461.
2752	2	1	69.9	59.7	53.6	49.0	39.6	30.2	24.8	19.7	15.5	12.7	184.6	-24.	252.
		2	65.3	55.5	49.7	45.3	36.4	27.6	22.6	18.0	14.0	11.4	95.2	19.	390.
		3	58.5	49.6	44.2	40.1	32.5	24.7	20.0	15.8	12.4	10.3	51.6	-6.	422.
		4	57.6	48.9	43.9	40.1	31.9	24.4	19.9	15.8	12.3	9.8	32.9	6.	449.
2502	2	1	64.3	55.0	49.3	45.3	36.5	27.9	22.9	18.3	14.3	11.8	239.4	8.	300.
		2	56.7	48.3	43.1	39.4	31.6	23.8	19.5	15.5	12.1	9.9	94.6	-8.	357.
		3	52.0	44.0	39.3	36.0	28.6	21.8	17.7	14.0	10.8	8.8	56.5	-10.	424.
		4	56.0	47.4	42.7	39.3	31.8	24.6	20.4	16.5	12.9	10.6	35.9	10.	451.
2252	2	1	60.1	51.4	46.2	42.2	34.1	26.0	21.4	17.1	13.4	11.0	97.8	-1.	205.
		2	54.8	46.7	41.8	38.0	30.7	23.3	19.1	15.2	11.8	9.7	47.5	11.	298.
		3	53.7	46.0	40.9	37.3	29.8	22.9	18.8	14.6	11.7	9.4	31.4	-12.	393.
		4	52.2	44.4	39.6	36.3	29.7	22.1	18.1	14.8	11.1	9.5	18.5	35.	387.
2002	2	1	55.2	47.1	42.5	38.9	31.3	24.0	19.7	15.7	12.3	10.1	121.9	-12.	201.
		2	55.0	46.9	42.2	38.6	30.9	23.5	19.2	15.2	12.0	9.7	55.7	11.	276.
		3	50.1	42.7	38.1	34.8	27.9	21.2	17.5	13.9	10.9	8.9	31.6	36.	312.
		4	50.2	42.6	38.4	34.9	27.7	21.0	17.1	13.5	10.7	8.6	21.5	-30.	354.
1752	2	1	51.4	43.4	39.2	36.0	29.2	22.2	18.1	14.6	11.8	9.3	91.6	22.	180.

Index: L-1200N.IND

Data : L-1200N.DAT

		2	50.1	42.4	38.0	34.7	27.8	21.1	17.5	13.7	10.1	9.0	39.1	31.	230.
		3	46.8	39.7	35.6	32.6	26.3	19.9	16.4	13.0	10.4	8.6	24.0	-25.	282.
		4	49.6	41.6	37.0	34.0	27.2	20.7	16.7	13.2	10.1	8.0	17.5	-24.	344.
1502	2	1	43.4	37.2	33.0	30.5	24.5	18.8	15.5	12.4	9.7	8.0	82.3	36.	172.
		2	46.8	39.9	35.4	32.6	26.0	19.8	16.2	12.9	10.0	8.2	34.4	-28.	216.
		3	46.1	39.5	34.9	32.1	25.6	19.6	16.0	12.7	9.8	8.1	22.5	-16.	282.
		4	46.2	39.3	35.1	32.7	25.7	19.5	16.1	12.8	10.1	8.3	15.9	2.	332.
1252	2	1	34.2	29.0	26.0	24.0	18.1	14.4	12.1	9.2	7.2	6.1	104.0	-22.	181.
		2	44.7	37.8	33.7	30.1	26.3	19.0	15.0	12.8	9.8	7.8	43.0	-20.	225.
		3	42.7	36.3	32.1	29.1	23.9	18.0	14.6	11.7	9.2	7.5	26.5	6.	276.
		4	39.7	33.3	29.6	26.8	21.6	16.7	13.5	10.7	8.4	6.9	19.6	-17.	342.
1002	2	1	26.6	22.3	19.9	18.4	14.7	11.2	9.1	7.3	5.7	4.6	118.3	-18.	206.
		2	39.8	33.6	29.9	27.3	21.7	16.5	13.4	10.6	8.3	6.8	41.9	7.	219.
		3	35.5	29.9	26.5	24.3	19.5	15.0	12.0	9.5	7.6	6.2	26.9	-11.	280.
		4	34.3	29.2	26.2	23.7	18.9	14.7	11.7	9.3	7.2	5.7	21.0	39.	367.
752	2	1	22.3	18.6	16.6	15.2	12.2	9.2	7.5	6.0	4.6	3.8	101.0	10.	198.
		2	31.1	25.9	23.1	21.0	16.8	12.6	10.3	8.1	6.4	5.1	42.7	-26.	251.
		3	29.2	24.5	21.7	19.1	16.0	12.1	10.0	7.9	6.1	5.0	25.7	59.	302.
		4	29.1	24.3	21.7	19.1	15.7	11.7	9.6	7.5	5.9	4.9	20.8	-8.	406.
502	2	1	16.5	13.8	12.2	11.3	9.0	6.8	5.6	4.5	3.5	2.8	136.3	-18.	285.
		2	25.6	21.4	18.9	17.3	13.4	10.3	7.9	6.1	4.9	4.0	45.8	53.	287.
		3	24.2	20.6	18.3	16.7	13.3	9.9	8.2	6.6	5.0	4.1	29.9	-2.	374.
		4	26.7	22.3	19.8	18.2	14.5	10.7	8.9	7.0	5.5	4.5	21.4	-5.	447.
252	2	1	14.6	12.3	10.9	9.9	7.9	6.0	4.9	3.9	3.1	2.4	172.2	41.	245.
		2	21.7	18.3	16.2	14.7	11.7	8.8	7.1	5.7	4.3	3.6	70.4	0.	302.
		3	22.0	18.8	16.7	15.2	12.2	9.3	7.5	6.0	4.7	3.8	43.2	2.	368.
		4	24.9	21.0	18.7	17.1	13.6	10.3	8.5	6.7	5.2	4.3	31.7	-7.	452.
0	2	1	11.5	9.3	8.3	7.7	6.0	4.5	3.7	2.9	2.2	1.8	249.5	-7.	435.
		2	17.2	14.2	12.8	11.7	9.2	7.0	5.7	4.5	3.5	2.8	71.6	-1.	375.
		3	19.9	16.7	15.0	13.7	10.9	8.2	6.6	5.3	4.2	3.4	42.6	0.	444.
		4	23.7	19.4	17.5	16.0	12.7	9.7	7.8	6.2	4.7	3.9	31.8	-4.	554.
254	2	1	11.4	9.6	8.5	7.9	6.2	4.7	3.8	3.1	2.4	2.0	134.2	-1.	280.
		2	17.9	14.9	13.2	12.2	9.0	7.1	5.7	4.5	3.6	2.8	58.1	-1.	365.
		3	20.0	17.1	15.1	13.8	10.8	8.1	6.7	5.3	4.3	3.5	37.7	4.	472.
		4	24.3	20.4	18.3	17.1	13.6	9.8	8.2	6.4	5.3	4.2	27.3	-7.	570.
504	2	1	9.4	7.7	6.9	6.2	5.0	3.8	3.1	2.5	1.9	1.6	170.3	2.	356.
		2	16.2	13.3	11.8	10.6	8.4	6.3	5.1	4.0	3.1	2.5	74.4	-1.	467.
		3	19.2	16.0	14.5	13.0	10.4	7.8	6.4	5.1	4.0	3.3	44.7	0.	560.
		4	23.9	19.5	17.6	15.9	12.7	9.6	7.8	6.2	4.8	4.0	28.7	-3.	600.
754	2	1	8.4	7.6	6.1	5.8	4.5	3.4	2.7	2.2	1.7	1.4	247.1	4.	408.

Index: L-1200N.IND

Data : L-1200N.DAT

		2	14.9	12.4	10.9	10.0	7.8	5.8	4.7	3.7	2.9	2.3	106.3	-3.	527.
		3	17.6	15.0	13.3	12.2	9.6	7.3	5.9	4.8	3.8	3.1	58.6	5.	579.
		4	24.7	20.5	18.1	16.3	13.0	10.1	7.9	6.4	5.0	4.0	34.1	-6.	563.
1004	2	1	8.6	7.4	6.4	6.0	4.7	3.6	2.9	2.3	1.8	1.5	203.6	-6.	376.
		2	13.5	11.5	10.0	9.2	7.1	5.2	4.2	3.3	2.5	2.0	96.8	2.	536.
		3	18.6	15.8	13.9	12.7	10.1	7.6	6.1	4.8	3.8	3.1	49.9	1.	551.
		4	26.1	22.2	19.7	17.9	14.2	10.7	8.7	6.8	5.3	4.3	30.0	-13.	554.
1254	2	1	7.1	6.0	5.2	4.7	3.8	2.9	2.3	1.9	1.5	1.2	299.5	-1.	376.
		2	14.2	12.0	10.4	9.3	7.3	5.5	4.4	3.5	2.6	2.2	139.4	0.	525.
		3	20.2	17.2	15.2	13.7	11.0	8.3	6.8	5.3	4.1	3.4	73.6	2.	553.
		4	27.9	23.3	20.8	18.8	15.0	11.4	9.2	7.3	5.8	4.7	37.0	3.	464.
1504	2	1	7.1	5.6	5.2	4.6	3.6	2.7	2.2	1.7	1.4	1.1	288.0	1.	565.
		2	16.7	13.8	12.2	11.0	8.5	6.3	5.0	4.0	3.0	2.4	92.3	-3.	544.
		3	21.9	18.5	16.5	15.2	11.8	8.9	7.3	5.9	4.5	3.6	39.1	12.	459.
		4	28.7	23.9	21.5	19.7	15.5	11.7	9.6	7.7	6.0	4.8	27.3	-17.	535.
1754	2	1	9.0	7.6	6.5	6.0	4.8	3.6	3.0	2.3	1.8	1.5	268.0	3.	400.
		2	19.1	16.0	14.0	12.7	9.9	7.3	5.9	4.7	3.6	2.9	89.2	6.	400.
		3	24.2	20.8	18.2	16.7	13.4	10.1	8.3	6.6	5.0	4.2	54.9	-76.	491.
		4	29.2	24.3	21.5	19.7	15.7	11.9	9.7	7.7	5.9	4.9	31.6	70.	472.
2004	2	1	9.0	7.7	6.6	6.1	4.8	3.6	3.0	2.3	1.8	1.5	199.6	6.	391.
		2	18.3	15.5	13.5	12.3	9.7	7.3	5.7	4.6	3.6	2.9	77.2	-8.	455.
		3	23.0	19.8	17.3	15.9	12.6	9.6	7.9	6.2	4.9	4.0	38.1	11.	447.
		4	28.0	23.5	20.5	18.9	15.2	11.6	9.6	7.6	5.9	4.8	22.9	-13.	449.
2254	2	1	9.0	7.4	6.7	6.0	4.8	3.7	3.0	2.4	1.8	1.5	407.1	-6.	581.
		2	18.0	15.0	13.4	11.9	9.3	6.9	5.5	4.3	3.3	2.6	108.5	6.	464.
		3	21.2	17.9	16.0	14.4	11.6	8.9	7.1	5.6	4.5	3.6	51.8	-8.	442.
		4	26.5	22.0	19.7	17.6	14.2	10.7	8.7	6.9	5.4	4.4	33.6	3.	480.
2504	2	1	8.5	6.9	6.2	5.6	4.5	3.4	2.8	2.2	1.7	1.4	265.1	16.	416.
		2	16.7	13.8	12.2	11.0	8.6	6.4	5.2	4.0	3.1	2.5	81.6	-12.	385.
		3	20.3	17.2	15.3	13.8	11.1	8.3	6.8	5.3	4.1	3.3	42.8	13.	402.
		4	25.0	20.7	18.4	16.7	13.3	10.0	8.3	6.5	4.9	4.1	27.4	-13.	430.
2754	2	1	7.9	6.5	5.7	5.3	4.3	3.3	2.7	2.1	1.7	1.4	241.8	-5.	421.
		2	15.8	13.0	11.4	10.4	8.0	5.9	4.8	3.7	2.9	2.3	72.5	7.	379.
		3	18.3	15.4	13.4	12.4	9.8	7.4	6.0	4.8	3.7	3.0	37.2	-9.	388.
		4	23.3	19.0	16.9	15.3	12.1	9.2	7.5	5.8	4.6	3.8	28.7	-6.	501.
3004	2	1	7.8	6.5	5.6	5.1	4.1	3.1	2.5	2.0	1.5	1.3	253.0	17.	441.
		2	14.2	11.9	10.2	9.3	7.2	5.2	4.2	3.2	2.4	1.8	73.5	-14.	385.
		3	16.3	13.8	11.9	10.8	9.0	6.5	5.4	4.2	3.3	2.6	47.1	1.	491.
		4	20.1	16.8	14.4	13.0	10.9	7.8	6.5	5.1	4.0	3.1	30.0	11.	523.
3254	2	1	7.2	6.1	5.4	4.8	3.9	3.0	2.3	1.9	1.5	1.2	243.8	-8.	402.

		2	12.1	10.2	9.0	8.0	6.3	4.7	3.9	3.0	2.3	1.8	97.2	-2.	482.
		3	14.0	11.9	10.5	9.8	7.5	5.7	4.4	3.5	2.7	2.2	51.3	19.	507.
		4	18.2	15.2	13.4	12.5	9.6	7.5	5.9	4.7	3.7	3.0	31.9	24.	526.
3504	2	1	7.8	6.2	5.6	5.2	4.1	3.2	2.5	2.0	1.6	1.3	458.4	7.	553.
		2	12.3	10.0	8.8	8.0	6.0	4.3	3.5	2.7	2.0	1.6	135.4	16.	490.
		3	12.9	10.7	9.5	8.7	6.8	5.1	4.1	3.3	2.4	2.1	78.7	42.	568.
		4	18.7	15.3	13.6	12.5	9.9	7.6	6.2	4.9	3.9	3.0	48.9	-47.	590.
3754	2	1	6.9	5.7	4.9	4.6	3.7	2.8	2.2	1.8	1.4	1.1	243.5	22.	509.
		2	11.8	9.7	8.4	7.7	5.9	4.3	3.5	2.7	2.1	1.7	78.3	38.	492.
		3	12.9	10.9	9.5	8.8	6.8	5.0	4.0	3.2	2.4	1.9	50.1	-44.	627.
		4	18.8	15.3	13.4	12.2	9.8	6.9	6.1	4.7	3.6	3.4	21.6	-7.	451.
4004	2	1	7.1	5.5	5.1	4.7	3.8	2.8	2.4	1.8	1.4	1.1	404.3	48.	635.
		2	11.8	9.5	8.6	7.6	5.9	4.3	3.5	2.7	2.1	1.7	137.2	-43.	646.
		3	12.8	10.4	9.4	8.5	6.7	5.0	4.1	3.2	2.5	2.0	61.8	-7.	581.
		4	20.5	16.5	14.9	13.5	10.8	8.1	6.5	5.3	4.3	3.4	41.9	-8.	658.
4254	2	1	6.8	5.9	4.9	4.8	3.8	2.8	2.3	1.8	1.4	1.1	314.6	-36.	519.
		2	11.6	9.8	8.3	7.7	5.9	4.2	3.3	2.6	2.0	1.6	111.2	-11.	551.
		3	15.1	12.8	11.2	10.3	8.1	6.1	5.0	4.0	3.0	2.4	65.1	-4.	643.
		4	27.2	22.9	20.2	18.4	14.6	10.9	8.8	7.1	5.4	4.4	33.8	1.	558.
4504	2	1	6.6	5.4	4.7	4.4	3.4	2.5	2.0	1.6	1.2	1.0	355.3	-3.	507.
		2	13.4	10.1	8.9	8.2	6.3	4.6	3.7	2.9	2.2	1.8	152.4	-10.	652.
		3	20.3	17.0	14.9	13.8	10.8	8.2	6.6	5.2	4.1	3.3	65.6	8.	560.
		4	31.2	25.9	22.6	21.2	16.6	12.4	9.9	7.9	6.1	5.0	41.8	7.	596.
4754	2	1	7.0	5.9	5.1	4.6	3.8	2.8	2.3	1.8	1.3	1.1	348.7	0.	684.
		2	17.5	14.7	13.1	11.7	8.7	6.5	5.4	4.3	3.4	2.8	96.8	6.	570.
		3	22.8	19.3	17.0	15.6	12.2	9.2	7.4	5.9	4.4	3.6	54.9	16.	645.
		4	29.6	24.7	21.8	19.8	15.6	11.9	9.6	7.5	5.7	4.8	36.8	-3.	722.
5004	2	1	8.6	7.4	6.3	5.7	4.7	3.5	2.9	2.3	1.7	1.4	212.5	13.	417.
		2	18.1	15.2	13.0	11.7	9.3	6.9	5.5	4.5	3.4	2.7	98.3	11.	579.
		3	22.6	19.2	16.7	15.2	12.3	9.2	7.3	5.8	4.4	3.7	55.8	8.	655.
		4	29.4	24.7	21.7	19.8	15.8	11.9	8.2	7.6	5.9	5.0	32.0	-17.	628.
5254	2	1	9.6	7.7	7.1	6.7	5.3	4.1	3.3	2.6	2.1	1.7	300.6	12.	858.
		2	18.4	15.3	13.5	12.2	9.4	6.7	5.5	4.2	3.2	2.6	107.6	0.	921.
		3	21.2	17.5	15.6	14.1	11.3	8.6	7.1	5.6	4.4	3.7	47.0	-13.	803.
5504	2	1	9.9	8.2	7.2	6.6	5.2	3.9	3.1	2.5	1.9	1.5	355.2	0.	1115.
		2	15.8	13.1	11.4	10.5	8.2	6.1	5.0	3.9	3.0	2.4	133.1	-14.	1253.

IFR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-1300N.IND

DATA FILE : L-1300N.DAT

LINE NO. : 1300

Station	Receive Mode	Dipole :	M0	M1	M2	M3	M4	M5	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
3502	2	1	22.8	19.2	17.0	15.6	12.5	9.4	7.7	6.1	4.7	3.9	949.2	-10.	1103.
		2	56.1	47.5	42.3	38.6	30.8	23.3	18.9	15.0	11.7	9.5	177.9	12.	620.
		3	87.4	74.2	66.1	60.4	48.4	36.6	29.9	23.6	18.3	15.1	94.6	-5.	658.
		4	89.7	75.8	67.5	61.4	49.0	37.1	30.3	24.0	18.7	15.3	41.6	4.	483.
3252	2	1	39.6	33.7	30.0	27.3	21.9	16.5	13.4	10.6	8.3	6.8	321.4	8.	504.
		2	83.3	70.7	63.0	57.3	45.9	34.6	28.2	22.3	17.3	14.2	119.8	-2.	564.
		3	86.3	73.6	65.6	59.7	47.9	36.3	29.6	23.5	18.3	15.0	46.1	3.	433.
		4	77.8	65.6	58.6	53.1	42.5	32.0	26.1	20.6	16.0	13.0	30.0	-2.	471.
3002	2	1	49.2	41.9	37.4	34.3	27.5	20.9	17.1	13.6	10.6	8.6	592.7	-16.	930.
		2	86.0	73.1	65.3	59.7	47.7	36.1	29.4	23.4	18.2	14.8	158.0	11.	744.
		3	80.9	68.7	61.2	56.0	44.7	33.8	27.5	21.7	17.0	13.8	74.2	-14.	697.
		4	84.6	71.6	63.9	58.4	46.6	35.4	28.8	22.9	17.8	14.5	46.3	-4.	727.
2752	2	1	53.7	45.4	40.6	36.9	29.6	22.4	18.3	14.4	11.2	9.2	323.4	9.	534.
		2	65.2	55.1	49.2	44.7	35.8	27.1	22.0	17.5	13.6	11.1	93.7	-2.	464.
		3	71.7	60.9	54.4	49.6	39.9	30.3	24.7	19.7	15.3	12.5	68.6	-13.	678.
		4	81.1	68.7	61.5	56.1	45.1	34.3	28.0	22.3	17.5	14.3	41.3	-2.	682.
2502	2	1	44.2	37.2	33.0	30.3	24.0	18.1	14.7	11.6	9.0	7.3	207.4	-3.	383.
		2	53.5	45.3	40.4	37.0	29.6	22.4	18.3	14.5	11.3	9.2	116.3	-21.	644.
		3	66.0	56.5	50.5	46.4	37.5	28.8	23.7	18.8	14.5	12.1	59.0	9.	652.
		4	68.9	57.6	51.1	46.5	36.9	27.4	22.1	17.8	14.4	11.3	23.9	19.	440.
2252	2	1	33.8	28.5	25.5	23.3	18.7	14.1	11.6	9.1	7.1	5.8	560.7	-20.	838.
		2	51.5	43.5	39.0	35.7	28.7	21.8	17.9	14.2	11.1	9.1	139.9	0.	627.
		3	58.6	49.8	44.6	40.8	32.8	24.9	20.4	16.2	12.7	10.4	46.5	25.	416.
		4	65.2	54.4	48.8	44.6	35.8	27.2	22.4	17.8	14.0	11.4	26.4	-25.	394.
2002	2	1	34.2	29.2	26.4	24.3	19.6	15.0	12.4	9.9	7.8	6.3	441.1	-1.	659.

		2	51.1	43.2	38.7	35.3	28.3	21.7	17.6	13.9	10.8	9.1	78.3	19.	351.
		3	56.7	48.2	43.1	39.4	31.7	24.0	19.7	15.6	12.3	10.1	36.0	-20.	322.
		4	56.6	47.3	42.4	38.4	30.7	23.4	19.2	15.3	11.7	9.7	20.2	26.	302.
1752	2	1	32.3	28.0	25.0	23.2	18.8	14.5	12.0	9.6	7.6	6.2	199.2	17.	367.
		2	52.0	44.3	38.7	35.9	28.9	22.0	17.9	14.3	11.2	9.2	47.6	-20.	264.
		3	49.6	42.5	37.6	34.7	27.7	21.0	17.2	13.7	10.7	8.7	23.8	27.	262.
		4	52.7	44.3	39.1	36.0	28.8	21.9	17.9	14.3	11.2	9.1	15.4	-21.	284.
1502	2	1	47.9	40.9	36.8	33.6	27.2	20.8	17.0	13.6	10.7	8.8	132.9	-20.	219.
		2	46.3	39.3	35.2	32.0	25.7	19.5	15.9	12.7	9.9	8.0	47.4	29.	235.
		3	47.2	40.4	36.1	32.8	26.4	20.1	16.4	13.0	10.2	8.2	27.0	-17.	266.
		4	45.7	38.6	34.3	31.2	25.1	19.3	15.6	12.5	9.7	8.0	17.3	-7.	286.
1252	2	1	44.5	37.5	33.8	30.8	24.7	18.8	15.6	12.4	9.7	7.9	63.8	15.	134.
		2	45.9	38.6	34.7	31.6	25.5	19.4	15.6	12.4	9.8	8.0	27.7	-8.	174.
		3	42.4	35.7	32.2	29.2	23.4	17.7	14.5	11.5	9.0	7.4	16.5	8.	206.
		4	40.7	34.1	30.6	27.9	22.3	16.9	13.8	11.0	8.6	7.1	12.7	-6.	266.
1002	2	1	44.9	38.4	34.4	31.4	25.4	19.4	15.9	12.6	9.9	8.1	73.0	-6.	143.
		2	42.3	35.7	32.1	29.2	23.4	17.8	14.5	11.5	9.0	7.3	28.6	8.	168.
		3	38.1	32.6	29.0	26.6	21.2	16.1	13.1	10.5	8.2	6.7	19.1	-3.	224.
		4	37.6	31.2	28.3	25.3	20.5	15.6	12.7	10.1	7.9	6.4	14.2	-10.	279.
752	2	1	32.9	27.7	24.8	22.7	18.3	13.8	11.4	9.0	7.1	5.8	70.1	8.	157.
		2	36.5	31.0	27.4	25.1	20.0	15.2	12.6	9.9	7.7	6.4	26.0	22.	175.
		3	35.1	30.3	27.2	24.5	19.6	15.0	12.2	9.9	8.1	6.4	14.4	-31.	194.
		4	32.5	27.0	23.8	22.3	17.9	13.3	10.9	8.3	6.2	5.3	11.6	32.	259.
502	2	1	25.3	20.8	18.4	16.6	12.8	9.4	7.6	5.9	4.6	3.7	121.1	31.	190.
		2	33.1	28.0	25.1	23.0	18.3	13.9	11.2	9.0	7.0	5.7	32.4	-37.	153.
		3	31.1	26.2	23.6	21.4	17.1	13.0	10.5	8.3	6.5	5.3	21.5	35.	201.
		4	30.8	26.1	23.4	21.4	17.0	13.0	10.6	8.5	6.6	5.5	18.7	-10.	293.
252	2	1	18.4	15.4	13.4	12.2	9.8	7.4	6.1	4.7	3.7	3.1	90.8	-36.	178.
		2	27.1	22.7	20.2	18.6	14.9	11.3	9.2	7.4	5.6	4.5	28.6	36.	168.
		3	28.0	23.7	21.3	19.7	15.6	11.8	9.8	7.8	6.0	4.9	19.7	-10.	231.
		4	29.6	24.9	21.8	19.5	16.1	12.1	9.8	7.7	6.0	5.1	16.1	16.	316.
0	2	1	13.2	11.3	9.9	8.8	7.1	5.4	4.4	3.5	2.7	2.2	134.6	35.	234.
		2	23.7	20.2	17.9	16.2	13.0	9.8	8.0	6.3	4.9	4.0	39.4	-13.	206.
		3	26.1	22.5	19.8	17.9	14.4	10.9	8.9	7.1	5.5	4.5	24.5	17.	255.
		4	26.2	22.2	19.6	17.8	14.2	10.9	8.9	7.0	5.5	4.6	20.3	0.	353.
254	2	1	12.5	10.6	9.3	8.5	6.6	5.0	4.0	3.2	2.5	2.0	131.0	-12.	257.
		2	21.3	18.1	16.1	14.7	11.7	8.8	7.2	5.7	4.4	3.6	39.2	19.	231.
		3	23.1	19.9	17.5	16.0	12.8	9.6	7.8	6.2	4.8	4.0	24.7	-1.	289.
		4	23.5	20.0	17.6	16.2	12.9	9.9	8.0	6.4	5.0	3.9	20.0	0.	392.
504	2	1	11.2	9.3	8.4	7.5	6.0	4.6	3.7	2.9	2.2	1.8	134.8	18.	264.

Index: L-1300N.IND

Data : L-1300N.DAT

	2		18.4	15.4	13.9	12.5	10.1	7.7	6.3	5.0	3.9	3.2	41.3	-1.	243.
	3		20.2	17.0	15.4	13.7	11.0	8.3	6.7	5.3	4.2	3.5	24.7	2.	290.
	4		20.8	17.1	16.4	15.2	11.3	8.8	7.3	5.4	4.4	3.6	16.8	-9.	330.
754	2	1	10.6	8.5	7.4	6.7	5.5	4.3	3.5	2.7	2.1	1.5	138.8	-2.	311.
		2	15.9	13.4	11.9	11.0	8.7	6.7	5.5	4.4	3.5	3.3	42.3	2.	285.
		3	17.7	15.2	13.4	12.3	9.8	7.4	6.0	4.7	3.6	3.0	26.6	-6.	357.
		4	20.1	16.8	14.6	13.5	10.5	8.1	6.6	5.3	4.1	3.4	19.3	4.	433.
1004	2	1	9.3	8.0	7.1	6.5	5.2	4.0	3.3	2.6	2.1	1.7	194.6	3.	305.
		2	14.3	12.2	10.8	9.9	7.9	6.0	5.0	4.0	3.1	2.6	73.4	-9.	346.
		3	16.8	14.4	12.7	11.6	9.3	7.1	5.8	4.6	3.6	2.9	41.4	8.	388.
		4	20.7	17.5	15.5	14.2	11.4	8.6	7.0	5.6	4.4	3.6	35.3	-4.	554.
1254	2	1	8.5	7.1	6.2	6.0	4.6	3.6	2.9	2.4	1.9	1.6	200.4	-10.	370.
		2	13.1	11.1	9.7	9.1	7.2	5.4	4.5	3.5	2.7	2.2	67.3	10.	373.
		3	17.3	14.7	12.8	12.0	9.4	7.2	5.8	4.5	3.5	2.9	46.2	-8.	510.
		4	23.0	19.2	17.0	15.6	12.4	9.3	7.6	6.0	4.7	3.9	28.1	19.	519.
1504	2	1	8.9	7.7	6.5	6.2	4.9	3.7	3.0	2.4	1.9	1.5	180.7	8.	354.
		2	14.0	11.9	10.5	9.6	7.7	5.8	4.8	3.8	2.9	2.4	80.9	-9.	476.
		3	18.7	16.2	14.1	13.1	10.3	7.9	6.4	5.2	4.1	3.4	39.7	20.	466.
		4	23.7	19.8	17.3	15.9	12.6	9.5	7.7	6.0	4.6	3.7	27.3	-45.	534.
1754	2	1	9.4	7.8	7.0	6.2	5.0	3.8	3.1	2.5	1.9	1.6	312.4	12.	426.
		2	14.7	12.2	10.9	9.8	7.9	6.0	4.9	3.9	3.1	2.6	110.3	20.	451.
		3	18.9	16.1	14.3	13.0	10.6	8.1	6.6	5.1	3.9	3.2	63.0	-42.	514.
		4	24.2	19.9	17.9	16.0	12.8	9.7	7.8	6.5	5.2	4.3	44.0	-8.	600.
2004	2	1	9.3	7.4	6.6	6.1	4.7	3.5	2.8	2.2	1.7	1.4	208.7	12.	436.
		2	14.1	11.7	10.4	9.5	7.5	5.6	4.6	3.6	2.8	2.2	77.2	-43.	485.
		3	18.2	15.3	13.6	12.5	9.9	7.5	6.1	4.9	4.0	3.3	44.7	-9.	560.
		4	26.6	21.9	19.4	17.9	14.2	10.7	8.6	6.7	5.2	4.1	26.3	1.	550.
2254	2	1	8.6	7.2	6.3	5.6	4.4	3.3	2.6	2.1	1.6	1.3	246.3	-42.	454.
		2	13.1	11.1	9.6	8.8	7.1	5.4	4.4	3.4	2.5	2.1	99.1	-5.	549.
		3	19.7	16.9	15.0	13.7	11.0	8.3	6.7	5.3	4.2	3.3	48.0	0.	531.
		4	30.9	26.4	25.2	21.4	16.3	12.2	9.7	7.6	5.9	4.9	26.7	-1.	492.
2504	2	1	8.8	7.1	6.3	5.6	4.4	3.3	2.6	2.1	1.6	1.3	366.9	-5.	606.
		2	14.5	12.0	10.8	9.6	7.6	5.8	4.7	3.7	2.9	2.4	112.5	1.	557.
		3	23.4	19.9	17.7	16.1	12.8	9.7	7.9	6.2	4.8	3.9	49.5	0.	489.
		4	33.2	27.6	24.7	22.3	17.8	13.4	10.9	8.6	6.8	5.4	33.2	6.	548.
2754	2	1	13.8	11.6	10.2	9.2	7.3	5.5	4.5	3.5	2.7	2.2	361.2	3.	756.
		2	16.6	14.0	12.3	11.2	9.0	6.8	5.5	4.4	3.4	2.8	79.9	2.	502.
		3	25.7	22.0	19.4	17.7	14.2	10.6	8.7	6.8	5.3	4.3	42.3	6.	529.
		4	33.2	27.5	24.0	22.0	17.4	13.0	10.6	8.4	6.5	5.2	25.0	-7.	523.
3004	2	1	11.5	10.0	8.9	8.2	6.6	5.1	4.2	3.4	2.7	2.3	432.3	2.	969.

Index: L-1300N.IND

Data : L-1300N.DAT

		2	17.6	14.9	13.1	12.0	9.6	7.2	5.9	4.7	3.6	2.9	98.5	4.	663.
		3	25.0	21.0	18.5	16.9	13.4	9.9	8.1	6.3	4.9	3.9	45.8	-7.	614.
		4	30.9	25.5	22.5	20.5	16.3	12.2	9.9	7.7	6.0	4.9	33.8	3.	758.
3254	2	1	11.7	9.3	8.6	7.7	6.1	4.6	3.8	3.0	2.4	2.0	394.2	3.	825.
		2	16.8	13.6	12.2	11.1	8.7	6.5	5.3	4.1	3.2	2.6	83.4	-4.	524.
		3	22.8	18.7	16.9	15.5	12.1	8.9	7.1	5.6	4.4	3.6	49.0	2.	614.
		4	25.0	20.2	18.2	16.6	13.1	9.9	8.1	6.4	4.8	3.9	29.3	13.	614.
3504	2	1	9.5	8.1	7.0	6.1	4.9	3.6	2.9	2.2	1.7	1.4	212.7	-3.	477.
		2	15.7	13.2	11.6	10.4	8.3	6.2	5.0	3.9	3.0	2.5	83.6	3.	563.
		3	17.2	14.7	12.8	11.6	9.3	6.9	5.6	4.5	3.4	2.8	41.2	16.	552.
		4	21.0	17.0	14.8	13.1	10.4	7.8	6.4	4.8	3.8	3.5	23.6	-1.	529.
3754	2	1	16.0	13.2	11.6	10.4	8.1	6.1	4.9	3.9	3.1	2.5	348.3	14.	781.
		2	11.3	9.2	8.2	7.4	5.8	4.3	3.5	2.8	2.2	1.8	75.2	-6.	506.
		3	12.4	10.1	8.8	7.8	5.9	4.1	3.1	2.2	1.4	.9	39.3	7.	528.
		4	21.5	17.7	15.8	14.4	11.6	9.0	7.7	6.1	5.1	4.4	44.6	56.	1000.
4004	2	1	9.8	8.4	7.6	6.9	5.6	4.3	3.6	3.0	2.4	2.0	292.8	-5.	707.
		2	8.4	6.7	6.0	5.4	4.2	3.2	2.6	2.0	1.6	1.2	67.4	6.	488.
		3	13.5	11.3	10.0	9.1	7.2	5.3	4.3	3.4	2.6	2.1	62.7	56.	907.
		4	33.1	27.3	24.2	22.1	17.4	13.0	10.5	8.3	6.3	5.1	32.0	-56.	773.
4254	2	1	7.5	6.2	5.5	5.1	4.0	3.1	2.6	2.1	1.7	1.4	312.9	7.	655.
		2	9.8	7.8	6.8	6.4	5.2	3.7	3.1	2.4	1.9	1.6	136.7	56.	858.
		3	26.6	22.1	19.6	18.0	14.4	10.7	8.9	7.0	5.3	4.4	57.8	-54.	724.
		4	49.1	40.6	35.9	32.8	25.9	19.4	16.0	12.8	9.9	8.1	24.6	14.	514.
4504	2	1	6.7	5.2	4.7	4.2	3.3	2.4	2.0	1.5	1.2	1.0	433.7	30.	801.
		2	23.5	19.4	17.4	15.7	12.6	9.4	7.6	6.2	4.7	3.7	109.6	-31.	607.
		3	43.9	36.9	32.9	30.0	23.9	18.0	14.6	11.6	9.0	7.3	44.5	3.	491.
		4	59.5	49.4	44.2	40.0	31.9	24.2	19.9	15.7	12.2	10.1	20.6	-1.	379.
4754	2	1	17.0	14.1	12.6	11.3	9.0	6.8	5.5	4.3	3.4	2.7	149.0	-24.	334.
		2	39.2	32.8	29.2	26.6	21.1	15.8	12.8	10.2	7.9	6.4	46.7	6.	314.
		3	52.4	44.2	39.2	35.6	28.7	21.7	17.8	14.0	11.0	8.9	25.4	-5.	341.
		4	64.7	52.8	47.6	43.4	34.5	26.8	21.3	16.2	12.7	10.5	13.3	11.	299.
5004	2	1	24.0	20.2	18.2	16.7	12.9	9.9	8.2	6.2	4.6	3.8	200.4	7.	314.
		2	42.1	35.3	31.3	28.0	22.6	16.8	13.6	11.2	9.1	7.4	84.1	-8.	396.
		3	54.2	45.8	40.7	37.0	29.5	22.1	18.0	14.3	11.1	9.0	36.6	12.	344.
		4	61.9	51.9	46.4	42.2	33.7	25.5	20.8	16.5	12.7	10.4	23.8	-33.	372.
5254	2	1	17.5	14.6	13.1	11.9	9.5	7.2	5.8	4.7	3.8	2.9	195.1	-5.	437.
		2	33.9	27.8	25.1	22.3	16.8	13.5	11.4	8.5	6.5	4.5	58.7	13.	395.
		3	44.7	37.7	34.4	31.3	26.8	17.9	13.3	11.9	9.3	7.8	31.0	-35.	416.
5504	2	1	14.0	11.4	10.3	9.6	7.3	5.4	4.4	3.5	2.7	2.2	172.1	13.	385.
		2	25.5	20.4	18.1	16.9	13.3	9.9	8.1	6.2	4.7	3.5	66.8	-34.	449.

5754 2 1 10.1 8.7 7.9 7.2 5.9 4.5 3.7 3.0 2.3 2.0 379.1 -34. 915.

IPR-11 DATA SUMMARY

SURVEY : LORNEX - NINA PROPERTY

INDEX FILE : L-1400N.IND

DATA FILE : L-1400N.DAT

LINE NO. : 1400

Station	Receive Mode	Dipole	M0	M1	M2	M3	M4	M5 mV/V	M6	M7	M8	M9	Vp mV	SP mV	Apparent Resist.
1752	2	1	13.8	12.0	10.7	9.8	7.9	6.0	5.0	4.0	3.1	2.6	702.2	-5.	1469.
		2	30.3	25.6	22.8	20.8	17.0	13.4	10.7	8.4	6.9	5.5	126.8	9.	796.
		3	43.8	37.1	33.0	30.1	24.4	18.5	15.0	11.9	9.3	7.7	52.8	9.	661.
		4	47.2	39.7	35.5	32.3	25.7	19.3	16.0	12.7	9.7	8.2	22.8	34.	477.
1502	2	1	18.0	15.5	13.9	12.9	10.4	7.9	6.5	5.3	4.2	3.5	479.1	10.	1253.
		2	34.0	28.7	25.3	23.3	18.6	13.9	11.4	9.0	7.0	5.7	89.6	8.	703.
		3	36.0	30.7	27.1	24.9	19.8	15.2	12.1	9.8	7.6	6.3	31.6	37.	495.
		4	43.5	36.3	31.9	29.2	24.5	18.0	14.4	11.8	9.1	7.3	13.9	-3.	364.
1252	2	1	42.3	34.6	30.3	27.0	21.0	15.2	12.0	9.2	6.8	5.4	1550.0	0.	2700.
		2	30.6	26.1	23.2	21.1	17.0	12.8	10.5	8.3	6.5	5.3	106.1	41.	555.
		3	34.9	30.1	27.0	24.5	19.9	15.0	12.2	9.5	7.3	5.9	36.0	-2.	375.
		4	35.3	29.1	26.0	23.1	17.9	13.1	10.8	8.4	6.0	4.7	18.4	-12.	320.
1002	2	1	17.7	15.1	13.7	12.6	10.3	8.0	6.6	5.3	4.2	3.5	591.6	37.	1161.
		2	33.0	27.5	24.5	22.2	17.7	13.3	10.9	8.7	6.7	5.5	55.7	-2.	328.
		3	31.3	26.4	23.5	21.6	17.1	13.1	10.5	8.3	6.5	5.3	24.3	-8.	285.
		4	35.1	29.0	26.0	23.5	19.3	14.3	11.9	9.4	7.4	6.0	17.4	2.	341.
752	2	1	27.0	22.5	20.5	18.8	15.1	11.6	9.4	7.5	5.9	4.8	155.6	1.	287.
		2	27.4	23.4	20.5	18.6	14.8	11.2	9.1	7.3	5.7	4.6	39.8	-10.	221.
		3	30.5	25.6	23.3	21.1	16.7	12.6	10.3	8.1	6.3	5.1	27.7	10.	306.
		4	33.0	26.9	24.7	22.7	17.8	13.5	11.0	8.7	6.8	5.7	19.6	13.	362.
502	2	1	28.3	24.1	21.5	19.6	15.7	12.0	9.8	7.8	6.1	5.0	97.1	-7.	169.
		2	29.0	24.4	21.6	19.6	15.7	11.8	9.6	7.6	5.9	4.9	45.9	7.	240.
		3	29.1	24.8	21.7	19.8	15.8	11.9	9.8	7.7	6.1	4.9	27.1	22.	282.
		4	28.6	24.2	21.4	19.7	15.9	12.2	10.1	8.1	6.4	5.5	21.4	-16.	373.
252	2	1	33.2	28.1	25.0	22.7	18.2	13.8	11.3	9.0	7.0	5.7	66.2	13.	160.

Index: L-1400N.IND

Data : L-1400N.DAT

		2	30.6	25.7	22.9	20.7	16.6	12.5	10.2	8.1	6.3	5.1	25.8	24.	187.
		3	26.6	22.2	19.8	17.8	14.3	10.7	8.7	6.8	5.3	4.3	18.1	-14.	261.
		4	25.0	21.1	19.0	17.3	13.9	10.8	8.9	7.2	5.8	4.9	14.6	-3.	351.
0	2	1	31.7	26.5	23.7	21.5	17.3	13.1	10.7	8.5	6.6	5.4	68.1	27.	143.
		2	27.7	23.0	20.6	18.6	14.9	11.2	9.1	7.1	5.6	4.6	33.5	-14.	211.
		3	23.8	19.6	17.7	116.0	12.9	9.6	8.0	6.4	4.9	4.1	23.7	1.	297.
		4	24.6	20.3	18.3	16.5	13.2	9.9	8.0	6.3	4.9	3.9	18.9	-23.	395.
254	2	1	27.0	22.5	20.2	18.6	14.8	11.1	9.2	7.2	5.6	4.6	83.1	-15.	137.
		2	24.0	19.9	17.8	16.4	13.1	9.8	8.1	6.4	5.0	4.1	42.2	0.	209.
		3	24.0	20.2	17.9	16.2	13.1	9.7	7.9	6.2	4.8	3.9	30.6	-18.	303.
		4	22.7	18.8	16.8	15.6	12.5	9.3	7.7	6.1	4.7	3.9	24.6	-7.	406.
504	2	1	21.2	17.9	15.8	14.6	11.6	8.9	7.3	5.8	4.5	3.7	79.7	5.	132.
		2	24.1	20.1	17.8	16.3	13.0	9.7	7.9	6.2	4.8	3.9	42.6	-19.	211.
		3	21.5	18.1	15.9	14.7	11.7	8.8	7.3	5.8	4.4	3.7	30.2	-1.	298.
		4	19.4	16.3	14.4	13.3	10.6	8.0	6.4	5.1	3.9	3.2	29.0	13.	478.
754	2	1	18.1	15.1	13.5	12.1	9.6	7.2	5.8	4.7	3.6	2.9	108.6	-17.	179.
		2	20.6	17.1	15.3	13.8	11.0	8.3	6.7	5.1	4.2	3.4	46.5	-7.	230.
		3	18.3	15.3	13.6	12.3	9.8	7.4	6.0	4.5	3.8	3.0	39.5	21.	390.
		4	18.4	15.4	13.7	12.3	9.8	7.7	6.5	5.2	4.2	3.3	32.2	-7.	532.
1004	2	1	11.5	9.5	8.4	7.5	6.1	4.5	3.7	3.0	2.3	1.9	130.3	-5.	240.
		2	16.6	13.8	12.2	11.2	8.8	6.6	5.4	4.2	3.2	2.6	53.0	20.	294.
		3	16.6	14.0	12.3	11.1	8.9	6.5	5.4	4.2	3.2	2.4	37.4	-2.	413.
		4	19.6	16.1	14.1	13.0	10.4	7.7	6.3	5.0 5.0	4.0	3.1	28.6	-25.	528.
1254	2	1	10.6	9.0	7.9	7.0	5.6	4.2	3.4	2.7	2.1	1.7	269.5	22.	402.
		2	14.0	12.0	10.6	9.2	7.5	5.7	4.6	3.7	2.9	2.3	90.2	-6.	404.
		3	17.4	15.2	13.0	11.6	9.4	7.1	5.7	4.5	3.5	2.9	58.3	-18.	521.
		4	21.0	17.8	15.8	14.0	11.3	8.6	7.0	5.5	4.3	3.5	40.8	-8.	610.
1504	2	1	7.9	6.5	5.7	5.1	4.1	3.1	2.6	2.1	1.6	1.4	222.7	-4.	388.
		2	13.0	10.9	9.6	8.6	7.0	5.2	4.2	3.3	2.6	2.1	77.2	-27.	404.
		3	17.1	14.7	13.0	11.7	9.8	7.2	5.9	4.7	3.6	3.1	44.9	1.	469.
		4	19.6	16.5	14.7	13.2	11.0	8.0	6.5	5.2	4.0	3.3	36.8	-7.	641.
1754	2	1	8.4	6.8	6.1	5.5	4.5	3.4	2.7	2.1	1.7	1.4	295.0	-23.	463.
		2	12.9	10.3	9.3	8.4	6.9	5.1	4.4	3.3	2.7	2.2	101.1	0.	476.
		3	16.1	13.2	11.8	10.7	8.6	6.4	5.4	4.2	3.4	2.7	67.0	-5.	629.
		4	17.1	13.5	12.2	11.1	9.1	6.9	5.6	4.3	3.4	2.7	41.7	-9.	654.
2004	2	1	8.3	7.0	6.3	5.9	4.7	3.6	3.0	2.4	1.9	1.6	363.1	1.	600.
		2	12.2	10.1	8.9	8.2	6.4	4.9	3.9	3.1	2.4	2.0	124.0	-8.	614.
		3	12.5	10.5	9.3	8.7	6.8	5.1	4.1	3.2	2.6	2.1	61.6	0.	609.
		4	21.2	17.5	15.5	14.3	11.2	8.5	6.9	5.4	4.2	3.4	45.0	11.	744.
2254	2	1	11.7	10.0	8.8	7.9	6.3	4.8	3.9	3.1	2.4	2.0	373.2	-17.	901.

		2	8.5	7.2	6.3	5.8	4.6	3.5	2.9	2.3	1.8	1.4	83.9	-6.	608.
		3	16.0	13.8	12.1	10.9	8.6	6.6	5.3	4.3	3.2	2.7	49.0	22.	709.
		4	30.0	25.1	22.4	20.1	15.5	12.1	9.5	7.5	6.1	5.0	27.5	-20.	664.
2504	2	1	9.2	7.6	6.7	6.1	4.8	3.6	2.9	2.3	1.9	1.5	359.1	-2.	704.
		2	12.0	10.0	8.7	8.2	6.4	4.8	4.0	3.1	2.3	2.0	114.2	16.	672.
		3	24.4	20.4	18.0	16.5	13.1	9.8	7.9	6.3	4.7	4.0	52.0	-15.	611.
		4	33.6	28.4	24.6	22.4	17.7	13.4	10.9	8.7	6.2	5.5	32.6	-5.	640.
2754	2	1	15.2	12.6	11.1	10.0	8.0	6.0	4.9	3.9	3.0	2.6	617.6	21.	1385.
		2	17.6	14.7	13.0	11.8	9.6	7.2	5.8	4.5	3.5	2.9	97.3	-16.	655.
		3	26.0	22.1	19.6	17.9	14.1	10.7	8.8	7.0	5.4	4.4	49.2	3.	660.
		4	38.5	31.9	28.3	25.6	20.5	15.1	12.3	9.5	7.2	5.9	30.0	-12.	673.
3004	2	1	14.5	12.0	10.9	10.0	8.0	6.2	5.2	4.2	3.4	2.8	549.4	-15.	1232.
		2	16.3	13.6	12.3	11.3	9.0	6.8	5.6	4.5	3.5	2.9	108.7	-2.	731.
		3	29.4	24.7	21.8	19.9	15.7	11.8	9.5	7.5	5.8	4.8	46.7	-5.	627.
		4	36.1	30.0	26.6	24.5	19.2	14.1	11.6	9.0	7.1	6.0	23.0	6.	515.
3254	2	1	16.7	14.1	12.4	11.4	9.2	7.1	5.9	4.8	3.8	3.2	1245.0	-1.	2600.
		2	18.4	15.5	13.6	12.4	9.9	7.5	6.2	4.9	3.8	3.1	167.8	-3.	1053.
		3	24.0	20.4	17.8	16.5	13.2	9.8	7.9	6.0	4.6	4.0	51.3	10.	642.
		4	28.3	23.6	20.2	18.9	14.9	11.2	9.1	7.5	5.8	4.6	51.1	27.	1069.
3504	2	1	30.0	24.3	21.3	19.3	15.1	11.2	9.0	7.1	5.5	4.5	1111.0	-5.	3170.
		2	17.7	15.1	13.4	12.3	9.9	6.9	6.1	4.9	3.7	3.1	95.0	6.	813.
		3	19.7	16.5	14.7	13.5	10.7	7.7	6.6	5.1	3.9	3.2	59.2	33.	1011.
		4	21.1	17.2	15.2	14.1	11.2	7.7	6.9	5.3	4.1	3.3	48.6	10.	1387.
3754	2	1	13.6	11.7	10.4	9.6	7.8	6.1	5.2	4.3	3.4	2.9	934.5	3.	1956.
		2	12.3	10.5	9.3	8.3	6.9	5.2	4.2	3.3	2.6	2.1	196.6	33.	1234.
		3	14.0	11.6	10.0	9.6	7.2	5.3	4.3	3.4	2.5	2.1	115.5	16.	1440.
		4	15.7	13.1	11.3	10.2	8.2	6.1	5.2	4.0	3.1	2.4	70.9	-56.	1483.
4004	2	1	13.0	10.8	9.7	9.0	7.2	5.4	4.5	3.6	2.8	2.3	898.4	31.	2014.
		2	9.5	7.6	6.7	6.0	4.8	3.5	2.9	2.2	1.7	1.4	201.0	13.	1352.
		3	10.5	8.7	7.6	6.5	5.6	4.2	3.5	2.7	22.1	1.7	106.2	-49.	1420.
		4	20.6	17.3	15.3	14.3	11.2	8.7	6.8	5.2	4.3	3.4	46.8	-8.	1048.
4254	2	1	6.0	4.7	4.5	4.0	3.1	2.3	1.9	1.5	1.2	1.0	384.8	15.	863.
		2	8.0	6.4	6.1	5.3	4.2	3.2	2.5	2.0	1.6	1.3	170.6	-17.	1147.
		3	18.8	15.5	14.2	12.8	10.2	7.6	6.2	4.6	3.7	3.1	61.8	-33.	829.
		4	43.5	36.2	32.7	29.3	23.0	17.6	14.1	11.0	8.5	6.9	40.3	-1.	903.
4504	2	1	7.3	6.0	5.5	5.1	4.0	3.0	2.5	1.9	1.4	.9	504.1	-15.	1130.
		2	15.0	12.4	11.0	10.3	8.2	6.3	5.0	4.4	3.7	3.7	126.0	-37.	847.
		3	37.3	31.3	27.8	25.8	20.2	15.2	12.3	9.7	7.6	6.6	69.7	5.	936.
		4	62.8	52.2	47.1	43.9	34.1	25.7	20.7	16.7	13.0	11.2	32.9	-9.	738.
4754	2	1	10.1	8.4	7.4	6.7	5.4	4.1	3.5	2.9	2.2	1.9	583.9	-26.	1078.

		2	31.0	25.9	22.9	20.7	16.7	12.6	10.2	7.9	6.6	5.2	199.3	3.	1104.
		3	58.1	48.9	43.7	39.8	31.9	24.2	19.6	15.5	12.2	10.0	73.2	-2.	809.
		4	85.9	71.6	63.9	57.9	46.5	35.2	28.7	23.0	17.7	14.5	26.6	-2.	490.
5004	2	1	20.0	16.8	14.8	13.7	10.9	8.2	6.7	5.3	4.1	3.4	1193.0	1.	2200.
		2	43.6	36.9	32.8	30.0	24.1	18.2	14.9	11.8	9.2	7.5	169.8	-6.	940.
		3	76.3	65.0	57.8	53.0	42.6	32.2	26.4	20.9	16.2	13.3	46.6	10.	515.
		4	98.1	82.4	73.5	68.0	53.5	40.7	32.8	26.3	20.5	16.8	21.1	3.	390.
5254	2	1	20.7	17.5	15.7	14.5	11.6	8.9	7.3	5.9	4.6	3.8	268.2	-2.	1050.
		2	55.6	47.2	42.1	38.9	31.1	23.5	19.4	15.3	12.0	9.8	39.4	10.	463.
		3	87.0	74.3	66.3	60.8	48.5	37.5	30.7	24.3	19.1	15.1	14.3	-3.	330.
		4	89.3	74.2	65.2	60.0	47.8	36.5	29.0	22.8	18.1	14.7	8.1	8.	317.
5504	2	1	22.3	18.8	17.0	15.5	12.5	9.5	7.9	6.3	4.9	4.1	356.7	12.	746.
		2	63.7	53.8	48.4	44.0	35.4	26.8	21.9	17.4	13.7	11.2	65.8	2.	413.
		3	78.3	64.5	59.2	53.9	43.1	32.6	26.4	20.9	16.3	13.4	28.7	4.	359.
		4	78.8	64.8	59.2	53.6	43.0	32.4	26.8	21.2	16.6	13.5	16.4	-3.	342.
5754	2	1	19.5	16.6	14.9	13.8	11.1	8.6	7.1	5.7	4.5	3.7	459.4	0.	1030.
		2	47.3	39.8	35.8	32.7	26.1	19.8	16.1	12.7	9.9	8.2	67.5	3.	454.
		3	56.4	47.5	42.9	39.0	31.2	23.5	19.2	15.1	11.5	9.7	27.9	2.	374.
		4	60.1	50.6	47.5	41.8	31.8	23.5	19.4	15.5	12.3	10.2	17.5	5.	393.
6004	2	1	15.8	13.5	12.2	11.1	9.0	6.9	5.7	4.6	3.7	3.0	365.5	1.	819.
		2	29.4	24.5	22.1	20.0	16.0	12.1	9.8	7.8	6.1	5.0	70.4	3.	474.
		3	33.2	27.8	24.6	22.2	18.1	13.8	11.1	8.7	6.8	5.6	36.7	7.	492.
6254	2	1	13.1	11.1	10.0	9.1	7.4	5.6	4.6	3.6	2.9	2.4	438.5	1.	917.
		2	16.0	13.1	11.5	10.4	8.3	6.2	4.9	4.1	3.1	2.5	110.6	8.	694.
6504	2	1	14.2	12.3	11.0	10.0	8.2	6.4	5.2	4.2	3.3	2.7	715.2	7.	1497.

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 500

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	882.7	1319.0	2.2	51.39	.03	.20	-2000.00	-2000.000	1.88	-2000.00
	2	262.2	1176.0	2.2	53.59	.03	.20	-2000.00	-2000.000	1.90	-2000.00
	3	150.5	1340.0	2.0	32.92	.10	.30	-2000.00	-2000.000	1.49	-2000.00
	4	71.2	1064.0	3.1	132.23	.01	.10	-2000.00	-2000.000	2.66	-2000.00
254	1	1091.0	1370.0	2.0	32.90	.10	.30	-2000.00	-2000.000	2.15	-2000.00
	2	424.8	1600.0	2.1	56.94	.01	.20	-2000.00	-2000.000	3.00	-2000.00
	3	171.7	1290.0	2.8	73.06	.01	.20	-2000.00	-2000.000	3.52	-2000.00
	4	42.4	532.0	6.9	146.36	.10	.20	-2000.00	-2000.000	3.49	-2000.00
504	1	1244.0	1560.0	1.9	49.43	.01	.20	-2000.00	-2000.000	9.71	-2000.00
	2	411.1	1549.0	2.6	60.64	.03	.20	-2000.00	-2000.000	15.53	-2000.00
	3	85.7	644.0	6.4	146.37	.03	.20	-2000.00	-2000.000	8.65	-2000.00
	4	25.9	325.0	16.9	511.81	3.00	.10	-2000.00	-2000.000	7.21	-2000.00
754	1	1033.0	1410.0	2.7	58.47	.10	.20	-2000.00	-2000.000	1.79	-2000.00
	2	174.0	712.0	6.3	146.10	.03	.20	-2000.00	-2000.000	1.13	-2000.00
	3	42.4	346.0	16.2	543.07	.03	.10	-2000.00	-2000.000	.67	-2000.00
	4	37.0	505.0	12.1	443.45	.01	.10	-2000.00	-2000.000	1.26	-2000.00
1004	1	452.8	710.9	5.7	224.84	.01	.10	-2000.00	-2000.000	1.20	-2000.00
	2	75.1	353.8	16.0	511.05	1.00	.10	-2000.00	-2000.000	2.30	-2000.00
	3	52.7	495.2	12.5	439.40	.03	.10	-2000.00	-2000.000	1.08	-2000.00
	4	32.4	508.1	11.9	399.34	.30	.10	-2000.00	-2000.000	1.15	-2000.00
1254	1	164.3	322.0	14.3	442.24	10.00	.10	-2000.00	-2000.000	.78	-2000.00
	2	63.3	372.8	13.6	494.24	.01	.10	-2000.00	-2000.000	1.14	-2000.00
	3	34.2	401.0	12.2	454.86	.01	.10	-2000.00	-2000.000	1.37	-2000.00
	4	17.8	350.0	12.4	404.48	.30	.10	-2000.00	-2000.000	1.98	-2000.00
1504	1	88.8	309.0	9.4	344.77	.03	.10	-2000.00	-2000.000	.92	-2000.00
	2	28.2	294.0	12.1	417.63	.10	.10	-2000.00	-2000.000	1.71	-2000.00
	3	11.8	240.0	10.9	245.26	.03	.20	-2000.00	-2000.000	3.76	-2000.00
1754	1	465.3	730.0	4.0	149.92	30.00	.10	-2000.00	-2000.000	2.16	-2000.00
	2	98.9	465.8	5.9	241.62	.01	.10	-2000.00	-2000.000	2.99	-2000.00
2004	1	997.6	2409.0	2.4	95.43	100.00	.10	-2000.00	-2000.000	4.84	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 600

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	691.5	986.0	2.0	80.47	.10	.10	-2000.00	-2000.000	1.88	-2000.00
	2	265.3	1135.0	1.7	37.11	.10	.20	-2000.00	-2000.000	3.91	-2000.00
	3	136.9	1160.0	2.5	26.56	.30	.40	-2000.00	-2000.000	3.31	-2000.00
	4	58.0	827.0	4.5	173.55	30.00	.10	-2000.00	-2000.000	2.80	-2000.00
254	1	444.0	1072.0	1.2	32.92	.03	.20	-2000.00	-2000.000	8.24	-2000.00
	2	184.4	1336.0	2.7	112.90	.01	.10	-2000.00	-2000.000	3.28	-2000.00
	3	68.2	986.0	4.3	41.61	.30	.60	-2000.00	-2000.000	185.97	-2000.00
	4	18.9	456.0	16.2	318.96	.10	.20	-2000.00	-2000.000	1.41	-2000.00
504	1	588.0	1318.0	2.6	101.11	1.00	.10	-2000.00	-2000.000	1.71	-2000.00
	2	155.0	1042.0	4.0	163.27	.01	.10	-2000.00	-2000.000	1.02	-2000.00
	3	33.4	449.0	16.8	325.94	.10	.20	-2000.00	-2000.000	.86	-2000.00
	4	14.6	328.0	11.3	230.31	.10	.20	-2000.00	-2000.000	2.49	-2000.00
754	1	698.2	1370.0	4.4	167.10	.30	.10	-2000.00	-2000.000	.95	-2000.00
	2	81.1	477.2	18.4	357.28	.10	.20	-2000.00	-2000.000	1.03	-2000.00
	3	27.2	319.0	11.7	237.64	.10	.20	-2000.00	-2000.000	2.56	-2000.00
	4	18.9	371.0	9.9	239.92	.01	.20	-2000.00	-2000.000	6.27	-2000.00
1004	1	206.7	499.0	19.9	658.45	.01	.10	-2000.00	-2000.000	.73	-2000.00
	2	42.1	305.3	13.7	272.50	.10	.20	-2000.00	-2000.000	1.11	-2000.00
	3	24.2	350.0	10.6	216.04	.10	.20	-2000.00	-2000.000	.82	-2000.00
	4	18.5	446.0	9.9	347.30	1.00	.10	-2000.00	-2000.000	1.92	-2000.00
1254	1	166.9	327.0	13.7	477.41	.03	.10	-2000.00	-2000.000	.85	-2000.00
	2	55.2	325.1	13.0	469.71	.01	.10	-2000.00	-2000.000	1.01	-2000.00
	3	35.5	417.0	11.7	425.96	.01	.10	-2000.00	-2000.000	.96	-2000.00
	4	18.2	357.0	9.8	349.54	1.00	.10	-2000.00	-2000.000	2.57	-2000.00
1504	1	223.9	413.0	2.3	23.22	.30	.60	-2000.00	-2000.000	8.45	-2000.00
	2	92.2	510.6	5.7	113.54	.10	.20	-2000.00	-2000.000	3.55	-2000.00
	3	39.2	433.0	5.1	113.29	.10	.20	-2000.00	-2000.000	2.06	-2000.00
1754	1	237.8	497.0	1.8	80.24	.10	.10	-2000.00	-2000.000	3.55	-2000.00
	2	73.7	462.8	2.7	104.10	.01	.10	-2000.00	-2000.000	4.16	-2000.00
2004	1	178.2	690.0	1.1	18.86	30.00	.30	-2000.00	-2000.000	14.55	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 700

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	546.9	1226.0	1.9	24.56	3.00	.30	-2000.00	-2000.000	1.57	-2000.00
	2	257.2	1730.0	1.8	49.19	.01	.20	-2000.00	-2000.000	4.02	-2000.00
	3	80.8	1085.0	2.0	48.35	.03	.20	-2000.00	-2000.000	1.92	-2000.00
	4	25.8	579.0	4.2	98.36	.03	.20	-2000.00	-2000.000	3.98	-2000.00
254	1	810.0	2119.0	1.9	48.78	.01	.20	-2000.00	-2000.000	1.68	-2000.00
	2	188.4	1478.0	1.9	81.28	.01	.10	-2000.00	-2000.000	1.06	-2000.00
	3	48.1	753.0	3.6	87.73	.03	.20	-2000.00	-2000.000	4.27	-2000.00
	4	27.3	713.0	5.4	109.56	.10	.20	-2000.00	-2000.000	5.42	-2000.00
504	1	719.4	1613.0	1.8	74.04	.03	.10	-2000.00	-2000.000	1.06	-2000.00
	2	122.3	822.0	3.8	99.07	.01	.20	-2000.00	-2000.000	1.05	-2000.00
	3	54.7	734.0	5.0	202.97	.01	.10	-2000.00	-2000.000	1.29	-2000.00
	4	23.6	528.0	5.6	225.07	.01	.10	-2000.00	-2000.000	2.46	-2000.00
754	1	565.6	1044.0	2.7	59.16	.10	.20	-2000.00	-2000.000	1.11	-2000.00
	2	155.8	863.0	4.8	102.25	.10	.20	-2000.00	-2000.000	1.64	-2000.00
	3	53.8	594.0	5.0	116.38	.03	.20	-2000.00	-2000.000	.80	-2000.00
	4	24.0	442.0	5.8	123.46	.10	.20	-2000.00	-2000.000	3.53	-2000.00
1004	1	256.9	537.0	3.7	81.08	.10	.20	-2000.00	-2000.000	1.75	-2000.00
	2	69.1	433.8	4.8	109.04	.03	.20	-2000.00	-2000.000	1.97	-2000.00
	3	27.7	347.0	5.6	193.10	.30	.10	-2000.00	-2000.000	5.63	-2000.00
	4	12.9	270.0	4.8	139.42	.01	.20	-2000.00	-2000.000	8.95	-2000.00
1254	1	196.2	362.0	1.5	61.56	.10	.10	-2000.00	-2000.000	3.46	-2000.00
	2	57.7	319.7	3.0	69.84	.03	.20	-2000.00	-2000.000	1.17	-2000.00
	3	23.1	256.0	4.0	92.13	.03	.20	-2000.00	-2000.000	1.68	-2000.00
	4	19.3	356.0	3.7	41.73	.30	.40	-2000.00	-2000.000	2.82	-2000.00
1504	1	171.1	335.0	.9	20.86	100.00	.30	-2000.00	-2000.000	13.66	-2000.00
	2	53.7	315.8	1.9	30.33	.10	.30	-2000.00	-2000.000	2.28	-2000.00
	3	35.3	415.0	2.0	87.55	1.00	.10	-2000.00	-2000.000	5.82	-2000.00
	4	25.9	508.0	2.6	65.74	.01	.20	-2000.00	-2000.000	3.27	-2000.00
1754	1	143.1	345.0	1.0	27.05	100.00	.20	-2000.00	-2000.000	16.42	-2000.00
	2	64.7	468.6	1.3	56.67	.10	.10	-2000.00	-2000.000	6.53	-2000.00
	3	40.4	583.0	1.8	19.83	.30	.40	-2000.00	-2000.000	7.91	-2000.00
	4	28.0	676.0	1.9	82.13	.10	.10	-2000.00	-2000.000	9.66	-2000.00
2004	1	207.1	406.0	3.5	101.46	100.00	.70	-2000.00	-2000.000	5.30	-2000.00
	2	101.5	597.0	1.6	38.55	.03	.20	-2000.00	-2000.000	5.29	-2000.00
	3	62.4	733.0	1.6	35.99	.10	.20	-2000.00	-2000.000	7.55	-2000.00
	4	35.9	705.0	1.6	46.39	.01	.20	-2000.00	-2000.000	7.41	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2254	1	187.5	490.0	1.2	53.99	1.00	.10	-2000.00	-2000.000	9.25	-2000.00
	2	80.7	633.8	1.9	40.44	.10	.20	-2000.00	-2000.000	7.92	-2000.00
	3	42.6	667.0	1.5	38.25	.10	.20	-2000.00	-2000.000	6.20	-2000.00
	4	23.3	608.0	2.0	24.76	10.00	.30	-2000.00	-2000.000	7.81	-2000.00
2504	1	480.0	1076.0	2.8	74.08	.01	.20	-2000.00	-2000.000	1.43	-2000.00
	2	140.3	944.0	2.8	44.48	.10	.30	-2000.00	-2000.000	1.43	-2000.00
	3	57.7	775.0	1.8	48.72	.01	.20	-2000.00	-2000.000	3.96	-2000.00
	4	26.0	582.0	3.4	91.37	.01	.20	-2000.00	-2000.000	2.28	-2000.00
2754	1	418.1	1193.0	2.5	102.53	.03	.10	-2000.00	-2000.000	1.65	-2000.00
	2	123.4	1056.0	1.9	46.66	.03	.20	-2000.00	-2000.000	2.99	-2000.00
	3	42.7	730.0	3.4	46.14	.10	.40	-2000.00	-2000.000	3.85	-2000.00
3004	1	509.0	1141.0	1.7	39.42	.03	.20	-2000.00	-2000.000	2.11	-2000.00
	2	124.7	839.0	3.6	58.12	.10	.30	-2000.00	-2000.000	1.97	-2000.00
3254	1	220.1	860.0	3.1	33.24	.30	.40	-2000.00	-2000.000	3.01	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 800

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	301.9	557.0	2.6	33.39	3.00	.30	-2000.00	-2000.000	2.52	-2000.00
	2	194.8	1079.0	3.0	124.71	.01	.10	-2000.00	-2000.000	2.13	-2000.00
	3	60.8	671.0	3.3	73.70	.10	.20	-2000.00	-2000.000	3.94	-2000.00
	4	37.7	696.0	4.2	64.89	.10	.30	-2000.00	-2000.000	2.93	-2000.00
254	1	496.2	1038.0	2.2	93.79	.01	.10	-2000.00	-2000.000	1.36	-2000.00
	2	118.0	741.0	2.7	53.46	.03	.30	-2000.00	-2000.000	.56	-2000.00
	3	55.7	697.0	3.6	144.50	.03	.10	-2000.00	-2000.000	2.16	-2000.00
	4	25.4	531.0	3.8	89.68	.03	.20	-2000.00	-2000.000	2.74	-2000.00
504	1	277.0	511.0	2.0	39.21	.10	.20	-2000.00	-2000.000	6.34	-2000.00
	2	98.8	547.3	2.8	130.82	.01	.10	-2000.00	-2000.000	9.35	-2000.00
	3	40.0	442.0	2.9	85.55	.01	.20	-2000.00	-2000.000	6.39	-2000.00
	4	31.0	572.0	4.7	169.38	.10	.10	-2000.00	-2000.000	10.22	-2000.00
754	1	277.6	512.0	1.9	80.36	.01	.10	-2000.00	-2000.000	2.48	-2000.00
	2	77.5	429.4	2.7	45.12	.10	.30	-2000.00	-2000.000	2.73	-2000.00
	3	50.8	561.0	3.0	125.38	.10	.10	-2000.00	-2000.000	6.40	-2000.00
	4	24.8	458.0	3.7	147.25	.10	.10	-2000.00	-2000.000	4.95	-2000.00
1004	1	207.1	382.0	1.9	44.83	.03	.20	-2000.00	-2000.000	1.83	-2000.00
	2	97.1	537.8	2.7	104.37	.30	.10	-2000.00	-2000.000	2.37	-2000.00
	3	40.4	446.0	2.7	121.07	.10	.10	-2000.00	-2000.000	6.00	-2000.00
	4	29.8	549.0	3.9	68.61	.10	.20	-2000.00	-2000.000	10.98	-2000.00
1254	1	211.1	473.0	2.0	41.24	30.00	.20	-2000.00	-2000.000	3.03	-2000.00
	2	59.1	397.3	2.4	49.13	.03	.30	-2000.00	-2000.000	2.24	-2000.00
	3	40.0	537.0	1.8	55.55	.01	.20	-2000.00	-2000.000	7.80	-2000.00
1504	1	168.4	377.0	1.6	30.61	30.00	.20	-2000.00	-2000.000	13.39	-2000.00
	2	81.8	550.6	1.5	43.04	.03	.20	-2000.00	-2000.000	16.15	-2000.00
	3	42.1	565.0	1.9	75.02	.01	.10	-2000.00	-2000.000	11.73	-2000.00
1754	1	333.2	871.0	1.4	56.13	30.00	.10	-2000.00	-2000.000	3.50	-2000.00
	2	119.1	934.0	1.6	32.64	.03	.30	-2000.00	-2000.000	4.00	-2000.00
	3	33.1	518.0	1.4	37.03	.01	.30	-2000.00	-2000.000	11.17	-2000.00
2004	1	525.8	1179.0	1.2	52.84	1.00	.10	-2000.00	-2000.000	8.61	-2000.00
	2	111.1	747.0	1.9	46.12	.03	.20	-2000.00	-2000.000	8.26	-2000.00
	3	86.9	1167.0	.9	51.30	.10	.10	-2000.00	-2000.000	27.23	-2000.00
2254	1	219.1	687.0	1.2	52.92	30.00	.10	-2000.00	-2000.000	12.42	-2000.00
	2	147.2	1386.0	1.4	34.85	.03	.20	-2000.00	-2000.000	3.58	-2000.00
	3	50.5	949.0	1.2	36.23	.01	.20	-2000.00	-2000.000	10.09	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2504	1	853.8	1787.0	1.2	53.86	.10	.10	-2000.00	-2000.000	9.20	-2000.00
	2	200.7	1260.0	1.5	33.11	.10	.20	-2000.00	-2000.000	3.44	-2000.00
	3	76.3	956.0	1.9	36.81	.03	.30	-2000.00	-2000.000	1.69	-2000.00
	4	50.7	1060.0	3.5	75.64	.10	.20	-2000.00	-2000.000	2.23	-2000.00
2754	1	616.1	1289.0	1.2	52.26	30.00	.10	-2000.00	-2000.000	8.70	-2000.00
	2	150.7	946.0	2.0	50.97	.01	.30	-2000.00	-2000.000	3.23	-2000.00
	3	75.3	943.0	3.3	86.39	.01	.20	-2000.00	-2000.000	3.04	-2000.00
	4	44.4	929.0	3.7	147.95	.10	.10	-2000.00	-2000.000	2.81	-2000.00
3004	1	277.6	1080.0	1.4	63.41	.01	.10	-2000.00	-2000.000	3.88	-2000.00
	2	81.8	963.0	3.4	81.11	.03	.20	-2000.00	-2000.000	1.48	-2000.00
	3	40.1	940.0	3.9	92.08	.03	.20	-2000.00	-2000.000	1.94	-2000.00
	4	27.1	1060.0	3.4	80.99	.03	.20	-2000.00	-2000.000	2.62	-2000.00
3254	1	336.8	755.0	3.2	68.67	.10	.20	-2000.00	-2000.000	1.76	-2000.00
	2	134.4	904.0	4.3	110.82	.01	.20	-2000.00	-2000.000	1.32	-2000.00
	3	80.1	1075.0	4.1	155.58	.30	.10	-2000.00	-2000.000	1.61	-2000.00
	4	54.8	1228.0	3.0	58.55	.03	.30	-2000.00	-2000.000	1.72	-2000.00
3504	1	277.9	671.0	3.2	69.67	.10	.20	-2000.00	-2000.000	.91	-2000.00
	2	123.9	897.0	3.4	80.87	.03	.20	-2000.00	-2000.000	2.07	-2000.00
	3	72.0	1041.0	3.6	83.67	.03	.20	-2000.00	-2000.000	3.25	-2000.00
3754	1	392.0	724.0	1.9	38.93	.30	.20	-2000.00	-2000.000	1.89	-2000.00
	2	170.4	944.0	2.5	40.48	.10	.30	-2000.00	-2000.000	4.28	-2000.00
4004	1	174.7	600.0	1.4	57.67	1.00	.10	-2000.00	-2000.000	6.32	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. = 900

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	1420.0	3180.0	3.6	69.67	1.00	.20	-2000.00	-2000.000	1.14	-2000.00
	2	109.7	738.0	1.7	41.99	100.00	.60	-2000.00	-2000.000	12.51	-2000.00
	3	86.9	1167.0	6.5	70.98	.30	.40	-2000.00	-2000.000	1.59	-2000.00
	4	40.6	911.0	3.9	75.34	.03	.30	-2000.00	-2000.000	5.82	-2000.00
254	1	675.6	1515.0	1.9	76.41	100.00	.10	-2000.00	-2000.000	1.13	-2000.00
	2	148.1	996.0	2.8	39.14	.30	.30	-2000.00	-2000.000	2.22	-2000.00
	3	53.0	711.0	2.9	23.89	.30	.50	-2000.00	-2000.000	9.06	-2000.00
	4	22.5	504.0	5.3	118.99	100.00	.20	-2000.00	-2000.000	9.98	-2000.00
504	1	443.5	870.0	2.1	81.56	.30	.10	-2000.00	-2000.000	1.05	-2000.00
	2	114.6	674.0	2.9	67.41	.03	.20	-2000.00	-2000.000	1.46	-2000.00
	3	42.5	499.0	2.9	49.32	.10	.30	-2000.00	-2000.000	3.01	-2000.00
	4	32.9	646.0	4.4	163.16	.03	.10	-2000.00	-2000.000	5.18	-2000.00
754	1	280.4	550.3	2.3	49.27	30.00	.20	-2000.00	-2000.000	3.39	-2000.00
	2	81.2	478.2	2.2	16.87	.30	.60	-2000.00	-2000.000	10.80	-2000.00
	3	53.1	623.6	2.6	58.85	.03	.30	-2000.00	-2000.000	8.41	-2000.00
1004	1	194.9	407.0	1.8	32.05	100.00	.30	-2000.00	-2000.000	7.90	-2000.00
	2	86.3	542.0	2.0	39.80	.03	.40	-2000.00	-2000.000	6.26	-2000.00
	3	47.7	597.0	3.3	69.60	.10	.20	-2000.00	-2000.000	3.82	-2000.00
1254	1	304.6	597.0	1.3	23.83	100.00	.30	-2000.00	-2000.000	9.50	-2000.00
	2	108.4	638.0	1.8	47.05	.03	.20	-2000.00	-2000.000	4.06	-2000.00
	3	39.8	467.0	2.5	59.32	.03	.20	-2000.00	-2000.000	2.82	-2000.00
1504	1	302.9	731.0	.7	21.39	100.00	.50	-2000.00	-2000.000	27.09	-2000.00
	2	76.3	553.2	1.6	40.33	.03	.20	-2000.00	-2000.000	11.72	-2000.00
	3	35.1	507.0	1.6	32.67	.03	.30	-2000.00	-2000.000	3.94	-2000.00
1754	1	227.6	1020.0	1.0	18.83	30.00	.30	-2000.00	-2000.000	13.94	-2000.00
	2	68.8	926.0	1.6	66.66	.10	.10	-2000.00	-2000.000	4.31	-2000.00
	3	35.3	940.0	1.5	36.24	.03	.20	-2000.00	-2000.000	7.52	-2000.00
2004	1	566.3	1270.0	1.4	57.81	.10	.10	-2000.00	-2000.000	5.58	-2000.00
	2	212.1	1427.0	1.5	37.09	.03	.20	-2000.00	-2000.000	4.30	-2000.00
	3	88.2	1184.0	1.4	39.58	.01	.20	-2000.00	-2000.000	6.10	-2000.00
2254	1	471.4	986.0	1.1	26.99	30.00	.20	-2000.00	-2000.000	8.58	-2000.00
	2	162.8	1022.0	1.4	58.07	.10	.10	-2000.00	-2000.000	23.26	-2000.00
	3	75.8	949.0	1.3	53.85	30.00	.10	-2000.00	-2000.000	8.20	-2000.00
2504	1	424.9	889.0	1.1	27.11	30.00	.20	-2000.00	-2000.000	13.19	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2		136.9	859.0	1.3	54.12	30.00	.10	-2000.00	-2000.000	17.44	-2000.00
2754	1	194.6	760.0	1.0	26.96	100.00	.20	-2000.00	-2000.000	11.71	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 1000

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	290.6	760.0	3.8	74.87	10.00	.20	-2000.00	-2000.000	1.16	-2000.00
	2	91.3	716.9	5.9	125.44	.10	.20	-2000.00	-2000.000	1.71	-2000.00
	3	44.1	690.0	7.6	275.68	.01	.10	-2000.00	-2000.000	3.15	-2000.00
	4	15.2	398.0	6.3	164.15	.10	.20	-2000.00	-2000.000	8.04	-2000.00
252	1	231.5	454.0	3.6	153.79	.01	.10	-2000.00	-2000.000	1.79	-2000.00
	2	85.8	505.3	6.5	249.10	.03	.10	-2000.00	-2000.000	1.07	-2000.00
	3	50.5	593.0	7.5	279.87	.03	.10	-2000.00	-2000.000	1.06	-2000.00
	4	28.8	564.0	8.3	326.41	.01	.10	-2000.00	-2000.000	1.35	-2000.00
254	1	390.2	942.0	4.2	157.93	10.00	.10	-2000.00	-2000.000	1.48	-2000.00
	2	85.8	621.5	5.7	229.87	.01	.10	-2000.00	-2000.000	1.02	-2000.00
	3	34.2	493.0	6.8	247.25	1.00	.10	-2000.00	-2000.000	.98	-2000.00
	4	17.3	417.0	7.5	273.61	.10	.10	-2000.00	-2000.000	2.44	-2000.00
502	1	264.6	415.0	4.4	93.14	.10	.20	-2000.00	-2000.000	1.03	-2000.00
	2	107.8	507.0	6.0	130.07	.10	.20	-2000.00	-2000.000	1.59	-2000.00
	3	60.6	569.0	8.3	308.73	.03	.10	-2000.00	-2000.000	.97	-2000.00
	4	37.7	592.0	9.2	339.19	.03	.10	-2000.00	-2000.000	1.57	-2000.00
504	1	291.0	761.0	3.1	119.64	30.00	.10	-2000.00	-2000.000	1.15	-2000.00
	2	63.5	498.5	5.6	119.00	.10	.20	-2000.00	-2000.000	1.75	-2000.00
	3	26.9	420.0	5.6	59.72	.30	.40	-2000.00	-2000.000	9.99	-2000.00
	4	17.3	453.0	8.0	153.88	30.00	.20	-2000.00	-2000.000	8.41	-2000.00
752	1	138.7	335.0	7.8	287.21	.10	.10	-2000.00	-2000.000	.78	-2000.00
	2	63.6	460.5	7.7	288.77	.03	.10	-2000.00	-2000.000	.87	-2000.00
	3	34.8	502.0	9.0	333.02	.03	.10	-2000.00	-2000.000	.55	-2000.00
	4	20.8	501.0	11.0	384.45	.10	.10	-2000.00	-2000.000	1.14	-2000.00
754	1	258.8	677.0	2.6	58.27	100.00	.20	-2000.00	-2000.000	2.60	-2000.00
	2	72.1	565.8	4.1	160.07	.10	.10	-2000.00	-2000.000	2.50	-2000.00
	3	34.6	542.0	5.9	117.49	.30	.20	-2000.00	-2000.000	.91	-2000.00
	4	23.1	604.0	5.8	234.97	.01	.10	-2000.00	-2000.000	2.33	-2000.00
1002	1	230.9	315.0	9.5	330.92	.30	.10	-2000.00	-2000.000	.91	-2000.00
	2	108.3	443.0	7.1	279.39	.01	.10	-2000.00	-2000.000	.92	-2000.00
	3	63.1	515.0	7.0	265.42	.03	.10	-2000.00	-2000.000	1.00	-2000.00
	4	39.2	534.0	8.7	314.27	.10	.10	-2000.00	-2000.000	1.27	-2000.00
1004	1	262.6	824.0	1.8	26.37	30.00	.30	-2000.00	-2000.000	3.70	-2000.00
	2	70.4	663.4	3.6	96.25	.01	.20	-2000.00	-2000.000	1.71	-2000.00
	3	37.2	699.0	3.7	74.68	.30	.20	-2000.00	-2000.000	1.16	-2000.00
	4	19.8	622.0	5.4	206.43	.10	.10	-2000.00	-2000.000	1.68	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
1252	1	134.7	302.0	10.9	399.84	.10	.10	-2000.00	-2000.000	2.13	-2000.00
	2	73.0	491.1	6.8	223.28	.30	.10	-2000.00	-2000.000	4.70	-2000.00
	3	39.4	528.0	5.0	193.05	.03	.10	-2000.00	-2000.000	1.35	-2000.00
	4	25.8	579.0	5.6	124.62	.10	.20	-2000.00	-2000.000	2.58	-2000.00
1254	1	383.6	1003.0	2.4	94.50	.10	.10	-2000.00	-2000.000	1.25	-2000.00
	2	131.8	1034.0	2.0	52.89	.01	.20	-2000.00	-2000.000	1.31	-2000.00
	3	51.9	813.0	3.6	140.73	1.00	.10	-2000.00	-2000.000	1.25	-2000.00
	4	27.9	729.0	3.6	91.94	.01	.20	-2000.00	-2000.000	2.72	-2000.00
1502	1	201.8	333.0	7.9	163.94	.10	.20	-2000.00	-2000.000	1.25	-2000.00
	2	72.7	360.1	11.7	428.11	.01	.10	-2000.00	-2000.000	.64	-2000.00
	3	52.2	516.0	6.5	249.47	.03	.10	-2000.00	-2000.000	1.28	-2000.00
	4	31.5	521.0	5.9	225.45	.03	.10	-2000.00	-2000.000	1.80	-2000.00
1504	1	433.7	1238.0	1.7	70.59	.01	.10	-2000.00	-2000.000	2.80	-2000.00
	2	123.1	1054.0	2.9	33.06	.30	.40	-2000.00	-2000.000	2.33	-2000.00
	3	52.9	903.0	2.3	50.24	.30	.20	-2000.00	-2000.000	4.20	-2000.00
	4	29.6	845.0	3.6	124.98	3.00	.10	-2000.00	-2000.000	8.77	-2000.00
1752	1	214.1	373.0	8.5	174.28	.10	.20	-2000.00	-2000.000	1.13	-2000.00
	2	81.1	424.6	8.1	298.95	.10	.10	-2000.00	-2000.000	2.18	-2000.00
	3	39.3	410.0	11.5	390.65	.30	.10	-2000.00	-2000.000	.80	-2000.00
	4	32.7	571.0	7.0	266.99	.03	.10	-2000.00	-2000.000	.75	-2000.00
1754	1	396.0	1130.0	2.3	50.90	.10	.20	-2000.00	-2000.000	1.68	-2000.00
	2	131.3	1124.0	2.2	30.26	.30	.30	-2000.00	-2000.000	1.96	-2000.00
	3	56.4	964.0	2.7	60.58	.10	.20	-2000.00	-2000.000	2.26	-2000.00
	4	31.8	908.0	2.8	64.43	.03	.20	-2000.00	-2000.000	2.24	-2000.00
2004	1	528.2	1275.0	1.7	68.75	3.00	.10	-2000.00	-2000.000	2.15	-2000.00
	2	170.5	1235.0	2.8	72.49	.01	.20	-2000.00	-2000.000	3.20	-2000.00
	3	82.0	1186.0	2.3	23.45	.30	.40	-2000.00	-2000.000	6.39	-2000.00
2254	1	390.2	1113.0	1.7	66.18	30.00	.10	-2000.00	-2000.000	27.48	-2000.00
	2	134.7	1153.0	2.0	85.29	100.00	.10	-2000.00	-2000.000	7.53	-2000.00
	3	63.3	1082.0	2.8	59.38	.10	.20	-2000.00	-2000.000	2.99	-2000.00
2504	1	650.5	1856.0	1.5	66.06	.01	.10	-2000.00	-2000.000	2.85	-2000.00
	2	168.2	1440.0	2.7	70.67	.01	.20	-2000.00	-2000.000	2.17	-2000.00
	3	57.3	980.0	2.2	50.11	.10	.20	-2000.00	-2000.000	4.98	-2000.00
2754	1	527.1	1655.0	1.7	27.94	.10	.30	-2000.00	-2000.000	6.61	-2000.00
	2	116.1	1093.0	2.5	63.62	100.00	.20	-2000.00	-2000.000	24.16	-2000.00
3004	1	247.2	970.0	1.5	60.07	.10	.10	-2000.00	-2000.000	5.30	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. 1100

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	321.5	593.0	2.3	60.43	.01	.20	-2000.00	-2000.000	1.84	-2000.00
	2	161.5	894.0	3.5	149.66	.01	.10	-2000.00	-2000.000	2.32	-2000.00
	3	64.5	713.0	5.2	110.16	.10	.20	-2000.00	-2000.000	.88	-2000.00
	4	29.4	543.0	7.5	270.88	.30	.10	-2000.00	-2000.000	1.79	-2000.00
252	1	520.0	742.0	1.8	47.62	.01	.20	-2000.00	-2000.000	1.72	-2000.00
	2	195.1	835.0	3.2	69.41	.10	.20	-2000.00	-2000.000	1.38	-2000.00
	3	101.4	860.0	4.6	184.63	.01	.10	-2000.00	-2000.000	1.60	-2000.00
	4	52.5	750.0	6.2	248.00	.01	.10	-2000.00	-2000.000	1.05	-2000.00
254	1	419.4	693.0	2.4	56.74	.03	.20	-2000.00	-2000.000	2.43	-2000.00
	2	135.2	670.0	4.1	169.87	.01	.10	-2000.00	-2000.000	1.67	-2000.00
	3	53.9	533.0	6.6	261.42	.01	.10	-2000.00	-2000.000	1.27	-2000.00
	4	29.5	487.0	10.1	366.48	.03	.10	-2000.00	-2000.000	1.75	-2000.00
502	1	345.8	775.0	1.5	36.72	.03	.20	-2000.00	-2000.000	6.50	-2000.00
	2	123.1	828.0	2.8	124.22	.10	.10	-2000.00	-2000.000	6.32	-2000.00
	3	55.9	750.0	4.2	168.11	.10	.10	-2000.00	-2000.000	2.15	-2000.00
	4	33.2	743.0	5.7	218.44	.03	.10	-2000.00	-2000.000	1.27	-2000.00
504	1	377.5	561.0	2.5	55.63	.10	.20	-2000.00	-2000.000	1.84	-2000.00
	2	119.1	531.0	5.2	110.39	.10	.20	-2000.00	-2000.000	1.08	-2000.00
	3	55.8	496.0	8.8	326.31	.03	.10	-2000.00	-2000.000	.82	-2000.00
	4	36.2	539.0	10.8	364.34	1.00	.10	-2000.00	-2000.000	1.33	-2000.00
752	1	519.1	905.0	1.6	42.22	.01	.20	-2000.00	-2000.000	2.21	-2000.00
	2	171.2	895.0	2.7	113.83	.01	.10	-2000.00	-2000.000	1.63	-2000.00
	3	73.2	764.0	4.2	174.24	.01	.10	-2000.00	-2000.000	1.34	-2000.00
	4	35.1	612.0	6.1	80.08	.30	.30	-2000.00	-2000.000	5.03	-2000.00
754	1	407.9	512.0	3.3	77.85	.03	.20	-2000.00	-2000.000	1.78	-2000.00
	2	131.0	493.0	7.4	286.47	.01	.10	-2000.00	-2000.000	1.18	-2000.00
	3	66.8	502.0	9.6	336.26	.30	.10	-2000.00	-2000.000	1.05	-2000.00
	4	45.0	565.0	11.2	378.96	.30	.10	-2000.00	-2000.000	.89	-2000.00
1002	1	608.4	707.0	1.9	77.42	.03	.10	-2000.00	-2000.000	2.48	-2000.00
	2	261.9	913.0	3.1	72.79	.03	.20	-2000.00	-2000.000	1.59	-2000.00
	3	107.8	750.0	4.6	170.00	3.00	.10	-2000.00	-2000.000	1.82	-2000.00
	4	55.5	646.0	6.2	233.95	.10	.10	-2000.00	-2000.000	1.63	-2000.00
1004	1	261.3	372.0	6.8	134.28	30.00	.20	-2000.00	-2000.000	2.63	-2000.00
	2	108.4	464.0	8.6	331.57	.01	.10	-2000.00	-2000.000	1.23	-2000.00
	3	63.1	538.0	10.3	361.07	.10	.10	-2000.00	-2000.000	.92	-2000.00
	4	39.1	558.0	9.9	367.48	.03	.10	-2000.00	-2000.000	1.04	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
1252	1	239.5	470.0	2.7	58.41	.10	.20	-2000.00	-2000.000	2.52	-2000.00
	2	117.0	688.0	4.2	160.57	30.00	.10	-2000.00	-2000.000	2.10	-2000.00
	3	64.1	752.0	5.7	206.19	10.00	.10	-2000.00	-2000.000	1.56	-2000.00
	4	31.6	619.0	7.1	257.07	.30	.10	-2000.00	-2000.000	1.24	-2000.00
1254	1	226.1	394.0	5.3	216.01	.01	.10	-2000.00	-2000.000	1.38	-2000.00
	2	98.3	514.6	8.3	318.85	.01	.10	-2000.00	-2000.000	.81	-2000.00
	3	50.7	529.0	9.2	340.06	.03	.10	-2000.00	-2000.000	.64	-2000.00
	4	23.4	408.0	8.4	292.81	1.00	.10	-2000.00	-2000.000	2.18	-2000.00
1502	1	356.6	559.0	2.8	112.53	.10	.10	-2000.00	-2000.000	1.14	-2000.00
	2	131.2	617.0	5.3	208.28	.03	.10	-2000.00	-2000.000	1.34	-2000.00
	3	68.0	639.0	6.7	245.40	.30	.10	-2000.00	-2000.000	.78	-2000.00
	4	41.4	650.0	8.3	287.31	30.00	.10	-2000.00	-2000.000	1.34	-2000.00
1504	1	290.3	569.0	3.7	153.48	.01	.10	-2000.00	-2000.000	1.12	-2000.00
	2	110.9	652.0	6.3	248.83	.01	.10	-2000.00	-2000.000	1.11	-2000.00
	3	38.2	448.0	6.8	250.98	.30	.10	-2000.00	-2000.000	.93	-2000.00
	4	23.3	456.0	6.9	245.64	3.00	.10	-2000.00	-2000.000	1.82	-2000.00
1752	1	414.4	591.0	3.6	141.44	.10	.10	-2000.00	-2000.000	1.28	-2000.00
	2	152.3	652.0	5.8	213.32	.30	.10	-2000.00	-2000.000	1.12	-2000.00
	3	68.6	586.0	7.8	281.24	.30	.10	-2000.00	-2000.000	.79	-2000.00
	4	41.2	588.0	9.4	319.34	10.00	.10	-2000.00	-2000.000	1.19	-2000.00
1754	1	243.3	694.0	3.4	79.89	.03	.20	-2000.00	-2000.000	.79	-2000.00
	2	61.6	527.6	5.3	199.29	30.00	.10	-2000.00	-2000.000	2.32	-2000.00
	3	27.6	471.0	5.8	233.68	.01	.10	-2000.00	-2000.000	.74	-2000.00
	4	17.7	506.0	6.7	244.18	1.00	.10	-2000.00	-2000.000	.96	-2000.00
2002	1	285.1	471.0	4.1	156.70	.30	.10	-2000.00	-2000.000	1.21	-2000.00
	2	129.4	641.0	6.9	257.08	.10	.10	-2000.00	-2000.000	1.06	-2000.00
	3	61.8	611.0	8.7	298.82	3.00	.10	-2000.00	-2000.000	.88	-2000.00
	4	34.9	576.0	10.5	350.84	10.00	.10	-2000.00	-2000.000	1.29	-2000.00
2004	1	399.4	627.0	3.6	146.84	.01	.10	-2000.00	-2000.000	1.64	-2000.00
	2	127.7	601.0	4.3	96.32	.10	.20	-2000.00	-2000.000	2.19	-2000.00
	3	62.4	586.0	6.5	233.12	.03	.10	-2000.00	-2000.000	3.56	-2000.00
	4	35.8	561.0	6.3	231.83	1.00	.10	-2000.00	-2000.000	1.62	-2000.00
2252	1	310.1	572.0	4.1	168.87	.01	.10	-2000.00	-2000.000	1.11	-2000.00
	2	110.2	610.0	7.8	272.81	10.00	.10	-2000.00	-2000.000	1.17	-2000.00
	3	60.7	671.0	10.2	341.37	3.00	.10	-2000.00	-2000.000	.83	-2000.00
	4	32.7	604.0	11.6	385.80	1.00	.10	-2000.00	-2000.000	.95	-2000.00
2254	1	309.9	608.0	2.6	56.51	.10	.20	-2000.00	-2000.000	1.58	-2000.00
	2	101.6	598.0	4.3	92.06	.10	.20	-2000.00	-2000.000	1.31	-2000.00
	3	44.8	526.0	4.9	197.27	.01	.10	-2000.00	-2000.000	1.37	-2000.00
	4	28.8	564.0	5.2	110.77	.30	.20	-2000.00	-2000.000	2.59	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2502	1	360.2	706.0	4.0	156.88	.10	.10	-2000.00	-2000.000	1.26	-2000.00
	2	132.5	780.0	8.5	317.42	.03	.10	-2000.00	-2000.000	.84	-2000.00
	3	56.7	666.0	11.8	383.89	10.00	.10	-2000.00	-2000.000	.82	-2000.00
	4	35.5	696.0	13.6	431.17	3.00	.10	-2000.00	-2000.000	.99	-2000.00
2504	1	454.0	648.0	2.4	104.65	30.00	.10	-2000.00	-2000.000	5.43	-2000.00
	2	133.0	569.5	4.2	73.69	.30	.20	-2000.00	-2000.000	7.88	-2000.00
	3	70.3	600.7	4.4	167.98	.03	.10	-2000.00	-2000.000	2.47	-2000.00
	4	43.9	626.6	4.6	108.68	.03	.20	-2000.00	-2000.000	2.76	-2000.00
2754	1	265.8	695.0	2.1	84.35	.10	.10	-2000.00	-2000.000	3.41	-2000.00
	2	91.4	717.8	3.1	131.66	.01	.10	-2000.00	-2000.000	4.57	-2000.00
	3	46.6	729.0	3.8	146.19	.10	.10	-2000.00	-2000.000	1.47	-2000.00
	4	27.8	726.0	4.5	173.24	100.00	.10	-2000.00	-2000.000	2.95	-2000.00
3004	1	188.2	590.0	2.0	44.66	.10	.20	-2000.00	-2000.000	2.09	-2000.00
	2	69.8	657.9	2.8	66.45	.03	.20	-2000.00	-2000.000	1.75	-2000.00
	3	36.2	680.0	3.2	124.51	1.00	.10	-2000.00	-2000.000	1.29	-2000.00
	4	20.0	627.0	3.8	52.41	.30	.30	-2000.00	-2000.000	2.07	-2000.00
3254	1	393.8	772.0	1.9	74.31	3.00	.10	-2000.00	-2000.000	1.69	-2000.00
	2	147.9	870.0	2.5	58.89	.03	.20	-2000.00	-2000.000	1.56	-2000.00
	3	66.6	782.0	2.8	61.49	.10	.20	-2000.00	-2000.000	1.41	-2000.00
	4	44.4	871.0	3.4	71.84	.10	.20	-2000.00	-2000.000	1.74	-2000.00
3504	1	319.5	836.0	1.7	44.38	.01	.20	-2000.00	-2000.000	1.96	-2000.00
	2	111.2	872.0	2.4	38.44	.10	.30	-2000.00	-2000.000	3.28	-2000.00
	3	62.5	979.0	2.5	66.22	.01	.20	-2000.00	-2000.000	2.19	-2000.00
	4	36.2	946.0	2.9	46.31	.10	.30	-2000.00	-2000.000	1.70	-2000.00
3754	1	252.7	721.0	1.8	43.33	.03	.20	-2000.00	-2000.000	2.24	-2000.00
	2	115.1	985.0	2.4	39.27	.10	.30	-2000.00	-2000.000	3.62	-2000.00
	3	57.5	982.0	2.6	55.58	.10	.20	-2000.00	-2000.000	1.67	-2000.00
	4	36.1	1031.0	3.3	129.37	.10	.10	-2000.00	-2000.000	2.44	-2000.00
4004	1	377.9	988.0	1.8	73.52	.03	.10	-2000.00	-2000.000	2.12	-2000.00
	2	140.4	1102.0	2.3	36.57	.10	.30	-2000.00	-2000.000	1.78	-2000.00
	3	76.3	1195.0	2.6	110.84	.01	.10	-2000.00	-2000.000	1.85	-2000.00
	4	34.7	907.0	3.6	77.03	.10	.20	-2000.00	-2000.000	1.93	-2000.00
4254	1	405.6	979.0	1.8	71.81	1.00	.10	-2000.00	-2000.000	6.16	-2000.00
	2	176.9	1281.0	2.4	26.85	.30	.40	-2000.00	-2000.000	5.74	-2000.00
	3	70.5	1019.0	3.1	45.05	.30	.30	-2000.00	-2000.000	3.16	-2000.00
	4	34.6	836.0	3.7	81.96	.10	.20	-2000.00	-2000.000	3.05	-2000.00
4504	1	431.2	1041.0	2.0	42.44	.10	.20	-2000.00	-2000.000	1.83	-2000.00
	2	138.6	1004.0	3.0	78.75	.01	.20	-2000.00	-2000.000	1.40	-2000.00
	3	59.8	864.0	3.3	77.16	.03	.20	-2000.00	-2000.000	2.22	-2000.00
	4	33.8	816.0	4.0	86.03	.10	.20	-2000.00	-2000.000	2.76	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
4754	1	406.3	797.0	2.6	54.83	.10	.20	-2000.00	-2000.000	1.56	-2000.00
	2	145.7	857.0	3.1	82.28	.01	.20	-2000.00	-2000.000	1.22	-2000.00
	3	72.3	848.0	3.6	149.45	.01	.10	-2000.00	-2000.000	1.38	-2000.00
	4	43.5	853.0	4.1	86.47	.10	.20	-2000.00	-2000.000	1.95	-2000.00
5004	1	540.7	848.0	2.5	55.87	.10	.20	-2000.00	-2000.000	2.27	-2000.00
	2	203.9	960.0	3.4	73.75	.10	.20	-2000.00	-2000.000	2.02	-2000.00
	3	106.2	990.0	3.7	79.38	.10	.20	-2000.00	-2000.000	1.80	-2000.00
	4	61.5	964.0	3.8	82.52	.10	.20	-2000.00	-2000.000	1.86	-2000.00
5254	1	412.0	808.0	2.6	54.86	.10	.20	-2000.00	-2000.000	2.28	-2000.00
	2	166.7	981.0	3.3	78.10	.03	.20	-2000.00	-2000.000	2.01	-2000.00
	3	84.2	989.0	3.5	143.42	.01	.10	-2000.00	-2000.000	2.35	-2000.00
5504	1	355.4	743.0	2.6	56.15	.10	.20	-2000.00	-2000.000	1.29	-2000.00
	2	136.3	855.0	3.0	69.86	.03	.20	-2000.00	-2000.000	1.83	-2000.00
5754	1	261.5	821.0	2.5	107.44	.01	.10	-2000.00	-2000.000	1.57	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 1200

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	249.5	435.0	2.9	62.07	.10	.20	-2000.00	-2000.000	1.70	-2000.00
	2	71.6	374.9	4.5	177.77	.03	.10	-2000.00	-2000.000	1.07	-2000.00
	3	42.6	444.0	5.3	196.92	1.00	.10	-2000.00	-2000.000	1.17	-2000.00
	4	31.8	554.0	6.2	237.70	.03	.10	-2000.00	-2000.000	1.29	-2000.00
252	1	172.2	245.0	3.9	148.75	.30	.10	-2000.00	-2000.000	1.59	-2000.00
	2	70.4	301.6	5.7	226.37	.01	.10	-2000.00	-2000.000	1.10	-2000.00
	3	43.2	368.0	6.0	217.44	3.00	.10	-2000.00	-2000.000	.70	-2000.00
	4	31.7	452.0	6.7	241.51	1.00	.10	-2000.00	-2000.000	.90	-2000.00
254	1	134.2	280.0	3.1	118.25	1.00	.10	-2000.00	-2000.000	1.53	-2000.00
	2	58.1	364.7	4.5	185.35	.01	.10	-2000.00	-2000.000	2.53	-2000.00
	3	37.7	472.0	5.3	198.72	1.00	.10	-2000.00	-2000.000	1.93	-2000.00
	4	27.3	570.0	6.4	236.03	3.00	.10	-2000.00	-2000.000	2.15	-2000.00
502	1	136.3	285.0	4.5	165.88	3.00	.10	-2000.00	-2000.000	1.32	-2000.00
	2	45.8	287.3	6.1	134.14	.10	.20	-2000.00	-2000.000	2.15	-2000.00
	3	29.9	374.0	6.6	241.84	.10	.10	-2000.00	-2000.000	.99	-2000.00
	4	21.4	447.0	7.0	260.59	.10	.10	-2000.00	-2000.000	1.26	-2000.00
504	1	170.3	356.0	2.5	96.20	1.00	.10	-2000.00	-2000.000	1.82	-2000.00
	2	74.4	467.4	4.0	86.00	.10	.20	-2000.00	-2000.000	1.51	-2000.00
	3	44.7	560.0	5.1	189.80	1.00	.10	-2000.00	-2000.000	1.30	-2000.00
	4	28.7	600.0	6.2	233.10	.10	.10	-2000.00	-2000.000	1.51	-2000.00
752	1	101.0	198.0	6.0	219.93	.30	.10	-2000.00	-2000.000	.98	-2000.00
	2	42.7	251.1	8.1	304.54	.03	.10	-2000.00	-2000.000	1.07	-2000.00
	3	25.7	302.0	7.9	274.74	3.00	.10	-2000.00	-2000.000	1.74	-2000.00
	4	20.8	408.0	7.5	279.15	.10	.10	-2000.00	-2000.000	1.55	-2000.00
754	1	247.1	408.0	2.2	92.90	.01	.10	-2000.00	-2000.000	2.97	-2000.00
	2	106.3	527.0	3.7	79.89	.10	.20	-2000.00	-2000.000	1.40	-2000.00
	3	58.6	579.0	4.8	178.11	10.00	.10	-2000.00	-2000.000	1.56	-2000.00
	4	34.1	563.0	6.4	252.18	.01	.10	-2000.00	-2000.000	1.65	-2000.00
1002	1	118.3	206.0	7.3	256.37	10.00	.10	-2000.00	-2000.000	1.00	-2000.00
	2	41.9	219.2	10.6	364.76	.30	.10	-2000.00	-2000.000	.81	-2000.00
	3	26.9	280.0	9.5	325.83	10.00	.10	-2000.00	-2000.000	1.31	-2000.00
	4	21.0	367.0	9.3	339.08	.03	.10	-2000.00	-2000.000	1.20	-2000.00
1004	1	203.6	376.0	2.3	90.64	1.00	.10	-2000.00	-2000.000	1.34	-2000.00
	2	96.8	536.1	3.3	85.45	.01	.20	-2000.00	-2000.000	1.05	-2000.00
	3	49.9	551.0	4.8	197.42	.01	.10	-2000.00	-2000.000	1.07	-2000.00
	4	30.0	554.0	6.8	269.54	.01	.10	-2000.00	-2000.000	.54	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EK
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
1252	1	104.0	181.0	9.2	317.68	10.00	.10	-2000.00	-2000.000	2.19	-2000.00
	2	43.0	225.1	12.8	399.31	100.00	.10	-2000.00	-2000.000	2.63	-2000.00
	3	26.5	276.0	11.7	380.67	10.00	.10	-2000.00	-2000.000	1.06	-2000.00
	4	19.6	342.0	10.7	355.83	10.00	.10	-2000.00	-2000.000	1.28	-2000.00
1254	1	299.5	376.0	1.9	74.06	3.00	.10	-2000.00	-2000.000	2.19	-2000.00
	2	139.4	525.0	3.5	81.51	.03	.20	-2000.00	-2000.000	1.87	-2000.00
	3	73.6	553.0	5.3	203.42	.10	.10	-2000.00	-2000.000	.88	-2000.00
	4	37.0	464.0	7.3	266.25	.30	.10	-2000.00	-2000.000	1.29	-2000.00
1502	1	82.3	172.3	12.4	396.41	100.00	.10	-2000.00	-2000.000	1.07	-2000.00
	2	34.4	216.1	12.9	409.95	10.00	.10	-2000.00	-2000.000	.71	-2000.00
	3	22.5	282.0	12.7	405.43	10.00	.10	-2000.00	-2000.000	.79	-2000.00
	4	15.9	332.0	12.8	408.33	30.00	.10	-2000.00	-2000.000	1.01	-2000.00
1504	1	288.0	565.0	1.7	74.89	.01	.10	-2000.00	-2000.000	2.84	-2000.00
	2	92.3	543.5	4.0	102.53	.01	.20	-2000.00	-2000.000	1.11	-2000.00
	3	39.1	459.0	5.9	224.39	.03	.10	-2000.00	-2000.000	1.20	-2000.00
	4	27.3	535.0	7.7	70.06	.30	.60	-2000.00	-2000.000	107.48	-2000.00
1752	1	91.6	179.7	14.6	448.98	100.00	.10	-2000.00	-2000.000	1.50	-2000.00
	2	39.1	230.4	13.7	437.63	1.00	.10	-2000.00	-2000.000	2.03	-2000.00
	3	24.0	282.0	13.0	416.45	100.00	.10	-2000.00	-2000.000	1.20	-2000.00
	4	17.5	344.0	13.2	245.01	.30	.20	-2000.00	-2000.000	1.13	-2000.00
1754	1	268.0	400.0	2.3	93.68	.10	.10	-2000.00	-2000.000	1.86	-2000.00
	2	89.2	400.3	4.7	108.76	.03	.20	-2000.00	-2000.000	1.42	-2000.00
	3	54.9	491.0	6.6	239.37	.30	.10	-2000.00	-2000.000	1.00	-2000.00
	4	31.6	472.0	7.7	281.08	.10	.10	-2000.00	-2000.000	1.18	-2000.00
2002	1	121.9	201.0	15.7	473.34	100.00	.10	-2000.00	-2000.000	.64	-2000.00
	2	55.7	276.1	15.2	466.60	10.00	.10	-2000.00	-2000.000	.48	-2000.00
	3	31.6	312.0	13.9	433.32	30.00	.10	-2000.00	-2000.000	.73	-2000.00
	4	21.5	354.0	13.5	437.01	1.00	.10	-2000.00	-2000.000	.75	-2000.00
2004	1	199.6	391.0	2.3	96.13	.03	.10	-2000.00	-2000.000	1.75	-2000.00
	2	77.2	454.6	4.6	98.50	.10	.20	-2000.00	-2000.000	1.60	-2000.00
	3	38.1	447.0	6.2	226.69	1.00	.10	-2000.00	-2000.000	1.06	-2000.00
	4	22.9	449.0	7.6	265.30	10.00	.10	-2000.00	-2000.000	1.51	-2000.00
2252	1	97.8	204.8	17.1	502.37	100.00	.10	-2000.00	-2000.000	.68	-2000.00
	2	47.5	298.4	15.2	464.20	10.00	.10	-2000.00	-2000.000	.57	-2000.00
	3	31.4	393.0	14.6	456.54	10.00	.10	-2000.00	-2000.000	.90	-2000.00
	4	18.5	387.0	14.8	448.09	30.00	.10	-2000.00	-2000.000	1.44	-2000.00
2254	1	407.1	581.0	2.4	94.39	.10	.10	-2000.00	-2000.000	1.47	-2000.00
	2	108.5	464.0	4.3	111.43	.01	.20	-2000.00	-2000.000	.79	-2000.00
	3	51.8	442.0	5.6	208.69	1.00	.10	-2000.00	-2000.000	1.21	-2000.00
	4	33.6	480.0	6.9	256.84	.10	.10	-2000.00	-2000.000	1.25	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2502	1	239.4	300.0	18.3	526.53	100.00	.10	-2000.00	-2000.000	.71	-2000.00
	2	94.6	356.6	15.5	477.18	3.00	.10	-2000.00	-2000.000	.62	-2000.00
	3	56.5	424.0	14.0	454.76	.30	.10	-2000.00	-2000.000	.63	-2000.00
	4	35.9	451.0	16.5	280.52	10.00	.20	-2000.00	-2000.000	1.29	-2000.00
2504	1	265.1	416.0	2.2	88.21	.10	.10	-2000.00	-2000.000	1.60	-2000.00
	2	81.6	384.5	4.0	94.69	.03	.20	-2000.00	-2000.000	1.15	-2000.00
	3	42.8	402.0	5.3	213.90	.01	.10	-2000.00	-2000.000	.65	-2000.00
	4	27.4	430.0	6.5	248.33	.03	.10	-2000.00	-2000.000	1.44	-2000.00
2752	1	184.6	252.0	19.7	555.37	100.00	.10	-2000.00	-2000.000	.54	-2000.00
	2	95.2	389.9	18.0	525.54	10.00	.10	-2000.00	-2000.000	.60	-2000.00
	3	51.6	422.0	15.8	493.12	1.00	.10	-2000.00	-2000.000	.94	-2000.00
	4	32.9	449.0	15.8	482.07	3.00	.10	-2000.00	-2000.000	.78	-2000.00
2754	1	241.8	421.0	2.1	86.19	100.00	.10	-2000.00	-2000.000	2.09	-2000.00
	2	72.5	379.3	3.7	88.34	.03	.20	-2000.00	-2000.000	1.69	-2000.00
	3	37.2	388.0	4.8	188.04	.03	.10	-2000.00	-2000.000	1.24	-2000.00
	4	28.7	501.0	5.8	229.80	.03	.10	-2000.00	-2000.000	1.96	-2000.00
3002	1	191.7	376.0	19.3	548.18	30.00	.10	-2000.00	-2000.000	.51	-2000.00
	2	64.2	378.2	21.9	602.78	10.00	.10	-2000.00	-2000.000	.52	-2000.00
	3	41.3	485.0	19.7	560.64	10.00	.10	-2000.00	-2000.000	.57	-2000.00
	4	23.5	461.0	18.2	537.26	3.00	.10	-2000.00	-2000.000	.71	-2000.00
3004	1	253.0	441.0	2.0	80.53	.10	.10	-2000.00	-2000.000	2.37	-2000.00
	2	73.5	384.7	3.2	61.40	.03	.30	-2000.00	-2000.000	2.14	-2000.00
	3	47.1	491.0	4.2	172.65	.01	.10	-2000.00	-2000.000	1.76	-2000.00
	4	30.0	523.0	5.1	205.89	.01	.10	-2000.00	-2000.000	2.40	-2000.00
3252	1	138.7	335.0	18.4	536.30	10.00	.10	-2000.00	-2000.000	.60	-2000.00
	2	67.7	490.4	21.1	607.42	1.00	.10	-2000.00	-2000.000	.56	-2000.00
	3	29.2	422.0	23.7	627.29	30.00	.10	-2000.00	-2000.000	.61	-2000.00
	4	21.3	514.0	21.5	605.90	3.00	.10	-2000.00	-2000.000	.65	-2000.00
3254	1	243.8	402.0	1.9	76.53	.10	.10	-2000.00	-2000.000	1.94	-2000.00
	2	97.2	481.7	3.0	70.21	.03	.20	-2000.00	-2000.000	1.48	-2000.00
	3	51.3	507.0	3.5	76.33	.10	.20	-2000.00	-2000.000	1.55	-2000.00
	4	31.9	526.0	4.7	192.20	.01	.10	-2000.00	-2000.000	1.59	-2000.00
3504	1	458.4	553.0	2.0	79.61	1.00	.10	-2000.00	-2000.000	2.39	-2000.00
	2	135.4	490.0	2.7	52.24	.03	.30	-2000.00	-2000.000	1.90	-2000.00
	3	78.7	568.0	3.3	70.01	.10	.20	-2000.00	-2000.000	2.16	-2000.00
	4	48.9	590.0	4.9	191.42	.03	.10	-2000.00	-2000.000	2.05	-2000.00
3754	1	243.5	509.0	1.8	75.39	.01	.10	-2000.00	-2000.000	2.09	-2000.00
	2	78.3	491.9	2.7	71.92	.01	.20	-2000.00	-2000.000	1.84	-2000.00
	3	50.1	627.0	3.2	74.36	.03	.20	-2000.00	-2000.000	1.19	-2000.00
	4	21.6	451.0	4.7	179.98	1.00	.10	-2000.00	-2000.000	4.99	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
4004	1	404.3	634.8	1.8	37.11	.30	.20	-2000.00	-2000.000	2.93	-2000.00
	2	137.2	646.2	2.7	71.86	.01	.20	-2000.00	-2000.000	1.85	-2000.00
	3	61.8	581.1	3.2	69.07	.10	.20	-2000.00	-2000.000	1.56	-2000.00
	4	41.9	658.5	5.3	196.74	1.00	.10	-2000.00	-2000.000	2.59	-2000.00
4254	1	314.6	519.0	1.8	36.97	.30	.20	-2000.00	-2000.000	2.10	-2000.00
	2	111.2	551.0	2.6	42.66	.10	.30	-2000.00	-2000.000	2.37	-2000.00
	3	65.1	643.0	4.0	79.28	.30	.20	-2000.00	-2000.000	1.44	-2000.00
	4	33.8	558.0	7.1	275.94	.01	.10	-2000.00	-2000.000	1.07	-2000.00
4504	1	355.3	507.0	1.6	37.88	.03	.20	-2000.00	-2000.000	1.82	-2000.00
	2	152.4	652.0	2.9	76.55	.01	.20	-2000.00	-2000.000	3.48	-2000.00
	3	65.6	560.0	5.2	211.54	.01	.10	-2000.00	-2000.000	1.24	-2000.00
	4	41.8	596.0	7.9	308.15	.01	.10	-2000.00	-2000.000	1.69	-2000.00
4754	1	348.7	684.0	1.8	38.47	.10	.20	-2000.00	-2000.000	2.09	-2000.00
	2	96.8	569.9	4.3	179.07	.01	.10	-2000.00	-2000.000	3.58	-2000.00
	3	54.9	645.0	5.9	122.70	.10	.20	-2000.00	-2000.000	.90	-2000.00
	4	36.8	722.0	7.5	294.82	.01	.10	-2000.00	-2000.000	1.59	-2000.00
5004	1	212.5	417.0	2.3	92.36	.03	.10	-2000.00	-2000.000	1.95	-2000.00
	2	98.3	578.9	4.5	102.41	.03	.20	-2000.00	-2000.000	2.12	-2000.00
	3	55.8	655.0	5.8	233.26	.01	.10	-2000.00	-2000.000	1.51	-2000.00
	4	32.0	628.0	7.6	293.62	.01	.10	-2000.00	-2000.000	4.99	-2000.00
5254	1	300.6	858.0	2.6	104.71	100.00	.10	-2000.00	-2000.000	2.05	-2000.00
	2	107.6	921.0	4.2	111.14	.01	.20	-2000.00	-2000.000	1.70	-2000.00
	3	47.0	803.0	5.6	207.40	30.00	.10	-2000.00	-2000.000	2.05	-2000.00
5504	1	355.2	1115.0	2.5	53.43	.10	.20	-2000.00	-2000.000	1.47	-2000.00
	2	133.1	1253.0	3.9	83.78	.10	.20	-2000.00	-2000.000	1.54	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. : 1300

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	134.6	234.0	3.5	139.90	.03	.10	-2000.00	-2000.000	1.24	-2000.00
	2	39.4	206.1	6.3	236.57	.10	.10	-2000.00	-2000.000	.59	-2000.00
	3	24.5	255.0	7.1	256.18	.30	.10	-2000.00	-2000.000	.80	-2000.00
	4	20.3	353.0	7.0	252.71	1.00	.10	-2000.00	-2000.000	1.34	-2000.00
252	1	90.8	178.2	4.7	184.05	.10	.10	-2000.00	-2000.000	1.74	-2000.00
	2	28.6	168.3	7.4	262.03	.30	.10	-2000.00	-2000.000	1.28	-2000.00
	3	19.7	231.0	7.8	270.22	10.00	.10	-2000.00	-2000.000	.83	-2000.00
	4	16.1	316.0	7.7	279.99	.30	.10	-2000.00	-2000.000	1.81	-2000.00
254	1	131.0	257.0	3.2	133.74	.01	.10	-2000.00	-2000.000	1.47	-2000.00
	2	39.2	230.8	5.7	215.15	.10	.10	-2000.00	-2000.000	.53	-2000.00
	3	24.7	289.0	6.2	229.16	.30	.10	-2000.00	-2000.000	.84	-2000.00
	4	20.0	392.0	6.4	120.99	1.00	.20	-2000.00	-2000.000	1.43	-2000.00
502	1	121.1	190.0	5.9	152.95	.01	.20	-2000.00	-2000.000	1.60	-2000.00
	2	32.4	152.7	9.0	310.66	1.00	.10	-2000.00	-2000.000	.71	-2000.00
	3	21.5	201.0	8.3	296.58	.30	.10	-2000.00	-2000.000	.60	-2000.00
	4	18.7	293.0	8.5	293.34	30.00	.10	-2000.00	-2000.000	.99	-2000.00
504	1	134.8	264.0	2.9	120.97	.01	.10	-2000.00	-2000.000	1.16	-2000.00
	2	41.3	243.0	5.0	184.70	10.00	.10	-2000.00	-2000.000	1.00	-2000.00
	3	24.7	290.0	5.3	199.13	1.00	.10	-2000.00	-2000.000	1.41	-2000.00
	4	16.8	330.0	5.4	213.22	.10	.10	-2000.00	-2000.000	2.78	-2000.00
752	1	70.1	157.2	9.0	309.07	30.00	.10	-2000.00	-2000.000	.91	-2000.00
	2	26.0	174.7	9.9	333.96	10.00	.10	-2000.00	-2000.000	1.13	-2000.00
	3	14.4	194.0	9.9	335.30	100.00	.10	-2000.00	-2000.000	1.80	-2000.00
	4	11.6	259.0	8.3	172.66	.10	.20	-2000.00	-2000.000	2.03	-2000.00
754	1	138.8	311.0	2.7	36.97	.30	.30	-2000.00	-2000.000	4.41	-2000.00
	2	42.3	284.8	4.4	93.48	30.00	.20	-2000.00	-2000.000	4.69	-2000.00
	3	26.6	357.0	4.7	181.82	.10	.10	-2000.00	-2000.000	.80	-2000.00
	4	19.3	433.0	5.3	197.18	.30	.10	-2000.00	-2000.000	1.93	-2000.00
1002	1	73.0	143.3	12.6	404.39	100.00	.10	-2000.00	-2000.000	.48	-2000.00
	2	28.6	168.2	11.5	378.24	3.00	.10	-2000.00	-2000.000	.63	-2000.00
	3	19.1	224.0	10.5	348.72	10.00	.10	-2000.00	-2000.000	.73	-2000.00
	4	14.2	279.0	10.1	339.89	3.00	.10	-2000.00	-2000.000	1.13	-2000.00
1004	1	194.6	305.0	2.6	104.11	100.00	.10	-2000.00	-2000.000	1.19	-2000.00
	2	73.4	345.7	4.0	153.01	100.00	.10	-2000.00	-2000.000	1.33	-2000.00
	3	41.4	388.0	4.6	170.83	3.00	.10	-2000.00	-2000.000	.75	-2000.00
	4	35.3	554.0	5.6	205.57	1.00	.10	-2000.00	-2000.000	1.06	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
1252	1	63.8	133.5	12.4	395.64	30.00	.10	-2000.00	-2000.000	.88	-2000.00
	2	27.7	174.0	12.4	403.79	3.00	.10	-2000.00	-2000.000	.89	-2000.00
	3	16.5	206.0	11.5	382.14	1.00	.10	-2000.00	-2000.000	.81	-2000.00
	4	12.7	266.0	11.0	368.15	1.00	.10	-2000.00	-2000.000	1.06	-2000.00
1254	1	200.4	370.0	2.4	48.20	10.00	.20	-2000.00	-2000.000	2.88	-2000.00
	2	67.3	372.7	3.5	137.05	.10	.10	-2000.00	-2000.000	1.19	-2000.00
	3	46.2	510.0	4.5	180.55	.03	.10	-2000.00	-2000.000	1.28	-2000.00
	4	28.1	519.0	6.0	227.57	.10	.10	-2000.00	-2000.000	1.28	-2000.00
1502	1	132.9	219.0	13.6	426.71	100.00	.10	-2000.00	-2000.000	.76	-2000.00
	2	47.4	235.2	12.7	407.51	3.00	.10	-2000.00	-2000.000	.61	-2000.00
	3	27.0	266.0	13.0	416.10	3.00	.10	-2000.00	-2000.000	.50	-2000.00
	4	17.3	286.0	12.5	400.04	10.00	.10	-2000.00	-2000.000	1.05	-2000.00
1504	1	180.7	354.0	2.4	93.37	3.00	.10	-2000.00	-2000.000	1.87	-2000.00
	2	80.9	476.2	3.8	144.51	.30	.10	-2000.00	-2000.000	.90	-2000.00
	3	39.7	466.0	5.2	191.96	30.00	.10	-2000.00	-2000.000	1.60	-2000.00
	4	27.3	534.0	6.0	126.25	.10	.20	-2000.00	-2000.000	1.10	-2000.00
1752	1	199.2	367.0	9.6	176.74	10.00	.20	-2000.00	-2000.000	.82	-2000.00
	2	47.6	263.9	14.3	443.25	30.00	.10	-2000.00	-2000.000	1.11	-2000.00
	3	23.8	262.0	13.7	429.83	10.00	.10	-2000.00	-2000.000	.68	-2000.00
	4	15.4	284.0	14.3	444.21	10.00	.10	-2000.00	-2000.000	1.21	-2000.00
1754	1	312.4	426.0	2.5	97.13	.30	.10	-2000.00	-2000.000	1.69	-2000.00
	2	110.3	451.0	3.9	150.13	30.00	.10	-2000.00	-2000.000	2.02	-2000.00
	3	63.0	514.0	5.1	194.68	.10	.10	-2000.00	-2000.000	1.30	-2000.00
	4	44.0	600.0	6.5	236.35	100.00	.10	-2000.00	-2000.000	2.95	-2000.00
2002	1	441.1	659.0	9.9	182.48	10.00	.20	-2000.00	-2000.000	1.03	-2000.00
	2	78.3	351.4	13.9	437.80	10.00	.10	-2000.00	-2000.000	1.06	-2000.00
	3	36.0	322.0	15.6	474.40	30.00	.10	-2000.00	-2000.000	.73	-2000.00
	4	20.2	302.0	15.3	475.48	1.00	.10	-2000.00	-2000.000	1.09	-2000.00
2004	1	208.7	436.0	2.2	52.61	.03	.20	-2000.00	-2000.000	2.11	-2000.00
	2	77.2	484.8	3.6	76.83	.10	.20	-2000.00	-2000.000	1.36	-2000.00
	3	44.7	560.0	4.9	187.75	100.00	.10	-2000.00	-2000.000	2.23	-2000.00
	4	24.3	550.0	6.7	140.61	.10	.20	-2000.00	-2000.000	1.27	-2000.00
2252	1	560.7	838.0	9.1	315.43	1.00	.10	-2000.00	-2000.000	.67	-2000.00
	2	139.9	627.0	14.2	440.92	30.00	.10	-2000.00	-2000.000	.74	-2000.00
	3	46.5	416.0	16.2	486.17	30.00	.10	-2000.00	-2000.000	.62	-2000.00
	4	26.4	394.0	17.8	519.36	30.00	.10	-2000.00	-2000.000	1.13	-2000.00
2254	1	246.3	454.0	2.1	49.48	.03	.20	-2000.00	-2000.000	1.74	-2000.00
	2	99.1	549.1	3.4	72.20	.10	.20	-2000.00	-2000.000	1.93	-2000.00
	3	48.0	531.0	5.3	207.15	.03	.10	-2000.00	-2000.000	1.06	-2000.00
	4	26.7	492.0	7.6	177.02	.03	.20	-2000.00	-2000.000	2.79	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
2502	1	207.4	383.0	11.6	413.35	.03	.10	-2000.00	-2000.000	.73	-2000.00
	2	116.3	644.0	14.5	459.06	1.00	.10	-2000.00	-2000.000	.63	-2000.00
	3	59.0	652.0	18.8	535.80	100.00	.10	-2000.00	-2000.000	.83	-2000.00
	4	23.9	440.0	17.8	605.52	.01	.10	-2000.00	-2000.000	1.90	-2000.00
2504	1	366.9	606.0	2.1	49.51	.03	.20	-2000.00	-2000.000	2.15	-2000.00
	2	112.5	557.0	3.7	146.58	.10	.10	-2000.00	-2000.000	1.67	-2000.00
	3	49.5	489.0	6.2	239.27	.03	.10	-2000.00	-2000.000	.47	-2000.00
	4	33.2	548.0	8.6	330.63	.01	.10	-2000.00	-2000.000	1.11	-2000.00
2752	1	323.4	534.0	14.4	466.80	.30	.10	-2000.00	-2000.000	.57	-2000.00
	2	93.7	464.3	17.5	540.80	.30	.10	-2000.00	-2000.000	.63	-2000.00
	3	68.6	678.0	19.7	566.66	3.00	.10	-2000.00	-2000.000	.63	-2000.00
	4	41.3	682.0	22.3	610.63	10.00	.10	-2000.00	-2000.000	.74	-2000.00
2754	1	361.2	756.0	3.5	75.26	.10	.20	-2000.00	-2000.000	1.30	-2000.00
	2	79.9	501.9	4.4	169.47	.10	.10	-2000.00	-2000.000	1.09	-2000.00
	3	42.3	529.0	6.8	260.85	.03	.10	-2000.00	-2000.000	.59	-2000.00
	4	25.0	523.0	8.4	323.30	.01	.10	-2000.00	-2000.000	1.69	-2000.00
3002	1	592.7	930.0	13.6	427.01	10.00	.10	-2000.00	-2000.000	.56	-2000.00
	2	158.0	744.0	23.4	650.55	1.00	.10	-2000.00	-2000.000	.55	-2000.00
	3	74.2	697.0	21.7	635.25	.30	.10	-2000.00	-2000.000	.56	-2000.00
	4	46.3	727.0	22.9	641.28	1.00	.10	-2000.00	-2000.000	.66	-2000.00
3004	1	432.3	969.0	3.4	71.00	30.00	.20	-2000.00	-2000.000	1.76	-2000.00
	2	98.5	662.6	4.7	183.36	.03	.10	-2000.00	-2000.000	.91	-2000.00
	3	45.8	614.0	6.3	133.11	.10	.20	-2000.00	-2000.000	.88	-2000.00
	4	33.8	758.0	7.7	161.54	.10	.20	-2000.00	-2000.000	1.46	-2000.00
3252	1	321.4	504.0	10.6	365.05	.30	.10	-2000.00	-2000.000	.59	-2000.00
	2	119.8	564.0	22.3	646.82	.30	.10	-2000.00	-2000.000	.55	-2000.00
	3	46.1	433.0	23.5	653.16	1.00	.10	-2000.00	-2000.000	.54	-2000.00
	4	30.0	471.0	20.6	627.70	.10	.10	-2000.00	-2000.000	.64	-2000.00
3254	1	394.2	825.0	3.0	117.25	1.00	.10	-2000.00	-2000.000	2.56	-2000.00
	2	83.4	523.6	4.1	88.87	.10	.20	-2000.00	-2000.000	1.61	-2000.00
	3	49.0	614.0	5.6	120.63	.10	.20	-2000.00	-2000.000	1.65	-2000.00
	4	29.3	614.0	6.4	131.98	.10	.20	-2000.00	-2000.000	1.76	-2000.00
3502	1	949.2	1103.0	6.1	224.68	.30	.10	-2000.00	-2000.000	.89	-2000.00
	2	177.9	620.0	15.0	481.58	.30	.10	-2000.00	-2000.000	.66	-2000.00
	3	94.6	658.0	23.6	656.48	1.00	.10	-2000.00	-2000.000	.58	-2000.00
	4	41.6	483.0	24.0	680.04	.30	.10	-2000.00	-2000.000	.75	-2000.00
3504	1	212.7	477.0	2.2	59.23	.01	.20	-2000.00	-2000.000	1.74	-2000.00
	2	83.6	562.5	3.9	84.52	.10	.20	-2000.00	-2000.000	1.39	-2000.00
	3	41.2	552.0	4.5	181.90	.01	.10	-2000.00	-2000.000	1.22	-2000.00
	4	23.6	529.0	4.8	196.37	.10	.10	-2000.00	-2000.000	5.02	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
3754	1	348.3	781.0	3.9	163.49	.01	.10	-2000.00	-2000.000	2.67	-2000.00
	2	75.2	506.0	2.8	118.37	.01	.10	-2000.00	-2000.000	2.33	-2000.00
	3	39.3	528.0	2.2	18.18	.30	.70	-2000.00	-2000.000	4.69	-2000.00
	4	44.6	1000.0	6.1	134.01	100.00	.20	-2000.00	-2000.000	4.12	-2000.00
4004	1	292.8	707.0	3.0	66.66	100.00	.20	-2000.00	-2000.000	2.32	-2000.00
	2	67.4	488.3	2.0	47.64	.03	.20	-2000.00	-2000.000	2.62	-2000.00
	3	62.7	907.0	3.4	73.05	.10	.20	-2000.00	-2000.000	.93	-2000.00
	4	32.0	773.0	8.3	171.20	.10	.20	-2000.00	-2000.000	1.14	-2000.00
4254	1	312.9	655.0	2.1	42.43	10.00	.20	-2000.00	-2000.000	3.01	-2000.00
	2	136.7	858.0	2.4	98.47	.10	.10	-2000.00	-2000.000	3.07	-2000.00
	3	57.8	724.0	7.0	264.70	.03	.10	-2000.00	-2000.000	1.26	-2000.00
	4	24.6	514.0	12.8	432.19	.10	.10	-2000.00	-2000.000	1.64	-2000.00
4504	1	433.7	801.0	1.5	37.14	.03	.20	-2000.00	-2000.000	3.27	-2000.00
	2	109.6	607.0	6.2	240.75	.01	.10	-2000.00	-2000.000	1.48	-2000.00
	3	44.5	491.0	11.6	412.01	.03	.10	-2000.00	-2000.000	.73	-2000.00
	4	20.6	379.0	15.7	496.97	.30	.10	-2000.00	-2000.000	1.25	-2000.00
4754	1	149.0	334.0	4.3	177.84	.01	.10	-2000.00	-2000.000	1.26	-2000.00
	2	46.7	314.3	10.2	381.85	.01	.10	-2000.00	-2000.000	.84	-2000.00
	3	25.4	341.0	14.0	456.28	.30	.10	-2000.00	-2000.000	.93	-2000.00
	4	13.3	299.0	16.2	304.21	.30	.20	-2000.00	-2000.000	1.81	-2000.00
5004	1	200.4	314.0	6.2	85.56	.30	.30	-2000.00	-2000.000	1.76	-2000.00
	2	84.1	396.2	11.2	369.98	30.00	.10	-2000.00	-2000.000	2.81	-2000.00
	3	36.6	344.0	14.3	489.41	.03	.10	-2000.00	-2000.000	.71	-2000.00
	4	23.8	372.0	16.5	528.73	.10	.10	-2000.00	-2000.000	.76	-2000.00
5254	1	195.1	437.0	4.7	174.25	3.00	.10	-2000.00	-2000.000	1.95	-2000.00
	2	58.7	395.1	8.5	88.94	.30	.40	-2000.00	-2000.000	5.17	-2000.00
	3	31.0	416.0	11.9	409.26	.10	.10	-2000.00	-2000.000	4.97	-2000.00
5504	1	172.1	385.0	3.5	75.26	.10	.20	-2000.00	-2000.000	1.83	-2000.00
	2	66.8	449.2	6.2	155.19	.01	.20	-2000.00	-2000.000	2.96	-2000.00
5754	1	379.1	915.0	3.0	59.42	10.00	.20	-2000.00	-2000.000	1.56	-2000.00

IPR-11 SPECTRAL ANALYSIS SUMMARYLINE NO. = 1400

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
0	1	68.1	142.6	8.5	296.31	1.00	.10	-2000.00	-2000.000	.96	-2000.00
	2	33.5	210.5	7.1	266.83	.10	.10	-2000.00	-2000.000	1.23	-2000.00
	3	23.7	297.3	6.4	59.05	.30	.60	-2000.00	-2000.000	128.26	-2000.00
	4	18.9	395.2	6.3	250.73	.01	.10	-2000.00	-2000.000	1.08	-2000.00
252	1	66.2	159.9	9.0	310.35	1.00	.10	-2000.00	-2000.000	.85	-2000.00
	2	25.8	187.0	8.1	294.31	.10	.10	-2000.00	-2000.000	.88	-2000.00
	3	18.1	261.0	6.8	270.03	.01	.10	-2000.00	-2000.000	.93	-2000.00
	4	14.6	351.0	7.2	143.61	30.00	.20	-2000.00	-2000.000	2.40	-2000.00
254	1	83.1	137.3	7.2	261.24	.30	.10	-2000.00	-2000.000	.95	-2000.00
	2	42.2	209.3	6.4	232.09	1.00	.10	-2000.00	-2000.000	1.18	-2000.00
	3	30.6	303.0	6.2	247.52	.01	.10	-2000.00	-2000.000	.81	-2000.00
	4	24.6	406.0	6.1	221.40	1.00	.10	-2000.00	-2000.000	1.24	-2000.00
502	1	97.1	169.3	7.8	272.45	10.00	.10	-2000.00	-2000.000	.72	-2000.00
	2	45.9	240.1	7.6	280.18	.10	.10	-2000.00	-2000.000	1.04	-2000.00
	3	27.1	282.0	7.7	278.18	.30	.10	-2000.00	-2000.000	1.19	-2000.00
	4	21.4	373.0	8.1	153.51	10.00	.20	-2000.00	-2000.000	2.29	-2000.00
504	1	79.7	131.6	5.8	210.12	10.00	.10	-2000.00	-2000.000	1.09	-2000.00
	2	42.6	211.1	6.2	247.36	.01	.10	-2000.00	-2000.000	.95	-2000.00
	3	30.2	298.0	5.8	212.97	.30	.10	-2000.00	-2000.000	1.32	-2000.00
	4	29.0	478.0	5.1	205.17	.01	.10	-2000.00	-2000.000	.92	-2000.00
752	1	155.6	287.0	7.5	266.86	100.00	.10	-2000.00	-2000.000	.92	-2000.00
	2	39.8	220.7	7.3	268.01	.10	.10	-2000.00	-2000.000	1.19	-2000.00
	3	27.7	306.0	8.1	303.49	.03	.10	-2000.00	-2000.000	.63	-2000.00
	4	19.6	362.0	8.7	305.23	1.00	.10	-2000.00	-2000.000	1.56	-2000.00
754	1	108.6	179.0	4.7	189.16	.01	.10	-2000.00	-2000.000	1.23	-2000.00
	2	46.5	230.4	5.1	214.14	.01	.10	-2000.00	-2000.000	1.86	-2000.00
	3	39.5	390.0	4.5	192.49	.01	.10	-2000.00	-2000.000	2.18	-2000.00
	4	32.2	532.0	5.2	100.46	10.00	.20	-2000.00	-2000.000	2.89	-2000.00
1002	1	591.6	1161.0	5.3	107.14	30.00	.20	-2000.00	-2000.000	.98	-2000.00
	2	55.7	327.8	8.7	312.28	.10	.10	-2000.00	-2000.000	1.15	-2000.00
	3	24.3	285.0	8.3	302.66	.10	.10	-2000.00	-2000.000	.83	-2000.00
	4	17.4	341.0	9.4	320.49	3.00	.10	-2000.00	-2000.000	1.45	-2000.00
1004	1	130.3	240.0	3.0	117.50	.10	.10	-2000.00	-2000.000	1.96	-2000.00
	2	53.0	293.6	4.2	89.58	.10	.20	-2000.00	-2000.000	1.01	-2000.00
	3	37.4	413.0	4.2	58.04	.30	.30	-2000.00	-2000.000	2.20	-2000.00
	4	28.6	528.0	5.0	202.48	.01	.10	-2000.00	-2000.000	1.94	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
1252	1	1550.0	2700.0	9.2	174.38	.03	.30	-2000.00	-2000.000	1.06	-2000.00
	2	106.1	555.0	8.3	291.18	1.00	.10	-2000.00	-2000.000	.62	-2000.00
	3	36.0	375.0	9.5	182.78	.30	.20	-2000.00	-2000.000	1.04	-2000.00
	4	18.4	320.0	8.4	127.70	.10	.30	-2000.00	-2000.000	2.09	-2000.00
1254	1	269.5	402.0	2.7	113.81	.01	.10	-2000.00	-2000.000	1.54	-2000.00
	2	90.2	404.4	3.7	147.40	.03	.10	-2000.00	-2000.000	1.69	-2000.00
	3	58.3	521.0	4.5	185.17	.01	.10	-2000.00	-2000.000	1.67	-2000.00
	4	40.8	610.0	5.5	209.86	.10	.10	-2000.00	-2000.000	1.14	-2000.00
1502	1	479.1	1253.0	5.3	102.58	10.00	.20	-2000.00	-2000.000	1.42	-2000.00
	2	89.6	703.4	9.0	323.38	.10	.10	-2000.00	-2000.000	.86	-2000.00
	3	31.6	495.0	9.8	333.78	1.00	.10	-2000.00	-2000.000	1.07	-2000.00
	4	13.9	364.0	11.8	381.86	3.00	.10	-2000.00	-2000.000	1.84	-2000.00
1504	1	222.7	388.0	2.1	82.53	30.00	.10	-2000.00	-2000.000	3.26	-2000.00
	2	77.2	404.2	3.3	138.72	.01	.10	-2000.00	-2000.000	1.26	-2000.00
	3	44.9	469.0	4.7	176.42	30.00	.10	-2000.00	-2000.000	1.69	-2000.00
	4	36.8	641.0	5.2	198.03	.10	.10	-2000.00	-2000.000	1.23	-2000.00
1752	1	702.2	1469.0	4.0	78.85	10.00	.20	-2000.00	-2000.000	1.30	-2000.00
	2	126.8	796.0	8.4	296.58	100.00	.10	-2000.00	-2000.000	1.87	-2000.00
	3	52.8	661.0	11.9	387.71	10.00	.10	-2000.00	-2000.000	.91	-2000.00
	4	22.8	477.0	12.7	412.85	1.00	.10	-2000.00	-2000.000	1.24	-2000.00
1754	1	295.0	463.0	2.1	87.02	.10	.10	-2000.00	-2000.000	2.14	-2000.00
	2	101.1	476.0	3.3	130.86	30.00	.10	-2000.00	-2000.000	2.79	-2000.00
	3	67.0	629.0	4.2	159.42	3.00	.10	-2000.00	-2000.000	2.04	-2000.00
	4	41.7	654.0	4.3	172.69	.03	.10	-2000.00	-2000.000	2.32	-2000.00
2004	1	363.1	600.0	2.4	48.31	10.00	.20	-2000.00	-2000.000	1.64	-2000.00
	2	124.0	614.0	3.1	130.14	.01	.10	-2000.00	-2000.000	1.62	-2000.00
	3	61.6	609.0	3.2	129.82	.10	.10	-2000.00	-2000.000	1.67	-2000.00
	4	45.0	744.0	5.4	218.45	.01	.10	-2000.00	-2000.000	1.28	-2000.00
2254	1	373.2	901.0	3.1	122.60	.10	.10	-2000.00	-2000.000	1.22	-2000.00
	2	83.9	607.8	2.3	88.75	3.00	.10	-2000.00	-2000.000	1.71	-2000.00
	3	49.0	709.0	4.3	168.13	.03	.10	-2000.00	-2000.000	1.45	-2000.00
	4	27.5	664.0	7.5	300.19	.01	.10	-2000.00	-2000.000	2.36	-2000.00
2504	1	359.1	704.0	2.3	99.11	.01	.10	-2000.00	-2000.000	2.47	-2000.00
	2	114.2	672.0	3.1	122.91	.10	.10	-2000.00	-2000.000	2.26	-2000.00
	3	52.0	611.0	6.3	249.25	.01	.10	-2000.00	-2000.000	1.57	-2000.00
	4	32.6	640.0	8.7	175.92	.10	.20	-2000.00	-2000.000	2.57	-2000.00
2754	1	617.6	1385.0	3.9	153.18	.10	.10	-2000.00	-2000.000	2.31	-2000.00
	2	97.3	654.6	4.5	185.99	.01	.10	-2000.00	-2000.000	1.22	-2000.00
	3	49.2	660.0	7.0	252.89	.30	.10	-2000.00	-2000.000	.91	-2000.00
	4	30.0	673.0	9.5	213.72	.03	.20	-2000.00	-2000.000	1.18	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
3004	1	549.4	1232.0	4.2	86.36	30.00	.20	-2000.00	-2000.000	2.43	-2000.00
	2	108.7	731.0	4.5	168.04	30.00	.10	-2000.00	-2000.000	1.13	-2000.00
	3	46.7	627.0	7.5	295.03	.01	.10	-2000.00	-2000.000	1.21	-2000.00
	4	23.0	515.0	9.0	351.74	.01	.10	-2000.00	-2000.000	2.09	-2000.00
3254	1	1245.0	2600.0	4.8	97.86	30.00	.20	-2000.00	-2000.000	2.61	-2000.00
	2	167.8	1053.0	4.9	183.74	.30	.10	-2000.00	-2000.000	1.25	-2000.00
	3	51.3	642.0	6.0	129.86	.10	.20	-2000.00	-2000.000	2.07	-2000.00
	4	51.1	1069.0	7.5	277.34	.03	.10	-2000.00	-2000.000	2.29	-2000.00
3504	1	1111.0	3170.0	7.1	163.58	.03	.20	-2000.00	-2000.000	2.12	-2000.00
	2	95.0	813.2	4.9	178.58	1.00	.10	-2000.00	-2000.000	2.55	-2000.00
	3	59.2	1011.0	5.1	206.21	.01	.10	-2000.00	-2000.000	1.65	-2000.00
	4	48.6	1387.0	5.3	111.61	.10	.20	-2000.00	-2000.000	2.99	-2000.00
3754	1	934.5	1956.0	4.3	92.45	100.00	.20	-2000.00	-2000.000	2.75	-2000.00
	2	196.6	1234.0	3.3	128.44	.30	.10	-2000.00	-2000.000	1.09	-2000.00
	3	115.5	1440.0	3.4	79.43	.03	.20	-2000.00	-2000.000	2.06	-2000.00
	4	70.9	1483.0	4.0	163.29	.01	.10	-2000.00	-2000.000	2.48	-2000.00
4004	1	898.4	2014.0	3.6	136.58	30.00	.10	-2000.00	-2000.000	1.27	-2000.00
	2	201.0	1352.0	2.2	53.09	.03	.20	-2000.00	-2000.000	2.20	-2000.00
	3	106.2	1420.0	2.7	102.78	100.00	.60	-2000.00	-2000.000	142.48	-2000.00
	4	46.8	1048.0	5.2	217.51	.01	.10	-2000.00	-2000.000	2.02	-2000.00
4254	1	384.8	863.0	1.5	62.21	.10	.10	-2000.00	-2000.000	2.98	-2000.00
	2	170.6	1147.0	2.0	86.46	.01	.10	-2000.00	-2000.000	2.30	-2000.00
	3	61.8	829.0	4.6	196.68	.01	.10	-2000.00	-2000.000	2.12	-2000.00
	4	40.3	903.0	11.0	224.36	.10	.20	-2000.00	-2000.000	1.04	-2000.00
4504	1	504.1	1130.0	1.9	20.17	.30	.40	-2000.00	-2000.000	6.01	-2000.00
	2	126.0	847.0	4.4	69.34	30.00	.30	-2000.00	-2000.000	8.87	-2000.00
	3	69.7	936.0	9.7	338.89	1.00	.10	-2000.00	-2000.000	2.13	-2000.00
	4	32.9	738.0	16.7	515.31	1.00	.10	-2000.00	-2000.000	2.10	-2000.00
4754	1	583.9	1078.0	2.9	56.40	10.00	.20	-2000.00	-2000.000	3.43	-2000.00
	2	199.3	1104.0	7.9	287.51	1.00	.10	-2000.00	-2000.000	2.16	-2000.00
	3	73.2	809.0	15.5	486.62	1.00	.10	-2000.00	-2000.000	.83	-2000.00
	4	26.6	490.0	23.0	655.75	.30	.10	-2000.00	-2000.000	1.09	-2000.00
5004	1	1193.0	2200.0	5.3	198.64	.30	.10	-2000.00	-2000.000	1.06	-2000.00
	2	169.8	940.0	11.8	389.81	1.00	.10	-2000.00	-2000.000	.71	-2000.00
	3	46.6	515.0	20.9	591.94	3.00	.10	-2000.00	-2000.000	.60	-2000.00
	4	21.1	390.0	26.3	722.84	.30	.10	-2000.00	-2000.000	1.00	-2000.00
5254	1	268.2	1050.0	5.9	214.94	100.00	.10	-2000.00	-2000.000	1.19	-2000.00
	2	39.4	463.0	15.3	468.56	10.00	.10	-2000.00	-2000.000	.69	-2000.00
	3	14.3	330.0	24.3	642.94	10.00	.10	-2000.00	-2000.000	1.03	-2000.00
	4	8.1	317.0	22.8	707.82	.03	.10	-2000.00	-2000.000	1.47	-2000.00

Station	Dipole	Vp	Apparent Resist.	M7	Cole-Cole Parameters					Fit/IP	Fit/EM
					M-IP	TAU-IP	C-IP	M-EM	TAU-EM		
5504	1	356.7	746.0	6.3	228.64	100.00	.10	-2000.00	-2000.000	1.17	-2000.00
	2	65.8	413.0	17.4	515.53	10.00	.10	-2000.00	-2000.000	.77	-2000.00
	3	28.7	359.0	20.9	604.67	1.00	.10	-2000.00	-2000.000	1.02	-2000.00
	4	16.4	342.0	21.2	598.15	3.00	.10	-2000.00	-2000.000	1.22	-2000.00
5754	1	459.4	1030.0	5.7	109.70	10.00	.20	-2000.00	-2000.000	1.10	-2000.00
	2	67.5	453.9	12.7	415.93	1.00	.10	-2000.00	-2000.000	.69	-2000.00
	3	27.9	374.0	15.1	495.43	.10	.10	-2000.00	-2000.000	.82	-2000.00
	4	17.5	393.0	15.5	547.46	.01	.10	-2000.00	-2000.000	2.75	-2000.00
6004	1	365.5	819.0	4.6	90.01	10.00	.20	-2000.00	-2000.000	1.42	-2000.00
	2	70.4	473.8	7.8	280.42	.30	.10	-2000.00	-2000.000	.94	-2000.00
	3	36.7	492.0	8.7	310.16	.30	.10	-2000.00	-2000.000	1.20	-2000.00
6254	1	438.5	917.0	3.6	142.12	100.00	.10	-2000.00	-2000.000	1.15	-2000.00
	2	110.6	694.0	4.1	164.75	.01	.10	-2000.00	-2000.000	2.31	-2000.00
6504	1	715.2	1497.0	4.2	81.99	10.00	.20	-2000.00	-2000.000	.95	-2000.00

GEOLOGICAL BRANCH
ASSESSMENT REPORT

16,471

LORNE MINING CORPORATION

NINA PROPERTY

LINE NUMBER: 800 N

"A": 25.0 METRES

N=1 TO 5


SCINTREX IPA-11 RECEIVER

TX PULSE TIME: 2.0 SEC

POLE-DIPOLE ARRAY

RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

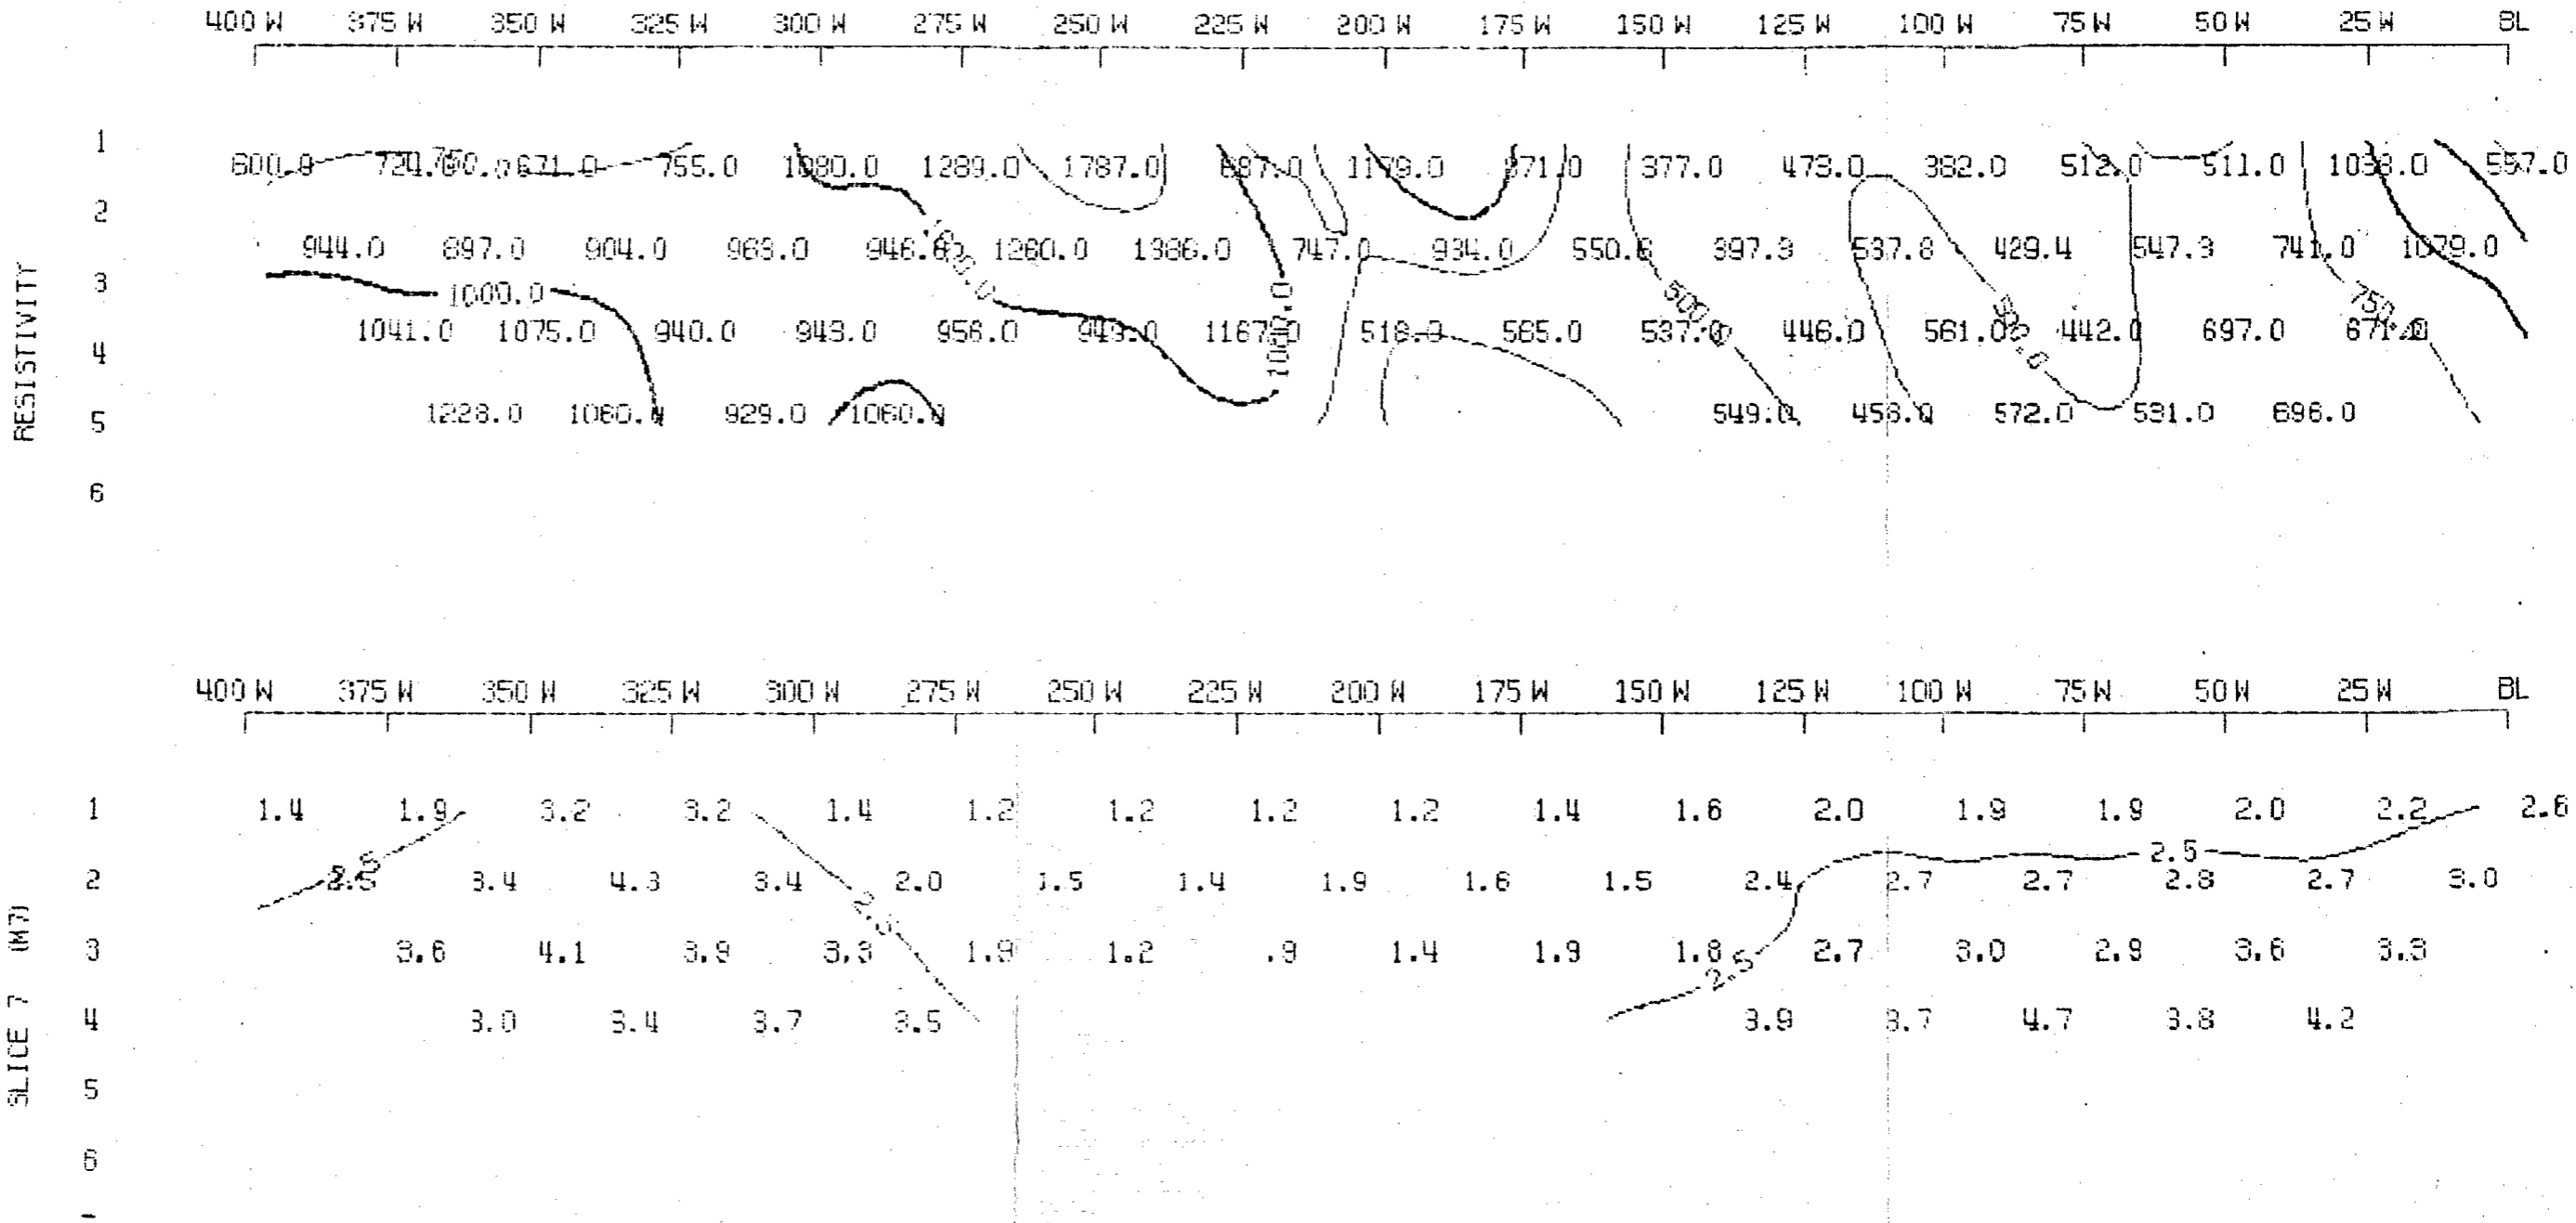

GEOLOGICAL BRANCH
ASSESSMENT REPORT

16,471

LORNEX MINING CORPORATION

NINA PROPERTY

LINE NUMBER: 1200N

25.0 METRES

N=1 TO 4


SCINTREX IFA-11 RECEIVER
POLE-DIPOLE ARRAY

TX PULSE TIME: 2.0 SEC
RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

SLICE 7 (M7)

RESISTIVITY

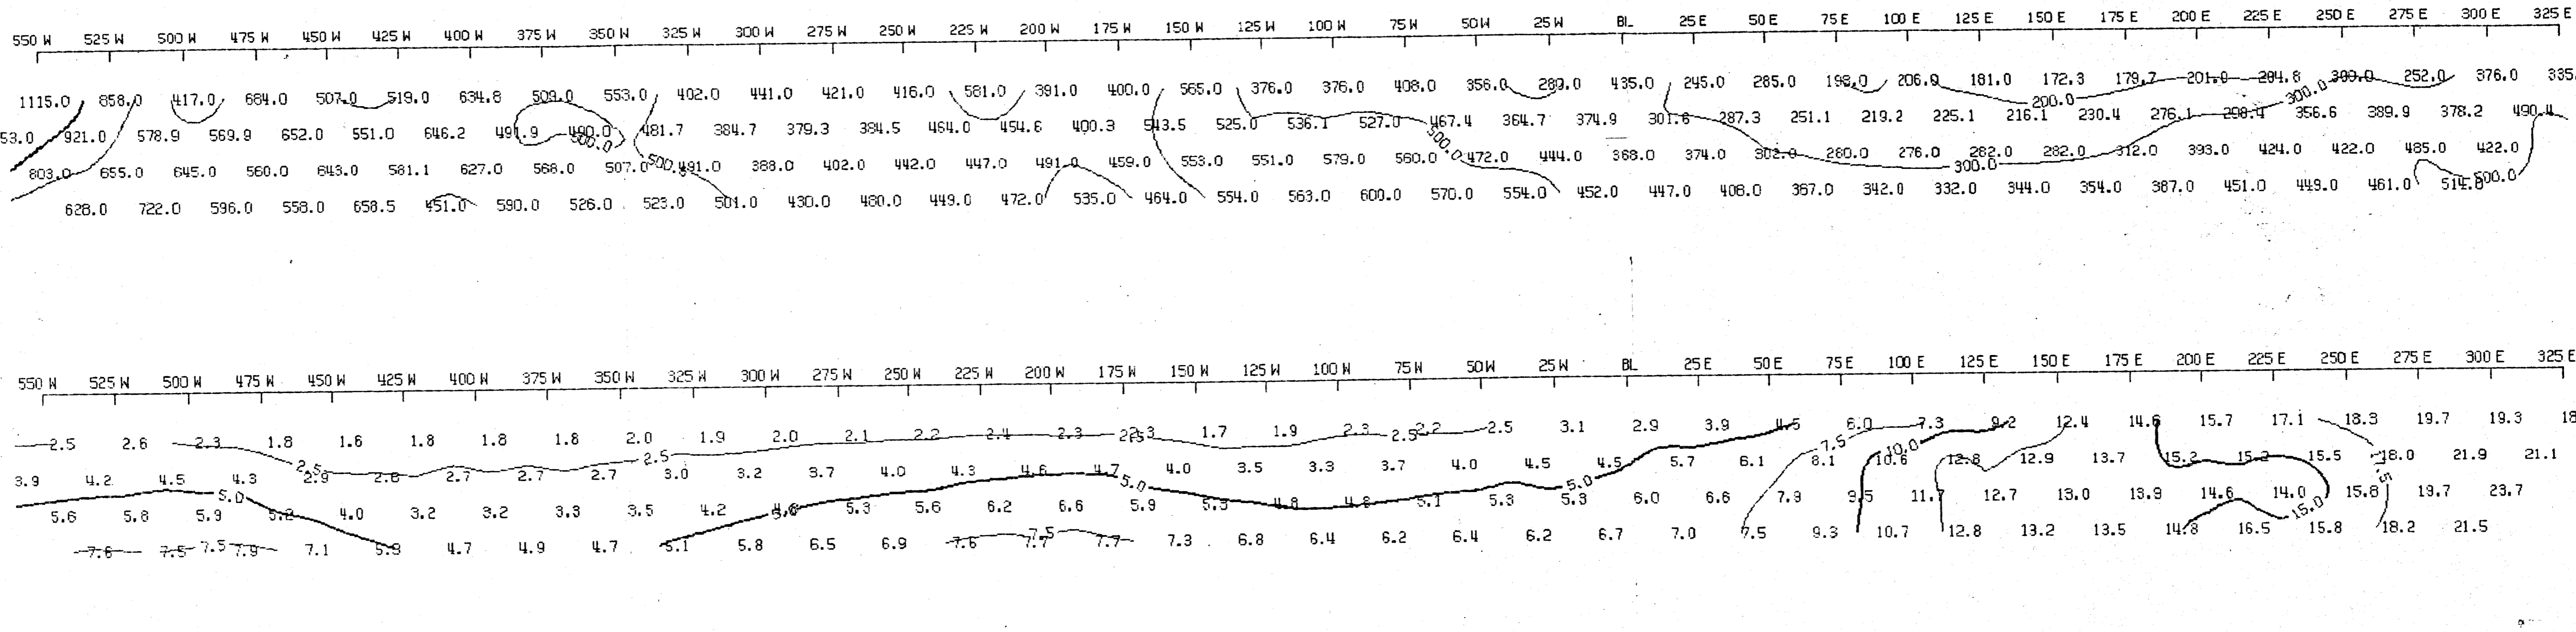

LORNEX MINING CORPORATION

NINA PROPERTY

LINE NUMBER: 1100N

"A": 25.0 METRES

SCINTREX IPA-11 RECEIVER

POLE-DIPOLE ARRAY

N=1 TO 5


TX PULSE TIME: 2.0 SEC

RECEIVE TIME: 2.0 SEC

**GEOLOGICAL BRANCH
ASSESSMENT REPORT**

SCALE 1: 1250

SLICE 7 (M7)

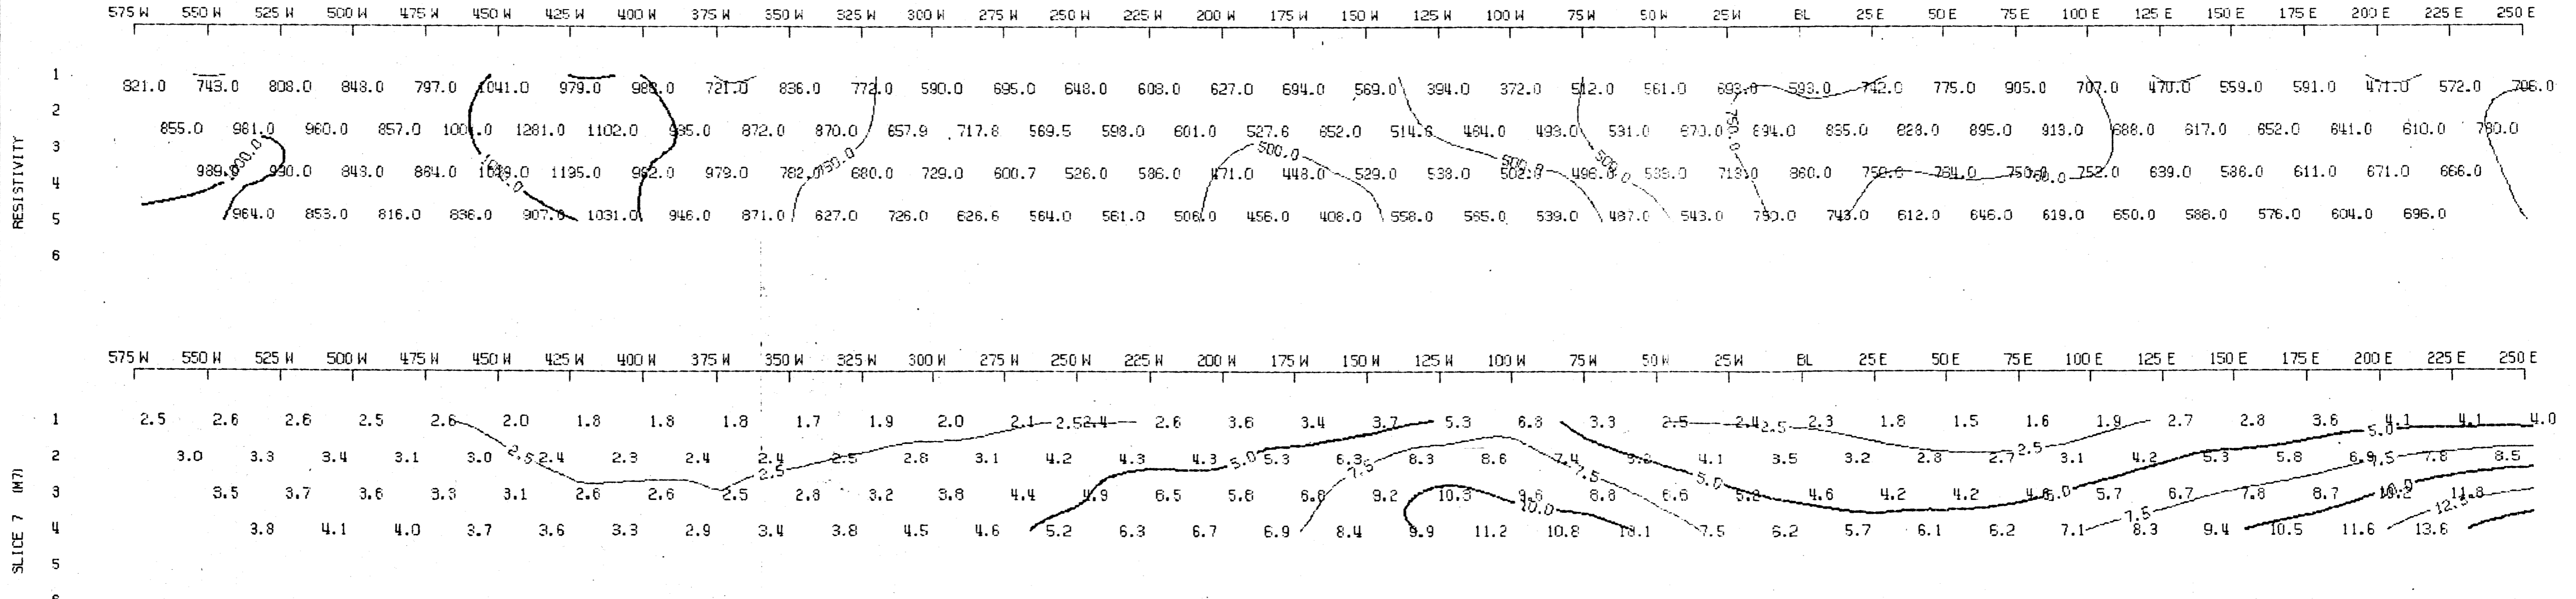

16,471

GEOLOGICAL BRANCH
ASSESSMENT REPORT

16,471

LORNE MINING CORPORATION

NINA PROPERTY

LINE NUMBER: 1400N

"A": 25.0 METRES

SCINTREX IPR-11 RECEIVER

POLE-DIPOLE ARRAY

N=1 TO 5


TX PULSE TIME: 2.0 SEC



RECEIVE TIME: 2.0 SEC

SCALE 1: 1250

SLICE 7 (M7)

RESISTIVITY

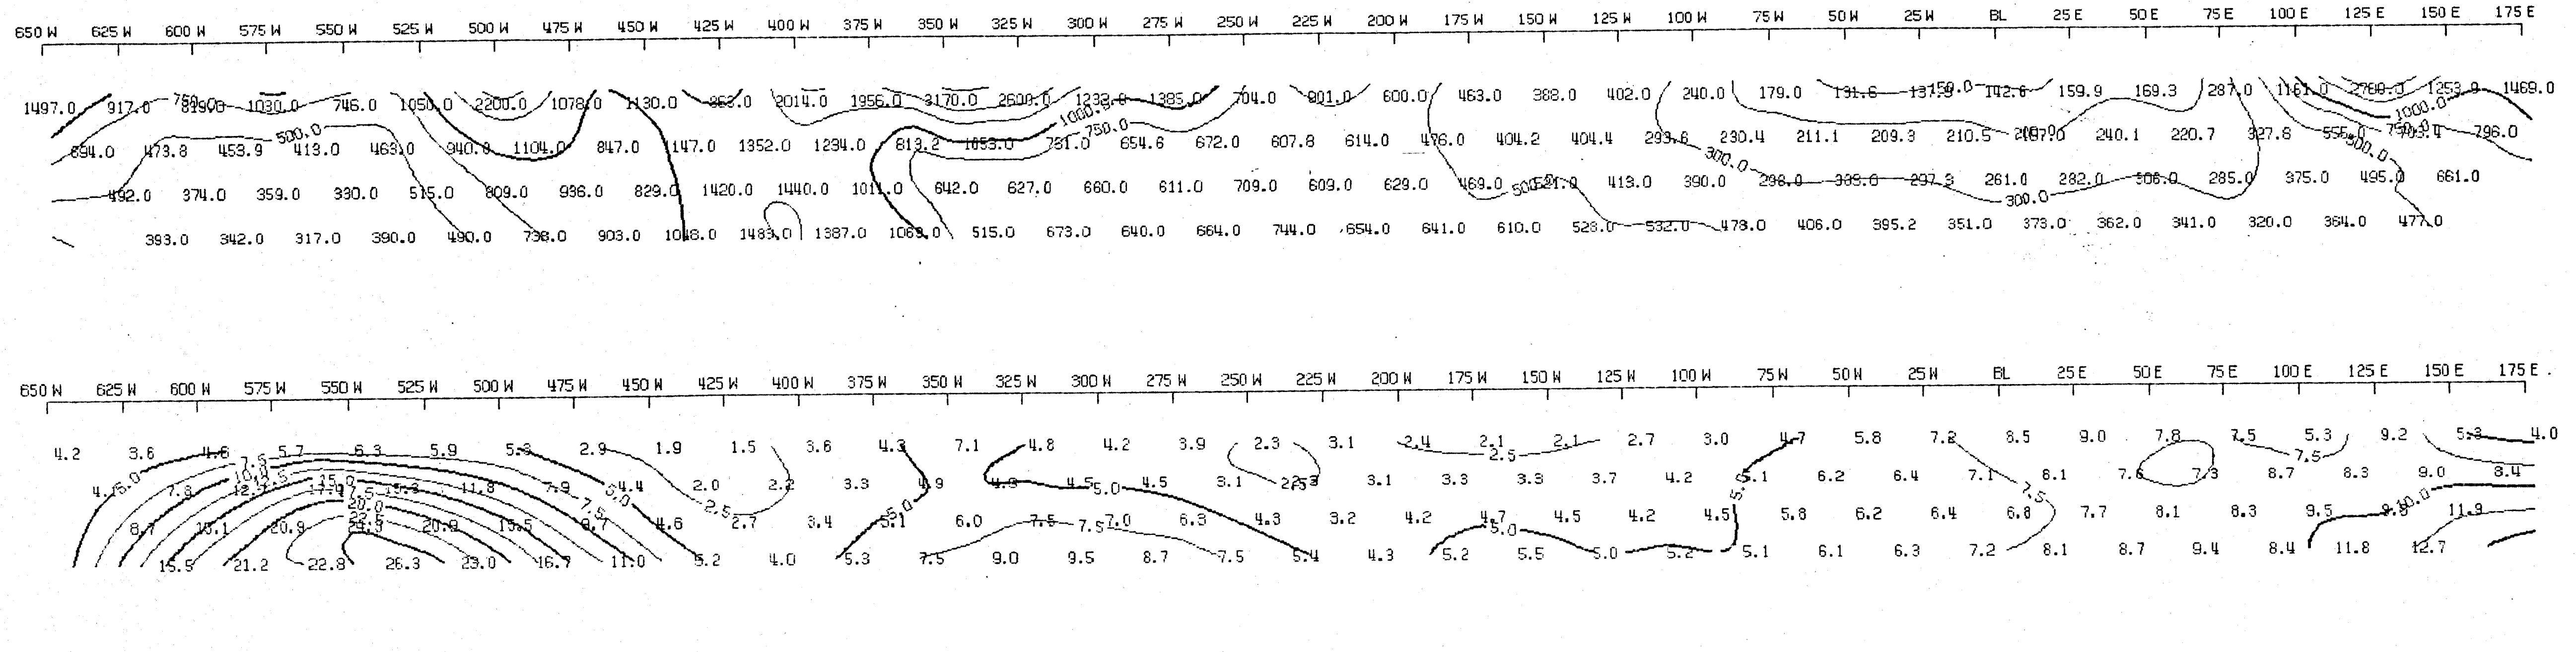

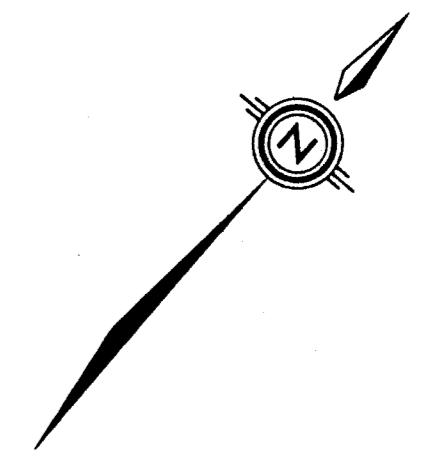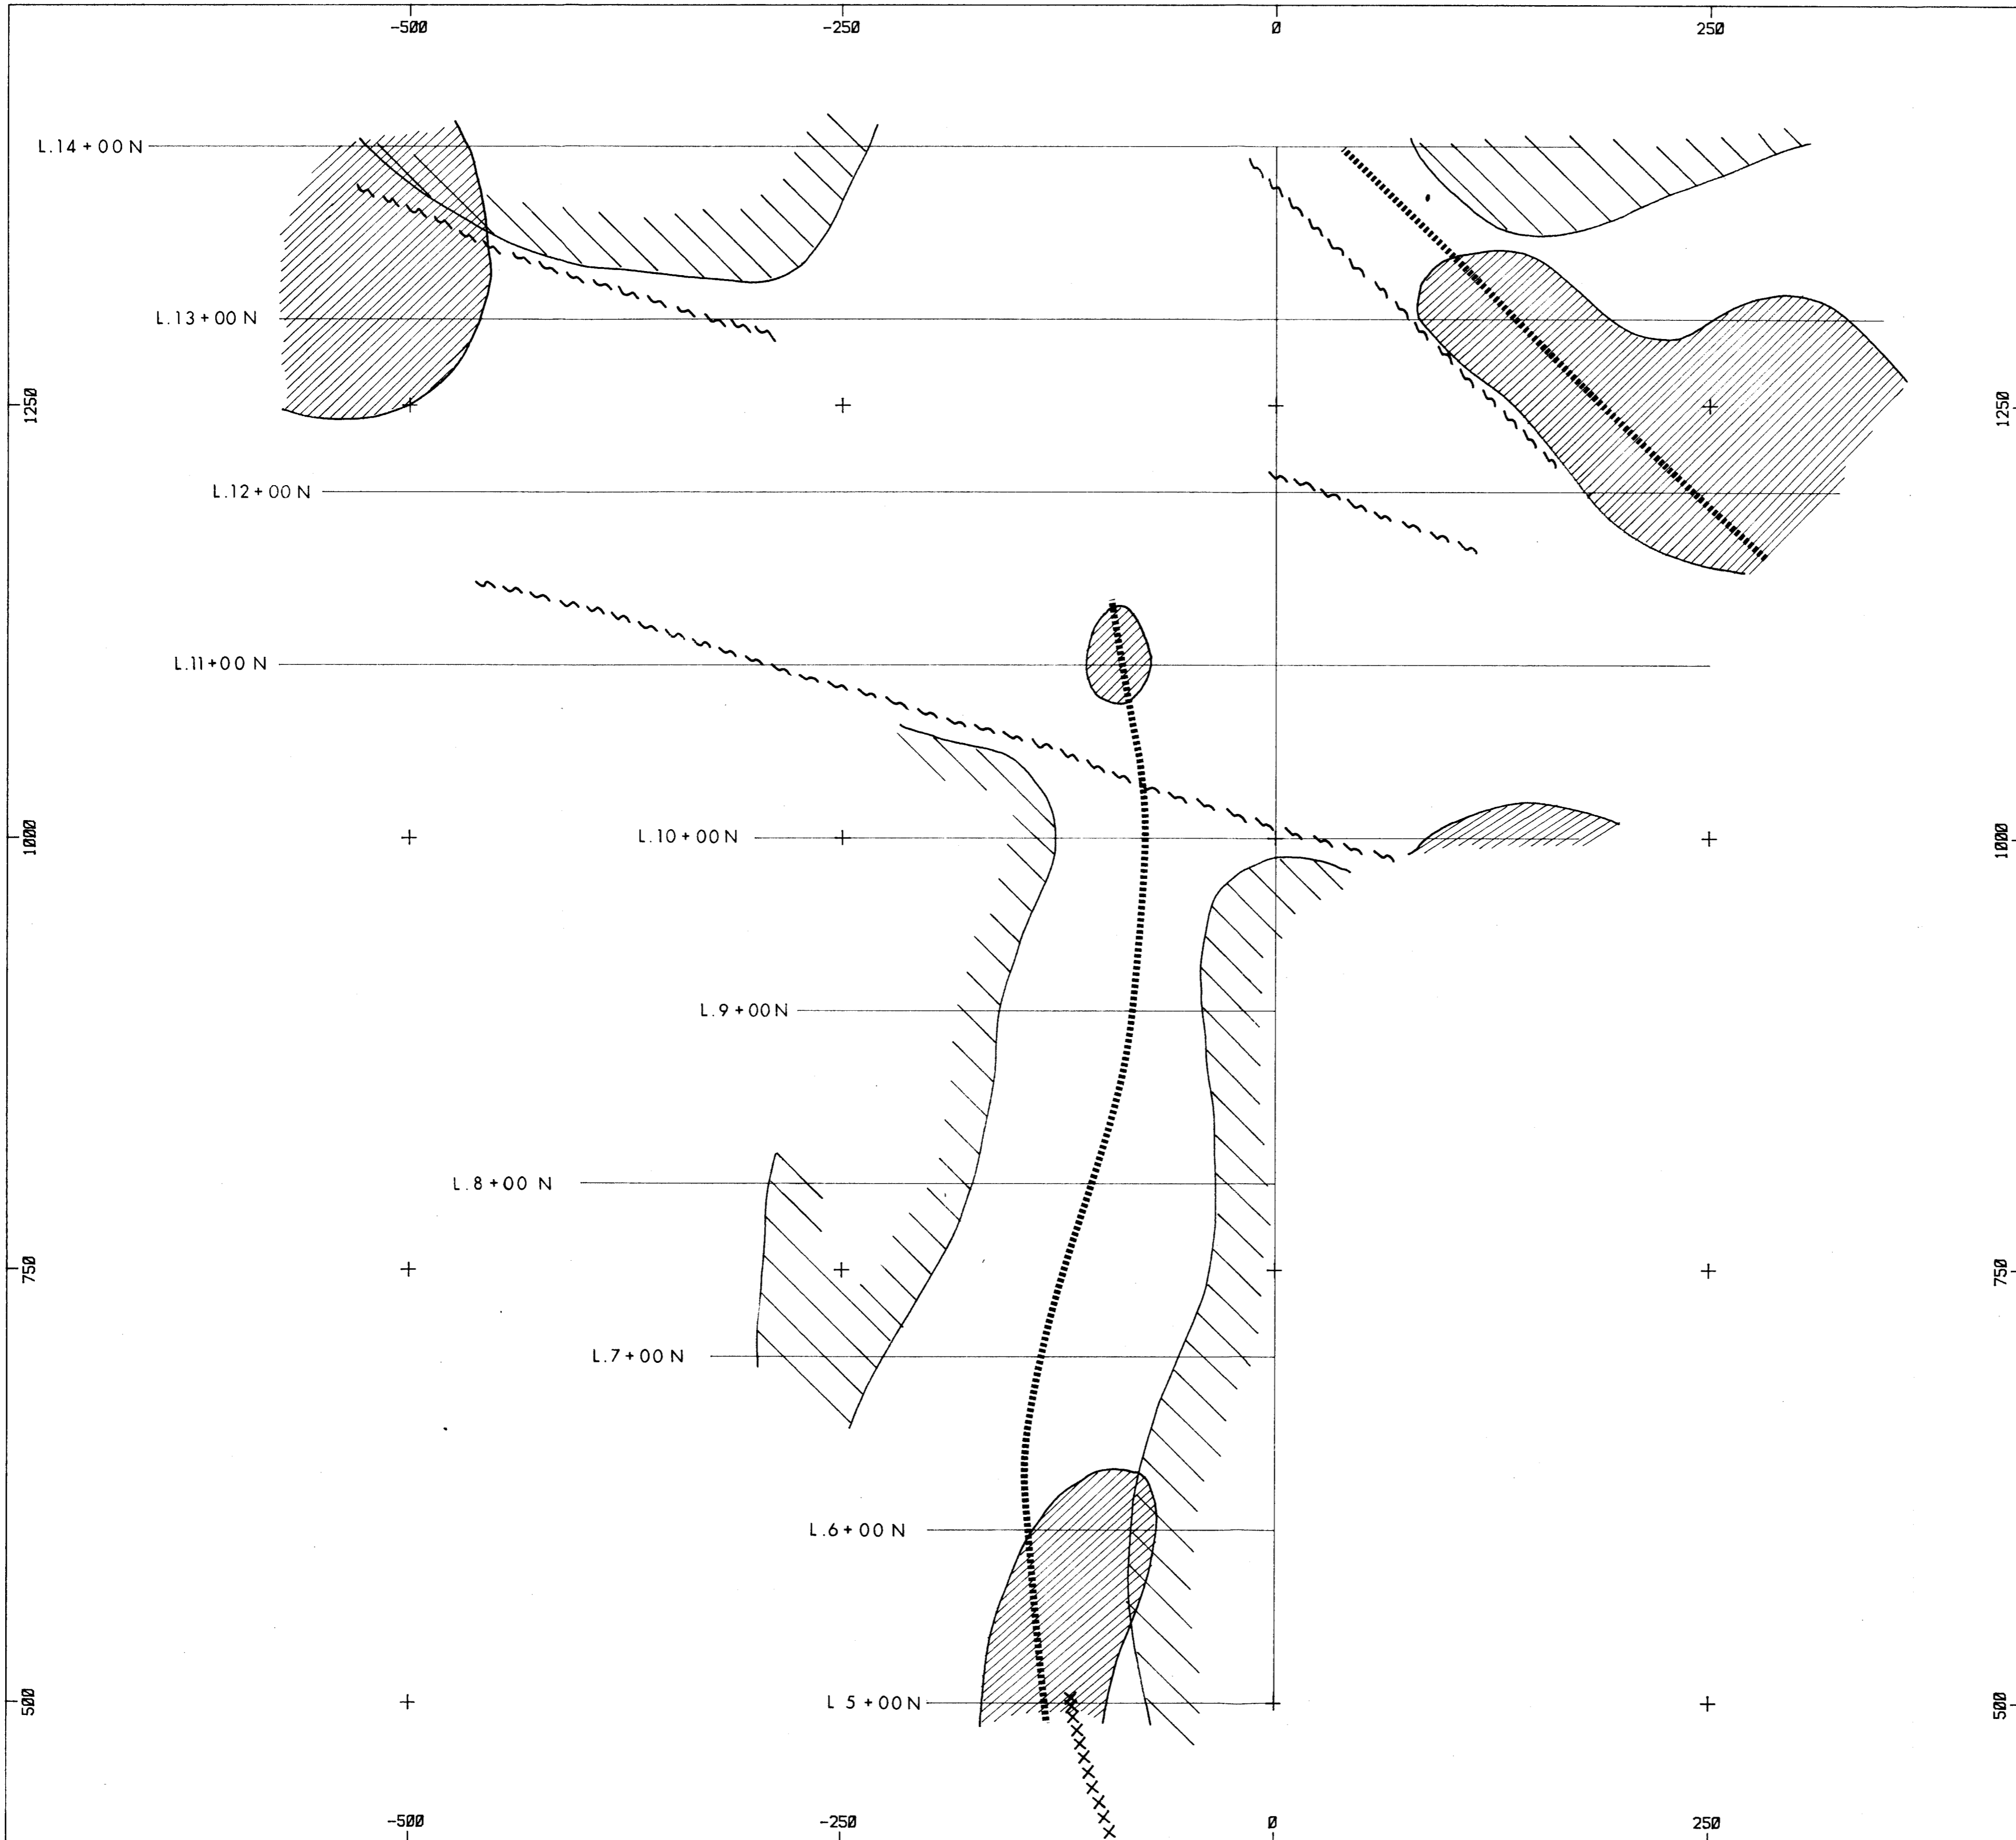

**GEOLOGICAL BRANCH
ASSESSMENT REPORT**

16,471







- LEGEND:**
-  Resistivity high
 -  Chargeability high
 -  Inferred fault
 -  VLF conductor (1985)
 -  Trace of resistivity low

PLATE V





LORNEX MINING CORPORATION

NINA PROPERTY - Nino Lake, B.C.
Germansen Landing Area

Geophysical Compilation

DRAWN BY: jmt DATE: November, 1987
SCOTT GEOPHYSICS LTD.

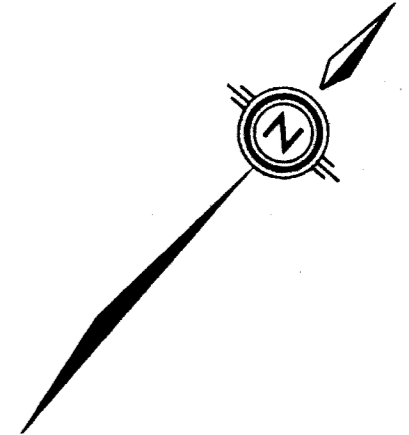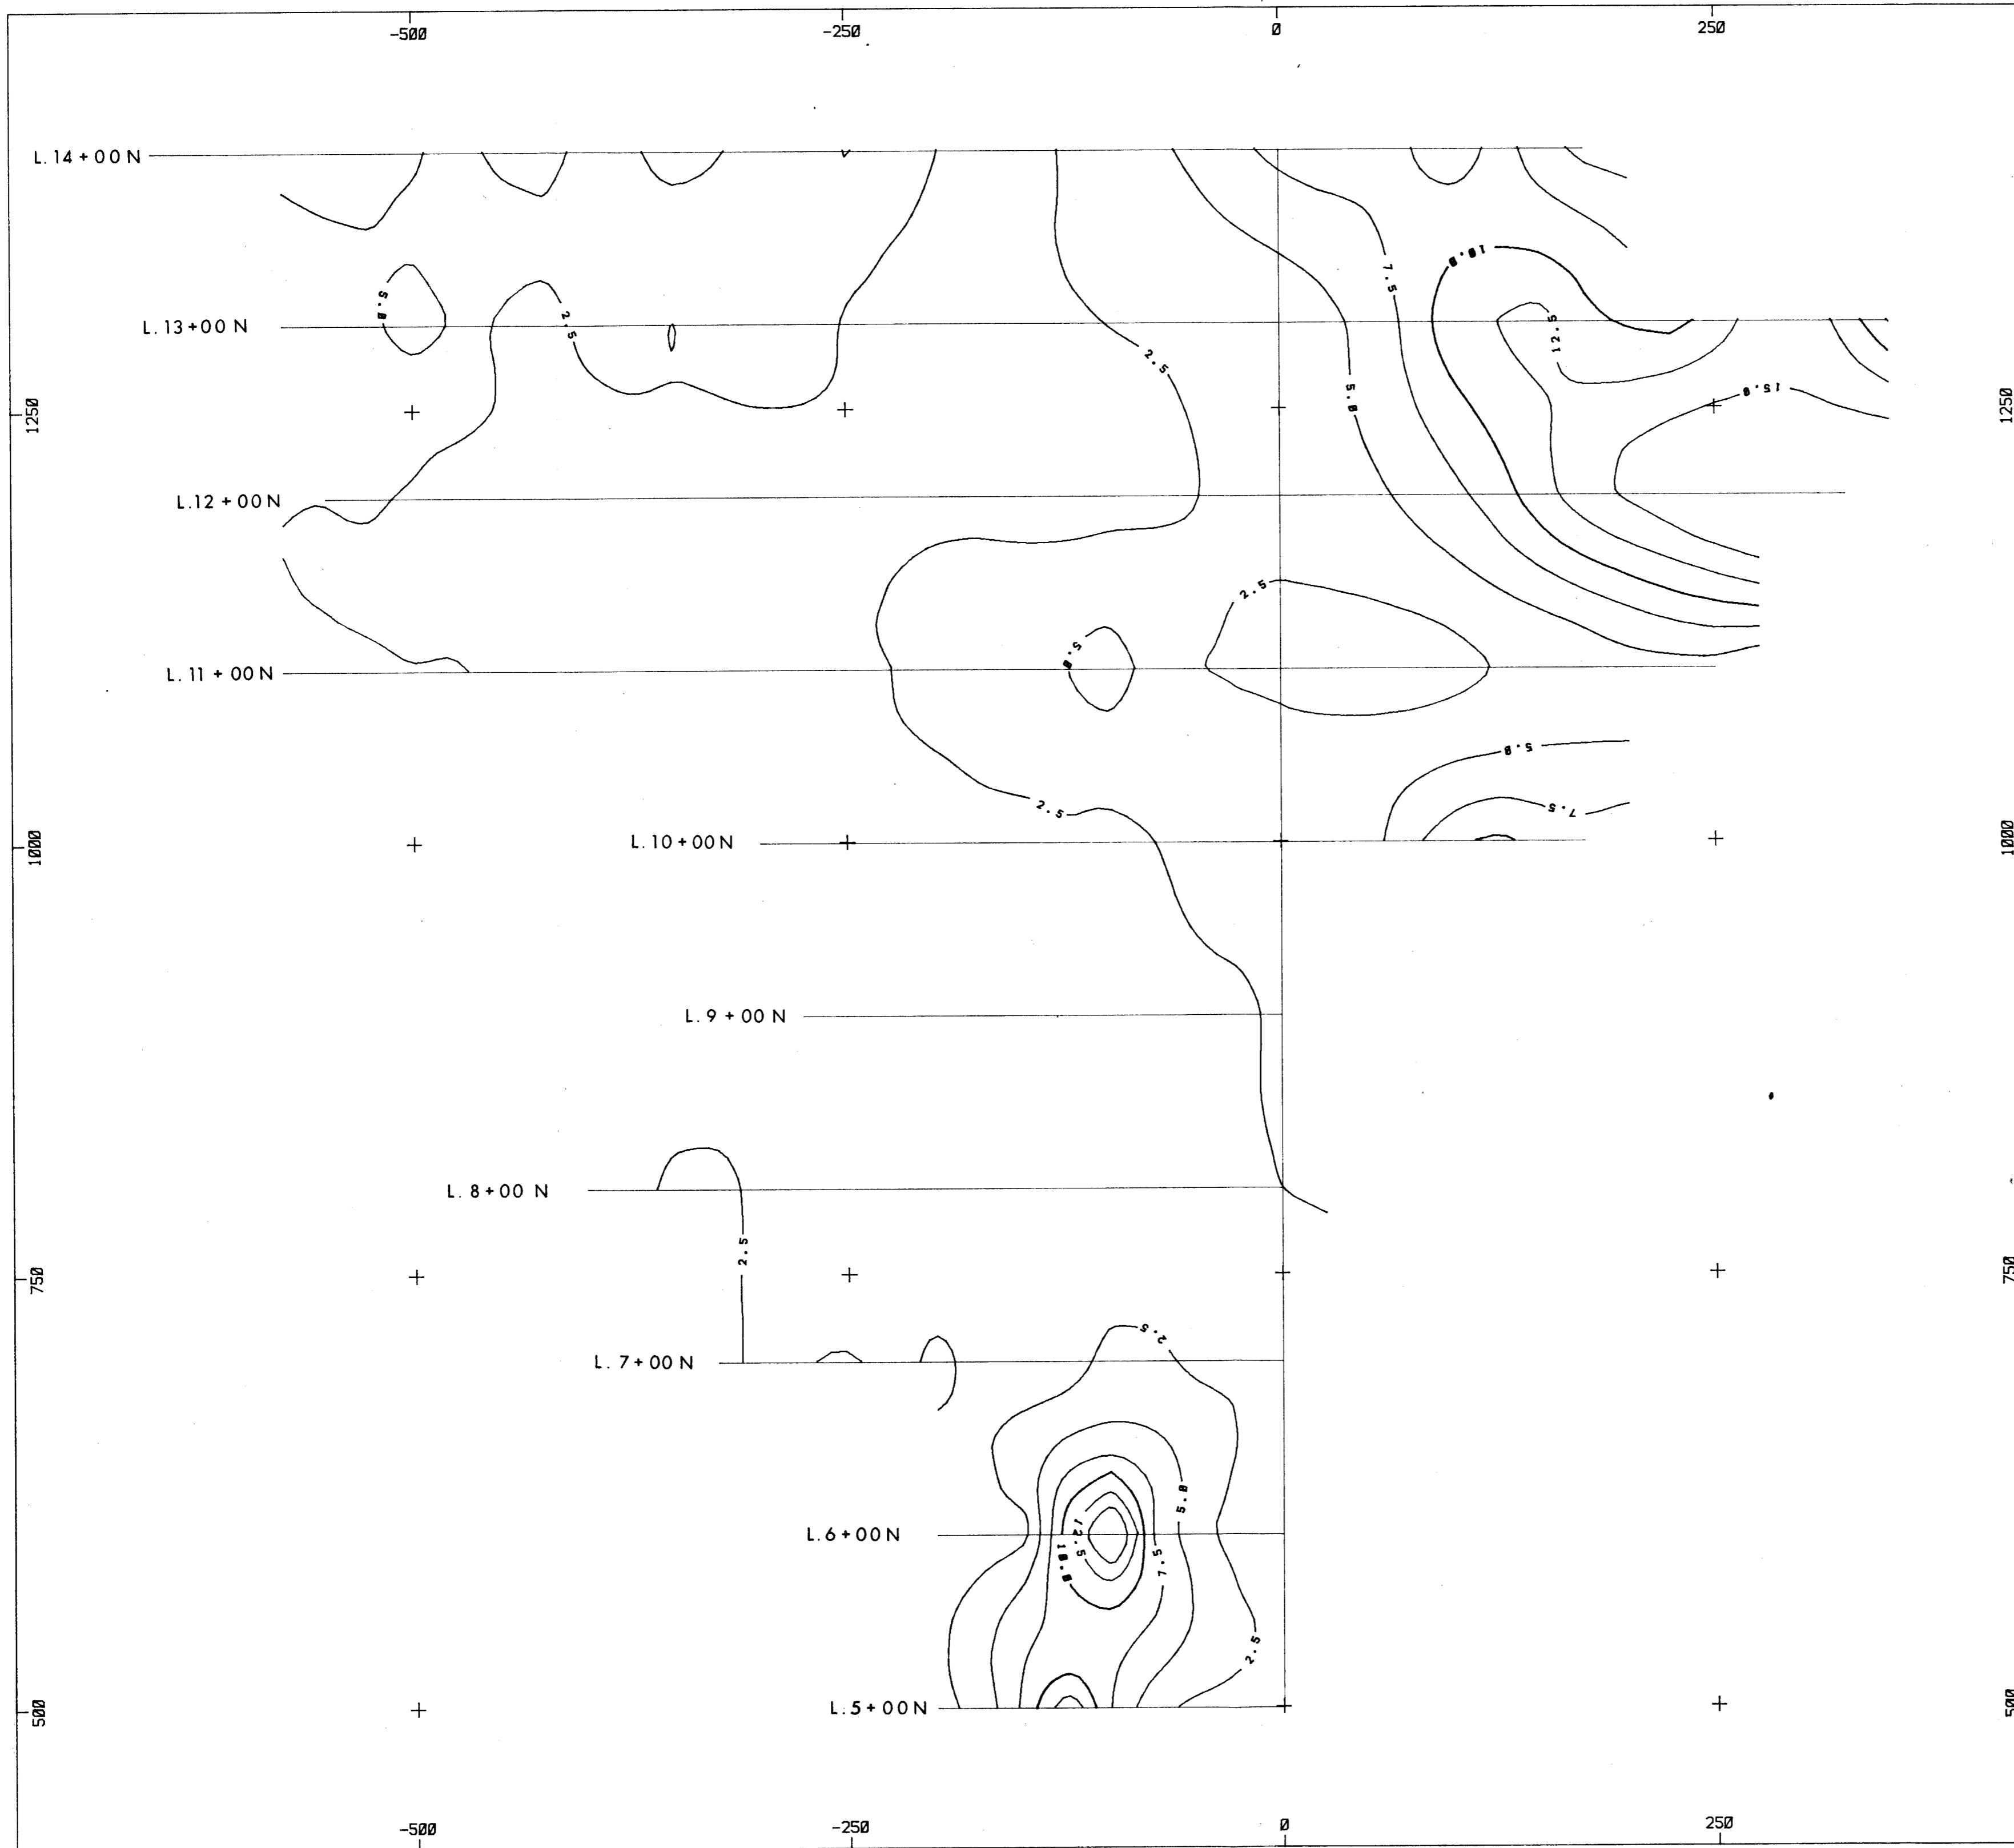

LEGEND:
 Pole dipole array $a = 25$ meters
 Current electrode E of potentials
 Contour Interval: 2.5 mV-sec/Volt

**GEOLOGICAL BRANCH
 ASSESSMENT REPORT**

16,471
 PLATE I





LORNE MINING CORPORATION

NINA PROPERTY - Nina Lake, B.C.
 Germansen Landing Area

IPR11 Survey - N = 1
 Chargeability Contour Plan

DRAWN BY: Jmt DATE: November, 1987
 SCOTT GEOPHYSICS LTD.

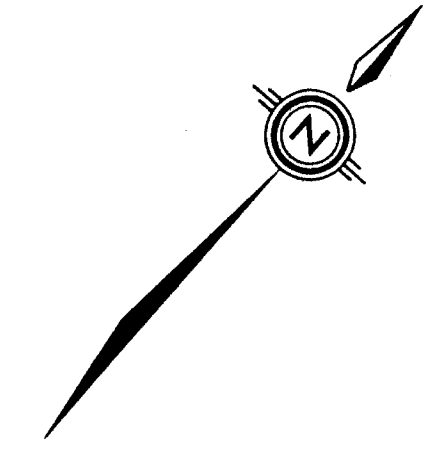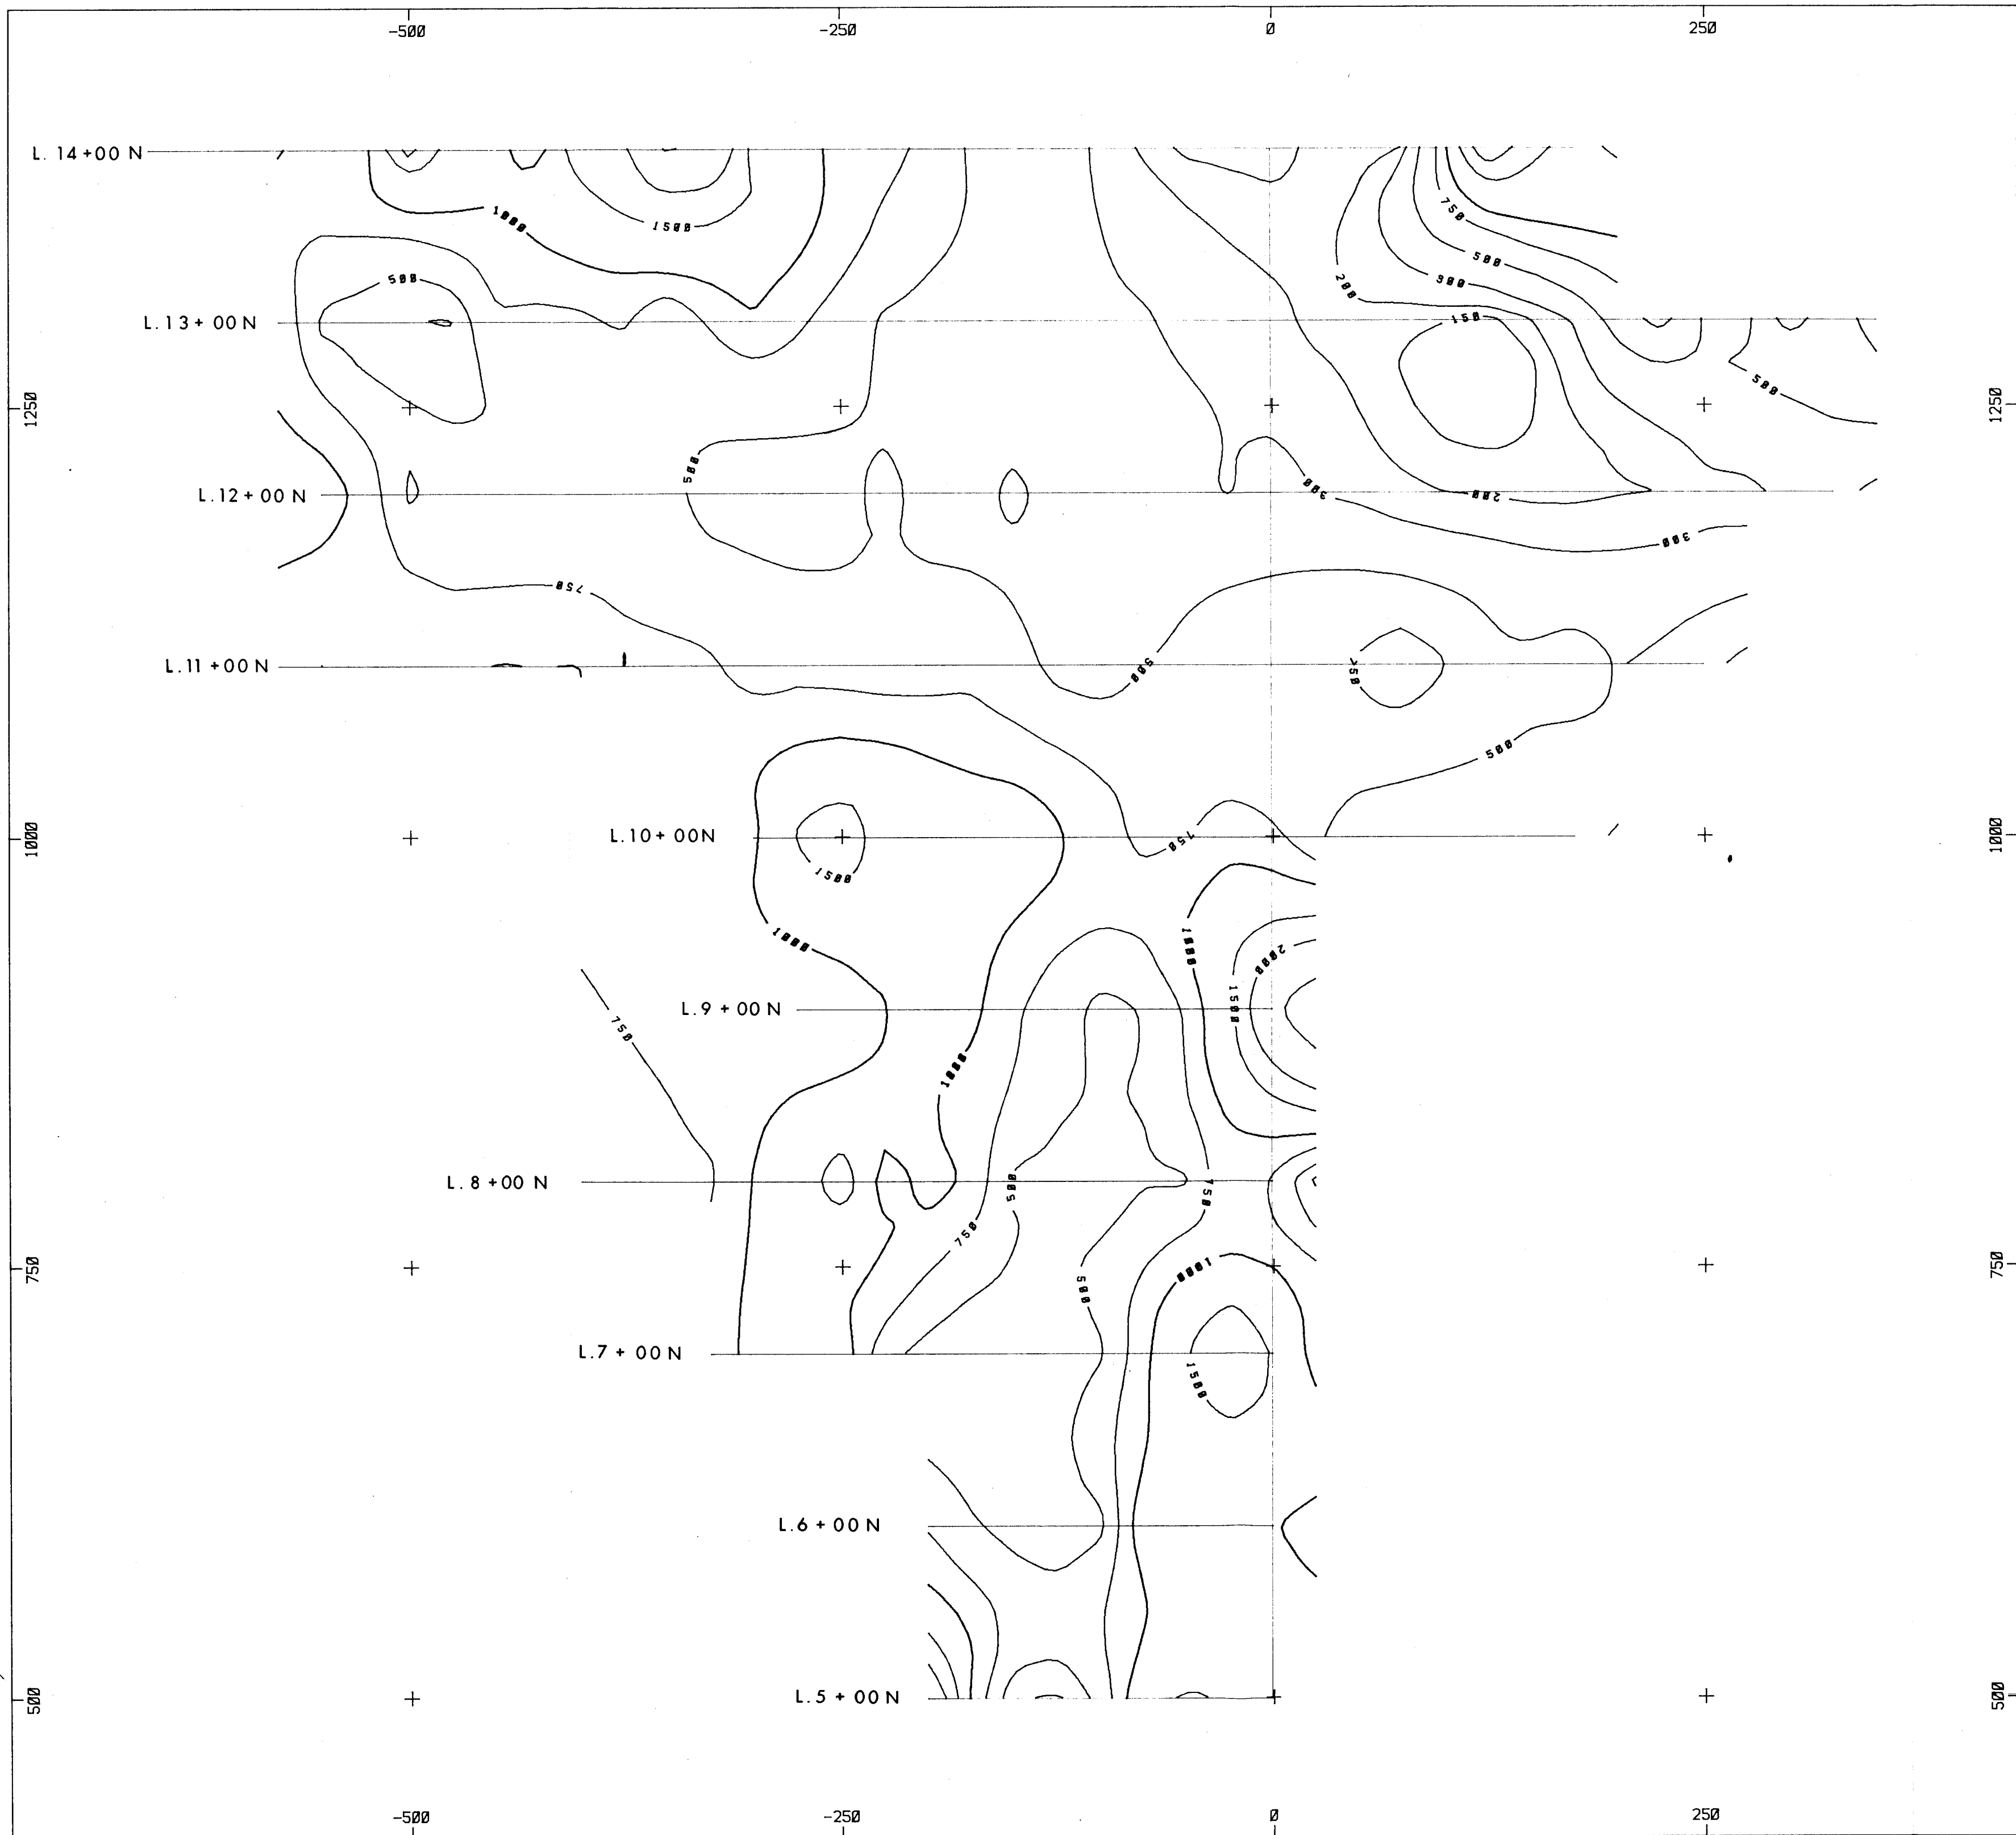

LEGEND:
 Pole dipole array a = 25 meters
 Current electrode E of potentials
 Logarithmic contours: 1.1.5.2.3.5.7.5.10
 Heavy contour lines: 100, 150, 200, 300, 400, 500, 750, 1000, 1500, 2000, 3000, 4000, 5000, 7500 meters

**GEOLOGICAL BRANCH
 ASSESSMENT REPORT**

16,471
 PLATE II





LORNEX MINING CORPORATION

NINA PROPERTY - Nino Lake, B.C.
 Germansen Landing Area

IPR11 Survey - N = 1
 Resistivity Contour Plan


DRAWN BY: Jmt DATE: November, 1987
 SCOTT GEOPHYSICS LTD.

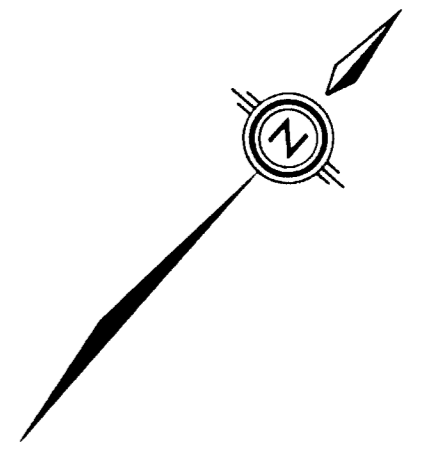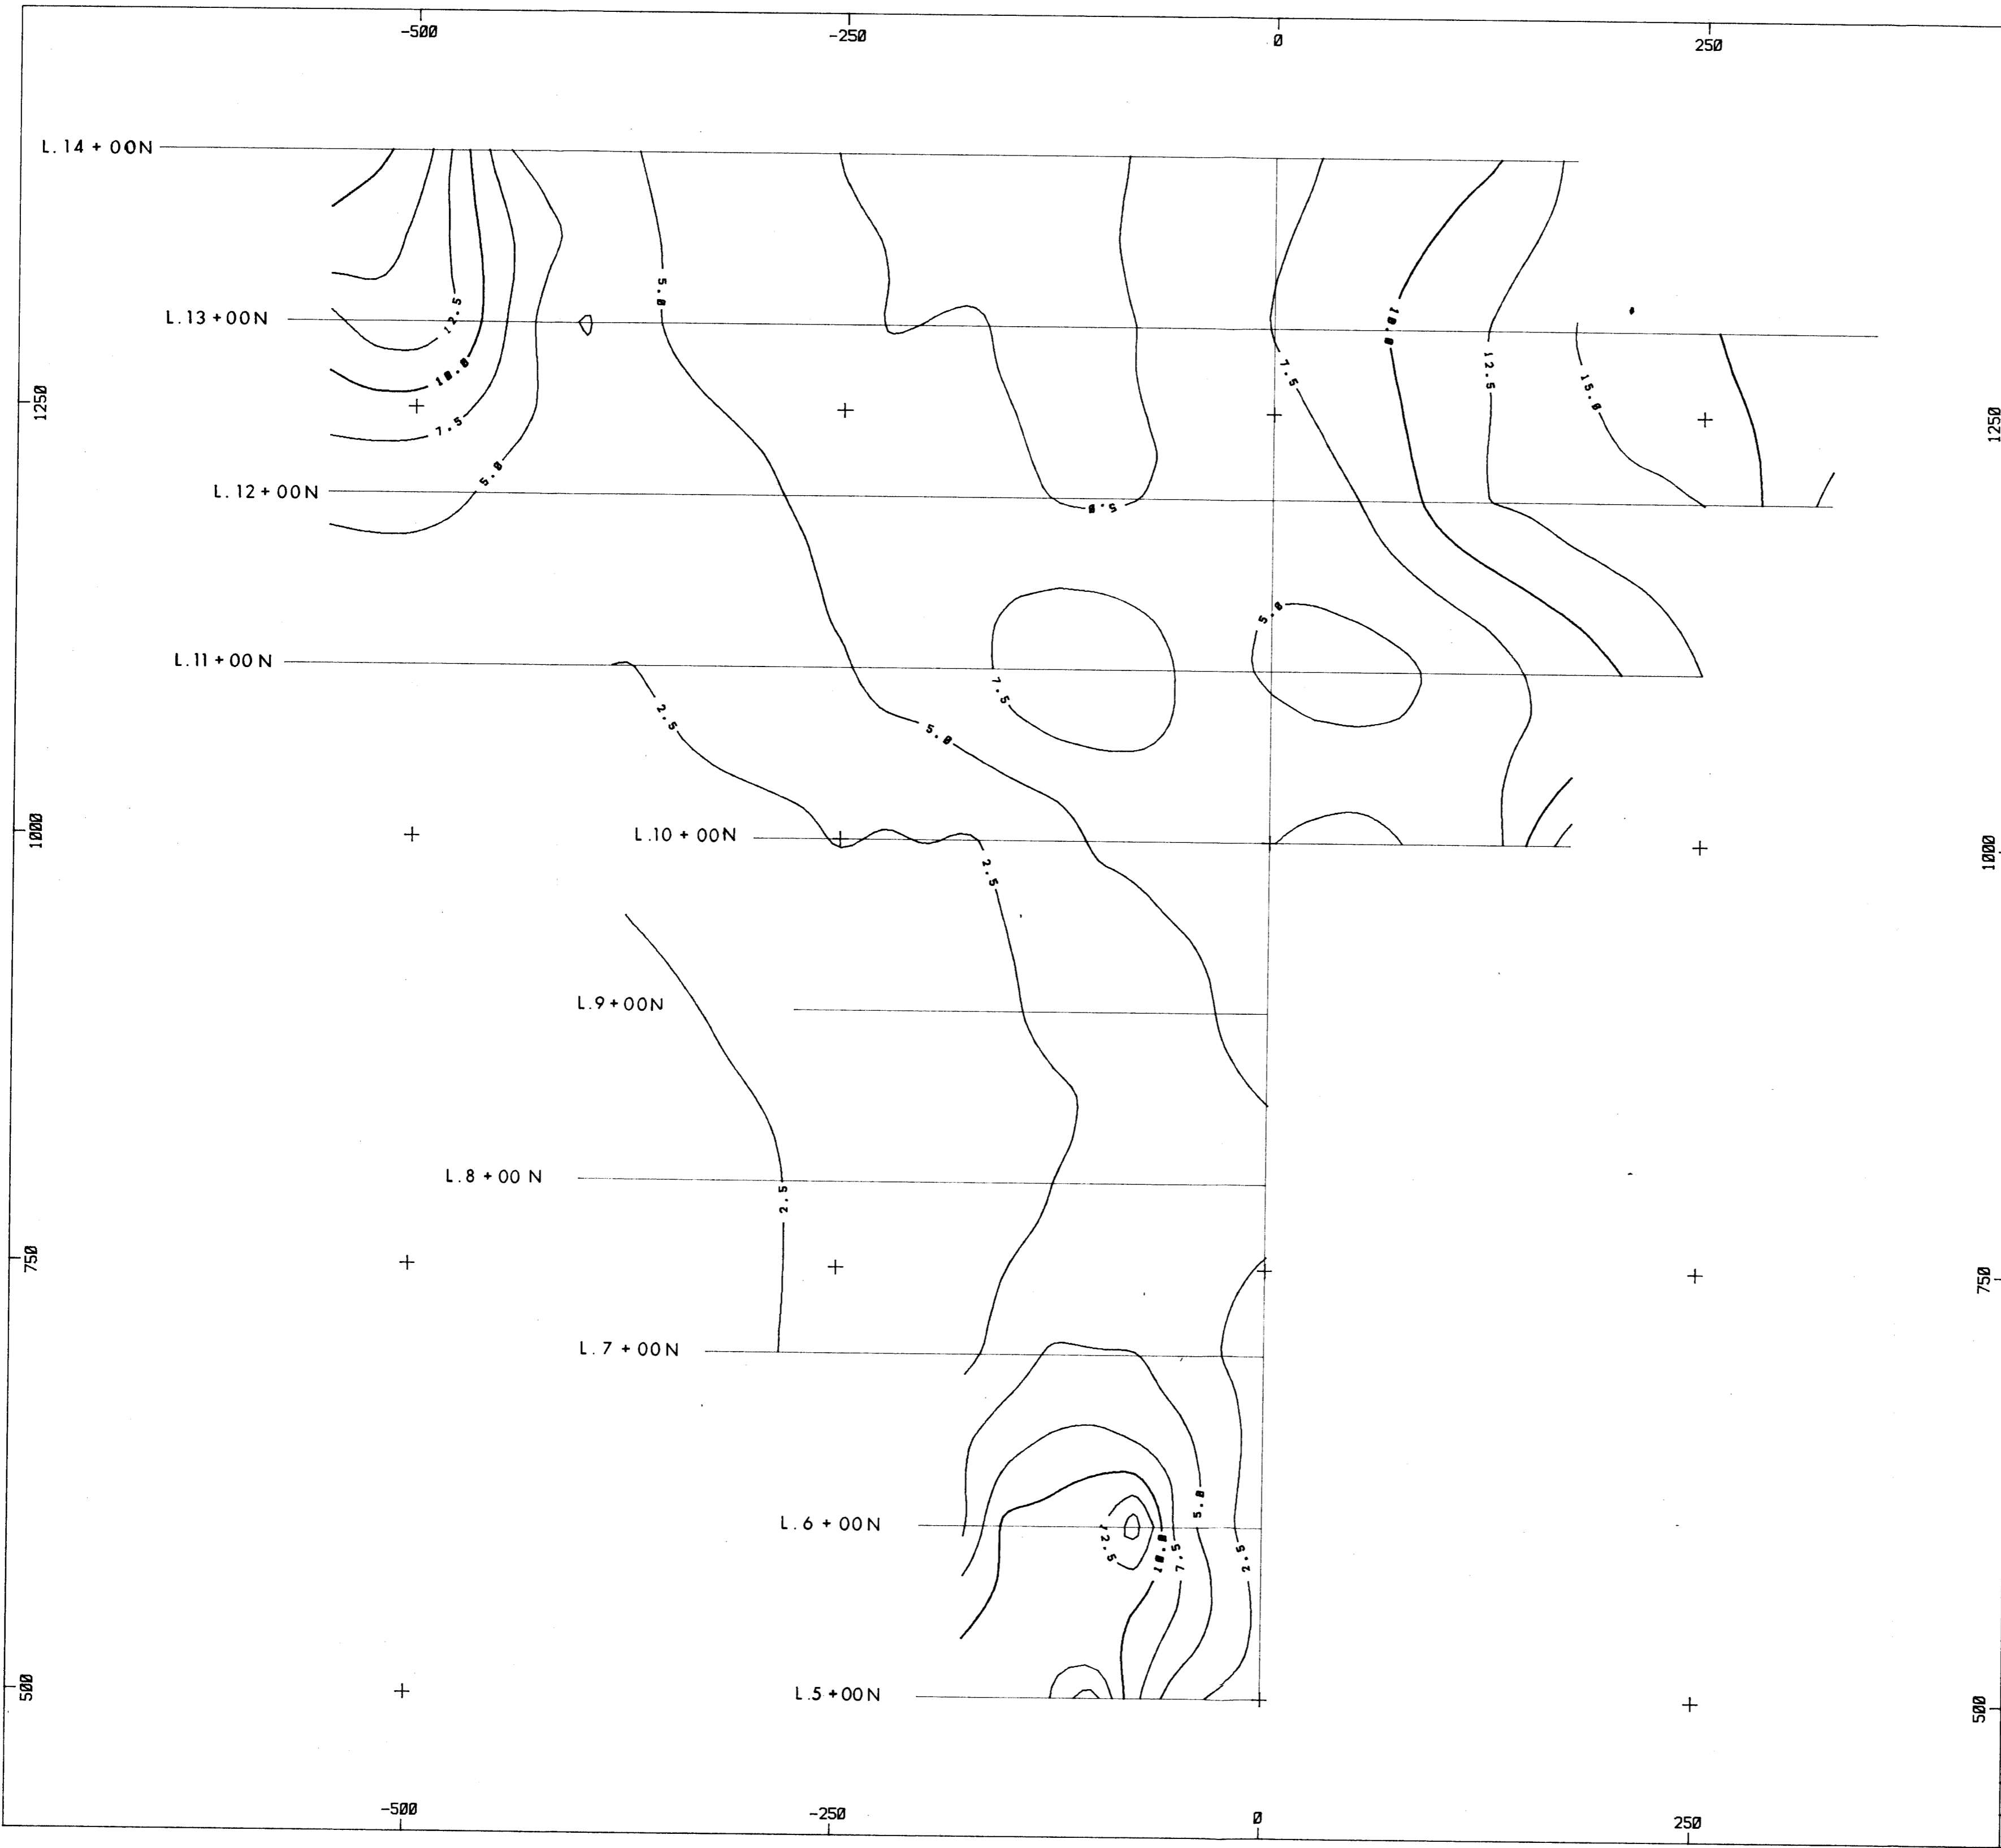



LEGEND:
 Pole dipole array $a = 25$ meters
 Current electrode E of potentials
 Contour Interval: 2.5 mV-sec/Volt

**GEOLOGICAL BRANCH
 ASSESSMENT REPORT**

16,471
 PLATE III



LORNEX MINING CORPORATION
 NINA PROPERTY - Nina Lake, B.C.
 Germansen Landing Area
 IPR11 Survey - N = 3
 Chargeability Contour Plan
 DRAWN BY: Jmt DATE: November, 1987
 SCOTT GEOPHYSICS LTD.

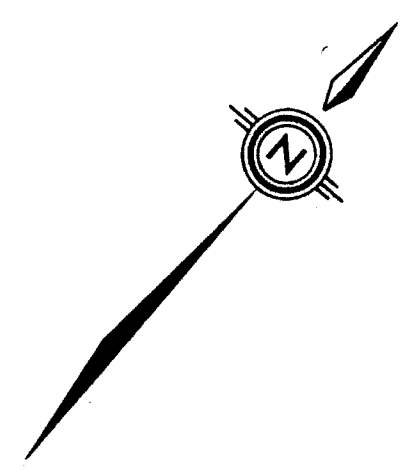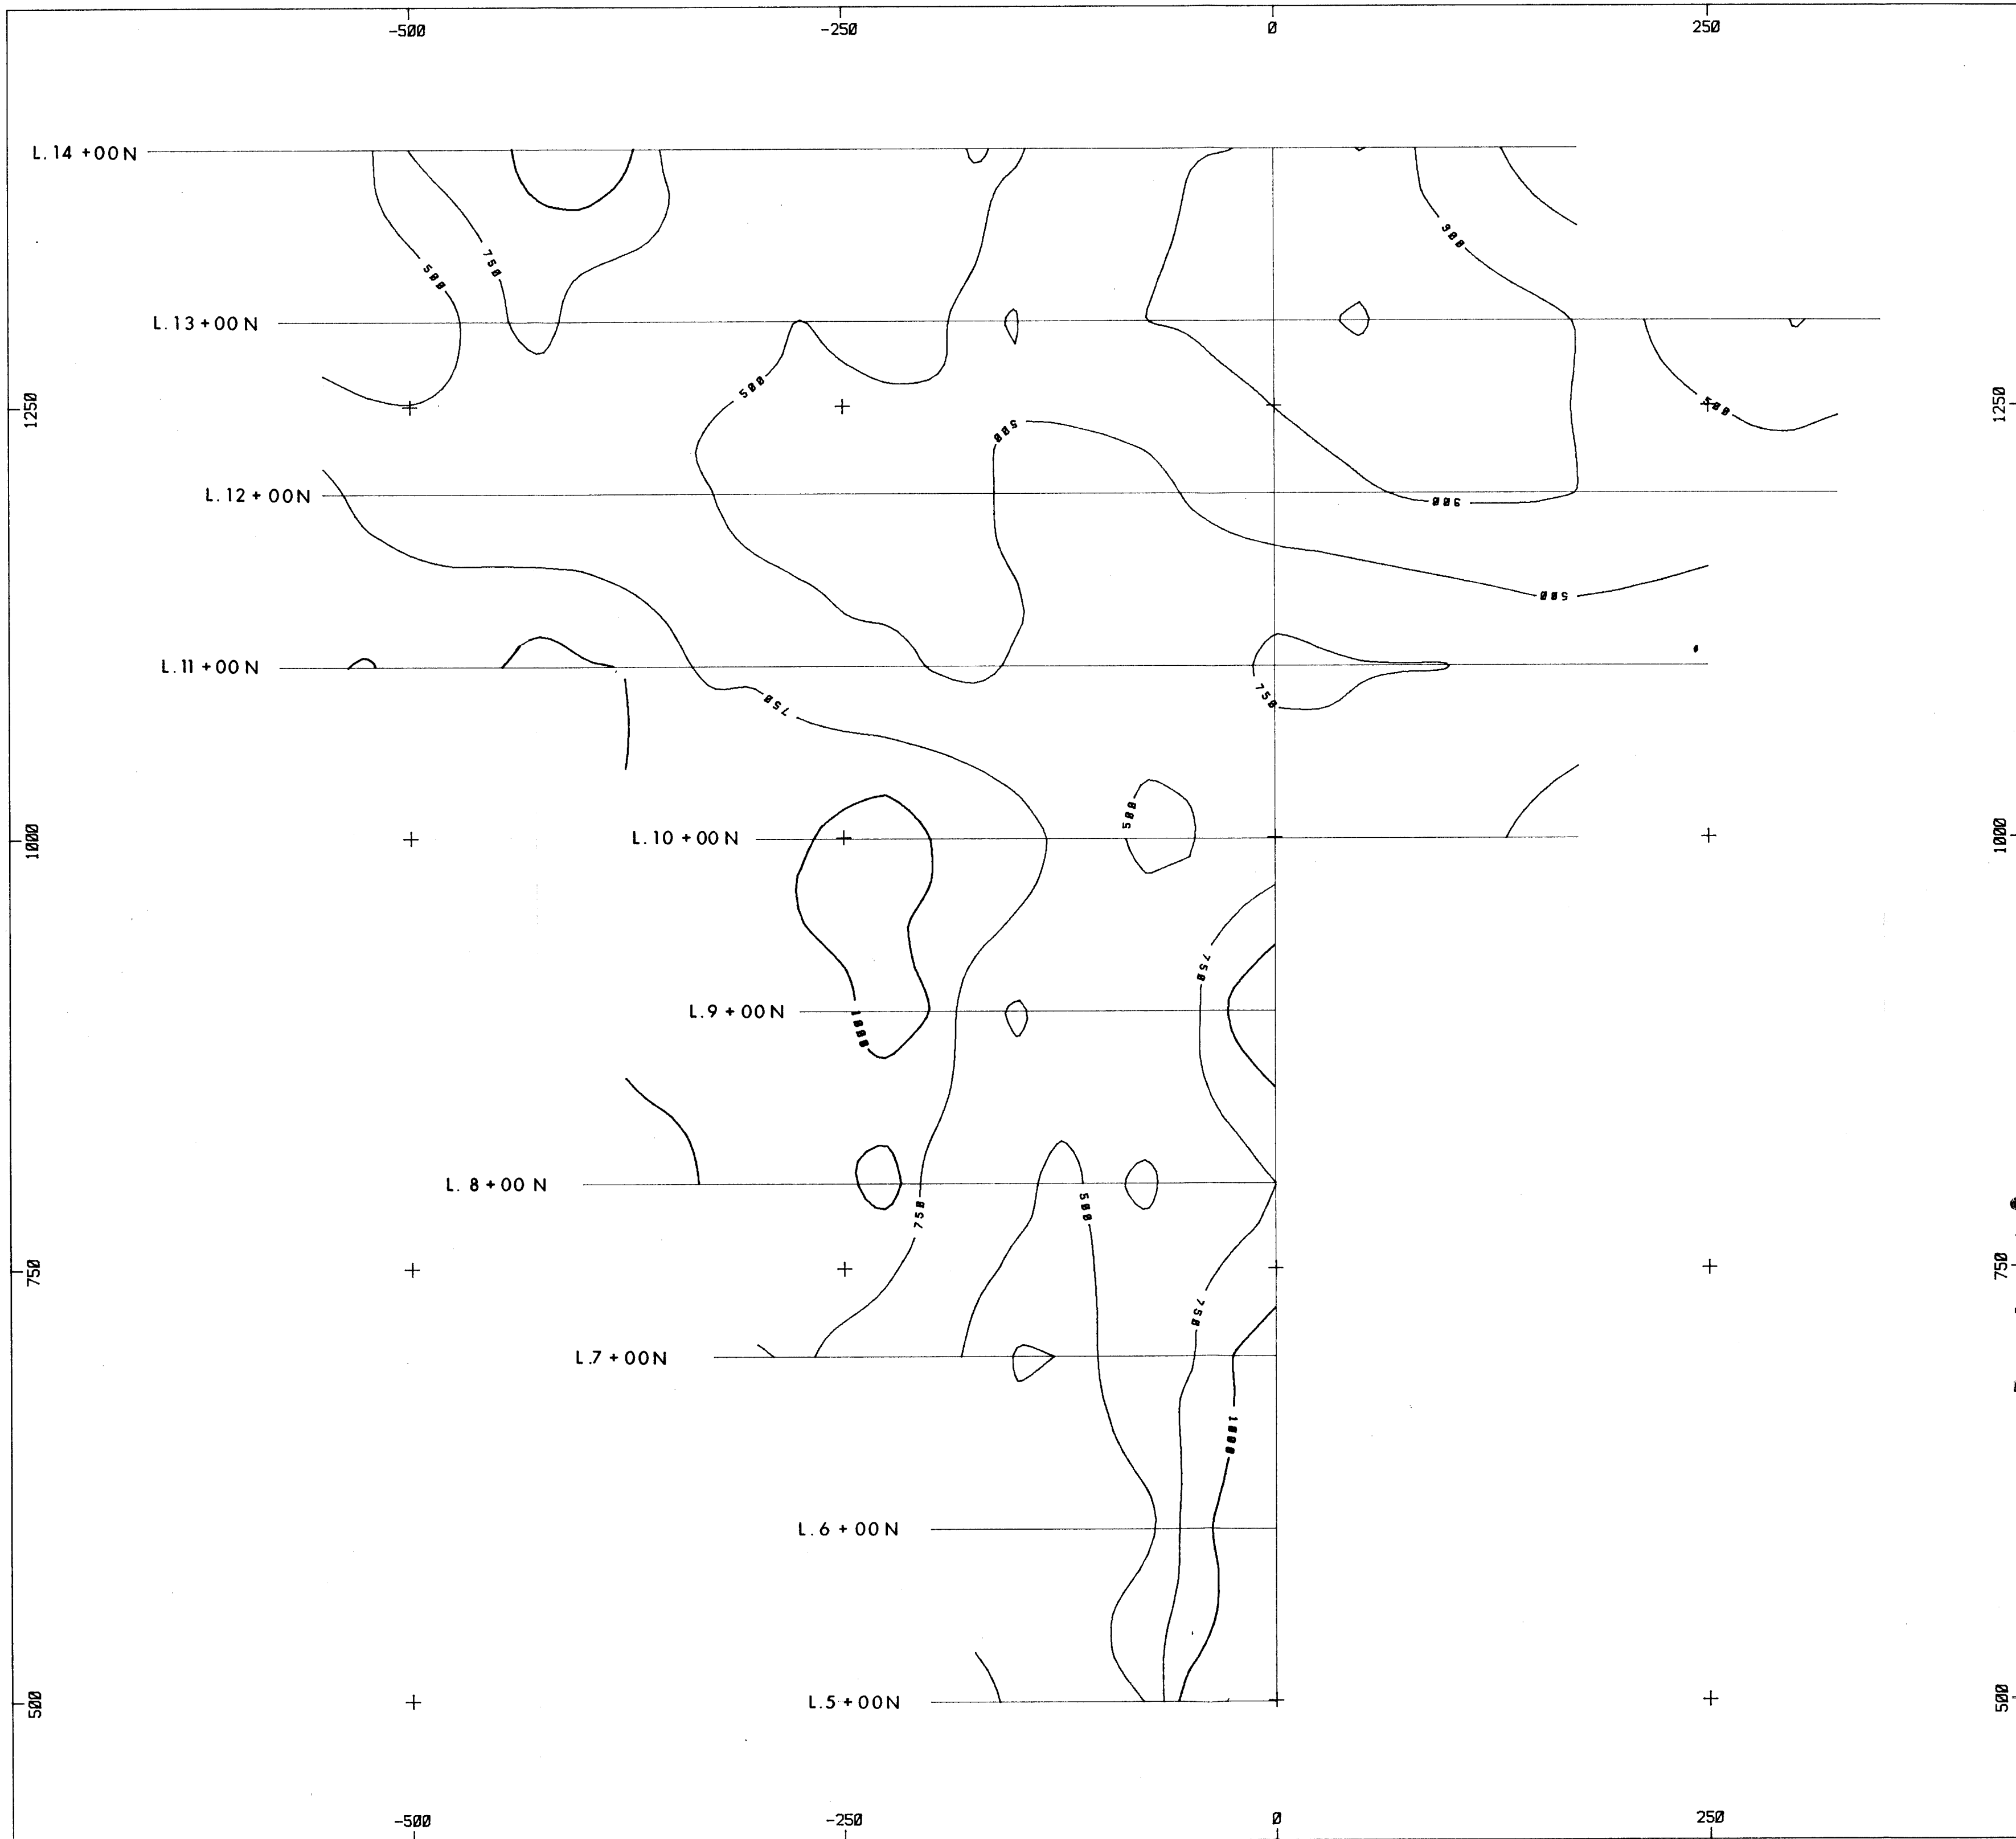

LEGEND:
 Pole dipole array a = 25 meters
 Current electrode E of potentials
 Logarithmic contours: 1.1.5.2.3.5.7.5.10
 Heavy contour lines: 100.1000 ohm meters

**GEOLOGICAL BRANCH
 ASSESSMENT REPORT**

16,471
 PLATE IV



LORNEX MINING CORPORATION
 NINA PROPERTY - Nina Lake, B.C.
 Gernansen Landing Area
 IPR11 Survey N = 3
 Resistivity Contour Plan
 DRAWN BY: jmt DATE: November, 1987
 SCOTT GEOPHYSICS LTD.