

ARIS SUMMARY SHEET

District Geologist, Kamloops

Off Confidential: 89.03.04

ASSESSMENT REPORT 17243

MINING DIVISION: Similkameen

PROPERTY: Hit-Miss
 LOCATION: LAT 49 40 48 LONG 120 31 50
 UTM 10 5505761 678146
 NTS 092H10E

CLAIM(S): Miss 2
 OPERATOR(S): First Western Platinum
 AUTHOR(S): Groeneweg, W.
 REPORT YEAR: 1988, 45 Pages

COMMODITIES
 SEARCHED FOR: Copper, Lead, Zinc

GEOLOGICAL
 SUMMARY: The claims are underlain by a moderate to steeply dipping north trending sequence of Upper Triassic Nicola Group alkaline volcanics, volcanoclastics and syenodioritic intrusives. Strong north trending shear zones correspond with a 2200 metre long by 100-800 metre wide highly silica-clay altered bleached zone which contains several per cent pyrite and minor chalcopyrite. East of the altered zone, a north trending 50 metre wide zone of quartz stockwork in weakly altered volcanics contains minor chalcopyrite, sphalerite, galena, silver and gold.

WORK
 FILE: Drilling
 DIAD 559.0 m 3 hole(s);NQ
 Map(s) - 1; Scale(s) - 1:2500
 SAMP 271 sample(s);ME

RELATED
 REPORTS: 10437,10962,13755
 MINFILE: 092HNE157

LOG NO: 0407	RD.
ACTION:	
FILE NO:	

DIAMOND DRILLING REPORT
ON THE MISS 2 CLAIM
SIMILKAMEEN MINING DIVISION
N.T.S. 92H-10E
Latitude: 49°41' North
Longitude: 120°32' West
Owned and Operated by:
CANADIAN NICKEL COMPANY LIMITED
Funded by:
FIRST WESTERN PLATINUM CORPORATION

FILMED

GEOLOGICAL BRANCH
ASSESSMENT REPORT

17,243

Drs. Wim Groeneweg
Senior Staff Geologist
Canadian Nickel Company Limited
Vancouver, B.C.

March 1988

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION	1
1.1 Location, Access, Physiography	1
1.2 Property Definition	1
1.3 History of the Property	2
1.4 1987 Drilling Program on the MISS 2 Claim	2
2.0 REGIONAL GEOLOGY	3
3.0 PROPERTY GEOLOGY	3
4.0 DIAMOND DRILLING	4
5.0 CONCLUSIONS	5
6.0 REFERENCES	6
7.0 STATEMENT OF EXPENDITURES	7
8.0 AUTHOR'S QUALIFICATIONS	8

APPENDICES

Appendix A - Borehole Logs

Appendix B - Analytical Results

FIGURES

Figure 1	Location Map	Scale 1:250,000	After Page 1
Figure 2	Claim Map	Scale 1:50,000	After Page 1
Figure 3	Geology and Borehole Locations	Scale: 1:2,500	In Pocket
Figure 4	Cross Section 2000S	Scale 1:1000	In Pocket

1.0 INTRODUCTION

This report covers work done on the MISS 2 claim during the period May 9, 1987 to June 15, 1987.

1.1 Location, Access, Physiography

N.T.S. sheet 92H-10E, Latitude: 49°41'N, Longitude: 120°32'W.

The MISS 2 claim is located 25 km north of Princeton, B.C. (fig. 1). The claim covers part of the SE slope of Missezula Mountain.

Access to the claim is provided by two alternate unpaved roads from Highway 5. The Summers Creek Road (Missezula Lake Road) cuts the eastern portion of the claim. This road branches off Highway 5 about 9 km north of Princeton. The central part of the claim is accessible by the Dillard Creek logging road which branches off Highway 5 about 48 km north of Princeton. It is then 23 km south to the claim.

Elevations range from 940 m at Summers Creek to 1460 m at the western claim boundary. The western margin is fairly flat, but most of the claim is on the steep slopes of the Summers Creek Valley. The claim is heavily wooded.

1.2 Property Definition

The MISS 2 claim is part of the HIT/MISS property, which consists of the following claims (see fig. 2):

<u>Claim Name</u>	<u>Units</u>	<u>Record No.</u>	<u>Date Recorded</u>	<u>Expiry Date</u>
HIT 1	9	1489	Aug. 5, 1981	Aug. 5, 1991
HIT 2	3	1490	Aug. 5, 1981	Aug. 5, 1991
HIT 3	4	1491	Aug. 5, 1981	Aug. 5, 1991
HIT 4	6	2166	June 12, 1984	June 12, 1991
MISS	15	1423	June 10, 1981	June 10, 1991
MISS 2	16	2821	March 9, 1987	March 9, 1988
MISS 3	12	2822	March 9, 1987	March 9, 1988

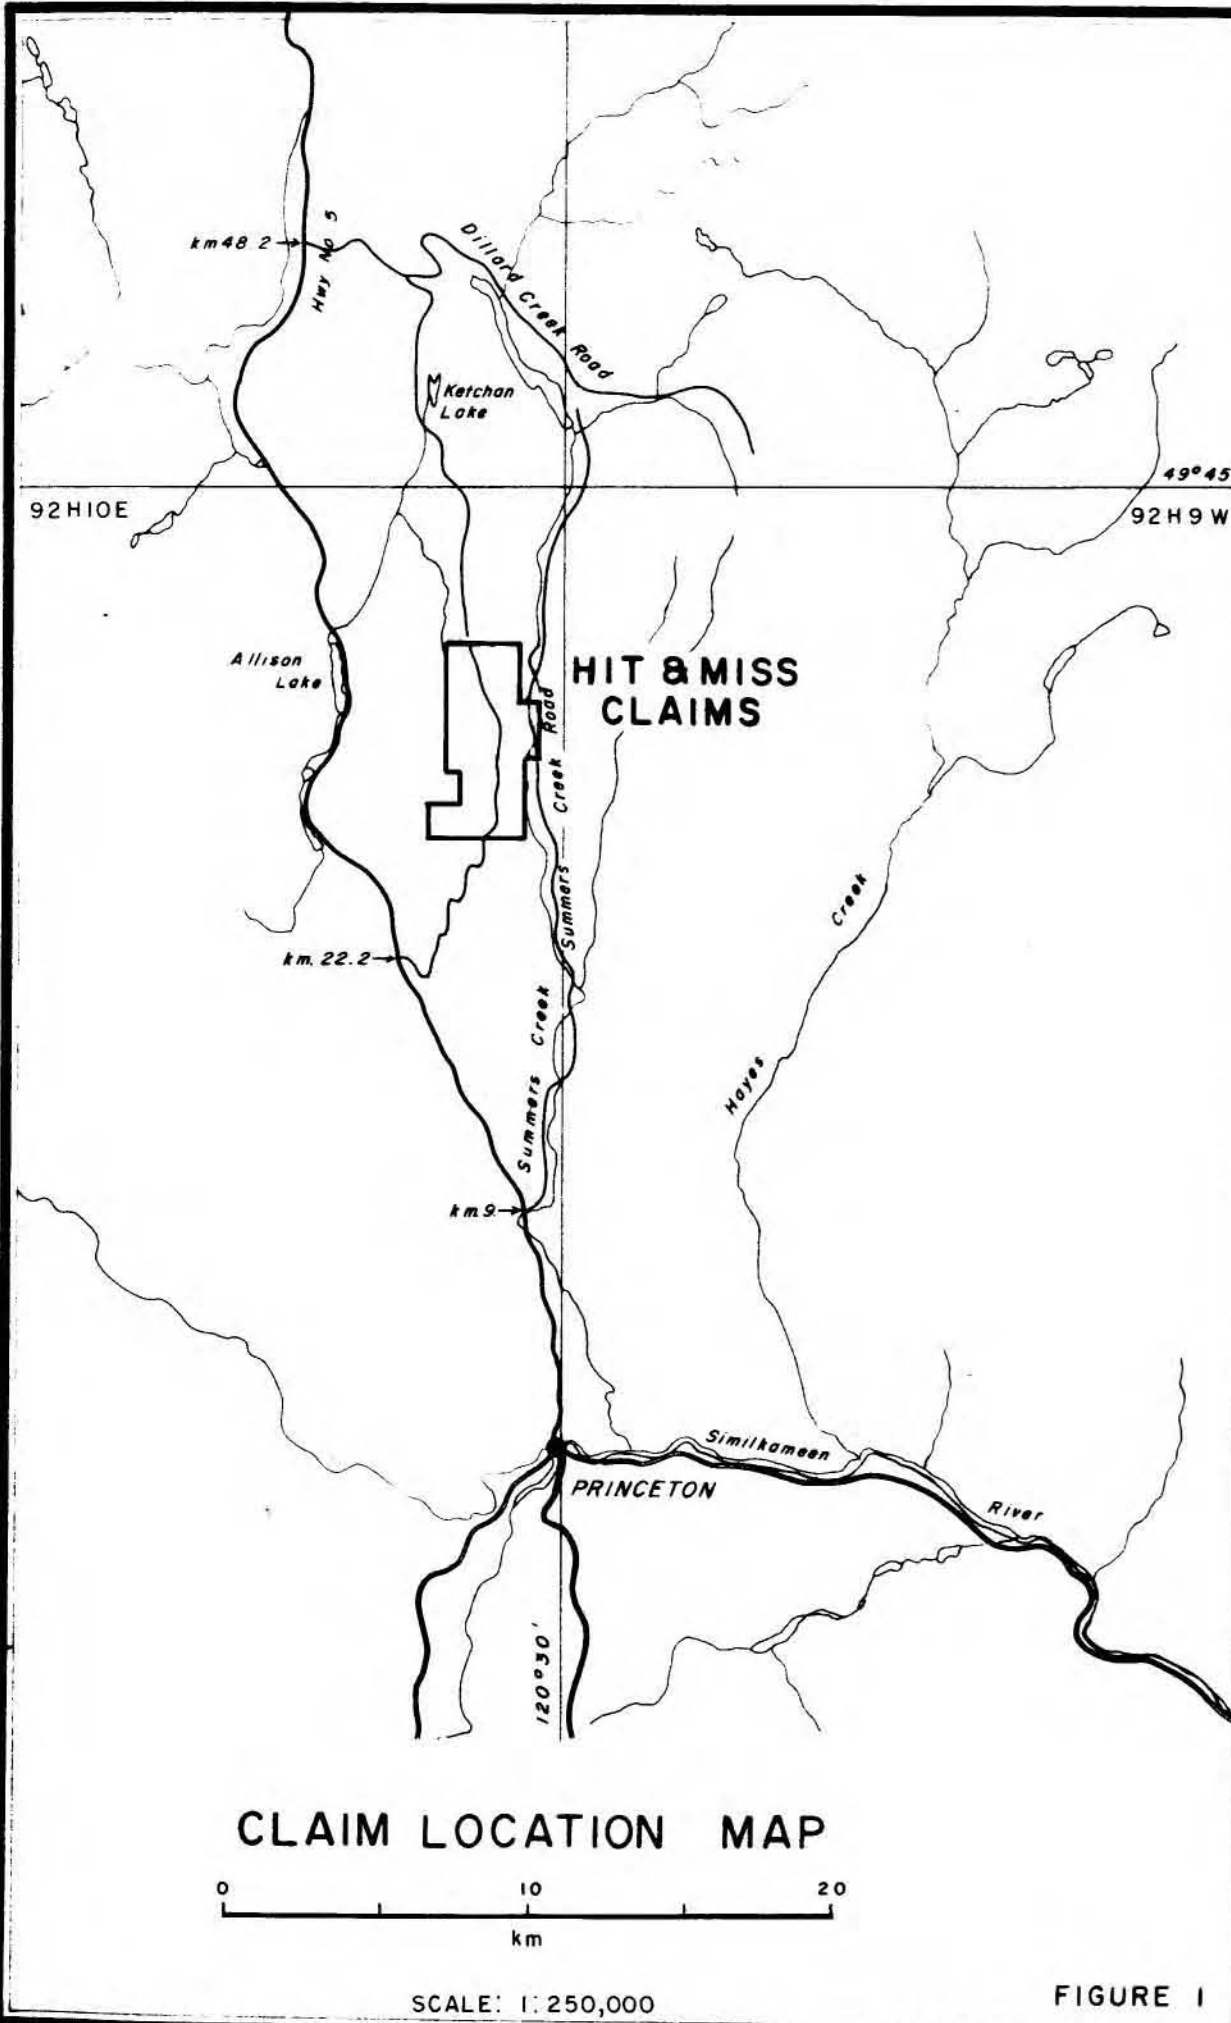


FIGURE 1

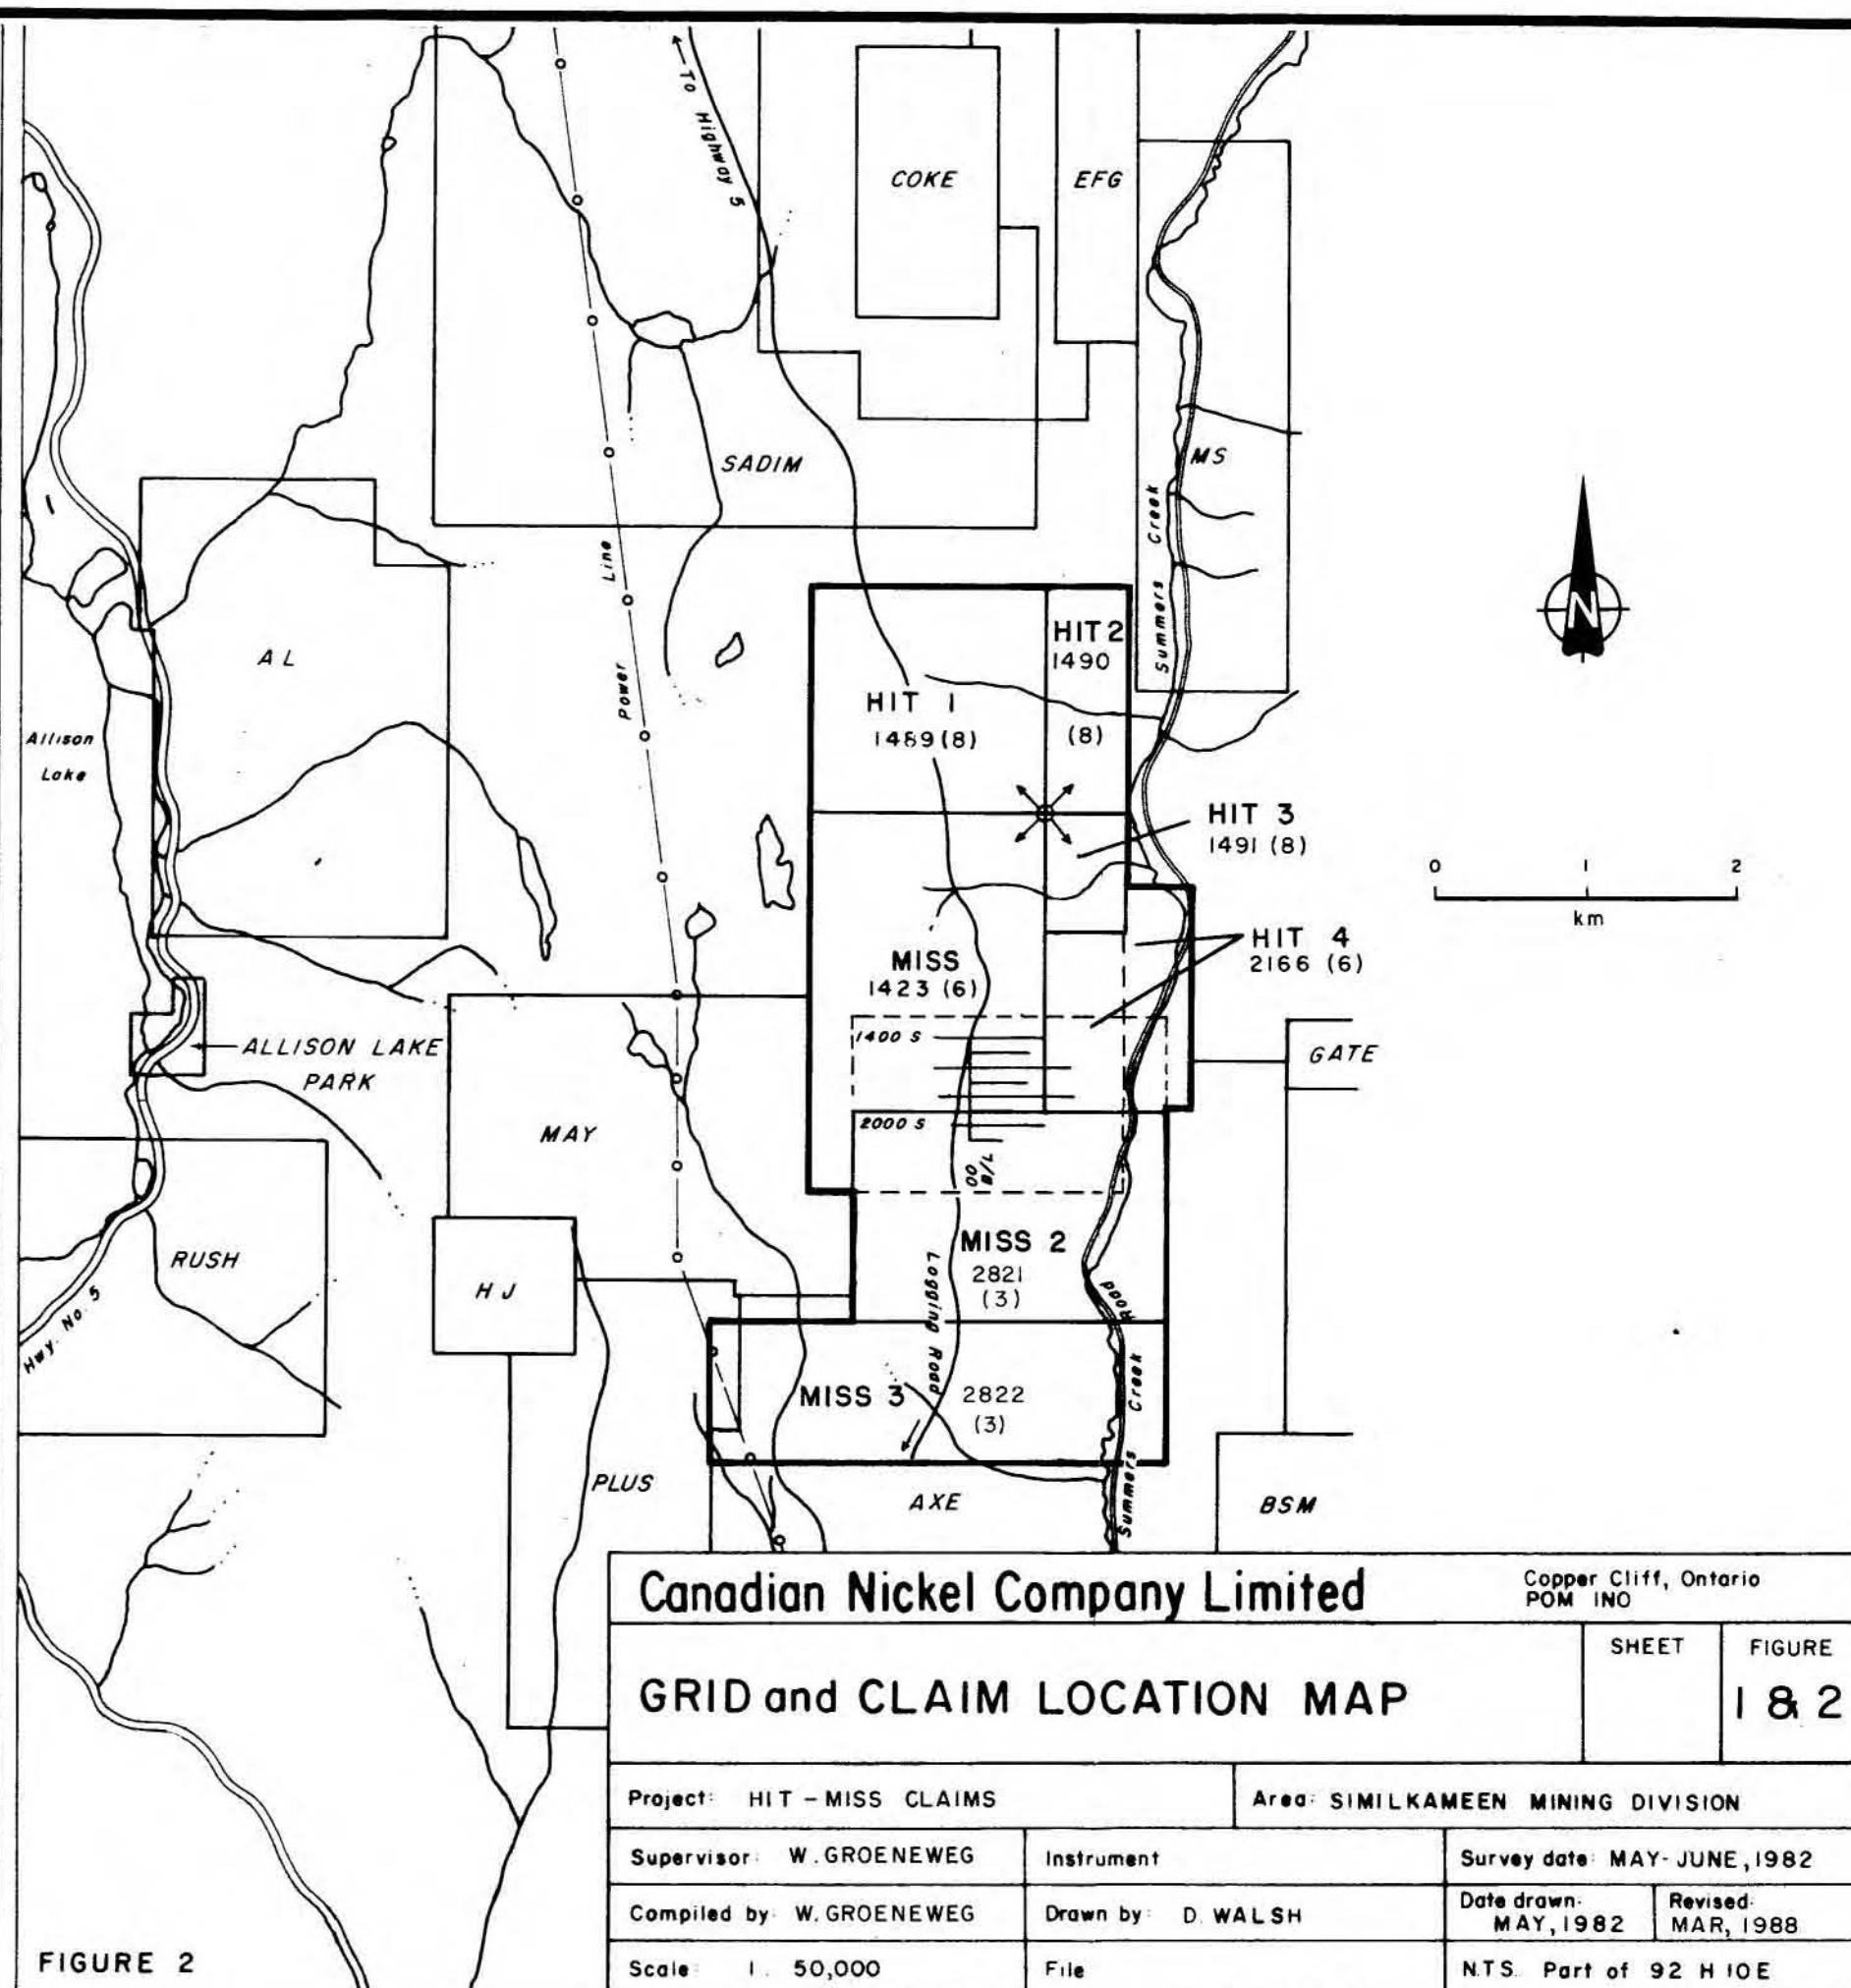


FIGURE 2

The HIT/MISS property is owned by Canadian Nickel Company Limited and optioned to First Western Platinum Corporation. During 1987, Canadian Nickel was the operator and the work was funded by First Western Platinum. The 1987 work was filed on the HIT 4, MISS, MISS 2 and MISS 3 claims.

1.3 History of the property

Portions of the HIT/MISS claims were previously held by Adonis Mines Ltd., Amax Potash Ltd., Texas Gulf Sulphur Co., and Sheba Copper Mines. The northeast portion of HIT 1 was mapped and sampled by Sheba Copper Mines Ltd. (Saleken, 1972) formerly held as the MDA-CORB claims. The B0 prospect (location approximate) was evaluated in 1970 by Texas Gulf Sulphur who completed reconnaissance soil sampling and mapping.

The HIT 1-3 and MISS claims were staked by Canadian Nickel in 1981. Exploration consisted of gridding, prospecting, geological mapping, rock and soil geochemical surveys, and VLF-EM and magnetometer geophysical surveys (Peto, 1982). During 1982, gridding, prospecting, geological mapping, rock and soil geochemical surveys, altimeter, VLF-EM, and magnetometer geophysical surveys were completed (Debicki, 1982). In 1983, the southern portion of the property was re-gridded and detailed geological mapping, rock geochemical survey, x-ray diffraction and fluid inclusion studies and soil gas survey (gas chromatography: CO₂, CS₂, COS, H₂S, SO₂) were completed (Booth, 1983; Clifton, 1984). The HIT 4 claim was staked in June 1984.

During 1984, Canadian Nickel carried out gridding, prospecting, geological mapping, rock sampling and an induced polarization survey on the southern portion of the property (Debicki, 1985). The MISS 2 & MISS 3 claims were staked in March 1987.

1.4 1987 drilling program on the MISS 2 claim

During the period May 9, 1987 to June 15, 1987, three NQWL diamond boreholes were drilled under contract by Beaupre Diamond Drilling Ltd.

for a total of 559 m. The core is stored on the MISS claim.

2.0 REGIONAL GEOLOGY

The general geology of the HIT/MISS claims area is outlined by G.S.C. Map 888A (Rice, 1947) and more recently by B.C.D.M. Bulletin 69 (Preto, 1979).

Upper Triassic Nicola Group rocks, underlying much of the immediate area, consist of subareal and submarine andesite and basalt flows, breccias, conglomerates, sediments, volcanoclastics and lahar deposits which have been intruded by synvolcanic diorite intrusives. Granite, granodiorite, quartz monzonite and diorite phases of the Upper Triassic-Lower Jurassic Allison Lake Pluton occupy much of the area several km west of the property. The Upper Cretaceous Summers Creek Stock, approximately one km in diameter composed of granodiorite and diorite, occurs several km to the south of the claim group.

The Nicola Group sequence, striking roughly north-south, in the vicinity of the HIT/MISS claim group, is part of the Nicola Group Central Belt (Preto, 1979) approximately 5-6 km wide and bounded on the east by the Summers Creek Fault. The area is geologically similar, and along strike to, the area hosting the Newmont Copper Mountain - Ingerbelle Cu deposit 50 km to the south.

The Nicola Group rocks are disrupted by several large north-south trending, high angle fault zones.

3.0 PROPERTY GEOLOGY

Geologically, the HIT/MISS claim group is underlain by a moderate to steeply dipping north-south trending sequence of Upper Triassic Nicola Group volcanics, volcanoclastics, sediments and synvolcanic diorite intrusives. Minor copper mineralization is associated with small fracture zones. On the east side of the property, a 2200 m long by 100-800 m wide highly altered, bleached, white to rust coloured, pyritic, quartz and illite rich zone is representative of extreme acid

alteration (epithermal) overprinted on advanced argillic alteration (porphyry). A stockwork of poorly exposed quartz-siderite veins and veinlets containing pyrite, chalcopyrite, galena, sphalerite and argentite has been traced for 350 m along the sheared, eastern contact between the alteration zone and fresh volcanics. Post mineral faults appear to disrupt the mineralization.

The best rock values from the mineralized quartz-siderite veins and veinlets were 65 ppb Au, 3.0 ppm Ag, 81 ppm As, 459 ppm Cu, 2766 ppm Pb, 7152 ppm Zn. The mineralization occurs within a 350 m by 350 m soil anomaly. Results of the induced polarization survey indicate higher chargeability and lower resistivity over the alteration zone compared to the adjacent fresh volcanics.

Anomalous values of Au, Ag, Hg, As, Cu, Ba, Zn and Pb occur in rocks and soils in the southern portion of the alteration zone (see fig. 3).

4.0 DIAMOND DRILLING

The zone of extreme acid alteration was interpreted to represent the highest part of an epithermal system which was overprinted on a hydrothermal porphyry system. To test the presence of an epithermal precious metal deposit below the alteration zone and to test the grade of the stockwork mineralization east of the alteration zone, three NQWL diamond drill holes were drilled on section 2000S, for a total of 559 m. The locations are shown in figure 3 and a summary is given in the following table:

<u>Hole Number</u>	<u>Grid Coordinates</u>	<u>Dip</u>	<u>Azimuth</u>	<u>Length</u>	<u>Collar Elevation</u>
72409	2000S/109W	-45°	90°	178 m	1448 m
72411	1994S/21E	-61°	90°	119 m	1435 m
72412	2007S/85E	-60°	270°	262 m	1412 m

Although drilling was very difficult due to the strong shearing, both the alteration zone and the stockwork zone were cross-cut complete-

ly (see fig. 4).

The alteration zone was found to continue to at least 300 m below surface. The rocks intersected consist of Nicola andesites and andesitic pyroclastics dipping 30° to the east, which were strongly altered to silica, clay, sericite and chlorite. Mineralization consists of irregularly distributed pyrite and occasionally minor chalcopyrite in quartz veinlets. Gold and silver values were not anomalous (see boreholes 72409 and 72412).

The stockwork zone, east of the alteration zone, was found to be about 50 m in true width. The zone was intersected in boreholes 72411 and 72412 (see fig. 4). The quartz stockwork cuts weakly altered Nicola andesites and andesitic pyroclastics. The veinlets contain pyrite, chalcopyrite, sphalerite and galena in anomalous concentrations, but not in economic grades.

The best values received were:

<u>BH</u>	<u>Intersection</u>	<u>Au in ppb</u>	<u>Ag in ppm</u>	<u>% Cu</u>	<u>% Pb</u>	<u>% Zn</u>
72412	47.85- 49.07 m	785	14.9	0.03	0.05	0.17
	108.66-110.66 m	79	5.2	0.3	0.08	1.5
	132.80-134.85 m	49	5.8	0.9	0.06	0.8

5.0 CONCLUSIONS

Diamond drilling on the MISS 2 claim intersected the two zones of interest completely. The alteration zone did not show any gold-silver mineralization. It is concluded that this strongly quartz-sericite-clay altered and strongly sheared zone represents a zone of shearing in a porphyry copper environment and not an epithermal overprint. The stockwork zone is about 50 m wide and contains anomalous values in Cu, Zn, Pb, Ag and Au. Further exploration of this stockwork is warranted.

6.0 REFERENCES

1. Booth, B.R., 1983; Miss Claim X-Ray Diffraction, Fluid Inclusion and Illite Crystallinity Study of an Argillic Alteration Zone in South-Central British Columbia, Independent Study, Dept. of Geological Sciences, McGill University, 44 p.
2. Christoffersen, J.E., De Paoli, G.M., and Hodgson, C.J., 1971; Geological, Geochemical and Geophysical Report on the Ketchan Creek Property (Rum Claims); B.C. Assessment Report #3365.
3. Clifton, G., 1984; Discussion of Soil Gas Data, Miss Claims, British Columbia; Company Report.
4. Debicki, E.J., 1982; Geological, Geochemical and Geophysical Report on the Hit 1-3 and Miss Claims; B.C. Assessment Report #10962.
5. Debicki, E.J., 1985; Geological, Geochemical and Geophysical Report on the HIT and MISS claims; B.C. Assessment Report #13755.
6. Peto, P., 1982; Prospecting and Geochemical Report on the Hit 1-3 and Miss Claims, Canadian Nickel Company Limited; B.C. Assessment Report #10437.
7. Preto, V.A., 1979; Geology of the Nicola Group between Merritt and Princeton; B.C.D.M. Bulletin #69.
8. Preto, V.A., 1972; Geology of the Allison Lake-Missezula Lake Area, B.C.; B.C.D.M. Preliminary Map No. 17, Scale 1:15,840.
9. Preto, V.A., 1981; Reconnaissance Rock Geochemistry of the Nicola and Kingsvale Groups between Merritt and Princeton; B.C.D.M. Paper 1981-2.
10. Rice, H.M.A., 1960; Geology and Mineral Deposits of the Princeton Map Area, B.C.; G.S.C. Memoir 243.
11. Rice, H.M.A., 1947; Princeton Geology Map; G.S.C. Map 888A, Sheet 92H (East Half), Scale 1:253,440.
12. Salekan, L.W., 1972; Report on the Geology, Geochemistry and Magnetism, Princeton Claims, South MDA - RCS and North MDA - CORB Claim Groups, B.C. Assessment Report #4227.

7.0 STATEMENT OF EXPENDITURES

E. Hunter, contract geologist

May 3 - June 8, 1987

Invoice (including meals, truck and motorhome rental) \$10,570

W. Groeneweg, supervising geologist

Field: 7 days

Report: 3 days \$ 3,000

Diamond Drilling (by Beaupre Diamond Drilling Ltd.)

559 m, NQWL \$56,862

Analytical (by Acme Analytical Laboratories Ltd.)

271 core samples @ 15.75 \$ 4,268

\$74,700

8.0 AUTHOR'S QUALIFICATIONS

I, Wim Groeneweg, of the City of Richmond, Province of British Columbia, do hereby certify that:

1. I am Senior Staff Geologist with Canadian Nickel Company Limited with offices at 512-808 Nelson Street, Vancouver, B.C. V6Z 2H2.
2. I am a graduate of the Univeristy of Leiden, The Netherlands, with a doctorandus degree (Master of Science equivalent) in geology (1966).
3. I have practised my profession as geologist since 1966.
4. I am a Fellow of the Geological Association of Canada, a member of the Society of Economic Geologists and a member of the Canadian Institute of Mining and Metallurgy.
5. I have partaken in and supervised the work described in this report on behalf of Canadian Nickel Company Limited.

Dated at Vancouver, British Columbia this seventeenth day of March, 1988.



W. Groeneweg

APPENDIX A

Borehole Logs

Ed Hunter - Geologist - B.Sc. 1970 U.B.C

ASSAYS CHK'D.....
DATE.....

BOREHOLE PROPERTY	PROP#	LEVEL	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	CO-ORD SYSTEM	LATITUDE METRES	DEPARTURE METRES	ELEVATION METRES	STARTED MO DY YR	COMPLETED MO DY YR
72409-0 HIT & MISS		SURF	178.00	090 00	-45 00		S 2000.	W 109.	1448.	05 09 87	05 15 87

INCLINATION AND AZIMUTH TESTS

DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN
45.7		-43 30	91.1		-43 30	138.4		-43 00			

LOGGED BY ED HUNTER NTS # 92 H 10E COUNTRY IS CANADA PROV/STATE IS BC GRID BRNG IS 000 90 SHT# ANDM#

ASSAY FOR * LA CR MG TI B AL NA K W

ASSAY FOR * AU AG AS BA SB CU NI ZN MO PB CO MN FE U TH SR CD BI V CA P

COMMENTS

DRILLED NO BY BEAUPRE DIAMOND DRILLING. HOLE IS LOCATED 2000 M SOUTH AND 892 M EAST OF NW CORNER OF MISS CLAIM. CORE IS STORED NEAR GRID COORDINATE 1600S/100W

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM AG	ELEMENT PPM CU	ELEMENT PPM PB	ELEMENT PPM ZN	ELEMENT PPM AS	ELEMENT PPM
0.0	0.0				COLLAR								
1.83	1.83			OB	GLACIAL OVERBURDEN AND WEATHERED BED ROCK, NO CORE RECOVERY								
4.08	2.25	FX080515	MVM	VOLC	INTENSE QTZ-CLAY ALTN OBSCURES ORIGINAL COMPOSITION OF THE ROCK. WHITE, 2 TO 4 % DISS PY, HLY OXIDIZED ON FRACTURES, HLY FRACTURED AND BROKEN. HAS THE APPEARANCE OF A PYRITIC RHYOLITE. ABOUT 50 % RECOVERY	0.004	0.100	8.000	12.000	18.000	11.000		
6.00	1.92	FX080516	MVM	VOLC	AS ABOVE, MODERATELY FRACTURED WITH HEAVY LIMONITE ON THE FRACTURES THAT ARE AT 30, 45 AND 70 DEGREES, 3 TO 5 % DISS PY OFTEN OCCURRING IN CLUSTERS, MINOR AMOUNTS OF SOFT WHITE SIDERITE ? AS IRREGULAR VEINLETS CUTTING THE SLCD GROUNDMASS, 75 % RECOVERY	0.002	0.100	18.000	5.000	22.000	5.000		
8.00	2.00	FX080517	MVM	VOLC	AS ABOVE, WEAKLY FRACTURED WITH HEAVY LIM ON FRACTURES, WEAKLY SHEARED AT 35 DEGREES, 3 TO 5 % FRESH PY WITH PY CLUSTERS ASSOCIATED WITH POCKETS OF SIDERITE ? 95 % RECOVERY	0.006	0.200	16.000	3.000	30.000	6.000		
10.00	2.00	FX080518	MVM	VOLC	AS ABOVE, DECREASE IN FRACTURES TO ABOUT 5 PER METER WITH LESS LIM COATING THAN ABOVE, WEAKLY SHRD AT 30 TO 35 DEGREES WITH 3 TO 5 % PY DISS BUT FAVOURING THE SHEAR PLANES, POSSIBLY MINOR PO, 100 % RECOVERY	0.001	0.100	13.000	4.000	31.000	6.000		
12.00	2.00	FX080519	MVM	VOLC	AS ABOVE, LOCALLY HLY BROKEN AND OXIDIZED WITH MINOR CHLORITE, FRACTURED AT 45 DEGREES, WEAKLY SHRD AT 30 DEGR EES, 90 % RECOVERY	0.001	0.100	16.000	3.000	33.000	4.000		

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	
						DEG	AU PPM	AG PPM	CU PPM	PB PPM	ZN PPM	AS PPM
14.00	2.00	FX080520	MMW	VOLC	AS ABOVE, 98 % RECOVERY		0.001	0.100	12.000	3.000	31.000	8.000
15.24	1.24	FX080521	MMW	VOLC	AS ABOVE, STRONG SHEARING AT 30 DEGREES. MINOR LIM ON FRACTURES, 3 TO 5 % DISS PY, 80 % RECOVERY	30	0.001	0.100	14.000	4.000	19.000	3.000
16.52	1.26	FX080522	MMW	VOLC	AS ABOVE, HLY BROKEN, SEVERAL CROSS CUTTING QTZ-CHLORITE-FELDSPAR ? VEINS SUBPARALLEL TO CORE AXIS UP TO 1 CM WIDE WITH OPEN SPACES, CORE IS TOO BROKEN TO DETERMINE TOTAL PERCENTAGE OF VEINS IN THIS INTERVAL, 75 % RECOVERY, NUMEROUS BLOOD RED SPECKS IN THE VEINS POSSIBLY JUST HEMATITE.		0.002	0.200	9.000	2.000	61.000	3.000
18.00	1.48	FX080523	MMW	VOLC	AS AT 15.24 M BUT HAS MINOR TO MODERATE AMOUNTS OF CHLORITE ASSOCIATED WITH THE PY, 95 % RECOVERY		0.005	0.100	7.000	2.000	13.000	2.000
20.00	2.00	FX080524	MMW	VOLC	AS ABOVE, WEAKLY FRACTURED AT 30 TO 45 DEGREES, 4 TO 5 % PY WITH ASSOCIATED CHLORITE AND SIDERITE ? POCKETS, WEAK FOLIATION AT 35 DEGREES, 98 % RECOVERY		0.001	0.100	13.000	4.000	29.000	3.000
22.00	2.00	FX080525	MMW	VOLC	AS ABOVE, 100 % RECOVERY		0.007	0.100	8.000	2.000	36.000	4.000
24.54	2.54	FX080526	MMW	VOLC	AS ABOVE BUT HAS A BLOTCHY TEXTURE LIKE IT HAS BEEN CRUSHED AND THEN REILLICIFIED OR THE BLOTCHES COULD BE HOSTS OF FORMER PHENOCRYSTS, ABUNDANT CHLORITE RIMS WITH THE PY CLUSTERS, 3 TO 5 % PY, 100 % RECOVERY		0.004	0.100	9.000	2.000	79.000	6.000
25.50	0.96	FX080527	MMW	VOLC	VERY FINE GRAINED PURPLE-GRAY BANDED AT 20 DEGREES WITH 5 MM QTZ-PY VEIN AT 20 DEGREES, LOOKS LIKE A CHILLED ZONE, 3-5 % PY WITH MINOR CPY AND CHLORITE ON FRACTURES, 80 PERCENT RECOVERY.		0.004	0.100	82.000	2.000	21.000	3.000
26.11	0.61	FX080528	MS	SULP	75 % PY WITH 25 % INTERSTITIAL QTZ, CONTACTS BROKEN, 95 % RECOVERY		0.038	0.800	73.000	18.000	26.000	22.000
28.00	1.89	FX080529	MMW	VOLC	VERY FINE GRAINED SIMILAR TO 25.5 M WEAK STOCKWORK OF VUGGY QTZ-PY VEINETS, MINOR CHLORITE, MODERATELY FRACTURED AT 30 AND 60 DEGREES, 95 % RECOVERY, CPY AND BORNITE IN ONE OPEN SPACED QTZ STR.		0.006	0.100	31.000	7.000	21.000	2.000
30.97	2.97	FX080530	MMW	VOLC	AS ABOVE, HLY BROKEN, LOCAL STRONG QTZ-PY STOCKWORK, POSSIBLY MINOR BORNITE, 65 % RECOVERY		0.004	0.100	40.000	6.000	36.000	8.000
33.00	2.03	FX080531	MMW	PRPH	DYKE ?, GRAY GROUNDMASS WITH PY-CHLORITE SPECKS AND ROUNDED PHENOCRYSTS OF A SOFT GRAY-WHITE MINERAL PROBABLY ALTERED FELDSPAR PHENOCRYSTS, 2-3 % DISS PY, SEVERAL OPEN FRACTURES AT 10 TO 20 DEGREES TO CORE AXIS, 90 % RECOVERY, PROBABLY DACITIC TO RHYOLITIC COMPOSITION		0.006	0.100	4.000	4.000	110.000	6.000
34.75	1.75	FX080532	MMW	PRPH	DYKE ? AS ABOVE, SLICKENSIDES AT 10 DEGREES, NUMEROUS PY-SIDERITE ? COATED FRACTURES AT 30 DEGREES, MODERATE		0.003	0.100	2.000	2.000	81.000	4.000

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM	ELEMENT AG	ELEMENT PPM	ELEMENT CU	ELEMENT PPM	ELEMENT PB	ELEMENT PPM	ELEMENT ZN	ELEMENT PPM	ELEMENT AS	ELEMENT PPM
					Y TO HLY FRACTURED AND BROKEN 85 % R ECOVERY													
35.50	0.75			LC	LOST CORE ECOVERY		0.003*	0.100*	2.923*	2.000*	81.000*	4.000*						
37.00	1.50	FX080533	MW	PRPH	DYKE ? AS AT 34.75 M, 90 % RECOVERY		0.003	0.100	4.000	2.000	61.000	4.000						
39.00	2.00	FX080534	MW	PRPH	DYKE ? AS ABOVE, A 3 MM QTZ-PY STR P ARALLEL TO CORE AXIS. MODERATELY BRO KEN, 90 % RECOVERY		0.002	0.100	4.000	2.000	92.000	2.000						
41.00	2.00	FX080535	MW	PRPH	DYKE ? AS ABOVE, 65 % RECOVERY, TWO H LY BROKEN ZONE WITH 0.7 M OF LOST CO RE.		0.002	0.100	4.000	2.000	77.000	5.000						
43.00	2.00	FX080536	MW	PRPH	DYKE ? AS ABOVE, 70 % RECOVERY		0.001	0.100	4.000	3.000	70.000	2.000						
45.00	2.00	FX080537	MW	PRPH	DYKE ? AS ABOVE, 60 % RECOVERY		0.001	0.200	4.000	2.000	66.000	3.000						
47.00	2.00	FX080538	MW	PRPH	DYKE ? AS ABOVE, V HLY BROKEN, 40 % RECOVERY		0.002	0.100	2.000	5.000	60.000	4.000						
49.38	2.38	FX080539	MW	PRPH	DYKE ? AS ABOVE, V HLY BROKEN, 30 % RECOVERY		0.001	0.100	6.000	3.000	49.000	6.000						
51.51	2.13	FX080540	MW	VOLC	V FG SILICEOUS AS AT 25.5 M, V HLY B ROKEN, UP TO 10 % PY DISS AND ON FRA CTURES. SEVERAL QTZ-PY STRS UP TO 1 CM WIDE, 50 % RECOVERY.		0.001	0.300	298.000	5.000	29.000	11.000						
53.95	2.44	FX080541	MW	VOLC	AS ABOVE, V HLY BROKEN, 35 % RECOVERY		0.001	0.100	208.000	3.000	28.000	4.000						
55.17	1.22	FX080542	MW	VOLC	AS ABOVE, V HLY BROKEN 35 % RECOVERY		0.001	0.100	27.000	2.000	67.000	4.000						
57.90	2.73	FX080543	MW	PRPH	DYKE ? AS AT 33.0 M, V HLY BROKEN, 4 T O 5 % PY-CHLORITE SPECKS, 40 % RECOVE RY		0.002	0.100	7.000	6.000	72.000	3.000						
60.00	2.10	FX080544	MW	VOLC	V FG AS AT 51.51 M, FRACTURED AT 30 A ND 45 DEGREES, A FEW QTZ-PY STRS OFF SET BY YOUNGER SHEARING AT 45 DEGREE S, MINOR CHLORITE ALONG FRACTURES, 3 T O 5 % PY, 95 % RECOVERY		0.001	0.100	7.000	5.000	33.000	3.000						
62.00	2.00	FX080545	MW	VOLC	AS ABOVE BUT BECOMING SLIGHTLY TALCY ON FRACTURES AND PY-SIDERITE POCKET S UP TO 1 CM LONG BECOMING ABUNDANT NEAR THE BOTTOM OF THE INTERVAL, HLY FRACTURED AT 35 TO 50 DEGREES, 95 % RECOVERY		0.002	0.200	11.000	5.000	33.000	8.000						
64.00	2.00	FX080546	MW	VOLC	AS ABOVE, V HLY BROKEN, 85 % RECOVERY OCCASSIONAL QTZ-PY STR		0.001	0.100	6.000	3.000	45.000	5.000						
66.75	2.75	FX080547	MW	VOLC	AS ABOVE, 25 % RECOVERY		0.001	0.200	26.000	2.000	35.000	3.000						
69.50	2.75	FX080548	MW	VOLC	AS ABOVE, 25 % RECOVERY		0.001	0.200	8.000	2.000	21.000	2.000						
72.00	2.50	FX080549	MW	VOLC	AS ABOVE, HLY SHRD AND CRUSHED, 3 TO 5 % PY, THIN DARK GRAY FILM ALONG SHE AR PLANES POSSIBLY GRAPHITE ? 98 % R ECOVERY		0.001	0.100	14.000	2.000	10.000	2.000						
74.00	2.00	FX080550	MW	VOLC	AS ABOVE, WEAKLY SHRD, ABUNDANT PY-SI DERITE ? POCKETS, ONLY TRACE OF CHLO RITE, 98 % RECOVERY		0.001	0.100	13.000	2.000	8.000	2.000						
76.00	2.00	FX080551	MW	VOLC	AS ABOVE, 95 % RECOVERY		0.001	0.100	15.000	10.000	19.000	4.000						
78.00	2.00	FX080552	MW	VOLC	AS ABOVE, 90 % RECOVERY		0.001	0.100	9.000	5.000	12.000	3.000						
80.00	2.00	FX080553	MW	VOLC	AS ABOVE, HLY BROKEN, 70 % RECOVERY		0.003	0.100	12.000	3.000	10.000	4.000						
82.00	2.00	FX080554	MW	VOLC	AS ABOVE, 85 % RECOVERY		0.002	0.100	8.000	2.000	6.000	4.000						
84.00	2.00	FX080555	MW	VOLC	AS ABOVE, 50 % RECOVERY		0.001	0.100	8.000	3.000	6.000	2.000						
86.00	2.00	FX080556	MW	VOLC	AS ABOVE SHRD AT 45 DGRS, 85 % RCVR		0.001	0.200	8.000	2.000	7.000	7.000						
88.00	2.00	FX080557	MW	VOLC	AS ABOVE, SOLID CORE, 1 MM QTZ STR PAR		0.001	0.100	3.000	2.000	3.000	2.000						

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM	ELEMENT AG	ELEMENT PPM	ELEMENT CU	ELEMENT PPM	ELEMENT PB	ELEMENT PPM	ELEMENT ZN	ELEMENT PPM	ELEMENT AS	ELEMENT PPM
					ALLEG TO CORE, V ABUNDANT LIGHT BROWN PY-SIDERITE ? POCKETS, 3 TO 5 % PY, 100 % RECOVERY													
90.00	2.00	FX080558	MVW	VOLC	AS ABOVE, 100 % RECOVERY	0.001	0.100	4,000	2,000	6,000	2,000							
92.00	2.00	FX080559	MVW	VOLC	AS ABOVE, 98 % RECOVERY	0.001	0.200	7,000	2,000	6,000	4,000							
94.00	2.00	FX080560	MVW	VOLC	AS ABOVE, 98 % RECOVERY	0.001	0.100	9,000	3,000	6,000	3,000							
96.00	2.00	FX080561	MVW	VOLC	AS ABOVE, 100 % RECOVERY	0.001	0.100	30,000	4,000	9,000	6,000							
98.00	2.00	FX080562	MVW	VOLC	AS ABOVE, 85 % RECOVERY	0.001	0.100	9,000	6,000	7,000	3,000							
100.00	2.00	FX080563	MVW	VOLC	AS ABOVE BUT NOTABLE DECREASE IN THE NUMBER AND SIZE OF THE PY-SIDERITE ? POCKETS, 3 TO 5 % PY, WEAK SHEARING AT 40 DEGREES, FRACTURES AT 55 DGRS, 95 % RECOVERY	0.001	0.100	5,000	2,000	5,000	3,000							
102.00	2.00	FX080564	MVW	VOLC	AS AT 98.0 M, 100 % RECOVERY	0.001	0.100	5,000	2,000	3,000	2,000							
104.00	2.00	FX080565	MVW	VOLC	AS ABOVE, 100 % RECOVERY	0.001	0.100	5,000	2,000	5,000	3,000							
106.00	2.00	FX080566	MVW	VOLC	AS ABOVE, 100 % RECOVERY	0.001	0.100	4,000	4,000	6,000	3,000							
108.00	2.00	FX080567	MVW	VOLC	AS ABOVE BUT DECREASE IN PY-SIDERITE POCKETS AND WAVY SHEARING AT 40 DEGREES, 95 % RECOVERY	0.002	0.100	4,000	2,000	5,000	2,000							
110.00	2.00	FX080568	MVW	VOLC	AS ABOVE, 95 % RECOVERY	0.001	0.100	4,000	2,000	6,000	2,000							
112.17	2.17	FX080569	MVW	VOLC	AS ABOVE, BUT NO PY-SIDERITE POCKETS, A FEW THIN QTZ STRS AT VARIOUS ANGLES OFFSET BY SHEARING AT 40 DEGREES, 80 % RECOVERY	0.001	0.100	4,000	2,000	3,000	3,000							
114.00	1.83	FX080570	MVW	VOLC	AS ABOVE, V HLY BROKEN, 20 % RECOVERY	0.001	0.100	4,000	4,000	4,000	2,000							
116.00	2.00	FX080571	MVW	VOLC	AS ABOVE, MODERATELY BROKEN, 75 % RECOVERY	0.001	0.200	30,000	2,000	27,000	7,000							
118.00	2.00	FX080572	MVW	VOLC	AS ABOVE, OCCASSIONAL THIN QTZ-PY-SIDERITE STR AND HAIRLINE QTZ STR, 90 % RECOVERY	0.002	0.300	38,000	2,000	30,000	7,000							
120.00	2.00	FX080573	MVW	VOLC	AS ABOVE, LOCALLY CRUSHED WIDE WHITE CARBONATE CEMENT, A FEW THIN QTZ-PY STRS, 90 % RECOVERY	0.003	0.200	15,000	4,000	11,000	7,000							
122.00	2.00	FX080574	MVW	VOLC	AS ABOVE, MODERATELY BROKEN, 75 % RECOVERY	0.001	0.200	6,000	2,000	14,000	2,000							
124.00	2.00	FX080575	MVW	VOLC	AS ABOVE, 85 % RECOVERY	0.001	0.200	7,000	5,000	30,000	5,000							
126.00	2.00	FX080576	MVW	VOLC	AS ABOVE BUT PICKING UP A FEW PY-SIDERITE ? POCKETS AGAIN AND HAS A LITTLE COARSER TEXTURE, STILL HAS 3 TO 5 % PY DISS. ON FRACTURES AND IN PACKETS, MODERATELY BROKEN, 85 % RECOVERY	0.001	0.100	5,000	2,000	26,000	4,000							
128.00	2.00	FX080577	MVW	VOLC	AS ABOVE, 90 % RECOVERY	0.001	0.100	4,000	2,000	31,000	4,000							
130.00	2.00	FX080578	MVW	VOLC	AS ABOVE BUT WITHOUT THE PY-SIDERITE POCKETS AND BACK TO THE FINE TEXTURE, 95 % RECOVERY	0.001	0.100	4,000	2,000	25,000	3,000							
132.00	2.00	FX080579	MVW	VOLC	AS ABOVE, MODERATELY FRACTURED FROM 40 TO 70 DEGREES, 90 % RECOVERY	0.001	0.100	4,000	2,000	30,000	4,000							
134.00	2.00	FX080580	MVW	VOLC	AS ABOVE, HLY BROKEN, 60 % RECOVERY	0.001	0.200	5,000	5,000	23,000	2,000							
136.00	2.00	FX080581	MVW	VOLC	AS ABOVE, V HLY BROKEN, 40 % RECOVERY, CHUNKS OF A QTZ-PY VEIN AT LEAST 1 CM WIDE	0.001	0.100	10,000	2,000	22,000	2,000							
138.00	2.00	FX080582	MVW	VOLC	AS ABOVE, SEVERAL QTZ-PY-SIDERITE ? VEINS UP TO 2 CM WIDE AT 10 DEGREES TO CORE AXIS, UP TO 50 % PY IN THE VEINS, 95 % RECOVERY	0.007	0.600	12,000	9,000	13,000	5,000							

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT
						DEG	AU	PPM	AG	PPM	CU	PPM
140.00	2.00	FX080583	MVN	VOLC	AS ABOVE, BUT A GRADUAL PICK UP OF PY-SIDERITE ? POCKETS AND COARSER TEXTURE. WEAKLY SHRD AT 35 TO 40 DEGREE S. 98 % RECOVERY, MINOR CHLORITE ON SLIDKESIDED FRACTURES.	0.001	0.100	8.000	6.000	30.000	5.000	
142.00	2.00	FX080584	MVN	VOLC	AS ABOVE, 98 % RECOVERY	0.001	0.100	7.000	5.000	35.000	5.000	
144.00	2.00	FX080585	MVN	VOLC	AS ABOVE, 98 % RECOVERY	0.001	0.100	5.000	3.000	45.000	4.000	
146.00	2.00	FX080586	MVN	VOLC	AS ABOVE, 98 % RECOVERY	0.001	0.100	4.000	7.000	47.000	2.000	
148.00	2.00	FX080587	MVN	VOLC	AS ABOVE, BUT FINER GRAINED AND WITHOUT THE LARGE PY-SIDERITE ? POCKETS, MINOR CHLORITE WITH THE PY CLUSTERS, STRONG FRACTURING AND LINEATIONS AT 40 DEGREES, 3 TO 5 % PY, 95 % RECOVERY	0.001	0.100	4.000	3.000	37.000	4.000	
150.00	2.00	FX080588	MVN	VOLC	AS ABOVE, V HLY FRACTURED, 0.5 CM WUGGY QTZ-PY STR SUBPARALLEL TO CORE AND QTZ-PY FILMS ON SOME FRACTURES, A PALE BROWN TO BUFF COLOURED COATING FAIRLY ABUNDANT ON FRACTURES POSSIBLY ALUNITE ? 85 % RECOVERY	0.003	0.100	7.000	5.000	37.000	3.000	
152.00	2.00	FX080589	MVN	VOLC	AS ABOVE, SEVERAL NARROW QTZ-PY STRS, HLY BROKEN 85 % RECOVERY	0.004	0.200	21.000	2.000	64.000	4.000	
154.00	2.00	FX080590	MVN	VOLC	AS ABOVE, SEVERAL QTZ-PY STRS WITH MINOR CHALCOPYRITE GENERALLY AT 10 TO 20 DEGREES TO CORE AXIS, HLY BROKEN, 98 % RECOVERY	0.001	0.300	2174.00	6.000	116.000	2.000	
156.00	2.00	FX080591	MVN	VOLC	AS ABOVE, A FEW V THIN QTZ-PY STRS, 98 % RECOVERY	0.004	0.100	8.000	2.000	53.000	4.000	
158.00	2.00	FX080592	MVN	VOLC	AS ABOVE, 95 % RECOVERY	0.003	0.100	8.000	2.000	54.000	2.000	
160.00	2.00	FX080593	MVN	VOLC	AS ABOVE, NO VEINS, MODERATELY BROKEN, STRONG FRACTURING AT 50 DEGREES	0.002	0.100	6.000	4.000	33.000	2.000	
162.00	2.00	FX080594	MVN	VOLC	AS ABOVE, 70 % RECOVERY	0.005	0.100	39.000	2.000	34.000	3.000	
164.00	2.00	FX080595	MVN	VOLC	AS ABOVE, MODERATELY BROKEN, 90 % RECOVERY	0.003	0.100	6.000	8.000	9.000	4.000	
166.00	2.00	FX080596	MVN	VOLC	AS ABOVE, SOME V FG GRAY SPECKS ON SOME SHEARS, POSSIBLY SULPHIDES, MODY T O HLY BROKEN, 75 % RECOVERY	0.006	0.100	1.000	3.000	6.000	2.000	
168.00	2.00	FX080597	MVN	VOLC	AS ABOVE, 65 % RECOVERY	0.001	0.100	5.000	2.000	18.000	3.000	
170.23	2.23	FX080598	MVN	VOLC	AS ABOVE, V HLY BROKEN, HEAVY CLAY COATING ON SOME FRACTURES, FRACTURES AT ALL ANGLES, SLICKENSIDES ON FRACTURES AT 10 DEGREES TO CORE AXIS INDICATING MOVEMENT NEARLY NORMAL TO CORE, 60 % RECOVERY	0.004	0.200	7.000	2.000	7.000	3.000	
172.82	2.59	FX080599	MVN	VOLC	AS ABOVE, V HLY BROKEN, 35 % RECOVERY	0.001	0.100	7.000	5.000	51.000	2.000	
174.96	2.14	FX080600	MVN	VOLC	AS ABOVE, HLY BROKEN, SLICKENSIDES AS AT 170.23 M, LOCALLY SILLY PORPHYRITIC AND CHLORITIC POSSIBLY A DYKE ? ONE 2 MM OPEN SPACED QTZ-PY-SIDERITE ? VEIN AT 15 DEGREES, 3 TO 5 % DISS PY, 80 % RECOVERY	0.006	0.100	9.000	7.000	45.000	2.000	
178.00	3.04	FX080601	MVN	VOLC	ONLY 15 % RECOVERY, MISLATCHED, AFTER ONE AND A HALF SHIFTS RODS WERE STILL 20 METERS OFF THE BOTTOM, THE ODDS OF BEING ABLE TO REACH THE TARGETE	0.007	0.200	17.000	9.000	20.000	3.000	

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT						
						DEG	AU	PPM	AG	PPM	CU	PPM	PB	PPM	ZN	PPM	AS	PPM
					D DEPTH OF 300 M BY REDUCING TO BQ C ONSIDERED TO BE VERY SLIM THEREFORE HOLE DISCONTINUED FOOT OF HOLE, ALL MATERIAL REMOVED													

NOTE SYMBOLS USED ARE :

* AFTER ASSAY VALUE INDICATES VALUE FOR LOST CORE WAS CALCULATED FROM ADJACENT SAMPLES

SUMMARY OF MINERALIZATION AND ROCK TYPES

FROM METRES	TO METRES	LENGTH METRES	MIN	ROCK
0.0	0.0	0.0		
0.0	1.83	1.83		OB
1.83	25.50	23.67	MW	VOLC
25.50	26.11	0.61	MS	SULP
26.11	30.97	4.86	MW	VOLC
30.97	34.75	3.78	MW	PRPH
34.75	35.50	0.75		LC
35.50	49.38	13.88	MW	PRPH
49.38	55.17	5.79	MW	VOLC
55.17	57.90	2.73	MW	PRPH
57.90	178.00	120.10	MW	VOLC

ASSAYS CHK'D.....
DATE.....

BOREHOLE PROPERTY	PROP#	LEVEL	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	CO-ORD SYSTEM	LATITUDE METRES	DEPARTURE METRES	ELEVATION METRES	STARTED MO DY YR	COMPLETED MO DY YR
72411-0 HIT-MISS		SURF	119.17	090 00	-61 00		S 1994.	E 21.	1435.	05 19 87	05 23 87

INCLINATION AND AZIMUTH TESTS

DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN
45.7		-59 30	94.8		-60 00						

LOGGED BY ED HUNTER NTS # 924-10E COUNTRY IS CANADA PROV/STATE IS BC GRD BRNG IS 000 90 SHT# ANOM#

ASSAY FOR * AU AG AS BA SB CU NI ZN MO PB CD MN FE U TH SR CD BI V CA P

ASSAY FOR * LA CR MG TI B AL NA K W

COMMENTS

DRILLED NO BY BEAUPRE DIAMOND DRILLING. HOLE IS LOCATED 1994 M SOUTH AND 1021 M EAST OF NW CORNER OF MISS CLAIM

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT AG	ELEMENT CU	ELEMENT PB	ELEMENT ZN	ELEMENT AS	ELEMENT PPM
0.0	0.0				COLLAR								
9.75	9.75			OB	CASING TO 9.75 M								
11.75	2.00	FX080622	MVM	VOLC	GRAY-GREEN, APPEARS TO BE A CRUSHED AND MDDY SLC'D ANDESITE. 5 TO 8 % PY D ISS AND FRACTURE CONTROLLED. HEAVY LIM AND MANGANESE ON FRACTURES. STRONG FRACTURING AT 25 AND 50 DEGREES. 85 % RECOVERY	0.044	4.700	39.000	108.000	390.000	15.000		
13.87	2.12	FX080623	MVM	VOLC	GRAY-GREEN AS ABOVE BUT NOT CRUSHED OR SLC'D. V POOR RECOVERY NEAR THE BOTTOM OF THIS INTERVAL. 45 % RECOVERY	0.001	2.000	107.000	36.000	325.000	11.000		
15.94	2.07	FX080624	MVM	VOLC	GRAY-GREEN, HLY SHRD AND DISTORTED ANDESITE ? SHEARING AND DISRUPTED QTZ VEINING SUBPARALLEL TO CORE AXIS. VEINS AVERAGE 1CM WIDE WITH PY AND MINOR FG GRAY TO BLACK SULPHIDES AND TINY BLOOD RED SPECKS. STRONG LIM ON FRACTURES, POSSIBLY FUCHITE ? AS BLEBS ALONG SHEAR PLANES NEAR THE TOP OF THE INTERVAL. 95 % RECOVERY	0.165	5.700	220.000	953.000	946.000	63.000		
18.00	2.06	FX080625	MVM	VOLC	AS AT 13.87 V HLY BROKEN WITH GOUGE ZONE ON TOP. 50 % RECOVERY	0.027	1.800	85.000	133.000	434.000	14.000		
20.00	2.00	FX080626	MVM	VOLC	GRAY-GREEN CRUSHED AND PARTIALLY SLC'D ANDESITE ? MDDY ALTD 5 TO 8 % PARTIALLY OXIDIZED PY, AND MINOR OXIDIZED GALENA ? IN 5 MM QTZ VEIN AT 80 DGRS TO CORE AS WELL AS IN OCCASSIONAL CHUNK OF BROKEN QTZ VEINLET. 85 % RECOVERY	0.015	0.500	81.000	126.000	671.000	24.000		
22.00	2.00	FX080627	MVM	VOLC	AS ABOVE, SHRD AT 35 TO 45 DGRS. STILL STRONG LIM ON FRACTURES. NO QTZ VEINS. 75 % RECOVERY	0.032	1.200	156.000	76.000	340.000	4.000		

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM	ELEMENT AG	ELEMENT PPM	ELEMENT CU	ELEMENT PPM	ELEMENT PB	ELEMENT PPM	ELEMENT ZN	ELEMENT PPM	ELEMENT AS	ELEMENT PPM
24.00	2.00	FX080628	MVM	VOLC	LIGHT GRAY, HLY ALTD, STRONG SHEARING AT 20 TO 30 DEGREES, 60 % RECOVERY	0.007	1.000	87.000	82.000	161.000	7.000							
26.00	2.00	FX080629	MVM	VOLC	AS ABOVE, 90 % RECOVERY	0.008	3.400	316.000	613.000	272.000	16.000							
28.00	2.00	FX080630	MVM	VOLC	AS ABOVE, STILL HEAVY LIM AND MANGANESE ON FRACTURES, HLY BROKEN, 80 % RECOVERY	0.003	0.600	114.000	49.000	336.000	7.000							
30.00	2.00	FX080631	MVM	VOLC	GRAY TO WHITE V HLY ALTD, 4 TO 6 % PARTIALLY OXIDIZED PY, HLY BROKEN, 80 % RECOVERY	0.006	0.800	51.000	108.000	115.000	2.000							
32.30	2.30	FX080632	MVM	AGLM	GRAY-GREEN, STRONG ARGILLIC ALTN, VOLC FRAGMENTS AROUND 1 CM SIZE APPEAR AS GHOSTS, MUDY BROKEN, ONE 5 MM QTZ STR AT 30 DGRS, HEAVY LIM ON FRACTURES, 60 % RECOVERY	0.005	0.400	36.000	48.000	166.000	2.000							
34.00	1.70	FX080633	MVM	AGLM	AS ABOVE, V HLY FRACTURED, LOCALLY BXTD, MAIN FRACTURING SUBPARALLEL TO CORE AXIS, 90 % RECOVERY	0.011	0.500	42.000	79.000	197.000	3.000							
36.00	2.00	FX080634	MVM	AGLM	BXTD, LIM CEMENT, 85 % RECOVERY	0.026	0.800	62.000	91.000	278.000	14.000							
37.64	1.64	FX080635	MVM	AGLM	BXTD ONLY 20 % RECOVERY	0.010	0.800	72.000	130.000	235.000	6.000							
40.00	2.36	FX080636	MVM	AGLM	BXTD, UP TO 10 % PY, HLY BROKEN AND OXIDIZED, 70 % RECOVERY	0.013	0.900	83.000	86.000	209.000	4.000							
42.40	2.40	FX080637	MVM	AGLM	GRAY-GREEN, MUDY SLCD, 10 % PY CLOTS, WEAKLY FRACTURED WITH LIM ON FRACTURES, 90 % RECOVERY	0.007	0.700	98.000	59.000	182.000	2.000							
42.67	0.27	FX080638	MVM	FLT	ZONE, BROKEN AGLM AND CLAY WITH SOME QTZ CHIPS, 75 % RECOVERY	0.026	1.000	193.000	416.000	455.000	32.000							
45.00	2.33	FX080639	MVM	ANDS	GRAY-GREEN, POSSIBLE MODERATE ARGILLIC ALTN, NOT SLCD, OCC 1 CM QTZ VEIN SUBPARALLEL TO CORE AXIS, LIM COATED FRACTURES AT 25 AND 45 DEGREES, 2 TO 3 % DISS PY, 90 % RECOVERY	0.015	1.300	123.000	271.000	482.000	16.000							
48.00	3.00	FX080640	MVM	ANDS	AS ABOVE, MINOR FG GALENA ? IN THE QTZ STRS, 98 % RECOVERY	0.024	1.600	205.000	278.000	647.000	15.000							
50.78	2.78	FX080641	MVM	ANDS	AS ABOVE BUT NO QTZ VEINING, 98 % RECOVERY	0.003	0.500	87.000	98.000	401.000	11.000							
53.00	2.22	FX080642	MVM	AGLM	AS AT 32.3 M, SHEARING AND QTZ STR ON UPPER CT SUBPARALLEL TO CORE AXIS, LIM ON FRACTURES, 90 % RECOVERY	0.009	1.000	163.000	106.000	238.000	10.000							
55.00	2.00	FX080643	MVM	AGLM	AS ABOVE, POSSIBLY WEAKLY SLCD, 98 % RECOVERY	0.012	1.200	99.000	104.000	385.000	6.000							
57.00	2.00	FX080644	MVM	AGLM	AS ABOVE 3 CM BX ZONE SUBPARALLEL TO CORE AXIS WITH LIM CEMENT	0.006	0.200	135.000	179.000	392.000	5.000							
59.00	2.00	FX080645	MVM	AGLM	AS ABOVE A FEW THIN QTZ STRS AND HEAVY LIM COATED FRACTURES SUBPARALLEL TO CORE AXIS, 98 % RECOVERY	0.004	0.300	161.000	116.000	359.000	6.000							
61.00	2.00	FX080646	MVM	AGLM	AS ABOVE, 95 % RECOVERY	0.022	0.700	257.000	143.000	506.000	14.000							
63.00	2.00	FX080647	MVM	AGLM	AS ABOVE, 95 % RECOVERY	0.137	7.600	753.000	680.000	4863.00	12.000							
65.00	2.00	FX080648	MVM	AGLM	AS ABOVE, 85 % RECOVERY	0.118	0.700	171.000	171.000	613.000	5.000							
67.00	2.00	FX080649	MVM	AGLM	AS ABOVE BUT NO QTZ STRS, 95 % RECOVERY	0.010	1.500	774.000	721.000	1506.00	23.000							
69.00	2.00	FX080650	MVM	AGLM	AS ABOVE, HLY BROKEN, ARGILLIC ALTN DECREASING WITH DEPTH, 90 % RECOVERY	0.029	1.200	616.000	370.000	594.000	18.000							
71.00	2.00	FX080651	MVM	AGLM	AS ABOVE, ONLY MINOR ALTN AND RARE QTZ STRS, MUDY BROKEN, 90 % RECOVERY	0.002	0.100	64.000	112.000	531.000	6.000							
73.00	2.00	FX080652	MVM	AGLM	AS ABOVE, 90 % RECOVERY	0.006	0.100	109.000	147.000	475.000	12.000							

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT
						DEG	AU	PPM	AG	PPM	CU	PPM
75.00	2.00	FX080653	MVN	AGLM	AS ABOVE, HLY BROKEN, 90 % RECOVERY	0.001	0.500	228.000	589.000	552.000	10.000	
77.00	2.00	FX080654	MVN	AGLM	AS ABOVE, 95 % RECOVERY	0.003	0.300	94.000	130.000	377.000	11.000	
79.00	2.00	FX080655	MVN	AGLM	AS ABOVE, 90 % RECOVERY	0.002	0.300	96.000	51.000	322.000	8.000	
81.00	2.00	FX080656	MVN	AGLM	AS ABOVE, POSSIBLY SLLY SLCD, LOCAL CA NARY YELLOW COATING ON FRACTURES, MAI N FRACTURING AT 45 AND PARALLEL TO C ORE, 90 % RECOVERY	0.004	0.300	84.000	22.000	340.000	7.000	
83.00	2.00	FX080657	MVN	AGLM	AS ABOVE, 95 % RECOVERY	0.001	0.300	69.000	36.000	371.000	6.000	
84.30	1.30	FX080658	MVN	AGLM	AS ABOVE, HLY FRACTURED, ONE 2 MM QTZ STR AT 65 DEGREES WITH PATCHES OF F G ARGENTITE ? 85 % RECOVERY	0.002	0.100	25.000	78.000	323.000	11.000	
85.50	1.20	FX080659	MVN	AGLM	AS ABOVE, SEVERAL 1 MM TO 2 MM DISCON TINUOUS QTZ-CARB STRS WITH FAIRLY AB UNDANT ARGENTITE ? 95 % RECOVERY	0.016	0.500	24.000	185.000	418.000	21.000	
87.17	1.67	FX080660	MVN	AGLM	AS ABOVE WITH A STOCKWORK OF QTZ-SID ERITE ? VEINS UP TO 1 CM WIDE WITH L OCALLY ABUNDANT ARGENTITE ? AND PY W ITH MINOR CPY, MAIN VEINS ARE SUBPAR ALLEL TO CORE AXIS, 95 % RECOVERY	0.124	3.600	628.000	1384.00	3162.00	44.000	
89.46	2.29	FX080661	MVN	AGLM	AS ABOVE, HLY BROKEN, WEAK STOCKWORK A S ABOVE, 60 % RECOVERY	0.027	0.700	93.000	381.000	1003.00	31.000	
91.74	2.28	FX080662	MVN	AGLM	AS ABOVE, V HLY BROKEN, ONLY 30 % RECO VERY, FRAGMENTS INDICATE THE PRESENC E OF A MINERALIZED STOCKWORK	0.041	0.900	173.000	438.000	2115.00	68.000	
93.57	1.83	FX080663	MVN	AGLM	AS ABOVE, V HLY BROKEN, ONLY 35 % RECO VERY, NUMEROUS FRAGMENTS OF MINERALI ZED VEINS,	0.260	1.300	115.000	727.000	1770.00	38.000	
94.49	0.92	FX080664	MVN	AGLM	AS ABOVE, ONLY 20 % RECOVERY, MOST FRA GMENTS CONTAIN QTZ-SIDERITE-ARGENTIT E VEINS	0.028	0.600	58.000	332.000	3785.00	35.000	
95.40	0.91			LC	COULDN'T CORE, USED TRICONE TO GET THR OUGH,	0.052*	1.627*	158.685*****			54.178*	
97.40	2.00	FX080665	MVN	AGLM	GOOD SOLID CORE, NUMEROUS THIN IRRATI C VEINS UP TO 2 CM BUT GENERALLY LES S THAN 5 MM WITH LOCALLY ABUNDANT AM OUNTS OF ARGENTITE ? AND LESS AMOUNT S OF CPY, SOME VEINS INDICATE ATLEAS T ONE STAGE OF BXTN AND CEMENTING, 9 5 % RECOVERY	0.063	2.100	205.000	1474.00	3682.00	63.000	
98.80	1.40	FX080666	MVN	AGLM	AS ABOVE, THIRTEEN QTZ-SIDERITE-ARGE NTITE VEINS FROM 2 MM TO 1 CM WIDE F ORMING A WEAK STOCKWORK, VEINS CUT C ORE AXIS AT 30 TO 40 DEGREES WITH VA RIOUS STRIKES, MINOR CPY IN THE VEIN S, PY CLOTS 6 TO 8 % ALMOST ENTIRELY IN THE AGLM ALTHOUGH A FEW CLOTS CRO SS OVER INTO THE VEINS, SOLID CORE, 10 0 % RECOVERY	0.039	0.400	121.000	178.000	4873.00	30.000	
100.80	2.00	FX080667	MVN	AGLM	AS ABOVE, ONLY A FEW THIN QTZ STRS, MO DY FRACTURED AT 30 TO 40 DEGREES, 95 % RECOVERY	0.037	0.100	36.000	298.000	1122.00	31.000	
102.80	2.00	FX080668	MVN	AGLM	AS ABOVE, A FEW THIN, BROKEN QTZ-STRS WITH MINOR ARGENTITE ? MODOY TO HLY BROKEN CORE, 90 % RECOVERY	0.016	0.400	31.000	93.000	589.000	19.000	
104.24	1.44	FX080669	MVN	AGLM	AS ABOVE, HLY BROKEN 90 % RECOVERY	0.022	1.300	58.000	51.000	280.000	10.000	

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM AG	ELEMENT PPM CU	ELEMENT PPM PB	ELEMENT PPM ZN	ELEMENT PPM AS	ELEMENT PPM
105.68	2.44	FX080670	MVM	AGLM	AS ABOVE, V HLY BROKEN 30 % RECOVERY	0.020	1.100	39.000	26.000	247.000	17.000		
109.12	2.44			LC		0.014*	0.839*	35.519*	29.046*	197.389*	12.648*		
					BROKEN CORE, 90 % RECOVERY								
111.00	1.88	FX080671	MVM	AGLM	AS ABOVE, ONLY 2 % PY, A FEW BROKEN QTZ STRS, 90 % RECOVERY	0.006	0.500	31.000	33.000	133.000	7.000		
113.00	2.00	FX080672	MVM	AGLM	AS ABOVE, SEVERAL BROKEN QTZ-SIDERITE-ARGENTITE VEINS UP TO 2 CM WIDE, HLY BROKEN, 90 % RECOVERY	0.054	11.600	47.000	96.000	267.000	34.000		
113.69	0.69	FX080673	MVM	AGLM	V SLCD WITH ABUNDANT BROKEN QTZ-SIDERITE-ARGENTITE VEINS, MINOR CPY, 85 % RECOVERY	0.111	9.700	201.000	656.000	1730.00	79.000		
115.20	1.51	FX080674	MVM	AGLM	SMALLER LESS DISTINCT CLASTS THAN ABOVE, PY CLOTS OCCURRING IN CLUSTERS, A FEW V THIN STRS, 98 % RECOVERY	0.025	3.800	28.000	39.000	176.000	18.000		
117.16	1.96	FX080675	MVM	ANDS	FLOW, APPARENT FLOW BANDING AT 35 TO 45 DEGREES, SEVERAL 2 MM QTZ-SIDERITE-ARGENTITE STRS AT 30 TO 45 DEGREES 95 % RECOVERY	0.023	4.500	49.000	51.000	264.000	23.000		
119.17	2.01	FX080676	MVM	AGLM	CLASTS GENERALLY AROUND 5 MM, LOOKS LIKE A VOLCANIC GRIT, A BUNCH OF BROKEN QTZ-SIDERITE VEINS IN THE BOTTOM 20 CM, V MINOR ARGENTITE FOOT OF HOLE, ALL MATERIAL REMOVED	0.024	9.600	57.000	213.000	954.000	16.000		

NOTE SYMBOLS USED ARE :

* AFTER ASSAY VALUE INDICATES VALUE FOR LOST CORE WAS CALCULATED FROM ADJACENT SAMPLES

SUMMARY OF MINERALIZATION AND ROCK TYPES

FROM METRES	TO METRES	LENGTH METRES	MIN	ROCK
0.0	0.0	0.0		
0.0	9.75	9.75		OB
9.75	30.00	20.25	MVN	VOLC
30.00	42.40	12.40	MVN	AGLM
42.40	42.67	0.27	MVN	FLT
42.67	50.78	8.11	MVN	ANDS
50.78	94.49	43.71	MVN	AGLM
94.49	95.40	0.91		LC
95.40	106.68	11.28	MVN	AGLM
106.68	109.12	2.44		LC
109.12	115.20	6.08	MVN	AGLM
115.20	117.16	1.96	MVN	ANDS
117.16	119.17	2.01	MVN	AGLM

ASSAYS CHK'D.....
DATE.....

BOREHOLE PROPERTY	PROP#	LEVEL	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	CO-ORD SYSTEM	LATITUDE METRES	DEPARTURE METRES	ELEVATION METRES	STARTED MO DY YR	COMPLETED MO DY YR
72412-0 HIT-MISS		SURF	262.20	270 00	-60 00	S	2007.	E 85.	1412.	05 23 87	06 15 87

INCLINATION AND AZIMUTH TESTS

DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN	DEPTH METRES	AZIMUTH DEG MIN	DIP DEG MIN
45.7		-60 00	91.4		-59 00	152.4		-60 00			

LOGGED BY EH & MG NTS # 92H-10E COUNTRY IS CANADA PROV/STATE IS BC GRD BRNG IS SHT# ANOM#

ASSAY FOR * LA CR MG TI B AL NA K W

ASSAY FOR * AU AG AS BA SB CU NI ZN MO PB CO MN FE U TH SR CD BI V CA P

COMMENTS

DRILLED IN BY BEAUPRE DIAMOND DRILLING. HOLE IS LOCATED 2007
M SOUTH AND 1085 M EAST OF NW CORNER OF MISS CLAIM

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM	ELEMENT AG	ELEMENT PPM	ELEMENT CU	ELEMENT PPM	ELEMENT PB	ELEMENT PPM	ELEMENT ZN	ELEMENT PPM	ELEMENT AS	ELEMENT PPM
0.0	0.0				COLLAR													
3.05	3.05			OB	AND WEATHERED BEDROCK, NO CORE													
5.18	2.13	FX080677	MVM	ANDS	LIGHT GREEN WEAKLY ALTD, 2 TO 4 % FIN ELY DISS PY. FLOWBANDING WEAT AT 65. 65 MAIN FRACTURING AT 65 TO 75 DEGREES . HEAVY LIM AND MANGANESE ON FRACTUR ES. 60 % RECOVERY	0.008	0.700	96.000	10.000	166.000	11.000							
7.16	1.98	FX080678	MVM	ANDS	AS ABOVE, 60 % RECOVERY	0.005	0.200	103.000	9.000	379.000	10.000							
9.14	1.98	FX080679	MVM	ANDS	AS ABOVE, STRONG FOLIATION AT 45 DGRS 45 . 50 % RECOVERY	0.004	0.100	104.000	9.000	619.000	8.000							
12.34	3.20	FX080680	MVM	ANDS	AS ABOVE, SOME QTZ-PY-SIDERITE FILLED POCKETS POSSIBLY VESICULERS, V BROK EN ONLY 40 % RECOVERY	0.003	0.300	121.000	14.000	800.000	6.000							
16.46	4.12			LC	EN ONLY 40 % RECOVERY	0.003*	0.208*	116.387*	13.077*	658.848*	5.077*							
19.20	2.74	FX080681	MVM	ANDS	AS ABOVE, FOLIATION AT 30 DEGREES, HLY 30 BROKEN, 40 % RECOVERY	0.004	0.100	111.000	12.000	494.000	4.000							
21.34	2.14	FX080682	MVM	ANDS	AS ABOVE, 35 % RECOVERY	0.003	0.100	85.000	4.000	820.000	2.000							
23.16	1.82	FX080683	MVM	ANDS	AS ABOVE, 40 % RECOVERY	0.002	0.100	104.000	6.000	528.000	2.000							
25.30	2.14	FX080684	MVM	ANDS	AS ABOVE, FOLIATION AT 20 DEGREES, 75 20 % RECOVERY	0.006	0.200	116.000	6.000	1025.00	3.000							
28.04	2.74	FX080685	MVM	ANDS	AS ABOVE, 65 % RECOVERY	0.009	0.100	127.000	10.000	641.000	6.000							
30.48	2.44	FX080686	MVM	ANDS	AS ABOVE, HLY BROKEN, 45 % RECOVERY	0.003	0.200	116.000	9.000	446.000	4.000							
32.46	1.98	FX080687	MVM	ANDS	AS ABOVE, BUT HLY BROKEN AND MODERATE LY ALTD, 40 % RECOVERY	0.004	0.500	111.000	20.000	429.000	7.000							
34.75	2.29	FX080688	MVM	ANDS	GRAY-WHITE, HLY ALTD, QTZ-CLAY ALTN SI MILAR TO MAIN ALTN ZONE. JAROSITE ON FRACTURES AT 40 DEGREES. 65 % RECOV ERY	0.041	9.900	97.000	247.000	160.000	26.000							
36.83	2.08	FX080689	MVM	ANDS	AS ABOVE, 40 % RECOVERY	0.038	12.300	38.000	124.000	200.000	42.000							
38.71	1.68	FX080690	MVM	ANDS	MOODY ALTD, MOODY BXTD WITH LIM CEMENT, UP TO 5 % PY. 70 % RECOVERY	0.067	4.700	141.000	232.000	435.000	53.000							

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT AG	ELEMENT CU	ELEMENT PB	ELEMENT ZIN	ELEMENT AS
							PPM	PPM	PPM	PPM	PPM	PPM
40.23	1.52	FX080691	MVM	ANDS	WEAK TO MDDY ALTD,STRONG FRACTURING AT 35 DEGREES WITH HEAVY LIM COATING . SEVERAL QTZ-SIDERITE-ARGENTITE STRS UP TO 1 CM WIDE FOLLOWING THE FRACTURES. 90 % RECOVERY	0.035	2.200	151.000	252.000	418.000	39.000	
41.91	1.68	FX080692	MVM	ANDS	AS ABOVE,WIGGLY AND DISJOINTED QTZ-SIDERITE STRS. 90 % RECOVERY	0.037	2.400	155.000	68.000	513.000	19.000	
44.00	2.09	FX080693	MVM	AGLM	? STRANGE GRAY-GREEN BLOTCHY TEXTURE WITH GHOSTY CLASTS ? A FEW V THIN D ISCONTINUOUS QTZ-SIDERITE-ARGENTITE-CP4 STRS. 2 TO 3 % DISS PY. LIM ON FRACTURES AT 45 DEGREES. 95 % RECOVERY	0.052	2.000	184.000	384.000	606.000	31.000	
46.30	2.30	FX080694	MVM	AGLM	MODERATE ARGILLIC ALTN,5 % DISS PY, 65 % RECOVERY	0.028	1.200	90.000	130.000	381.000	23.000	
47.85	1.55	FX080695	MVM	ANDS	GRAY,MDDY TO HLY ALTD,6 TO 8 % DISS PY. INDISTINCT CONTACTS. LOCALLY BTD WITH LIM CEMENT. 75 % RECOVERY	0.038	2.300	133.000	271.000	460.000	28.000	
49.07	1.22	FX080696	MVM	ANDS	AS ABOVE,A 2 CM OPEN CAVITY QTZ-SIDERITE-ARGENTITE VEIN SUBPARALLEL TO CORE AXIS. 50 % RECOVERY	0.785	14.900	276.000	496.000	1719.00	39.000	
50.90	1.83	FX080697	MVM	AGLM	GRAY,HLY ALTD,3 TO 5 % DISS PY, OCC V THIN QTZ-SIDERITE-ARGENTITE STR. MDDY BROKEN. 50 % RECOVERY	0.185	0.800	77.000	110.000	147.000	36.000	
52.42	1.52	FX080698	MVM	AGLM	AS ABOVE,MDDY ALTD,LOCAL FOLIATION AT 50 DEGREES. 90 % RECOVERY	0.019	1.200	100.000	36.000	209.000	14.000	
53.64	1.22	FX080699	MVM	AGLM	GREEN-GRAY,WEAKLY ALTD,5 TO 6 % PY CLOTS UP TO 5MM ACROSS. SIDERITE COATING SOME FRACTURES AT 35 DEGREES. 80 % RECOVERY	0.013	0.900	110.000	22.000	240.000	60.000	
55.35	1.71	FX080700	MVM	ANDS	MDDY ALTD,FOLIATION AT 45 DEGREES,SIDERITE FILLED FRACTURES,4 % DISS PY, 95 % RECOVERY	0.033	1.400	46.000	109.000	308.000	38.000	
56.39	1.04	FX080701	MVM	AGLM	WEAKLY ALTD. A 5 CM WIDE QTZ-SIDERITE-ARGENTITE POCKET AND A 1 CM VEIN AT 15 DEGREES TO CORE AXIS. 98 % RECOVERY	0.165	2.500	125.000	834.000	1792.00	101.000	
57.39	1.00	FX080702	MVM	AGLM	HLY ALTD,6-7 % PY. IRREGULAR STOCKWORK OF QTZ-SIDERITE-ARGENTITE STRS UP TO 1 CM WIDE. 99 % RECOVERY	0.425	4.700	847.000	1066.00	2053.00	214.000	
58.39	1.00	FX080703	MVM	AGLM	AS ABOVE. 98 % RECOVERY	0.525	5.400	220.000	931.000	7011.00	217.000	
59.74	1.35	FX080704	MVM	AGLM	AS ABOVE,95 % RECOVERY. SOME GALENA IN THE VEINS.	0.285	3.500	119.000	2797.00	6179.00	102.000	
61.42	1.68	FX080705	MVM	AGLM	AS ABOVE,FRACTURED AT 75 TO 85 DGRS 80 % RECOVERY	0.048	1.200	63.000	663.000	1247.00	35.000	
62.79	1.37	FX080706	MVM	AGLM	AS ABOVE,APPEARS TO BE A LITTLE GALENA MIXED IN WITH THE ARGENTITE. 85 % RECOVERY	0.050	1.800	61.000	1248.00	656.000	53.000	
64.77	1.98	FX080707	MVM	AGLM	DARK GREEN-GRAY WEAK TO MDDY ALTD. POSSIBLE BEDDING AT 70 DEGREES. A FEW 70 BARREN QTZ-SIDERITE VEINS AT 30 DEGREES. 3 % DISS PY. 98 % RECOVERY	0.014	0.100	56.000	98.000	615.000	17.000	
67.00	2.23	FX080708	MVM	AGLM	AS ABOVE, PY CLOTS UP TO 8 %. 95 % RECOVERY	0.009	0.100	53.000	64.000	305.000	12.000	
69.00	2.00	FX080709	MVM	AGLM	AS ABOVE,LOCALLY MDDY ALTD. 95 % RECOVERY	0.019	0.600	59.000	60.000	284.000	24.000	

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT
						DEG	AU	PPM	AG	PPM	CU	PPM
					OVERY							
70.41	1.41	FX080710	MVM	AGLM	AS ABOVE, 90 % RECOVERY	0.012	0.100	47.000	91.000	444.000	20.000	
73.46	3.05	FX080711	MVM	AGLM	AS ABOVE BUT ONLY 25 % RECOVERY	0.027	0.300	68.000	1049.00	878.000	48.000	
74.98	1.52	FX080712	MVM	AGLM	HLY ALTD,V HLY BROKEN, NUMEROUS CHUNKS OF QTZ-SIDERITE-ARGENTITE-COPY VEIN S. ONLY 70 % RECOVERY	0.036	3.100	105.000	468.000	2385.00	92.000	
76.05	1.07	FX080713	MVM	AGLM	WEAKLY ALTD, A FEW HAIRLINE STRS WITH ARGENTITE, 99 % RECOVERY	0.015	2.800	259.000	423.000	1098.00	88.000	
78.03	1.98	FX080714	MVM	AGLM	AS ABOVE, 70 % RECOVERY	0.002	0.100	56.000	21.000	176.000	14.000	
79.35	1.52	FX080715	MVM	AGLM	AS ABOVE, V HLY BROKEN ONLY 20 % RECOVERY	0.013	1.000	477.000	1430.00	1284.00	15.000	
81.08	1.53			LC		0.006*	0.600*	239.666*	499.330*	682.665*	7.667*	
					VERY							
84.12	3.04	FX080716	MVM	ANDS	GRAY-GREEN, V HLY BROKEN, LOCALLY MUDY SLCD. QTZ-SIDERITE FILLED FRACTURES ONLY 15 % RECOVERY	0.003	0.400	121.000	34.000	382.000	4.000	
85.34	1.22	FX080717	MVM	ANDS	HLY SLCD, HLY BROKEN, WELL CRACKLED WITH SIDERITE FILLING. 3 % PY. ONLY 20 % RECOVERY	0.004	0.400	213.000	403.000	1400.00	14.000	
86.30	0.96			LC		0.003*	0.251*	123.743*	227.462*	793.551*	10.033*	
					% RECOVERY							
87.50	1.20	FX080718	MVM	ANDS	HLY SLCD, FRACTURED AT 55 DEGREES, SOLID CORE, 95 % RECOVERY. 3 TO 4 % DISS PY	0.002	0.100	33.000	49.000	177.000	6.000	
90.27	2.77	FX080719	MVM	ANDS	GRAY-GREEN MUDY SLCD. ONE 1 CM QTZ-SIDERITE-ARGENTITE-GALENA-PY VEIN AT 25 DEGREES. ONLY 20 % RECOVERY	0.038	5.800	261.000	1767.00	6204.00	14.000	
92.10	1.83	FX080720	MVM	ANDS	AS ABOVE, A FEW THIN STRS AS ABOVE WITH MINOR COPY. 95 % RECOVERY	0.019	1.600	224.000	618.000	4378.00	14.000	
94.38	2.28	FX080721	MVM	ANDS	AS ABOVE, 98 % RECOVERY	0.003	0.200	98.000	89.000	1236.00	10.000	
95.15	0.77	FX080722	MVM	ANDS	AS ABOVE, MUDY FRACTURED AT 30 AND 50 DEGREES. 95 % RECOVERY	0.002	0.100	32.000	66.000	102.000	3.000	
96.77	1.62	FX080723	MVM	ANDS	DARK GREEN- GRAY, WEAKLY SLCD, SPECKULAR HEMATITE COMMON ON FRACTURES AND AS THIN STRS	0.002	0.100	18.000	5.000	124.000	7.000	
97.30	0.53	FX080724	MVM	TUFF	? GRAY FG, CONTACT AT 55 DEGREES. SILICEOUS WITH UP TO 6 % DISS PY. 98 % RECOVERY	0.001	0.700	35.000	353.000	376.000	60.000	
98.15	0.85	FX080725	MVM	ANDS	DARK GREEN, HLY BROKEN, WEAKLY MAGNETIC, WEAKLY SLCD, 3 % PY, 75 % RECOVERY	0.004	0.100	52.000	10.000	378.000	7.000	
99.97	1.82	FX080726	MVM	ANDS	AS ABOVE BUT MUDY TO HLY SLCD, HLY BROKEN. ABUNDANT DISRUPTED HAIRLIKE QTZ-CARB STRS. 90 % RECOVERY	0.001	0.100	63.000	7.000	160.000	6.000	
101.19	1.22	FX080727	MVM	ANDS	AS ABOVE, ONLY 40 % RECOVERY	0.001	0.200	86.000	4.000	38.000	17.000	
102.72	1.53	FX080728	MVM	ANDS	V HLY SLCD, STRONG FRACTURING AT 30 DEGREES. A 1 CM QTZ-SIDERITE-ARGENTITE-COPY VEIN OFFSET BY FRACTURING. ONLY 25 % RECOVERY	0.001	0.100	72.000	6.000	31.000	2.000	
103.94	1.22	FX080729	MVM	ANDS	DARK GREEN, WEAKLY SLCD, HLY BROKEN, PY AND LOCAL HEMATITE ON FRACTURES, 70 % RECOVERY	0.001	0.100	24.000	5.000	50.000	8.000	
106.07	2.13	FX080730	MVM	ANDS	GRAY-GREEN, LOCALLY HLY SLCD AND CRACKLED WITH QTZ-CARB CEMENT. V HLY BROKEN. 45 % RECOVERY	0.002	0.100	64.000	16.000	90.000	10.000	
107.60	1.53	FX080731	MVM	ANDS	GRAY-GREEN, WEAK TO MUDY ALTD. STRONG	0.003	0.200	90.000	33.000	283.000	10.000	

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM AG	ELEMENT PPM CU	ELEMENT PPM PB	ELEMENT PPM ZN	ELEMENT PPM AS	ELEMENT PPM
					SHEARING AT 35 DEGREES, 2 TO 4 % DI 35 SS PY, 90 % RECOVERY								
108.66	1.06	FX080732	MVM	ANDS	AS ABOVE, MUDY ALTD, A FEW IRREGULAR QTZ-CARB-ARGENTITE STRS AT 20 DEGREE S. 85 % RECOVERY	0.002	0.100	56.000	22.000	267.000	18.000		
110.66	2.00	FX080733	MVM	ANDS	HLV ALTD, IRREGULAR QTZ-SIDERITE-ARG ENTITE-CHALCOPYRITE-PY VEINING WITH LOCALLY ABNT CP. STRONG SHEARING AT 45 45 DEGREES, 95 % RECOVERY	0.079	5.200	3032.00	794.000	14609.0	39.000		
112.00	1.34	FX080734	MVM	ANDS	AS ABOVE, MONOR VEINING, 98 % RECOVERY	0.016	0.100	83.000	109.000	519.000	34.000		
113.84	1.84	FX080735	MVM	ANDS	V HLY ALTD, V STRONG SHEARING AT 35 T O 40 DEGREES, 80 % RECOVERY	0.028	0.200	71.000	35.000	396.000	15.000		
115.52	1.68	FX080736	MVM	VOLC	GRAY TO WHITE, LOCALLY PINKISH V HLY ALTD, ORIGINAL COMPOSITION OBSCURED B Y INTENSE QTZ-CLAY ALTERATION. HLY S HRD AND GOUGED AT 40 DEGREES, 3 TO 5 % PY CONCENTRATED ALONG SHEAR PLANE S. 85 % RECOVERY	0.010	0.100	27.000	3.000	49.000	12.000		
117.65	2.13	FX080737	MVM	VOLC	AS ABOVE, V HLY BROKEN, 40 % RECOVERY	0.008	0.100	66.000	4.000	48.000	8.000		
120.10	2.45	FX080738	MVM	VOLC	AS ABOVE, SOLID CORE, 95 % RECOVERY	0.003	0.100	44.000	5.000	9.000	4.000		
121.50	1.40	FX080739	MVM	VOLC	GREEN-GRAY, STRONG SHEARING AT 45 DEG REES. 95 % RECOVERY	0.006	0.200	120.000	7.000	146.000	15.000		
123.50	2.00	FX080740	MVM	VOLC	AS AT 115.52, 90 % RECOVERY	0.001	0.100	17.000	6.000	47.000	4.000		
126.64	3.14	FX080741	MVM	VOLC	AS ABOVE, V HLY BROKEN AND GOUGED, 40 % RECOVERY	0.002	0.100	15.000	2.000	20.000	2.000		
128.00	1.36	FX080742	MVM	VOLC	AS ABOVE, 30 % RECOVERY	0.039	2.200	1758.00	154.000	3100.00	21.000		
130.00	2.00	FX080743	MVM	VOLC	AS ABOVE, MOSTLY SOLID CORE, 75 % RECO VERY	0.006	0.200	49.000	7.000	22.000	7.000		
131.37	1.37	FX080744	MVM	VOLC	AS ABOVE, A FEW THIN QTZ-SIDERITE-ARG ENTITE STRS AT 45 AND 70 DEGREES, 98 % RECOVERY	0.006	0.500	170.000	15.000	1865.00	30.000		
132.80	1.43	FX080745	MVM	VOLC	AS ABOVE, SHRD AT 30 DEGREES, 80 % RE COVERY	0.004	0.100	25.000	21.000	34.000	6.000		
134.85	2.05	FX080746	MVM	VOLC	AS ABOVE, ONLY 65 % RECOVERY, THREE Q TZ-SULPHIDE VEINS UP TO 6 CM WIDE PO SSIBLY MORE BUT HARD TO TELL DUE TO POOR CORE RECOVERY, THESE VEINS HAVE UP TO 2% CHALCOPYRITE WITH MINOR ARGENTITE ? AND SIDERITE	0.049	5.800	9081.00	610.000	8288.00	76.000		
135.94	1.09	FX080747	MVM	VOLC	AS ABOVE, NO VEINS, ONLY 30 % RECOVERY	0.008	0.400	107.000	135.000	215.000	2.000		
137.46	1.52	FX080748	MVM	VOLC	AS ABOVE, LOCALLY V FG TEXTURE, ONLY 3 5 % RECOVERY	0.001	0.200	29.000	10.000	41.000	2.000		
141.43	3.97			LC		0.001*	0.133*	16.319*	5.328*	37.663*	2.000*		
					5 % RECOVERY								
144.48	3.05	FX080749	MVM	VOLC	GRAY-WHITE, V HLY ALTD, V SLCD, A FEW FRAGMENTS UP TO 1 CM ARE APPARENT, MU ST BE A VOLCANICALSTIC OF SOME KIND, 2-3 % DISS PY, 40 % RECOVERY	0.001	0.100	10.000	3.000	36.000	2.000		
146.50	2.02	FX080750	MVM	VOLC	AS ABOVE BUT FG WITH A FEW FRAGMENTS AT THE TOP OF THE INTERVAL, MUDY BR OKEN, 60 % RECOVERY	0.001	0.100	6.000	2.000	9.000	2.000		
148.50	2.00	FX080751	MVM	VOLC	AS ABOVE, MUDY FRACTURED AT 35 AND 55 35 DEGREES, 90 % RECOVERY 55	0.005	0.100	4.000	2.000	16.000	2.000		
150.50	2.00	FX080752	MVM	VOLC	AS ABOVE, MUDY BROKEN, 90 % RECOVERY	0.003	0.100	8.000	2.000	19.000	3.000		
151.30	0.80	FX080753	MVM	VOLC	AS ABOVE, PY AND CLAY ON SOME FRACTUR	0.001	0.100	4.000	2.000	5.000	3.000		

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG DEG	ELEMENT AU	ELEMENT PPM	ELEMENT AG	ELEMENT PPM	ELEMENT CU	ELEMENT PPM	ELEMENT PB	ELEMENT PPM	ELEMENT ZN	ELEMENT PPM	ELEMENT AS	ELEMENT PPM
'53.30	2.00	FX080754	MVM	TUFF	ES. 80 % RECOVERY LITHIC, A VOLCANICLASTIC WITH POLYMIC ICTIC SUBROUNDED FRAGMENTS UP TO 1 C M AVERAGING ABOUT 5 MM. V HLY ALTD, 2-4 % DISS PY IN THE GROUND MASS, 80 % RECOVERY. PROBABLY UNIT 1 E IN BU LLETIN 69. LESS SLCD THAN VOLC UNIT		0.001	0.100	4.000	2.000	35.000	2.000						
155.75	2.45	FX080755	MVM	TUFF	LITHIC .V HIGHLY BROKEN, 60 % RECOVER Y		0.002	0.100	5.000	2.000	38.000	2.000						
157.75	2.00	FX080756	MVM	TUFF	AS ABOVE, V HLY BROKEN, 75 % RECOVER Y		0.001	0.200	13.000	2.000	45.000	2.000						
160.00	2.25	FX080757	MVM	TUFF	WITH 30 CM FLOW OR POSSIBLY JUST A LARGE BLOCK OF HLY ALTD VOLC		0.001	0.100	9.000	2.000	26.000	2.000						
162.00	2.00	FX080758	MVM	TUFF	AS ABOVE, CLASTS ARE SMALLER AND LE SS PRONOUNCED THAN ABOVE. FAIRLY SOL ID CORE BUT ONLY 50 % RECOVERY		0.002	0.300	10.000	2.000	8.000	2.000						
164.00	2.00	FX080759	MVM	TUFF	AS ABOVE, SEVERAL CLAY GOUGE ZONES, LINEATIONS AT 50 DEGREES, A 3 CM QTZ 50 -PY BAND OR VEIN NEXT TO A GOUG ZON E, 50 % RECOVERY		0.006	0.100	7.000	2.000	11.000	4.000						
165.00	1.00	FX080760	MVM	TUFF	AS ABOVE, NUMEROUS 2 MM QTZ-PY STRS AT 65 TO 75 DEGREES TO CORE AXIS. SE VERAL POCKETS OF SOFT LIGHT BROWN MA TERICAL AS SEEN IN 72409. 90 % RECOV RY		0.001	0.100	5.000	2.000	9.000	2.000						
165.22	0.22	FX080761	MVM	VEIN	QTZ-PY-SIDERITE VEIN OR POSSIBLY BE DDING, CRUDELY LAYERED AROUND FRAGEN TS OF ALTD VOLC FLOW. 65 DEGREES TO CORE AXIS, 90 % RECOVERY	65	0.006	0.200	16.000	2.000	97.000	4.000						
167.30	2.08	FX080762	MVM	VOLC	GRAY-WHITE FG V STRONG QTZ-CLAY ALTN 3 TO 4 % DISS PY, A FEW 2 MM QTZ ST RS, HLY BROKEN 60 % RECOVERY		0.001	0.100	10.000	2.000	36.000	2.000						
170.10	2.80	FX080763	MVM	TUFF	LITHIC AS AT 153.3, V HLY BROKEN WIT H SOME CLAY GOUGE ZONES, 35 % RECOVER Y		0.001	0.100	17.000	7.000	38.000	2.000						
172.82	2.72	FX080764	MVM	VOLC	AS AT 167.3, MDDY BROKEN, 95 % RECOVE RY		0.002	0.100	22.000	2.000	34.000	2.000						
175.00	2.18	FX080765	MVM	TUFF	LITHIC, AS AT 153.3, OCC CLAST UP TO 2 CM, 3 TO 5 % DISS PY, MDDY SLCD, V S OLID CORE, NO VEINS, 98 % RECOVERY		0.001	0.100	41.000	3.000	34.000	2.000						
177.00	2.00	FX080766	MVM	TUFF	LITHIC AS ABOVE WEAK FOTN AT 65 DEGR 65 EES, 98 % RECOVERY		0.001	0.100	31.000	3.000	90.000	4.000						
179.00	2.00	FX080767	MVM	TUFF	LITHIC AS ABOVE, 90 % RECOVERY		0.001	0.100	44.000	2.000	137.000	4.000						
181.00	2.00	FX080768	MVM	TUFF	LITHIC AS ABOVE, MDDY BROKEN 85 % REC OVERY		0.001	0.100	22.000	2.000	50.000	3.000						
183.00	2.00	FX080769	MVM	TUFF	LITHIC AS ABOVE, SEVERAL CRUSHED ZONE S WITH CLAY CEMENT. 1 CM WIDE PY LEN SE, 75 % RECOVERY		0.001	0.100	23.000	5.000	23.000	3.000						
185.17	2.17	FX080770	MVM	TUFF	LITHIC AS ABOVE, MDDY CRUSHED WITH C LAY CEMENT. ONE 5 MM QTZ-PY STR AT 6 0 DEGREES, 97 % RECOVERY. STRONG SHEA RING AT 65 DEGREES		0.002	0.100	8.000	7.000	11.000	2.000						
187.15	1.98	FX080771	MVM	VOLC	FG GRAY HLY ALTD, STRONGLY SLCD. UP T O 6 % FG DISS PY. LOCAL BLEACHING ON FRACTURES, LOCALLY CRACKLED WITH WHI		0.001	0.100	8.000	4.000	20.000	3.000						

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT
						DEG	AU	PPM	AG	PPM	CU	PPM
					TE QTZ CEMENT, MDDY BROKEN, 95 % RECOVERY							
89.59	2.44	FX080772	MVM	VOLC	AS ABOVE, STRONG SHEARING AT 45 NEAR LOWER CT. 90 % RECOVERY	0.001	0.100	4.000	4.000	4.000	2.000	
191.72	2.13	FX080773	MVM	TUFF	LITHIC FG, INDISTINCT CLASTS DUE TO INTENSE ALTN, MDDY SLCD, 3% DISS PY, 9% RECOVERY	0.001	0.100	15.000	6.000	26.000	5.000	
196.00	4.28			LC	95 % RECOVERY	0.001*	0.100*	8.894*	5.339*	22.336*	3.779*	
199.34	3.34	FX080774	MVM	FLT	COUDE, HLY ALTD VOLC FRAGMENTS IN A HEAVY CLAY CEMENT. 80 % RECOVERY	0.001	0.100	5.000	5.000	20.000	3.000	
200.56	1.22	FX080775	MM	QTZ	CP, PY, ARGENTITE? CHUNKS. ONLY ABOUT 5 % RECOVERY, ABOUT 20 % TOTAL SULP MAINLY CP. EVERYTHING ASSAYED TO INSURE SUFFICIENT VOLUME.	0.009	0.700	14257.0	7.000	1.000	8.000	
202.50	1.94	FX080776	MVM	VOLC	AS AT 187.15 M, MDDY SLCD, 75 % RECOVERY	0.001	0.100	47.000	5.000	42.000	4.000	
204.50	2.00	FX080777	MVM	VOLC	AS ABOVE, A FEW V THIN QTZ-PY STRS AT 45 DEGREES, 85 % RECOVERY	0.001	0.100	45.000	8.000	32.000	5.000	
206.50	2.00	FX080778	MVM	VOLC	AS ABOVE, STARTING TO PICK UP LOCALLY ABNT RENES OR POCKETS OF SOFT GRAY MATERIAL AS SEEN IN HOLE 72409. STRONG SHEARING AT 40 TO 50 DEGREES. 2 TO 3 % DISS PY. 90 % RECOVERY	0.001	0.100	17.000	13.000	44.000	5.000	
208.50	2.00	FX080779	MVM	VOLC	PROBABLY A HLY ALTD LITHIC TUFF. INDISTINCT FG CLASTS. 9% RECOVERY	0.001	0.100	22.000	3.000	81.000	5.000	
210.50	2.00	FX080780	MVM	VOLC	AS ABOVE, MDDY SLCD WITH LOCAL HLY SLCD ZONES WITH UP TO 10 % PY. 90 % RECOVERY	0.005	0.200	125.000	5.000	87.000	8.000	
212.50	2.00	FX080781	MVM	TUFF	LITHIC, AS ABOVE BUT CLASTS ARE MORE DISTINCT, WEAK TO MDDY SLCD. 95 % RECOVERY	0.001	0.100	11.000	5.000	73.000	5.000	
214.50	2.00	FX080782		TUFF	MG GREY TUFF STRONG SERICITE ALTERATION IN MATRIX AND AS STRETCHED PATCHES PARALLEL TO FOLIATION AT 60 DGRS TO CORE AXIS. 2 TO 3 % DISS PY, FEW QTZ VNLTs WITH 3% DISS PY & MINOR OL AT 60 DGRS, FEW CARBONATE VNLTs. REC 100% MEDIUM SILICIFIED	0.001	0.100	10.000	8.000	77.000	7.000	
216.50	2.00	FX080783		TUFF	DITTO	60	0.001	0.100	16.000	6.000	41.000	5.000
218.50	2.00	FX080784		TUFF	DITTO	60	0.001	0.100	10.000	5.000	99.000	6.000
220.50	2.00	FX080785		TUFF	DITTO 2 PY BANDS 2 MM THICK AT 60	60	0.002	0.100	10.000	6.000	64.000	6.000
222.50	2.00	FX080786		TUFF	DITTO FRAGMENTS UP TO 1 CM REC 90%		0.001	0.100	16.000	5.000	102.000	4.000
224.50	2.00	FX080787		TUFF	DITTO REC 90%		0.001	0.100	16.000	2.000	111.000	2.000
226.50	2.00	FX080788		TUFF	DITTO REC 90%		0.001	0.100	24.000	5.000	118.000	5.000
228.50	2.00	FX080789		TUFF	DITTO REC 90%		0.002	0.100	44.000	2.000	56.000	3.000
230.50	2.00	FX080790		TUFF	DITTO REC 90%		0.001	0.100	49.000	2.000	51.000	2.000
232.90	2.40	FX080791		TUFF	DITTO 10 CM FAULT BX AT 231.05 POSSIBLE SHEAR ZONE AT 232.8 REC 100		0.002	0.100	42.000	9.000	93.000	2.000
235.35	2.45	FX080792		TUFF	GREENISH GREY PY BANDS AT 233.4 AT 50 DGRS. FROM 233.4 TO 235.35 BROKEN ROCK SHEAR ZONE, REC 60%		0.001	0.100	212.000	6.000	1833.00	6.000
237.80	2.45	FX080793		TUFF	DITTO VERY BROKEN UP REC 60%		0.001	0.100	20.000	6.000	268.000	9.000
40.70	2.90	FX080794		SHR	GRAVEL GROUND UP ROCK REC 38%		0.001	0.100	230.000	4.000	214.000	3.000
242.70	2.00	FX080795		AGGL	? STRONGLY SILICIFIED GREY, 2 TO 4		0.001	0.200	163.000	2.000	224.000	3.000

DEPTH METRES	LENGTH METRES	SAMPLE	MIN	ROCK	DESCRIPTION	ANG	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT	ELEMENT
						DEG	AU	PPM	AG	PPM	CU	PPM
					1/2 PY AS STRINGERS, PATCHES & DISS. BLACK PATCHES AND BLOTCHES FILLED WITH SERICITE, CHLORITE & PY. U CM QTZ VEIN WITH SER, CHLOR & PY AT 60 DORS AT 242.3 REC 100%							
244.50	1.80	FX080796		AGGL	DITTO	0.001	0.200	152.000	9.000	206.000	2.000	
246.50	2.00	FX080797		SLTS	FG GREY STRONGLY SILICIFIED ROCK, WITH BLACK BLOTCHES OF SER-CHL-PY SIMILAR TO PORPHYRY ? OF BH 72409 WHICH IN TS WAS DISCRIBED AS FELDSPA THIC SILTSTONE, FEW QTZ-PY STRINGERS 2 TO 4 DISS PY. REC 100%	0.001	0.100	119.000	2.000	149.000	2.000	
248.50	2.00	FX080798		SLTS	DITTO	0.005	0.100	8.000	2.000	107.000	2.000	
249.70	1.20	FX080799		SLTS	DITTO	0.001	0.100	6.000	4.000	108.000	2.000	
251.40	1.70	FX080800		SLTS	SIMILAR TO ABOVE BUT ALTERNATE BEDS OF FG SLTS WITHOUT BLOTCHES AND SIMI LAR SLTS WITH BLOTCHES (ALTERED FELD SPARS ?). FRACTURES WITH PY.	0.001	0.100	3.000	2.000	41.000	2.000	
253.35	1.95	FX080801		SLTS	DITTO	0.001	0.100	7.000	2.000	69.000	2.000	
254.90	1.55	FX080802		SLTS	DITTO	0.001	0.100	12.000	2.000	70.000	2.000	
256.10	1.20	FX080803		SLTS	DITTO STRONGLY SILICIFIED, BEDDING 75 AT 75 TO 70 DORS, 2 TO 3% DISS PY	0.001	0.100	5.000	2.000	143.000	2.000	
257.40	1.30	FX080804		LPTF	GREEN MEDIUM STRONG SILICIFICATION STILL WITH BLOTCHES, 5 CM QTZ-PY VEINS AT 256.60 & 256.95 2 TO 3% PY	0.002	0.100	34.000	2.000	168.000	8.000	
257.65	0.25	FX080805		LPTF	DITTO FOR 50% REPLACED BY QTZ AND PY	0.004	0.200	39.000	13.000	38.000	3.000	
258.85	1.20	FX080806		LPTF	AS TO 257.4 SEVERAL QTZ-PY STRINGERS	0.001	0.100	54.000	5.000	254.000	11.000	
259.15	0.30	FX080807		SULP	MASSIVE COARSLY CRYSTALLINE PY WITH MINOR QTZ	0.019	0.500	124.000	18.000	2035.00	5.000	
260.20	1.05	FX080808		LPTF	AS TO 257.4 REC 57%	0.004	0.300	14.000	2.000	351.000	7.000	
261.30	1.10	FX080809		FLT	CLAY ALTERED ROCK & GRAVEL	0.002	0.200	225.000	2.000	420.000	4.000	
262.20	0.90			LC	FOOT OF HOLE	0.0	0.0	0.0				

NOTE SYMBOLS USED ARE :

* AFTER ASSAY VALUE INDICATES VALUE FOR LOST CORE WAS CALCULATED FROM ADJACENT SAMPLES

SUMMARY OF MINERALIZATION AND ROCK TYPES

FROM METRES	TO METRES	LENGTH METRES	MNZN	ROCK
0.0	0.0	0.0		
0.0	3.05	3.05		OB
3.05	12.34	9.29	MW	ANDS
12.34	16.46	4.12		LC
16.46	41.91	25.45	MW	ANDS
41.91	46.30	4.39	MW	AGLM
46.30	49.07	2.77	MW	ANDS
49.07	53.64	4.57	MW	AGLM
53.64	55.35	1.71	MW	ANDS
55.35	79.55	24.20	MW	AGLM
79.55	81.08	1.53		LC
81.08	85.34	4.26	MW	ANDS
85.34	86.30	0.96		LC
86.30	96.77	10.47	MW	ANDS
96.77	97.30	0.53	MW	TUFF
97.30	113.84	16.54	MW	ANDS
113.84	137.46	23.62	MW	VOLC
137.46	141.43	3.97		LC
141.43	151.30	9.87	MW	VOLC
151.30	165.00	13.70	MW	TUFF
165.00	165.22	0.22	MW	VEIN
165.22	167.30	2.08	MW	VOLC
167.30	170.10	2.80	MW	TUFF
170.10	172.82	2.72	MW	VOLC
172.82	185.17	12.35	MW	TUFF
185.17	189.59	4.42	MW	VOLC
189.59	191.72	2.13	MW	TUFF
191.72	196.00	4.28		LC
196.00	199.34	3.34	MW	FLT
199.34	200.56	1.22	MW	QTZ
200.56	210.50	9.94	MW	VOLC
210.50	212.50	2.00	MW	TUFF
212.50	237.80	25.30		TUFF
237.80	240.70	2.90		SHR
240.70	244.50	3.80		AGOL
244.50	256.10	11.60		SLTS
256.10	258.85	2.75		LPTF
258.85	259.15	0.30		SULP
259.15	260.20	1.05		LPTF
260.20	261.30	1.10		FLT
261.30	262.20	0.90		LC

APPENDIX B

Analytical Results

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
 THIS LEACH IS PARTIAL FOR MN FE CA P LA CR MG BA TI Z N AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
 - SAMPLE TYPE: Core AU: ANALYSIS BY FA-AA FROM 10 GRAM SAMPLE. *Special preparation*

DATE RECEIVED: MAY 19 1987 DATE REPORT MAILED: *May 25/85* ASSAYER: *D. J. Jones* DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT - 60822-14010 File # 87-1310 Page 1

SAMPLED	NO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	N	AU11
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM
FX-080515	1	8	12	18	.1	1	1	45	1.39	11	5	ND	1	6	1	2	3	1	.03	.022	3	1	.24	52	.01	2	.51	.03	.12	1	4
FX-080516	3	18	5	22	.1	1	3	63	2.20	5	5	ND	1	4	1	3	2	1	.03	.029	3	1	.33	29	.01	2	.56	.02	.10	1	2
STD C/AU-R	20	59	38	132	7.0	70	29	981	3.91	41	16	8	34	46	17	15	20	60	.46	.102	35	54	.87	175	.07	37	1.66	.06	.12	13	195
FX-080517	6	16	3	30	.2	1	2	98	2.22	6	5	ND	1	9	1	3	2	1	.04	.038	3	1	.50	28	.01	3	.64	.01	.08	1	6
FX-080518	10	13	4	31	.1	1	3	97	1.95	6	5	ND	1	3	1	2	2	1	.04	.029	3	1	.51	18	.01	6	.67	.01	.07	1	1
FX-080519	3	16	3	33	.1	2	3	119	2.04	4	5	ND	1	5	1	2	2	1	.04	.026	4	1	.53	30	.01	2	.66	.02	.10	1	1
FX-080520	1	12	3	31	.1	1	3	89	2.00	8	5	ND	1	3	1	2	2	1	.05	.030	3	1	.47	35	.01	2	.67	.02	.10	1	1
FX-080521	2	14	4	19	.1	1	3	41	1.88	3	5	ND	1	7	1	3	2	1	.04	.023	2	1	.21	34	.01	3	.43	.02	.09	1	1
FX-080522	2	9	2	61	.2	1	3	60	1.31	3	5	ND	1	3	1	2	2	1	.06	.038	3	1	.56	71	.01	2	.96	.02	.08	1	2
FX-080523	2	7	2	13	.1	1	1	31	.69	2	5	ND	1	3	1	2	2	1	.06	.032	3	1	.17	28	.01	2	.42	.02	.08	1	3
FX-080524	8	13	4	29	.1	2	3	56	1.99	3	5	ND	1	3	1	2	2	1	.06	.031	3	1	.32	39	.01	2	.70	.02	.09	1	1
FX-080525	22	8	2	36	.1	2	3	115	1.22	4	5	ND	1	3	1	2	2	1	.11	.042	3	1	.36	41	.01	2	.66	.02	.10	1	7
FX-080526	4	9	2	79	.1	1	3	718	2.09	6	5	ND	1	3	1	2	2	2	.12	.036	3	1	1.03	49	.01	2	.86	.02	.09	1	4
FX-080527	16	82	2	21	.1	2	5	41	1.68	3	5	ND	1	2	1	2	3	1	.06	.017	2	1	.21	43	.01	2	.52	.02	.09	1	4
FX-080528	111	73	18	26	.8	2	60	65	18.30	22	5	ND	2	2	1	2	22	3	.82	.001	2	1	.07	4	.01	9	.13	.01	.06	3	38
FX-080529	36	31	7	21	.1	1	6	49	3.67	2	5	ND	1	3	1	2	3	1	.06	.019	2	1	.13	20	.01	3	.36	.02	.11	1	6
FX-080530	12	40	6	36	.1	1	7	98	5.54	8	5	ND	1	3	1	3	3	1	.05	.019	2	1	.21	15	.01	3	.54	.02	.10	1	4
FX-080531	5	4	4	110	.1	2	3	1058	2.10	6	5	ND	1	3	1	2	2	1	.99	.015	3	1	1.32	90	.01	2	1.32	.03	.10	1	6
FX-080532	2	2	2	81	.1	4	2	619	1.60	4	5	ND	1	2	1	2	2	1	.07	.017	3	1	.98	44	.01	4	1.04	.03	.06	1	3
FX-080533	2	4	2	81	.1	1	3	835	2.08	4	5	ND	1	3	1	2	2	1	.11	.020	4	1	.98	73	.01	3	1.01	.03	.09	1	3
FX-080534	3	4	2	92	.1	2	3	729	2.09	2	5	ND	1	2	1	2	2	1	.10	.017	2	1	1.10	40	.01	3	1.04	.03	.07	1	2
FX-080535	3	4	2	77	.1	4	3	809	2.06	5	5	ND	2	2	1	2	2	1	.13	.017	3	1	1.07	51	.01	2	1.00	.03	.09	1	2
FX-080536	2	4	3	70	.1	1	2	747	1.99	2	5	ND	1	2	1	2	2	1	.12	.017	3	1	.99	49	.01	4	.91	.03	.09	1	1
FX-080537	2	4	2	66	.2	3	2	488	2.04	3	5	ND	1	3	1	2	4	1	.09	.015	2	1	1.02	56	.01	2	.97	.03	.08	1	1
FX-080538	1	2	5	60	.1	1	2	460	1.75	4	5	ND	1	2	1	2	2	1	.10	.020	2	1	1.11	31	.01	4	1.03	.02	.07	1	2
FX-080539	1	6	3	49	.1	1	2	445	1.52	6	5	ND	1	2	1	2	2	1	.10	.020	3	1	.93	26	.01	2	.90	.03	.10	1	1
FX-080540	6	298	5	29	.3	2	13	270	4.51	11	5	ND	1	2	1	2	5	1	.97	.024	2	1	.23	13	.01	3	.33	.01	.10	1	1
FX-080541	2	208	3	28	.1	1	5	166	2.43	4	5	ND	1	2	1	2	4	1	.07	.019	2	1	.38	33	.01	2	.49	.01	.11	1	1
FX-080542	3	27	2	67	.1	1	2	306	2.16	4	5	ND	2	2	1	2	3	1	.06	.017	3	2	.85	46	.01	5	.87	.02	.12	1	1
FX-080543	2	7	6	72	.1	1	4	429	2.21	3	5	ND	1	3	1	2	4	1	.12	.017	2	1	.94	43	.01	2	.97	.02	.10	1	2
FX-080544	3	7	5	33	.1	1	6	315	2.59	3	5	ND	1	2	1	2	5	1	.10	.017	3	1	.66	28	.01	2	.68	.02	.11	1	1
FX-080545	7	11	5	33	.2	1	7	399	2.32	8	5	ND	1	2	1	2	3	1	.09	.022	3	1	.73	41	.01	3	.72	.02	.11	1	2
FX-080546	3	6	3	45	.1	1	3	460	1.70	5	5	ND	1	3	1	2	4	2	.13	.029	4	1	1.03	59	.01	2	.93	.01	.10	1	1
FX-080547	4	26	2	35	.2	1	6	280	2.76	3	5	ND	1	3	1	2	3	1	.14	.028	2	1	.53	33	.01	7	.64	.02	.10	1	1
FX-080548	3	8	2	21	.2	1	4	120	2.17	2	5	ND	1	3	1	2	2	1	.13	.028	3	1	.42	37	.01	3	.54	.02	.11	1	1
FX-080549	3	14	2	10	.1	1	4	59	2.84	2	5	ND	1	3	1	2	3	1	.09	.024	2	1	.16	26	.01	2	.37	.02	.10	1	1
FX-080550	5	13	2	8	.1	3	7	52	3.40	2	5	ND	1	2	1	2	3	1	.08	.023	2	1	.07	24	.01	4	.25	.02	.11	1	1

CANADIAN NICKEL PROJECT - 60822-14010 FILE # B7-1310

Page 2

SAMPLE#	MO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	MA	K	W	AU#1
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%	%	%	PPM	PPM
FX-080551	4	15	10	19	.1	2	5	48	3.40	4	5	ND	1	3	1	2	2	1	.08	.027	2	1	.09	23	.01	5	.30	.02	.12	1	1
FX-080552	3	9	5	12	.1	1	4	47	2.88	3	5	ND	1	2	1	2	2	1	.08	.027	2	2	.16	23	.01	5	.34	.02	.12	1	1
FX-080553	4	12	3	10	.1	1	4	39	2.77	4	5	ND	1	3	1	2	2	1	.07	.024	2	2	.08	26	.01	3	.30	.02	.12	1	3
FX-080554	4	8	2	6	.1	2	5	30	2.90	4	5	ND	1	3	1	3	2	1	.06	.020	2	1	.04	22	.01	2	.26	.02	.11	2	2
FX-080555	3	8	3	6	.1	3	4	28	2.40	2	5	ND	1	3	1	2	2	1	.05	.024	2	1	.02	22	.01	2	.25	.02	.10	1	1
FX-080556	4	8	2	7	.2	4	3	32	2.31	7	5	ND	1	2	1	2	2	1	.05	.019	2	2	.04	25	.01	3	.24	.02	.10	1	1
FX-080557	4	3	2	3	.1	2	1	21	.87	2	5	ND	1	2	1	2	2	1	.08	.030	2	2	.01	40	.01	2	.22	.02	.11	1	1
FX-080558	3	4	2	6	.1	3	2	18	1.32	2	5	ND	1	2	1	2	2	1	.06	.026	2	1	.02	28	.01	6	.22	.02	.10	1	1
FX-080559	4	7	2	6	.2	2	4	29	2.07	4	5	ND	1	2	1	2	2	1	.08	.029	2	1	.03	21	.01	2	.23	.02	.11	1	1
FX-080560	5	9	3	6	.1	1	3	32	2.05	3	5	ND	1	3	1	2	2	1	.11	.039	2	1	.02	21	.01	4	.22	.02	.12	1	1
FX-080561	3	30	4	9	.1	1	8	33	3.95	6	5	ND	1	2	1	2	2	1	.09	.034	2	2	.02	18	.01	3	.22	.02	.11	1	1
FX-080562	5	9	6	7	.1	3	3	24	2.24	3	5	ND	1	3	1	2	2	1	.15	.055	2	1	.02	18	.01	4	.25	.02	.12	1	1
FX-080563	4	5	2	5	.1	3	2	23	1.84	3	5	ND	1	2	1	2	2	1	.07	.024	2	2	.01	13	.01	2	.21	.02	.11	1	1
FX-080564	3	5	2	3	.1	2	2	19	1.43	2	5	ND	1	3	1	2	2	1	.06	.024	2	1	.01	9	.01	3	.15	.01	.08	1	1
FX-080565	3	5	2	5	.1	1	4	27	2.94	3	5	ND	1	2	1	2	2	1	.07	.027	2	2	.02	24	.01	4	.21	.01	.11	1	1
FX-080566	2	4	4	6	.1	1	3	23	2.14	3	5	ND	1	2	1	2	2	1	.09	.033	2	2	.03	17	.01	4	.22	.02	.11	1	1
FX-080567	3	4	2	5	.1	3	1	30	.88	2	5	ND	1	2	1	2	3	1	.04	.012	2	2	.02	30	.01	3	.22	.02	.12	1	2
FX-080568	4	4	2	6	.1	2	2	23	1.41	2	5	ND	1	2	1	2	2	1	.06	.020	2	1	.02	34	.01	2	.20	.02	.11	1	1
FX-080569	2	4	2	3	.1	2	1	22	.17	3	5	ND	1	2	1	2	2	1	.03	.010	2	1	.01	35	.01	2	.19	.02	.10	1	1
FX-080570	3	4	4	4	.1	2	1	22	.28	2	5	ND	1	3	1	2	2	1	.04	.012	3	2	.02	297	.01	2	.21	.02	.11	1	1
FX-080571	2	30	2	27	.2	1	2	235	1.88	7	5	ND	1	4	1	2	2	1	.29	.019	3	2	.59	35	.01	3	.53	.02	.10	1	1
FX-080572	2	38	2	30	.3	1	2	321	1.84	7	5	ND	1	5	1	2	6	1	.32	.019	3	1	.82	48	.01	3	.71	.02	.10	1	2
FX-080573	10	15	4	11	.2	2	12	740	3.75	7	5	ND	1	5	1	2	2	1	.96	.016	2	1	.63	18	.01	2	.28	.01	.10	1	3
FX-080574	19	6	2	14	.2	1	4	115	1.88	2	5	ND	1	2	1	2	3	1	.10	.012	2	1	.25	36	.01	2	.34	.02	.10	1	1
FX-080575	3	7	5	30	.2	1	3	257	2.34	5	5	ND	1	3	1	2	2	1	.10	.020	3	1	.82	32	.01	3	.73	.02	.11	1	1
FX-080576	2	5	2	26	.1	3	4	230	2.45	4	5	ND	1	5	1	2	4	1	.21	.028	3	1	.82	29	.01	2	.74	.02	.09	1	1
FX-080577	2	4	2	31	.1	2	2	197	2.09	4	5	ND	1	3	1	2	3	1	.19	.026	3	1	.84	28	.01	2	.76	.03	.09	2	1
FX-080578	2	4	2	25	.1	2	1	180	1.67	3	5	ND	1	3	1	2	2	1	.17	.012	2	1	.58	33	.01	2	.56	.02	.11	1	1
FX-080579	2	4	2	30	.1	1	1	208	1.60	4	5	ND	1	3	1	2	3	1	.18	.012	3	2	.68	50	.01	2	.62	.03	.11	1	1
FX-080580	3	5	5	23	.2	2	2	335	1.60	2	5	ND	1	3	1	2	2	1	.27	.012	2	1	.49	52	.01	2	.43	.02	.12	1	1
FX-080581	3	10	2	22	.1	1	9	259	4.21	2	5	ND	1	3	1	2	2	1	.11	.019	2	1	.24	12	.01	2	.31	.02	.10	1	1
FX-080582	14	12	9	13	.6	1	12	118	5.98	5	5	ND	2	2	1	2	4	1	.07	.016	2	2	.12	13	.01	2	.25	.02	.11	1	7
FX-080583	3	8	6	30	.1	2	4	199	2.46	5	5	ND	1	2	1	2	3	1	.12	.023	3	1	.64	32	.01	3	.60	.02	.11	1	1
FX-080584	2	7	5	35	.1	2	5	218	2.77	5	5	ND	1	2	1	2	4	1	.09	.027	3	1	.80	25	.01	2	.73	.02	.12	1	1
FX-080585	2	5	3	45	.1	2	3	276	1.85	4	5	ND	1	3	1	2	4	1	.13	.026	3	1	1.03	46	.01	2	.89	.02	.11	1	1
FX-080586	2	4	7	47	.1	1	2	364	1.48	2	5	ND	1	3	1	2	3	2	.13	.026	4	1	1.28	56	.01	2	1.06	.02	.10	1	1
STD C/AU-R	19	57	39	131	6.8	66	28	957	3.98	40	18	8	32	46	16	16	18	60	.48	.094	35	55	.88	174	.08	35	1.72	.06	.13	13	490

CANADIAN NICKEL PROJECT - 40822-14010 FILE # B7-1310

SAMPLE#	MG PPM	CU PPM	PB PPM	ZN PPM	AG PPM	NI PPM	CO PPM	MM PPM	FE %	AS PPM	V PPM	AU PPM	TH PPM	SR PPM	CD PPM	SB PPM	BI PPM	V PPM	CA %	P %	LA PPM	CR PPM	MG %	BA PPM	TI %	B PPM	AL %	NA %	K %	W PPM	AU11 PPB
FX-080587	2	4	3	37	.1	1	3	394	1.99	4	5	ND	1	2	1	2	6	1	.12	.018	2	3	.87	28	.01	2	.74	.02	.10	1	1
FX-080588	3	7	5	37	.1	1	3	288	2.17	3	5	ND	1	2	1	2	2	1	.12	.018	2	2	.76	38	.01	2	.67	.02	.11	1	3
FX-080589	4	21	2	64	.2	1	4	231	2.49	4	5	ND	1	2	1	2	2	1	.09	.015	2	3	.38	25	.01	2	.41	.02	.11	2	4
FX-080590	3	2174	6	118	.3	1	4	194	3.94	2	5	ND	1	2	1	2	2	1	.09	.022	2	2	.25	21	.01	2	.30	.02	.11	1	1
FX-080591	2	8	2	53	.1	1	3	321	2.26	4	5	ND	1	2	1	2	2	1	.10	.018	2	3	.77	32	.01	2	.52	.02	.11	1	4
FX-080592	2	8	2	54	.1	2	3	406	2.45	2	5	ND	1	2	1	2	3	1	.15	.015	2	2	1.07	34	.01	2	.75	.02	.08	1	3
FX-080593	1	6	4	33	.1	1	2	300	1.66	2	5	ND	1	4	1	2	5	1	.30	.018	2	3	.87	45	.01	2	.69	.02	.11	1	2
FX-080594	2	39	2	34	.1	1	1	266	1.68	3	5	ND	1	4	1	2	5	1	.32	.015	2	2	.70	46	.01	2	.56	.03	.11	1	5
FX-080595	2	6	8	9	.1	1	4	61	2.70	4	5	ND	1	2	1	3	2	1	.11	.025	2	2	.08	24	.01	2	.22	.02	.11	1	3
FX-080596	3	1	3	6	.1	1	1	28	1.30	2	5	ND	1	2	1	2	2	1	.07	.022	2	2	.04	17	.01	2	.19	.02	.08	1	6
FX-080597	3	5	2	18	.1	1	1	65	1.02	3	5	ND	1	2	1	2	3	1	.08	.027	2	2	.34	17	.01	2	.42	.02	.09	1	1
FX-080598	10	7	2	7	.2	1	1	28	.25	3	5	ND	1	2	1	2	2	1	.08	.023	2	2	.02	27	.01	2	.18	.02	.11	1	4
FX-080599	2	7	5	51	.1	1	2	93	1.61	2	5	ND	1	3	1	2	4	1	.15	.012	2	1	.38	25	.01	2	.48	.02	.07	2	1
FX-080600	4	9	7	45	.1	1	7	354	2.84	2	5	ND	1	3	1	2	7	1	.13	.028	2	1	1.01	39	.01	2	.79	.02	.09	1	6
FX-080601	3	17	9	20	.2	1	5	123	3.22	3	5	ND	1	3	1	3	4	1	.15	.037	2	1	.37	24	.01	2	.42	.03	.09	1	7
STD C/AU-R	19	60	35	132	6.6	66	29	989	3.86	41	18	7	32	47	17	17	19	61	.51	.100	35	57	.92	175	.08	40	1.74	.07	.14	13	505

HIT/MISS, B.C NTS 92H-10EC

BH 72403

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER. THIS LEACH IS PARTIAL FOR MN FE CA P LA CR MG BA TI B W AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM. - SAMPLE TYPE: Core AU# ANALYSIS BY FA#AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: MAY 25 1987 DATE REPORT MAILED: *May 29/87* ASSAYER: *D. J. J. DEAN TOYE*, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT - 60822-14010 File # 87-1396 Page 1

SAMPLE#	MO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	W	AU#
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%	%	%	PPM	PPM
FX-080602	1	12	9	60	.2	1	3	222	3.07	2	8	ND	1	3	1	2	14	16	.01	.011	2	1	1.00	20	.01	2	1.14	.04	.12	1	5
FX-080603	1	13	10	100	.4	1	5	527	5.58	2	5	ND	1	4	1	2	2	65	.02	.038	2	2	1.90	30	.01	4	1.92	.05	.08	1	3
FX-080604	1	11	3	26	.2	1	2	138	2.42	2	5	ND	1	1	1	2	3	13	.01	.008	2	1	.60	21	.01	2	.77	.04	.08	2	4
FX-080605	1	55	11	129	.1	1	17	796	9.55	2	5	ND	1	1	1	2	2	67	.01	.027	2	1	3.26	26	.01	4	3.01	.02	.12	1	5
FX-080606	1	8	5	20	.2	1	3	79	1.50	2	5	ND	1	1	1	2	3	3	.01	.013	2	1	.32	10	.01	3	.39	.06	.03	2	4
FX-080607	8	88	12	176	.2	6	49	773	17.68	4	5	ND	3	3	1	2	2	129	.13	.042	2	22	3.70	22	.01	2	3.84	.05	.14	1	8
FX-080608	1	11	10	127	.2	8	11	368	3.78	2	5	ND	2	3	1	6	3	62	.05	.022	2	14	2.73	20	.01	2	2.58	.08	.05	1	3
FX-080609	2	8	4	123	.1	9	15	777	4.25	2	5	ND	1	4	1	2	5	44	.27	.026	2	9	1.94	19	.01	4	1.88	.08	.06	1	2
FX-080610	1	6	5	118	.2	13	12	158	3.12	2	5	ND	1	3	2	2	2	36	.07	.031	2	8	1.26	23	.01	2	1.73	.06	.04	1	3
FX-080611	2	4	3	60	.2	16	11	153	2.81	2	5	ND	1	2	1	2	2	13	.06	.025	2	17	.72	25	.01	3	.96	.07	.03	1	9
FX-080612	1	96	20	442	.5	22	34	2350	8.59	17	5	ND	2	9	1	7	2	130	.64	.031	2	39	4.37	18	.01	2	4.30	.02	.08	1	3
FX-080613	4	27	18	400	.3	62	36	3600	11.74	11	5	ND	2	8	1	5	2	201	.96	.047	2	154	5.58	22	.01	2	5.13	.04	.05	1	2
FX-080614	1	68	11	579	.2	77	28	5549	7.95	4	5	ND	3	15	1	4	2	166	2.37	.042	2	143	5.70	24	.01	2	4.46	.05	.09	1	3
FX-080615	2	53	12	1151	.4	30	19	6634	7.81	2	5	ND	4	28	5	4	2	77	3.91	.030	2	36	4.21	25	.01	2	1.69	.04	.12	1	1
FX-080616	5	23	37	80	.5	18	44	1401	17.48	8	5	ND	2	6	1	2	3	40	.56	.033	2	22	1.13	14	.01	2	.99	.02	.11	1	1
FX-080617	1	218	9	414	.3	82	32	4609	9.29	2	5	ND	3	14	1	3	2	200	2.11	.048	2	155	5.71	26	.01	2	4.65	.07	.11	1	1
FX-080618	1	547	12	565	.3	62	27	6107	7.55	2	5	ND	3	16	2	2	2	153	2.91	.043	2	122	4.63	22	.01	2	3.80	.05	.09	1	5
FX-080619	1	132	13	232	.2	82	22	3336	6.52	2	5	ND	2	7	1	2	2	123	1.07	.039	3	93	3.26	11	.01	2	2.81	.05	.03	1	2
FX-080620	1	19	9	344	.3	69	39	4913	11.39	5	5	ND	2	7	1	2	2	184	.92	.033	2	131	5.03	10	.01	2	4.51	.04	.04	1	1
FX-080621	2	70	31	403	.2	88	44	5633	13.58	9	5	ND	2	8	1	2	2	170	1.18	.034	2	126	5.85	11	.01	2	5.02	.01	.04	1	4
FX-080622	1	39	108	390	4.7	72	33	2849	8.38	15	5	ND	2	10	4	5	2	126	.26	.098	2	139	4.09	21	.01	2	2.91	.06	.07	1	44
FX-080623	1	107	36	325	2.0	8	24	2154	8.04	11	5	ND	1	5	1	3	2	92	.10	.100	2	15	3.45	58	.01	2	3.29	.05	.14	1	1
FX-080624	3	220	953	946	5.7	49	22	1741	9.21	63	5	ND	2	9	3	3	2	71	.05	.088	7	109	2.35	46	.01	4	2.19	.02	.18	1	165
FX-080625	1	85	133	434	1.8	30	8	653	7.39	14	5	ND	2	6	1	2	2	79	.01	.078	5	83	2.76	130	.01	2	2.71	.02	.12	1	27
FX-080626	1	81	126	671	.5	39	20	575	7.62	24	5	ND	1	6	3	4	2	79	.03	.093	2	79	2.65	26	.01	2	2.50	.04	.16	1	15
FX-080627	1	156	76	340	1.2	44	19	760	7.25	4	5	ND	2	6	2	2	2	66	.05	.084	2	56	3.16	23	.01	2	2.96	.02	.14	1	32
FX-080628	2	87	82	161	1.0	31	8	619	6.69	7	5	ND	1	5	1	4	2	85	.01	.058	3	67	3.15	63	.01	3	2.87	.02	.18	1	7
FX-080629	2	316	613	272	3.4	33	12	645	7.76	16	5	ND	1	7	1	5	2	93	.01	.084	3	65	3.39	56	.01	2	3.46	.02	.18	1	8
FX-080630	1	114	49	336	.6	53	39	2728	6.60	7	5	ND	1	6	2	4	2	61	.08	.070	2	31	2.60	32	.01	3	2.60	.02	.26	1	3
FX-080631	1	51	108	115	.8	38	21	277	6.66	2	5	ND	1	8	1	2	2	49	.02	.075	2	33	1.49	14	.01	2	1.56	.02	.19	1	6
FX-080632	1	36	48	166	.4	42	18	427	6.73	2	5	ND	2	10	1	3	2	62	.01	.058	4	45	2.08	25	.01	2	2.25	.02	.20	1	5
FX-080633	1	42	79	197	.5	39	11	414	6.77	3	5	ND	1	9	1	2	2	56	.01	.118	2	34	2.01	50	.01	3	2.48	.02	.18	1	11
FX-080634	1	62	91	278	.8	40	7	564	6.70	14	5	ND	1	7	1	2	2	64	.01	.129	3	29	2.37	71	.01	2	2.97	.01	.16	1	26
FX-080635	1	72	130	235	.8	31	14	513	6.14	6	5	ND	1	6	1	2	2	121	.04	.086	2	72	2.38	31	.01	2	2.19	.05	.07	1	10
FX-080636	1	83	86	209	.9	29	14	607	6.76	4	5	ND	2	9	1	2	2	105	.06	.088	2	57	2.12	30	.01	2	1.95	.04	.09	1	13
FX-080637	1	98	59	182	.7	39	23	638	6.89	2	5	ND	1	6	1	2	2	115	.12	.077	2	75	2.56	20	.01	2	2.09	.05	.06	1	7
STD C/AU-R	19	59	41	131	6.8	69	28	1000	3.90	36	20	8	33	47	17	18	20	60	.46	.099	35	55	.87	177	.08	35	1.71	.07	.13	13	495

SAMPLE#	MO PPM	CU PPM	PB PPM	ZN PPM	AG PPM	NI PPM	CO PPM	MN PPM	FE %	AS PPM	U PPM	AU PPM	TH PPM	SR PPM	CD PPM	SB PPM	BI PPM	V PPM	CA %	P %	LA PPM	CR PPM	MG %	BA PPM	TI %	B PPM	AL %	NA %	K %	W PPM	AU## PPB
FX-080638	1	193	416	455	1.0	24	13	694	7.11	32	5	ND	2	6	1	2	4	105	.07	.088	3	40	2.76	38	.01	3	2.67	.06	.09	3	26
FX-080639	1	123	271	482	1.3	33	20	2557	7.54	16	5	ND	2	9	2	2	2	113	.18	.095	2	49	3.40	40	.01	3	2.64	.07	.17	1	15
FX-080640	2	205	278	647	1.6	33	26	4541	6.58	15	5	ND	2	11	3	2	2	87	.27	.091	2	40	4.30	62	.01	2	2.68	.08	.24	1	24
FX-080641	1	87	98	401	.5	31	26	5674	6.75	11	5	ND	2	12	2	2	2	107	.23	.097	2	47	6.06	96	.02	2	3.59	.06	.33	1	3
FX-080642	1	163	106	238	1.0	41	24	1991	6.69	10	5	ND	2	15	1	2	5	70	.27	.089	2	43	2.48	48	.01	2	2.40	.05	.26	1	9
FX-080643	1	99	104	385	1.2	42	30	2143	7.44	6	5	ND	2	12	2	2	2	131	.19	.092	2	66	3.83	35	.01	5	2.77	.10	.14	1	12
FX-080644	1	135	179	392	.2	43	24	2172	6.67	5	5	ND	2	11	2	2	5	83	.17	.091	2	66	3.27	57	.01	7	2.76	.07	.20	1	6
FX-080645	1	161	116	359	.3	51	27	1618	6.84	6	5	ND	2	9	1	2	2	87	.17	.090	2	70	3.52	35	.01	6	3.33	.05	.13	1	4
FX-080646	1	257	143	506	.7	55	25	913	6.99	14	5	ND	1	9	2	2	2	108	.11	.096	2	58	3.78	55	.01	2	4.42	.05	.16	1	22
FX-080647	4	753	680	4863	7.6	32	23	2379	5.84	12	5	ND	1	13	26	2	12	107	.24	.086	2	37	3.20	50	.01	4	3.01	.09	.13	1	137
FX-080648	1	171	171	613	.7	48	28	3132	6.19	5	5	ND	2	11	2	2	4	102	.19	.082	2	62	3.35	45	.01	2	2.95	.09	.19	1	118
FX-080649	1	774	721	1506	1.5	54	28	1785	6.08	23	5	ND	2	12	8	3	2	74	.20	.080	2	56	2.66	40	.01	7	2.83	.07	.15	1	10
FX-080650	1	616	370	594	1.2	53	34	3349	7.68	18	5	ND	2	12	5	2	4	77	.32	.088	2	52	2.31	55	.01	3	2.16	.07	.21	1	29
FX-080651	1	64	112	531	.1	63	31	2660	6.85	6	5	ND	1	10	3	2	2	147	.22	.091	2	103	4.08	41	.01	13	3.25	.11	.06	1	2
FX-080652	1	109	147	475	.1	63	31	1729	6.13	12	5	ND	1	10	6	2	3	132	.19	.091	2	94	3.91	45	.01	2	3.42	.09	.09	1	6
FX-080653	1	228	689	652	.5	47	23	1670	5.45	10	5	ND	2	9	11	2	4	160	.19	.084	3	90	4.41	67	.01	2	3.68	.11	.07	1	1
FX-080654	1	94	130	377	.3	56	29	2821	6.61	11	5	ND	2	10	10	2	2	180	.22	.091	3	116	5.24	56	.01	2	4.07	.08	.04	1	3
FX-080655	1	96	51	322	.3	59	29	4614	6.45	6	5	ND	3	16	6	2	2	151	.37	.095	3	108	5.01	61	.01	4	3.68	.09	.10	1	2
FX-080656	1	84	22	340	.3	57	34	4776	7.09	7	5	ND	2	12	2	2	2	148	.31	.084	2	101	4.54	45	.01	5	3.28	.09	.07	1	4
FX-080657	1	69	36	371	.3	42	29	5773	6.74	6	5	ND	2	13	1	2	2	137	.34	.092	2	63	4.22	50	.01	6	3.13	.11	.12	1	1
FX-080658	1	25	78	323	.1	43	25	6277	5.94	11	5	ND	2	25	1	2	2	118	.85	.078	2	85	3.93	47	.01	6	2.55	.11	.07	2	2
FX-080659	1	24	185	418	.5	36	25	6990	5.64	21	6	ND	3	38	1	2	2	97	1.75	.075	2	73	3.92	31	.01	2	2.24	.08	.07	1	16
FX-080660	3	628	1384	3162	3.6	34	22	6969	5.64	44	5	ND	3	62	11	2	2	91	3.86	.058	3	63	4.20	26	.01	2	1.96	.06	.06	1	124
FX-080661	2	93	381	1003	.7	35	18	7764	4.92	31	5	ND	3	63	4	2	2	66	3.83	.064	2	49	3.21	55	.01	2	1.53	.06	.09	1	27
FX-080662	5	173	438	2115	.8	8	14	7312	4.60	68	5	ND	3	53	9	2	4	41	2.12	.088	2	6	2.86	54	.01	2	1.94	.03	.23	2	41
FX-080663	4	115	727	1770	1.3	34	18	8202	5.52	38	5	ND	3	49	6	2	2	65	2.68	.063	2	36	3.14	27	.01	2	1.65	.05	.08	1	260
FX-080664	6	58	332	3785	.6	37	18	6565	4.18	35	5	ND	2	40	17	2	5	67	1.83	.062	2	43	2.59	35	.01	2	1.51	.08	.10	1	28
FX-080665	7	205	1474	3682	2.1	23	21	5678	6.51	63	5	ND	2	22	14	2	5	81	.86	.109	2	25	3.58	76	.01	2	2.94	.08	.26	1	63
STD C/AU-R	21	62	36	140	7.2	69	31	1074	3.94	42	20	8	36	50	18	16	21	66	.47	.107	38	61	.87	191	.09	37	1.71	.07	.14	13	490

HIT/MISS , BC NTS 92H-10E

BH 72411 FX 80622-65

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
THIS LEACH IS PARTIAL FOR MN FE CA P LA CR MG BA TI B W AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
- SAMPLE TYPE: Core AU11 ANALYSIS BY FA+AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: JUNE 1 1987 DATE REPORT MAILED: *June 4/87* ASSAYER: *D. J. Toy*, DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT - 60822-14010 File # 87-1508 Page 1

SAMPLE#	NO	CU	PB	ZN	AG	NI	CO	NM	FE	AS	U	AU	TH	SR	CD	SE	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	W	AU11
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	I	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	I	I	PPM	PPM	I	PPM	I	PPM	I	I	I	PPM	PPB
FX-080666	10	121	178	4873	.4	37	22	2556	5.77	30	5	ND	1	12	15	2	2	43	.41	.072	2	36	1.53	9	.01	2	1.11	.04	.09	1	39
FX-080667	5	36	298	1122	.1	39	22	3737	5.62	31	5	ND	1	17	4	2	2	50	.58	.074	2	44	2.25	10	.01	2	1.51	.03	.10	1	37
FX-080668	4	31	93	589	.4	48	23	4504	6.00	19	5	ND	1	32	2	2	2	73	.85	.074	2	57	3.77	12	.01	2	2.40	.02	.08	1	16
FX-080669	4	58	51	280	1.3	52	26	2859	6.42	18	5	ND	1	24	1	2	2	66	.67	.076	2	51	3.36	19	.01	2	2.36	.02	.11	1	22
FX-080670	3	39	26	247	1.1	39	20	5118	5.22	17	5	ND	1	62	1	2	2	59	1.94	.069	2	40	3.44	29	.01	2	2.00	.02	.11	1	20
FX-080671	2	31	33	133	.5	34	14	3955	3.97	7	5	ND	1	29	1	2	3	44	.97	.055	4	59	3.95	55	.01	2	2.72	.01	.11	1	6
FX-080672	10	42	96	267	11.6	30	14	3423	3.93	34	5	ND	1	18	1	2	2	39	.75	.052	3	43	3.01	38	.01	2	2.18	.02	.11	1	64
FX-080673	28	201	656	1730	9.7	19	19	3063	4.31	79	5	ND	1	27	5	4	2	33	1.14	.039	2	6	1.80	9	.01	2	1.14	.01	.09	1	111
FX-080674	5	28	39	176	3.8	21	14	2829	3.82	18	5	ND	1	13	1	2	2	30	.46	.046	3	37	2.81	33	.01	2	2.11	.02	.11	1	25
FX-080675	7	49	51	264	4.5	6	11	1710	5.00	23	5	ND	1	14	1	2	2	21	.42	.142	4	1	2.22	61	.01	2	2.28	.02	.14	1	25
FX-080676	5	57	213	954	9.6	22	16	2444	4.40	16	5	ND	1	32	3	2	2	31	1.16	.074	3	18	2.60	62	.01	2	2.13	.02	.12	1	24
FX-080677	4	96	10	166	.7	31	23	1779	6.69	11	5	ND	1	9	1	2	2	60	.39	.089	3	21	2.24	28	.01	2	2.73	.02	.17	1	8
FX-080678	3	103	9	379	.2	50	28	5034	6.90	10	5	ND	1	28	1	2	2	84	1.63	.061	4	42	3.62	27	.01	2	3.57	.01	.14	2	5
FX-080679	1	104	9	619	.1	38	25	4024	5.95	8	5	ND	1	16	2	2	2	72	.66	.070	4	24	2.89	32	.01	2	3.18	.02	.15	1	4
FX-080680	1	121	14	800	.3	29	24	4130	6.91	6	5	ND	2	11	3	2	2	79	.47	.074	3	14	3.19	30	.01	2	3.51	.01	.17	1	3
FX-080681	1	111	12	494	.1	40	21	2295	5.81	4	5	ND	1	12	2	2	2	74	.70	.069	4	41	2.98	42	.01	2	3.01	.02	.14	1	4
FX-080682	1	85	4	820	.1	42	23	2976	5.85	2	5	ND	2	11	2	2	2	73	.46	.075	5	49	2.41	28	.01	2	2.91	.02	.16	1	3
FX-080683	1	104	6	528	.1	38	22	1787	5.67	2	5	ND	1	7	2	2	2	66	.20	.070	5	41	2.40	22	.01	2	2.77	.02	.13	2	2
FX-080684	2	116	6	1025	.2	26	32	4738	7.06	3	5	ND	1	24	3	2	2	61	1.74	.072	3	11	2.19	30	.01	2	2.42	.02	.14	1	6
FX-080685	1	127	10	641	.1	38	30	2499	6.48	6	5	ND	1	14	6	2	2	70	.88	.075	3	21	2.30	21	.01	2	2.71	.02	.13	1	9
FX-080686	1	116	9	446	.2	57	26	1042	5.94	4	5	ND	2	8	6	4	2	69	.22	.074	4	42	2.48	18	.01	2	3.08	.02	.10	1	3
FX-080687	1	111	20	429	.5	46	17	1339	5.33	7	5	ND	1	10	6	2	2	54	.27	.065	4	25	2.22	18	.01	2	2.92	.02	.11	1	4
FX-080688	3	97	247	160	9.9	15	8	290	2.61	24	5	ND	1	8	1	4	2	17	.04	.034	5	5	.57	27	.01	4	.96	.02	.15	1	41
FX-080689	5	38	124	200	12.3	8	5	329	3.52	42	5	ND	1	16	1	3	2	23	.82	.049	7	4	.68	35	.01	2	.90	.02	.17	1	38
FX-080690	6	141	232	435	4.7	15	10	936	5.50	53	5	ND	1	9	1	3	2	42	.04	.079	3	18	1.75	54	.01	3	1.84	.02	.13	1	67
FX-080691	1	151	252	418	2.2	23	17	2653	5.98	39	5	ND	1	9	3	2	2	60	.30	.092	3	22	3.17	30	.01	2	2.99	.02	.10	1	35
FX-080692	1	155	68	513	2.4	27	27	5948	6.34	19	5	ND	1	20	3	2	2	57	.76	.079	2	16	3.37	37	.01	2	2.82	.01	.11	1	37
FX-080693	2	184	384	606	2.0	32	18	3206	5.53	31	5	ND	1	5	2	2	2	65	.14	.073	2	53	3.11	40	.01	2	2.53	.02	.08	1	52
FX-080694	1	90	130	381	1.2	36	22	2511	6.20	23	5	ND	1	5	2	2	2	55	.17	.076	2	51	2.11	25	.01	2	1.81	.04	.11	1	28
FX-080695	1	133	271	460	2.3	25	18	431	6.61	28	5	ND	1	6	1	3	2	32	.05	.080	2	18	1.02	11	.01	2	1.25	.03	.12	1	38
FX-080696	6	276	496	1719	14.9	31	16	1273	3.91	39	5	ND	1	13	7	3	2	21	.50	.057	2	15	1.30	12	.01	3	1.13	.02	.13	1	785
FX-080697	2	77	110	147	.8	31	17	168	3.74	36	5	ND	1	8	1	2	3	10	.20	.074	2	7	.16	10	.01	3	.45	.03	.12	1	185
FX-080698	1	100	36	209	1.2	37	23	2563	5.76	14	5	ND	1	6	1	2	2	52	.21	.077	2	41	1.95	23	.01	2	1.76	.03	.11	1	19
FX-080699	1	110	22	240	.9	41	23	4157	6.13	60	5	ND	1	8	2	2	2	83	.30	.077	2	71	3.62	27	.01	2	2.76	.03	.10	1	13
FX-080700	1	46	109	308	1.4	34	21	2923	5.46	38	5	ND	1	13	3	2	2	33	.63	.075	2	35	1.72	20	.01	2	1.38	.03	.15	1	33
FX-080701	3	125	834	1792	2.5	29	15	5218	4.30	101	5	ND	1	20	6	3	2	43	1.15	.065	2	40	2.37	21	.01	2	1.50	.03	.11	1	165
STD C/AU-R	21	62	41	138	7.1	72	29	1057	4.01	40	18	8	36	50	18	15	20	60	.45	.104	38	63	.86	189	.09	34	1.71	.08	.14	13	565

SAMPLE#	MO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	W	AU##
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	%	%	%	%	PPM	PPM
FX-080702	9	847	1066	2053	4.7	31	20	1473	5.91	214	5	ND	1	17	8	3	2	12	.63	.066	2	9	.42	7	.01	4	.40	.03	.14	1	425
FX-080703	9	220	931	7011	5.4	30	17	3053	4.52	217	5	ND	1	23	27	3	2	13	1.14	.060	2	12	.75	9	.01	2	.43	.03	.14	1	525
FX-080704	8	119	2797	6179	3.5	32	19	3103	5.58	102	5	ND	1	25	24	4	2	17	1.15	.055	2	12	1.17	8	.01	2	.73	.02	.14	1	285
FX-080705	2	63	663	1247	1.2	36	21	4309	5.39	35	5	ND	1	10	6	2	2	42	.23	.080	2	27	2.25	17	.01	3	1.49	.04	.17	1	48
FX-080706	4	61	1248	656	1.8	30	20	2681	5.62	53	5	ND	1	29	4	2	2	24	.76	.066	2	9	1.33	14	.01	2	1.03	.02	.16	1	50
FX-080707	2	56	98	615	.1	45	23	6850	6.25	17	5	ND	1	20	2	2	2	100	.44	.087	3	70	3.76	44	.01	2	2.81	.05	.12	1	14
FX-080708	2	53	64	305	.1	52	27	4981	7.32	12	5	ND	1	17	1	2	2	103	.42	.089	3	78	3.72	26	.01	2	2.73	.04	.11	1	9
FX-080709	4	59	60	284	.6	62	31	4420	7.81	24	5	ND	1	22	1	2	2	71	.51	.088	2	56	2.93	12	.01	2	2.17	.03	.12	1	19
FX-080710	3	47	91	444	.1	57	28	5982	7.00	20	5	ND	2	13	1	2	4	85	.34	.086	2	65	3.74	17	.01	2	2.75	.04	.13	1	12
FX-080711	2	68	1049	878	.3	58	23	5540	6.31	48	5	ND	1	11	3	2	2	80	.30	.081	3	62	3.46	31	.01	2	2.58	.03	.10	1	27
FX-080712	3	105	468	2385	3.1	39	20	4073	5.36	92	5	ND	1	41	9	2	2	34	1.03	.063	2	24	1.62	12	.01	3	1.04	.03	.13	1	36
FX-080713	2	259	423	1098	2.8	51	22	6491	5.99	88	5	ND	1	26	4	2	2	76	1.06	.085	3	97	3.21	19	.01	2	2.19	.03	.09	1	15
FX-080714	3	56	21	176	.1	49	25	6896	6.03	14	5	ND	1	44	1	2	2	88	2.12	.078	3	110	4.19	31	.01	2	2.58	.03	.09	1	2
FX-080715	2	477	1430	1284	1.0	46	20	7235	5.78	15	5	ND	1	34	10	2	2	88	2.08	.092	2	89	4.30	32	.01	2	2.20	.03	.06	1	13
FX-080716	2	121	34	382	.4	37	11	2480	5.87	4	5	ND	1	13	1	2	2	111	.63	.121	5	65	3.68	80	.01	2	2.75	.05	.08	1	3
FX-080717	2	213	403	1400	.4	22	18	3320	5.57	14	5	ND	1	18	7	2	2	59	1.20	.117	2	38	2.55	10	.01	2	1.69	.05	.09	1	4
FX-080718	3	33	49	177	.1	23	10	2663	5.14	6	5	ND	1	26	1	2	2	69	1.52	.147	3	26	2.85	46	.01	2	1.91	.06	.05	1	2
FX-080719	8	261	1767	6204	5.8	36	18	4674	7.64	14	9	ND	1	28	24	2	2	109	2.03	.077	2	50	4.11	12	.01	2	2.59	.04	.07	1	38
FX-080720	3	224	618	4378	1.6	26	17	5699	6.17	14	5	ND	1	17	19	2	2	156	1.31	.080	2	46	3.42	25	.01	3	2.38	.05	.08	1	19
FX-080721	2	98	89	1236	.2	41	17	2590	7.09	10	5	ND	1	15	5	2	2	136	.91	.112	3	54	3.18	28	.01	2	2.64	.06	.06	1	3
FX-080722	1	32	66	102	.1	13	12	1704	4.40	3	5	ND	1	15	1	2	2	94	1.03	.091	5	24	2.23	44	.01	2	1.97	.06	.05	1	2
FX-080723	1	18	5	124	.1	18	19	1739	7.42	7	5	ND	2	14	1	2	2	179	.71	.086	4	43	3.08	64	.01	2	2.94	.06	.08	1	2
FX-080724	3	35	353	376	.7	18	22	1426	6.35	60	5	ND	1	13	2	2	2	41	.63	.065	2	12	.95	9	.01	2	.86	.02	.17	1	1
FX-080725	2	52	10	378	.1	24	12	2547	5.44	7	5	ND	1	42	1	2	2	120	1.90	.076	2	24	3.62	38	.01	2	2.60	.06	.05	1	4
FX-080726	1	63	7	160	.1	22	21	1733	5.78	6	5	ND	1	30	1	2	2	160	2.25	.083	7	33	2.78	33	.01	2	2.13	.06	.03	2	1
FX-080727	1	86	4	38	.2	12	20	1115	3.89	17	6	ND	2	17	1	2	2	99	1.16	.113	5	19	2.26	88	.01	2	1.75	.07	.04	1	1
FX-080728	1	72	6	31	.1	11	14	1313	2.91	2	5	ND	2	23	1	2	2	94	1.92	.119	5	24	1.68	13	.01	2	1.13	.09	.02	1	1
FX-080729	1	24	5	50	.1	13	21	1194	7.03	8	5	ND	2	25	1	2	2	219	1.85	.128	8	14	2.60	21	.01	2	2.75	.06	.05	1	1
FX-080730	2	64	16	90	.1	10	17	2289	5.21	10	5	ND	1	44	1	2	2	114	3.19	.118	5	13	2.68	48	.01	2	1.91	.07	.09	1	2
FX-080731	2	90	33	283	.2	11	22	4011	6.13	10	5	ND	1	25	1	2	2	61	1.46	.117	3	6	3.20	51	.01	2	1.81	.03	.15	1	3
FX-080732	3	56	22	267	.1	8	17	4963	5.59	18	5	ND	1	24	1	2	2	38	1.38	.125	5	4	3.77	90	.01	2	1.42	.03	.16	1	2
STD C/AU-R	20	59	38	135	7.0	69	28	1021	3.98	39	14	8	35	49	18	16	21	65	.48	.099	37	57	.88	184	.08	36	1.72	.07	.13	14	510

HIT/MISS ,B.C NTS 92H-10E

BH 72411 : FX 80666 -76

BH 72412 : FX 80677 -732

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
 THIS LEACH IS PARTIAL FOR NM FE CA P LA CR MG BA TI B W AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
 - SAMPLE TYPE: Core AU11 ANALYSIS BY FA-AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: JUNE 6 1987 DATE REPORT MAILED: *June 12/87* ASSAYER: *D. Toy* DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT-60B22-14010 File # B7-1620

SAMPLE#	MO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	W	AU11
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM
FX-080733	9	3032	794	14609	5.2	10	13	4521	6.14	39	8	ND	1	30	69	2	3	26	2.05	.078	2	4	2.31	17	.01	2	.57	.04	.12	1	79
FX-080734	1	83	109	519	.1	48	23	3784	5.98	34	5	ND	1	38	2	5	2	37	2.61	.082	2	37	3.73	33	.01	2	1.11	.05	.13	1	16
FX-080735	3	71	35	396	.2	48	18	1717	5.76	15	5	ND	1	14	1	2	4	22	.75	.237	2	10	1.28	24	.01	3	.96	.05	.19	1	28
FX-080736	2	27	3	49	.1	12	14	286	4.77	12	5	ND	1	5	1	2	6	6	.15	.046	2	1	.24	17	.01	2	.39	.03	.13	1	10
FX-080737	3	66	4	48	.1	11	13	273	5.59	8	5	ND	1	6	1	2	2	9	.36	.052	2	1	.27	10	.01	2	.37	.03	.13	1	8
FX-080738	1	44	5	9	.1	6	4	98	2.57	4	5	ND	1	3	1	2	3	1	.14	.016	2	2	.11	28	.01	2	.25	.02	.12	1	3
FX-080739	1	120	7	146	.2	31	26	3172	6.89	15	5	ND	1	15	1	2	3	42	1.35	.076	2	16	3.14	24	.01	2	1.54	.03	.16	1	6
FX-080740	1	17	6	47	.1	5	4	788	2.28	4	5	ND	1	8	1	2	2	3	.81	.040	2	1	.68	21	.01	2	.41	.03	.11	1	1
FX-080741	1	15	2	20	.1	2	2	150	1.45	2	5	ND	1	4	1	2	4	1	.23	.035	2	3	.14	18	.01	3	.29	.02	.12	1	2
FX-080742	9	1758	154	3100	2.2	8	13	135	4.61	21	5	ND	1	4	14	2	11	31	.23	.064	2	5	.42	23	.01	2	.64	.03	.12	1	39
FX-080743	3	49	7	22	.2	1	1	106	2.06	7	5	ND	1	2	1	2	4	1	.12	.015	2	2	.11	26	.01	2	.26	.02	.13	1	6
FX-080744	1	170	15	1865	.5	1	1	80	1.86	30	5	ND	1	2	7	2	4	1	.09	.014	2	2	.08	32	.01	3	.26	.03	.13	1	6
FX-080745	2	25	21	34	.1	1	1	62	1.76	6	5	ND	1	3	1	2	4	1	.10	.013	2	1	.06	33	.01	2	.22	.02	.11	1	4
FX-080746	1	9081	610	8288	5.8	2	2	266	2.70	76	5	ND	1	5	33	2	8	1	.24	.018	2	1	.21	30	.01	2	.26	.03	.11	1	49
FX-080747	2	107	135	215	.4	4	5	775	2.29	2	5	ND	1	11	1	2	4	5	.64	.038	2	2	.54	35	.01	2	.35	.04	.12	1	8
FX-080748	2	29	10	41	.2	1	1	108	1.39	2	5	ND	1	4	1	2	2	1	.16	.012	3	1	.36	62	.01	2	.45	.03	.10	1	1
FX-080749	2	10	3	36	.1	1	3	133	2.02	2	5	ND	1	4	1	2	2	2	.16	.025	2	1	.63	48	.01	2	.65	.03	.12	1	1
FX-080750	3	6	2	9	.1	1	3	41	2.09	2	5	ND	1	2	1	2	2	1	.05	.015	2	3	.08	34	.01	2	.27	.03	.13	1	1
FX-080751	2	4	2	16	.1	1	1	76	1.82	2	5	ND	1	2	1	2	2	1	.04	.008	2	3	.33	39	.01	2	.50	.03	.13	1	5
FX-080752	2	8	2	19	.1	1	1	104	1.63	3	5	ND	1	2	1	2	2	1	.06	.007	2	3	.47	42	.01	2	.58	.04	.12	1	3
FX-080753	2	4	2	5	.1	1	-1	27	2.32	3	5	ND	1	2	1	2	2	1	.04	.009	2	2	.06	42	.01	2	.28	.03	.13	1	1
FX-080754	1	4	2	35	.1	1	4	263	2.47	2	5	ND	1	5	1	2	2	3	.20	.033	2	2	.88	39	.01	2	.88	.03	.10	1	1
FX-080755	1	5	2	38	.1	1	3	239	2.49	2	5	ND	1	4	1	2	2	3	.22	.029	2	2	.86	35	.01	2	.78	.03	.11	1	2
FX-080756	2	13	2	45	.2	1	4	216	2.63	2	6	ND	1	4	1	2	2	4	.18	.033	2	4	.99	38	.01	3	.92	.03	.11	2	1
FX-080757	2	9	2	26	.1	1	5	153	2.97	2	5	ND	1	4	1	2	3	2	.21	.029	2	3	.61	28	.01	2	.64	.03	.12	1	1
FX-080758	2	10	2	8	.3	1	6	52	3.30	2	5	ND	1	4	1	2	3	2	.12	.030	2	3	.15	22	.01	2	.32	.02	.13	1	2
FX-080759	4	7	2	11	.1	1	6	149	3.45	4	6	ND	1	5	1	2	2	2	.30	.027	2	2	.26	21	.01	3	.35	.02	.12	1	6
FX-080760	14	5	2	9	.1	1	3	99	1.93	2	5	ND	1	4	1	2	2	2	.21	.043	2	3	.15	35	.01	2	.28	.02	.11	1	1
FX-080761	74	16	2	97	.2	1	14	372	9.48	4	5	ND	1	5	1	2	6	2	.56	.076	2	1	.34	14	.01	4	.33	.03	.11	1	6
STD C/AU-S	20	59	38	138	6.9	71	29	1037	3.98	42	18	7	34	49	19	17	22	65	.46	.104	37	59	.90	184	.09	33	1.76	.07	.13	12	49

HIT/MISS, B.C

NTS ~~92H~~ 92H-10E

BH 72412

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
 THIS LEACH IS PARTIAL FOR MN FE CA P LA CR NG BA TI B AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
 - SAMPLE TYPE: Core AU#1 ANALYSIS BY FA+AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: JUNE 11 1987

DATE REPORT MAILED: June 17/87

ASSAYER: *Doyle* ... DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT - 60822-14010 File # 87-1703

SAMPLE#	NO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	NG	BA	TI	B	AL	NH	K	W	AU#1
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%	%	PPM	PPM	PPM
FX-80762	2	10	2	36	.1	1	2	157	1.95	2	5	ND	1	5	1	2	2	1	.17	.013	2	2	.44	50	.01	2	.58	.03	.16	2	1
FX-80763	2	17	7	38	.1	1	4	262	2.92	2	5	ND	1	9	1	2	2	1	.42	.027	2	1	.74	45	.01	2	.73	.03	.14	1	1
FX-80764	2	22	2	34	.1	1	3	178	2.23	2	5	ND	1	6	1	2	2	1	.32	.015	2	1	.48	57	.01	2	.50	.02	.13	1	2
FX-80765	2	41	3	34	.1	1	5	177	3.09	2	5	ND	1	6	1	2	2	1	.27	.033	2	1	.51	39	.01	2	.55	.02	.14	1	1
FX-80766	2	31	3	90	.1	1	3	265	2.47	4	5	ND	1	9	1	2	2	1	.34	.031	2	1	.96	51	.01	2	.87	.03	.13	1	1
FX-80767	2	44	2	137	.1	1	3	330	2.55	4	5	ND	1	9	1	2	3	2	.39	.031	2	3	1.15	52	.01	2	.95	.04	.12	1	1
FX-80768	2	22	2	50	.1	1	4	320	2.72	3	5	ND	1	6	1	2	2	2	.30	.029	2	2	1.32	48	.01	2	1.11	.03	.14	2	1
FX-80769	2	23	5	23	.1	1	3	154	2.57	3	5	ND	1	5	1	2	2	1	.19	.030	2	1	.50	44	.01	2	.62	.02	.15	1	1
FX-80770	2	8	7	11	.1	1	6	40	3.85	2	5	ND	1	4	1	2	2	1	.10	.030	2	1	.97	23	.01	3	.30	.02	.13	1	2
FX-80771	1	8	4	20	.1	1	1	243	2.31	3	5	ND	1	7	1	2	2	1	.47	.018	2	2	.52	47	.01	2	.54	.02	.13	1	1
FX-80772	2	4	4	4	.1	1	1	23	1.08	2	5	ND	1	4	1	2	2	1	.07	.022	2	1	.03	39	.01	13	.26	.03	.12	1	1
FX-80773	2	15	6	26	.1	4	5	117	3.25	5	5	ND	1	4	1	2	2	1	.17	.030	2	2	.53	39	.01	18	.66	.03	.16	18	1
FX-80774	1	5	5	20	.1	1	3	156	2.35	3	5	ND	1	7	1	2	2	1	.29	.030	2	2	.60	60	.01	2	.81	.02	.16	1	1
FX-80775	49	14257	7	1	.7	5	6	235	8.74	8	5	ND	2	5	1	2	6	1	.41	.050	2	6	.18	13	.01	4	.15	.01	.07	1	9
FX-80776	1	47	5	42	.1	1	4	408	2.91	4	5	ND	1	6	1	2	2	1	.29	.025	2	1	1.17	60	.01	20	1.18	.03	.18	1	1
FX-80777	2	45	8	32	.1	1	4	373	2.73	5	5	ND	1	6	1	2	2	1	.35	.022	2	1	.78	62	.01	2	.77	.02	.14	1	1
FX-80778	1	17	13	44	.1	1	4	197	2.62	5	5	ND	1	7	1	2	2	1	.22	.032	3	1	.65	61	.01	3	.83	.03	.16	1	1
FX-80779	1	22	3	81	.1	2	5	299	2.82	5	5	ND	1	7	1	2	2	1	.23	.032	3	2	.77	58	.01	2	.86	.02	.15	1	1
FX-80780	8	125	5	87	.2	2	9	534	4.39	8	5	ND	1	5	1	2	2	2	.19	.026	2	1	1.11	37	.01	4	1.09	.02	.15	1	5
FX-80781	9	11	5	73	.1	2	9	572	3.72	5	5	ND	1	6	1	2	2	1	.26	.034	2	2	1.15	46	.01	2	1.06	.02	.16	1	1
FX-80782	3	10	8	77	.1	3	6	592	3.12	7	5	ND	1	7	1	2	2	1	.31	.033	2	2	1.19	54	.01	2	1.06	.02	.14	1	1
FX-80783	10	16	6	41	.1	2	10	294	3.88	5	5	ND	1	3	1	2	2	1	.12	.029	2	2	.61	38	.01	2	.68	.01	.14	1	1
FX-80784	3	10	5	99	.1	2	6	770	3.32	6	5	ND	1	3	1	2	2	2	.12	.035	2	1	1.55	53	.01	4	1.41	.01	.15	1	1
FX-80785	3	10	6	64	.1	1	9	550	3.89	6	5	ND	1	4	1	2	3	1	.14	.038	2	1	1.06	41	.01	2	1.06	.01	.14	1	2
FX-80786	1	16	5	102	.1	3	7	958	3.32	4	5	ND	1	5	1	2	2	3	.17	.033	2	2	1.32	58	.01	2	1.36	.02	.12	1	1
FX-80787	1	16	2	111	.1	1	4	1449	2.46	2	5	ND	1	8	1	2	2	4	.62	.034	3	2	1.23	101	.01	2	1.29	.03	.12	1	1
FX-80788	2	24	5	118	.1	1	4	832	2.76	5	5	ND	1	5	1	2	2	4	.15	.035	3	1	1.28	63	.01	17	1.33	.03	.11	1	1
FX-80789	3	44	2	56	.1	1	6	498	2.87	3	5	ND	1	6	1	2	2	1	.28	.036	2	2	.62	50	.01	3	.67	.03	.11	1	2
STB C/AU-R	19	59	42	133	7.0	66	27	1012	4.14	39	18	8	33	48	17	16	21	61	.50	.100	36	58	.92	180	.08	36	1.81	.07	.14	12	490

HIT/MISS, B.C.

NTS 92H-10E

BH 72412

GEOCHEMICAL ICF ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
 THIS LEACH IS PARTIAL FOR MN FE CA P LA CR MS BA TI B W AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
 - SAMPLE TYPE: Core AU+AA ANALYSIS BY FA+AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: JUNE 15 1987 DATE REPORT MAILED: *June 17/87* ASSAYER: *D. Toye* DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT - 60822-14010 File # 87-1791

SAMPLE#	NO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CP	MG	BA	TI	B	AL	NA	K	W	AU+AA
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%	%	%	PPM	PPM
FX-080790	1	49	2	51	.1	1	5	228	3.01	2	5	ND	1	6	1	2	2	1	.17	.035	3	1	.44	45	.01	2	.57	.03	.10	2	1
FX-080791	1	42	9	93	.1	1	10	581	4.05	2	5	ND	1	5	1	2	3	2	.19	.032	3	1	.97	34	.01	4	1.03	.02	.13	1	2
FX-080792	2	212	6	1833	.1	3	17	1285	6.23	6	5	ND	1	9	11	2	2	50	.34	.041	2	2	2.14	29	.01	5	1.91	.03	.10	1	1
FX-080793	1	20	6	268	.1	19	33	2797	9.00	9	5	ND	1	18	1	2	2	125	.76	.013	2	9	3.94	32	.01	2	1.46	.06	.08	1	1
FX-080794	1	230	4	214	.1	13	23	2377	8.55	3	5	ND	1	12	1	2	2	167	.73	.010	2	7	3.97	32	.01	2	2.92	.04	.10	1	1
FX-080795	17	163	2	224	.2	4	11	1178	4.31	3	5	ND	1	7	1	2	2	18	.48	.023	2	6	1.64	17	.01	4	1.28	.04	.07	1	1
FX-080796	7	152	9	206	.2	6	18	1319	5.53	2	5	ND	1	6	1	2	3	59	.40	.023	2	12	2.25	19	.01	3	1.73	.04	.07	1	1
FX-080797	3	119	2	149	.1	6	12	1075	3.98	2	5	ND	1	4	1	2	2	45	.24	.023	2	12	2.36	20	.01	4	1.88	.04	.07	1	1
FX-080798	2	8	2	107	.1	4	7	832	2.96	2	5	ND	1	6	1	2	4	34	.30	.019	2	8	2.16	17	.01	2	1.63	.05	.07	1	5
FX-080799	1	6	4	108	.1	4	11	762	3.62	2	5	ND	1	5	1	2	4	45	.21	.025	2	10	2.46	20	.01	2	1.87	.04	.08	1	1
FX-080800	2	3	2	41	.1	4	6	421	2.12	2	5	ND	1	5	1	2	2	14	.22	.023	2	5	1.35	16	.01	2	1.02	.05	.07	1	1
FX-080801	2	7	2	69	.1	3	10	599	4.80	2	5	ND	1	6	1	2	2	29	.25	.028	2	8	1.74	20	.01	4	1.30	.05	.06	1	1
FX-080802	1	12	2	70	.1	5	10	653	4.18	2	5	ND	1	6	1	2	2	45	.19	.026	2	6	2.05	12	.01	2	1.59	.05	.05	1	1
STD C/AU-R	19	57	37	133	6.8	64	28	1000	3.88	41	16	8	33	48	17	16	21	62	.44	.094	35	58	.88	178	.08	37	1.72	.07	.14	13	495

HIT/MISS NTS 92H-10E

BH 72412

GEOCHEMICAL ICP ANALYSIS

.500 GRAM SAMPLE IS DIGESTED WITH 3ML 3-1-2 HCL-HNO3-H2O AT 95 DEG.C FOR ONE HOUR AND IS DILUTED TO 10 ML WITH WATER.
 THIS LEACH IS PARTIAL FOR MN FE CA P LA CR MG BA TI B W AND LIMITED FOR NA AND K. AU DETECTION LIMIT BY ICP IS 3 PPM.
 - SAMPLE TYPE: CORE/ROCK AU** ANALYSIS BY FA+AA FROM 10 GRAM SAMPLE.

DATE RECEIVED: JULY 2 1987

DATE REPORT MAILED:

July 7/87

ASSAYER: *D. Toye* DEAN TOYE, CERTIFIED B.C. ASSAYER

CANADIAN NICKEL PROJECT-60822-14010 File # 87-2138

SAMPLE#	MO	CU	PB	ZN	AG	NI	CO	MN	FE	AS	U	AU	TH	SR	CD	SB	BI	V	CA	P	LA	CR	MG	BA	TI	B	AL	NA	K	Y	AU**
	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	I	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	I	I	PPM	PPM	I	PPM	I	I	I	I	PPM	PPM	
FX-080803	2	5	2	143	.1	7	13	1190	5.08	2	5	ND	1	5	1	2	2	42	.17	.023	2	9	2.68	18	.01	2	2.32	.03	.08	1	1
FX-080804	1	34	2	168	.1	6	12	1878	5.46	8	5	ND	1	8	1	3	2	42	.37	.017	2	4	2.78	22	.01	2	2.56	.03	.10	1	2
FX-080805	5	39	13	38	.2	12	65	1362	18.46	3	5	ND	2	11	1	2	2	19	.77	.008	2	1	.69	9	.01	2	.62	.01	.13	1	4
FX-080806	3	54	5	254	.1	11	23	2425	7.91	11	5	ND	1	8	1	4	2	143	.45	.018	2	23	4.05	24	.01	2	3.69	.02	.11	2	1
FX-080807	26	124	18	2035	.5	4	58	653	23.23	5	8	ND	1	3	13	2	2	12	.22	.001	2	1	.54	8	.01	3	.60	.01	.06	1	19
FX-080808	1	14	2	351	.3	12	26	2720	9.47	7	5	ND	1	10	1	2	2	182	.49	.014	2	31	5.10	25	.01	2	4.58	.01	.11	1	4
FX-080809	1	225	2	420	.2	14	23	2682	7.02	4	7	ND	1	22	1	2	2	174	.84	.026	2	36	5.28	17	.01	2	4.62	.01	.03	1	2


FX 80803 - 80809

BH 72412





MISS 2 claim

NTS 92H-10E

17,243

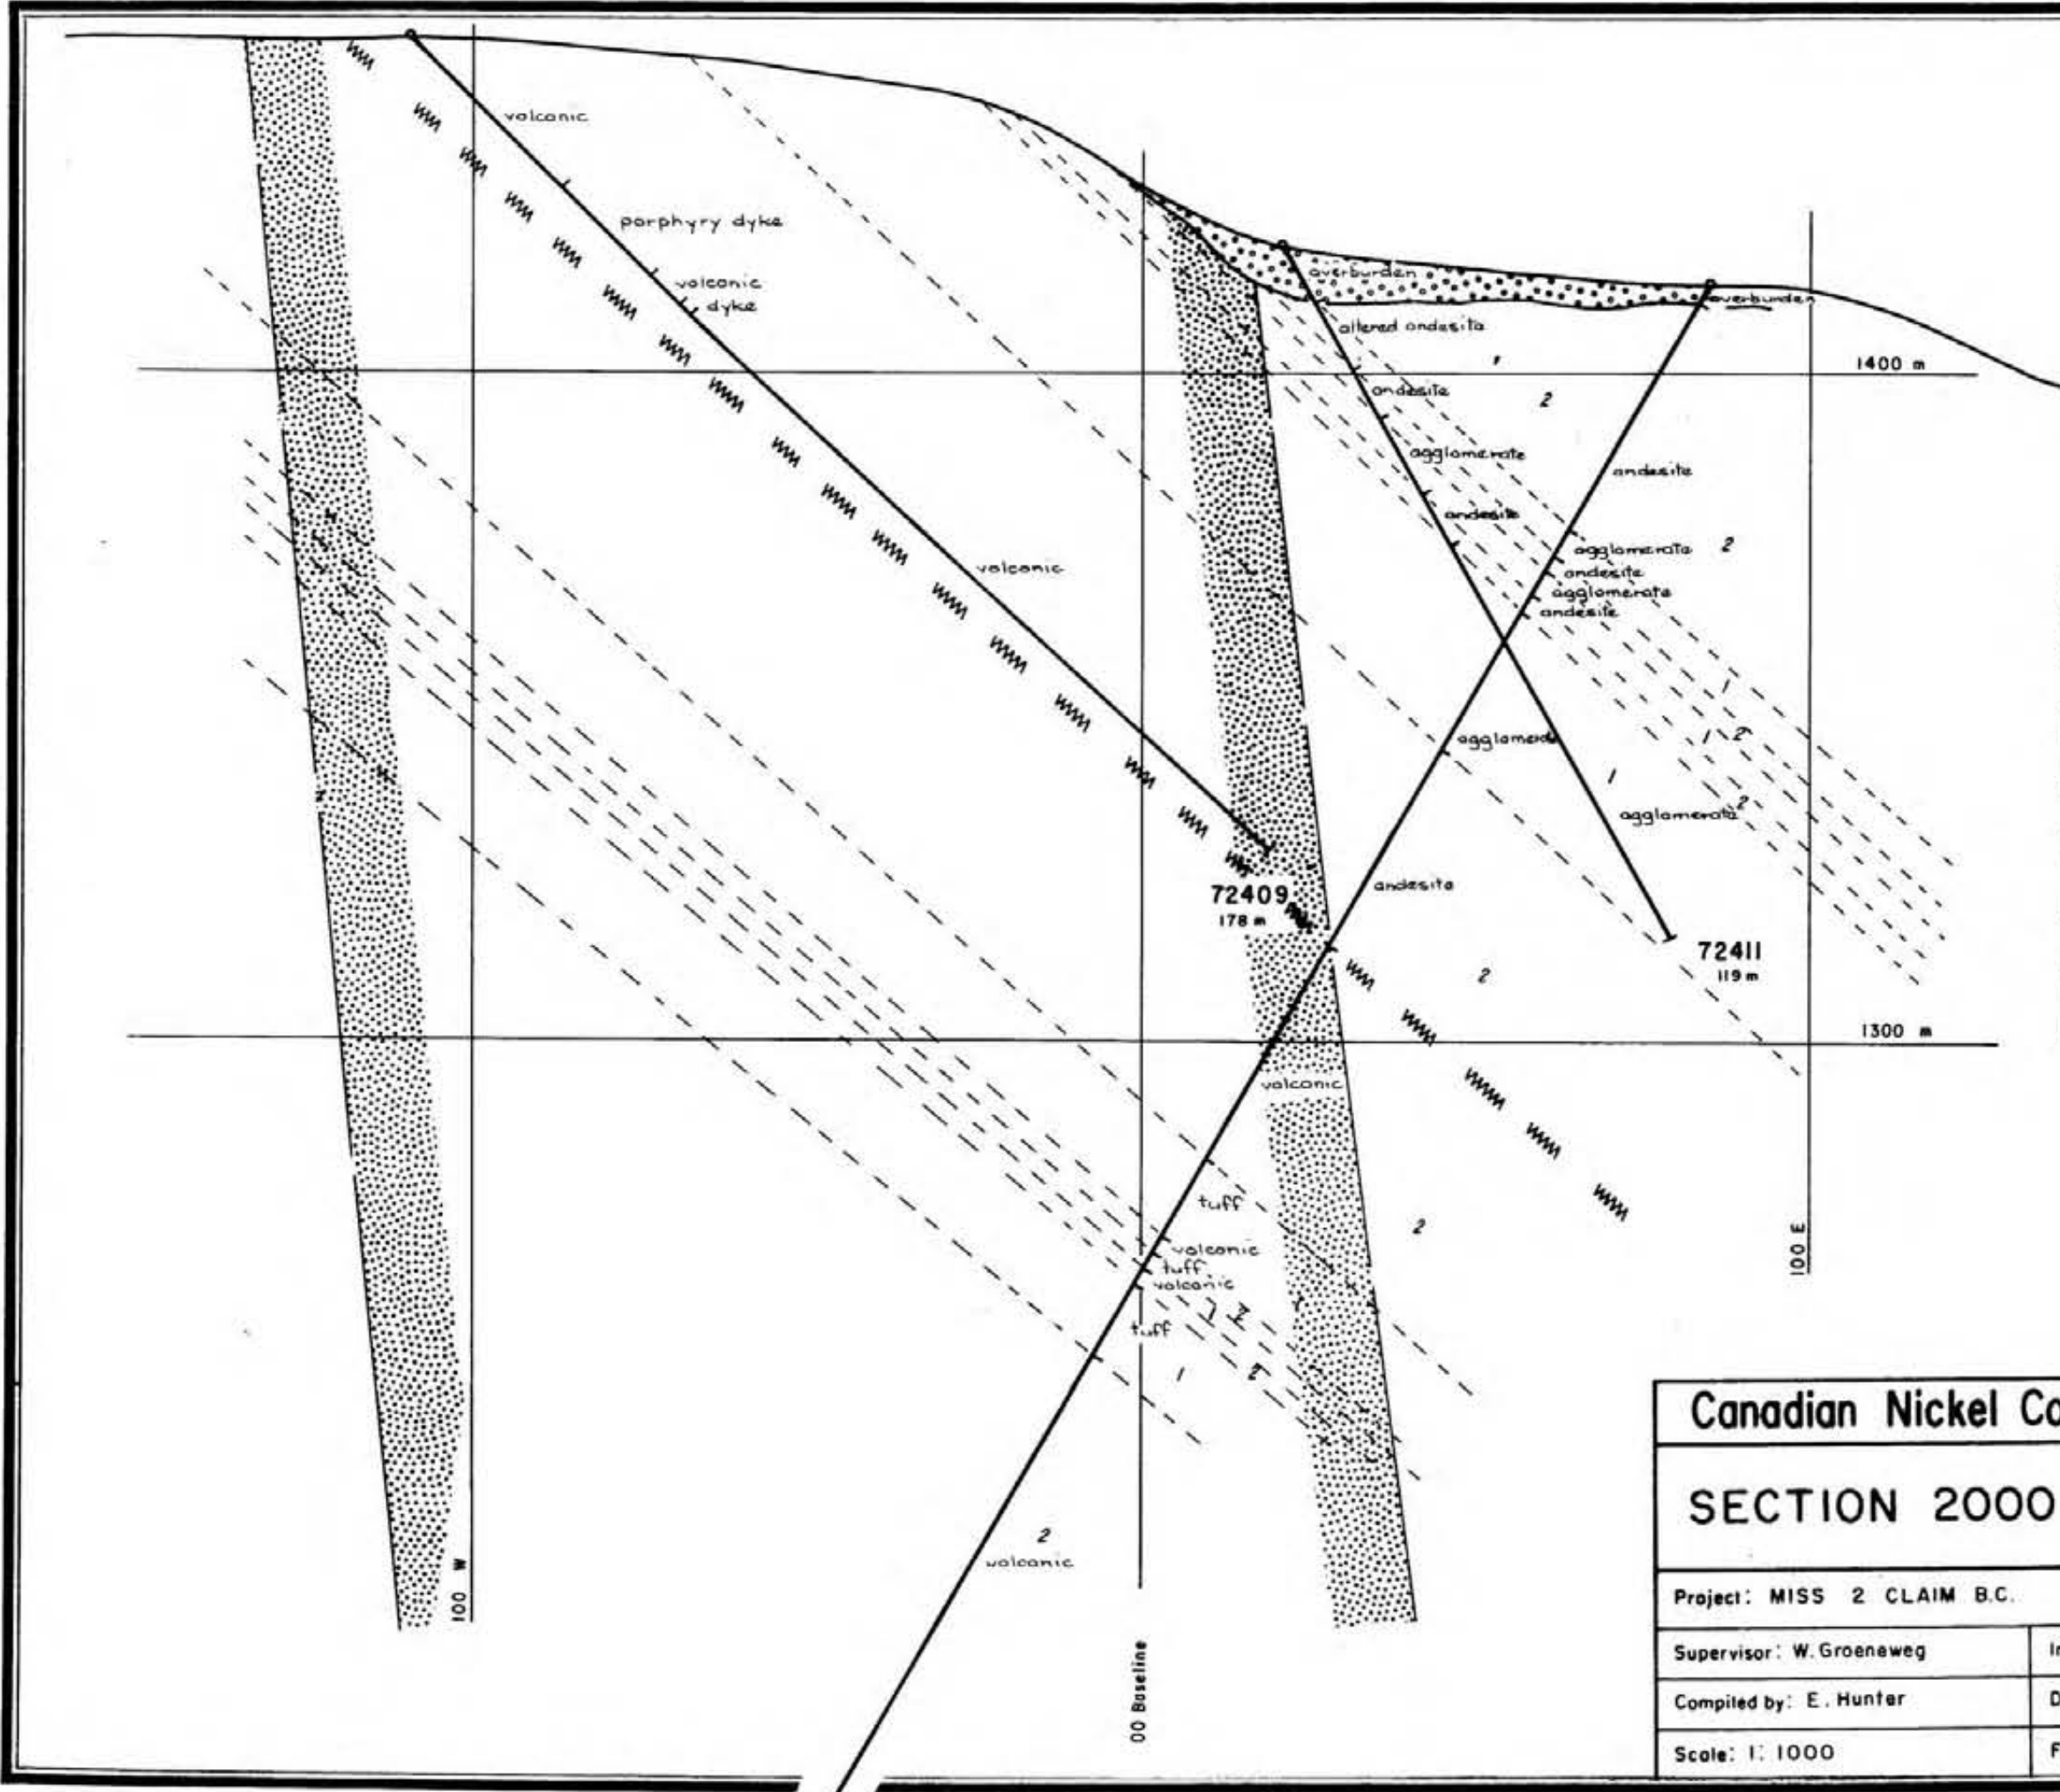

NICOLA GROUP

-  Quartz -clay altered zone
-  Agglomerate, tuff
-  Andersite, volcanic
-  Porphyry dyke

Canadian Nickel Company Limited		Copper Cliff, Ontario POM 1NO	
SECTION 2000 S		SHEET	FIGURE
			4
Project: MISS 2 CLAIM B.C.		Area: SIMILKAMEEN MINING DIVISION B.C.	
Supervisor: W. Groeneweg	Instrument:	Survey date:	
Computed by: E. Hunter	Drawn by: D. W. Walsh	Date drawn: March, 1988	Revised:
Scale: 1: 1000	File:	N.T.S. 92 H 10 E	

