

# REYNOLDS GEOLOGICAL

LOG NO:	NOV 22 1994	RD.
ACTION:		
FILE NO:		

## PERCUSSION DRILLING REPORT

on the

### DOMINIC MINERAL CLAIMS

Kamloops Mining Division  
British Columbia

N.T.S. 092I/10E  
Latitude 50° 35' N  
Longitude 120° 43' W

for

Mr. Charles Boitard  
2245 West 13th Avenue  
Vancouver, B.C.  
V6K 2S4

by

P. REYNOLDS, B.Sc., P.Geo.  
NOVEMBER 14, 1994

<b>SUB-RECORDER</b> RECEIVED
<b>NOV 16 1994</b>
M.R. # ..... \$ .....
VANCOUVER, B.C.

## GEOLOGICAL BRANCH ASSESSMENT REPORT

# 23,592

## TABLE OF CONTENTS

1.	SUMMARY	2
2.	INTRODUCTION	2
3.	LOCATION, ACCESS AND PHYSIOGRAPHY	2
4.	CLAIM STATUS	3
5.	HISTORY	3
6.	GEOLOGY	4
7.	DIAMOND DRILLING	4
8.	CONCLUSION AND RECOMMENDATIONS	5
9.	REFERENCES	6
10.	CERTIFICATE	7

## LIST OF FIGURES

FIGURE 1	LOCATION MAP	FOLLOWS PAGE 2
FIGURE 2	CLAIM MAP	FOLLOWS PAGE 3
FIGURE 3	REGIONAL GEOLOGY	FOLLOWS PAGE 4
FIGURE 4	DRILL PLAN	BACK POCKET

## APPENDICES

APPENDIX I	STATEMENT OF COSTS
APPENDIX II	DIAMOND DRILL LOG
APPENDIX III	ANALYTICAL RESULTS

## 1. SUMMARY


- 1.1 The Dominic property consists of three contiguous mineral claims totalling 44 units. The claims are located approximately 30 kilometres west of Kamloops, B.C. The claims are accessible by good gravel roads from Savona.
- 1.2 The property is underlain by andesites of the Nicola Volcanics.
- 1.3 Three percussion holes were drilled in 1994 to test for copper mineralization. No economic amounts of copper mineralization were encountered.

## 2. INTRODUCTION

- 2.1 This report has been prepared at the request of Mr. Charles Boitard to satisfy assessment requirements.
- 2.2 The information for the following report was obtained from sources cited under references and from the drill logs of PDH 94-1, 94-2 and 94-3. The drilling program was carried out by Mr. Charles Boitard between August 15 and August 18, 1994. The holes were logged by Mr. Brian Meyer, P. Geol., on November 13, 1994. No property examination was made.
- 2.3 The registered owner of the Dominic claims is Mr. Charles Boitard. The claims lie approximately 30 kilometres west of Kamloops, B.C. This area is known for its porphyry copper and molybdenum production from both volcanic and intrusive host rocks. Significant gold and silver has been recovered from these deposits.

## 3. LOCATION, ACCESS AND PHYSIOGRAPHY

- 3.1 The Dominic property is located on the Thompson Plateau approximately 30 kilometres west of Kamloops, B.C. The claims are centered at 50° 35' north latitude and 120° 43' west longitude on NTS map sheet 092I/10E. The claims are in the Kamloops Mining Division.
- 3.2 Access is provided by the Trans-Canada Highway and then south along Tunkwa Lake Road which branches off the highway at Savona. The Tunkwa Lake Road is followed for approximately 14 kilometres to the Durand Creek Road which is in turn followed for 15 kilometres to the base line on the Fox claim. Alternately, access may be gained from the Coquihalla Highway by taking the Logan Lake turnoff.

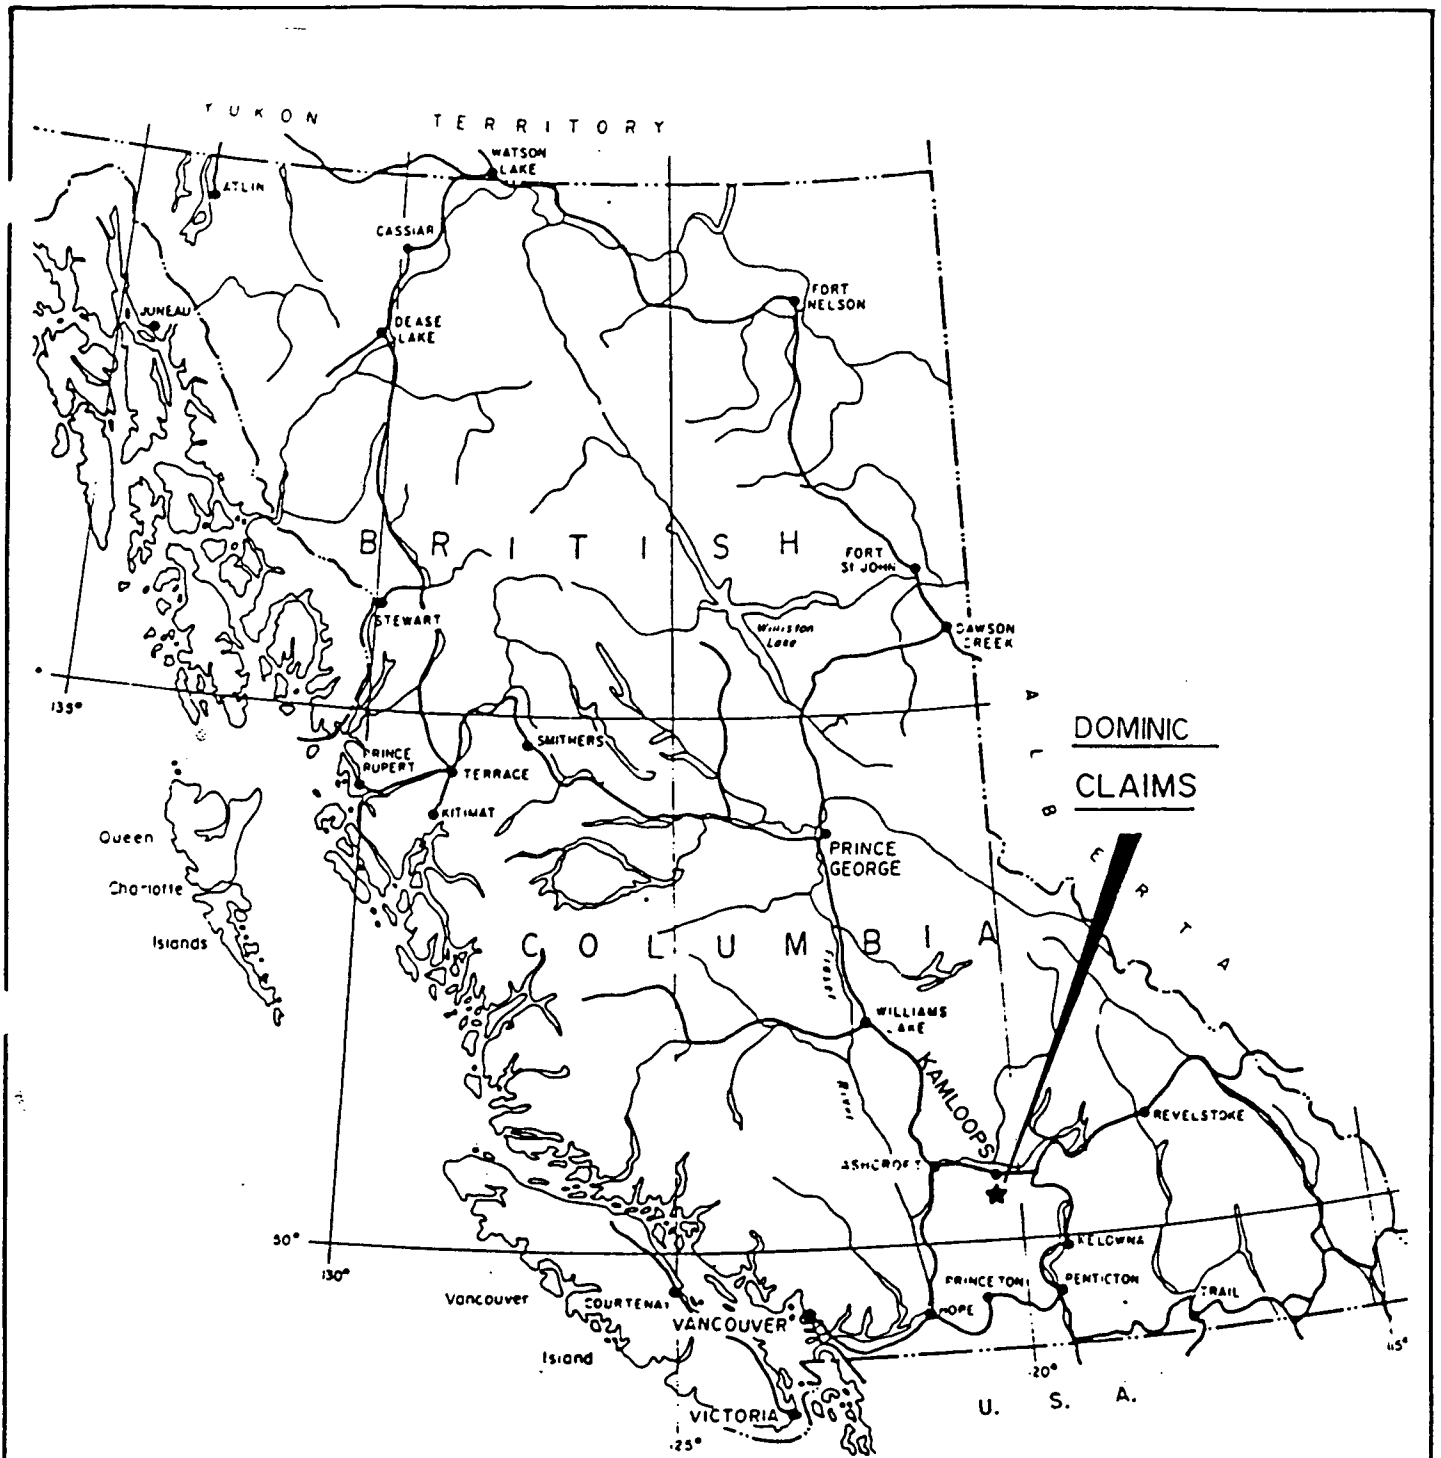

<b>REYNOLDS GEOLOGICAL</b>		
<b>LOCATION MAP</b>		
KAMLOOPS M.D.		NTS: 0921/10E
DRAWN: P.R.	MAY '93	FIG. NO. <u>  </u>

3.3 The property lies between elevations 1,525 and 1,595 metres above sea level. Vegetation consists of open to moderate Jack Pine. The property has been partially logged. Water for all stages of exploration is available from several large swamps and Chartrand Creek. The climate is characterized by warm, dry summers and cool winters with low to moderate snowfall.

#### 4. CLAIM STATUS

4.1 The Dominic property comprises three mineral claims totalling 44 units. Complete claim information is as follows:

<u>NAME</u>	<u>UNITS</u>	<u>RECORD NO.</u>	<u>EXPIRY DATE *</u>
Dominic North	8	216705	August 16, 1995
Dominic South	16	216706	August 16, 1996
Fox	20	300282	June 9, 1997

\* Includes assessment currently being applied.

4.2 All claims are recorded in the name of Mr. Charles Boitard. Any legal aspect of claim ownership is beyond the scope of this report.


#### 5. HISTORY

5.1 The first recorded work on the property was in 1978 when induced polarization surveys and soil geochemical surveys were carried out over a portion of the Dominic property by Geotronics Surveys Ltd. The I.P. survey delineated five anomalies, one of which is particularly interesting because of its size and its correlation with a resistivity low. Only two lines were soil sampled therefore the results are difficult to interpret with any meaning.

5.2 In January and February, 1980 a percussion drilling program was carried out on the property by Green Valley Mines Inc. Goldsmith et. al. reported that the results of the percussion drilling were low but could be correlated with lithology (La Rue, 1991).

5.3 In 1984, exploration consisted of induced polarization, VLF-EM, trenching and rock and soil sampling and one diamond drill hole.

5.4 In 1991, more induced polarization surveys were completed on the property and in 1993 one diamond drill hole was completed.

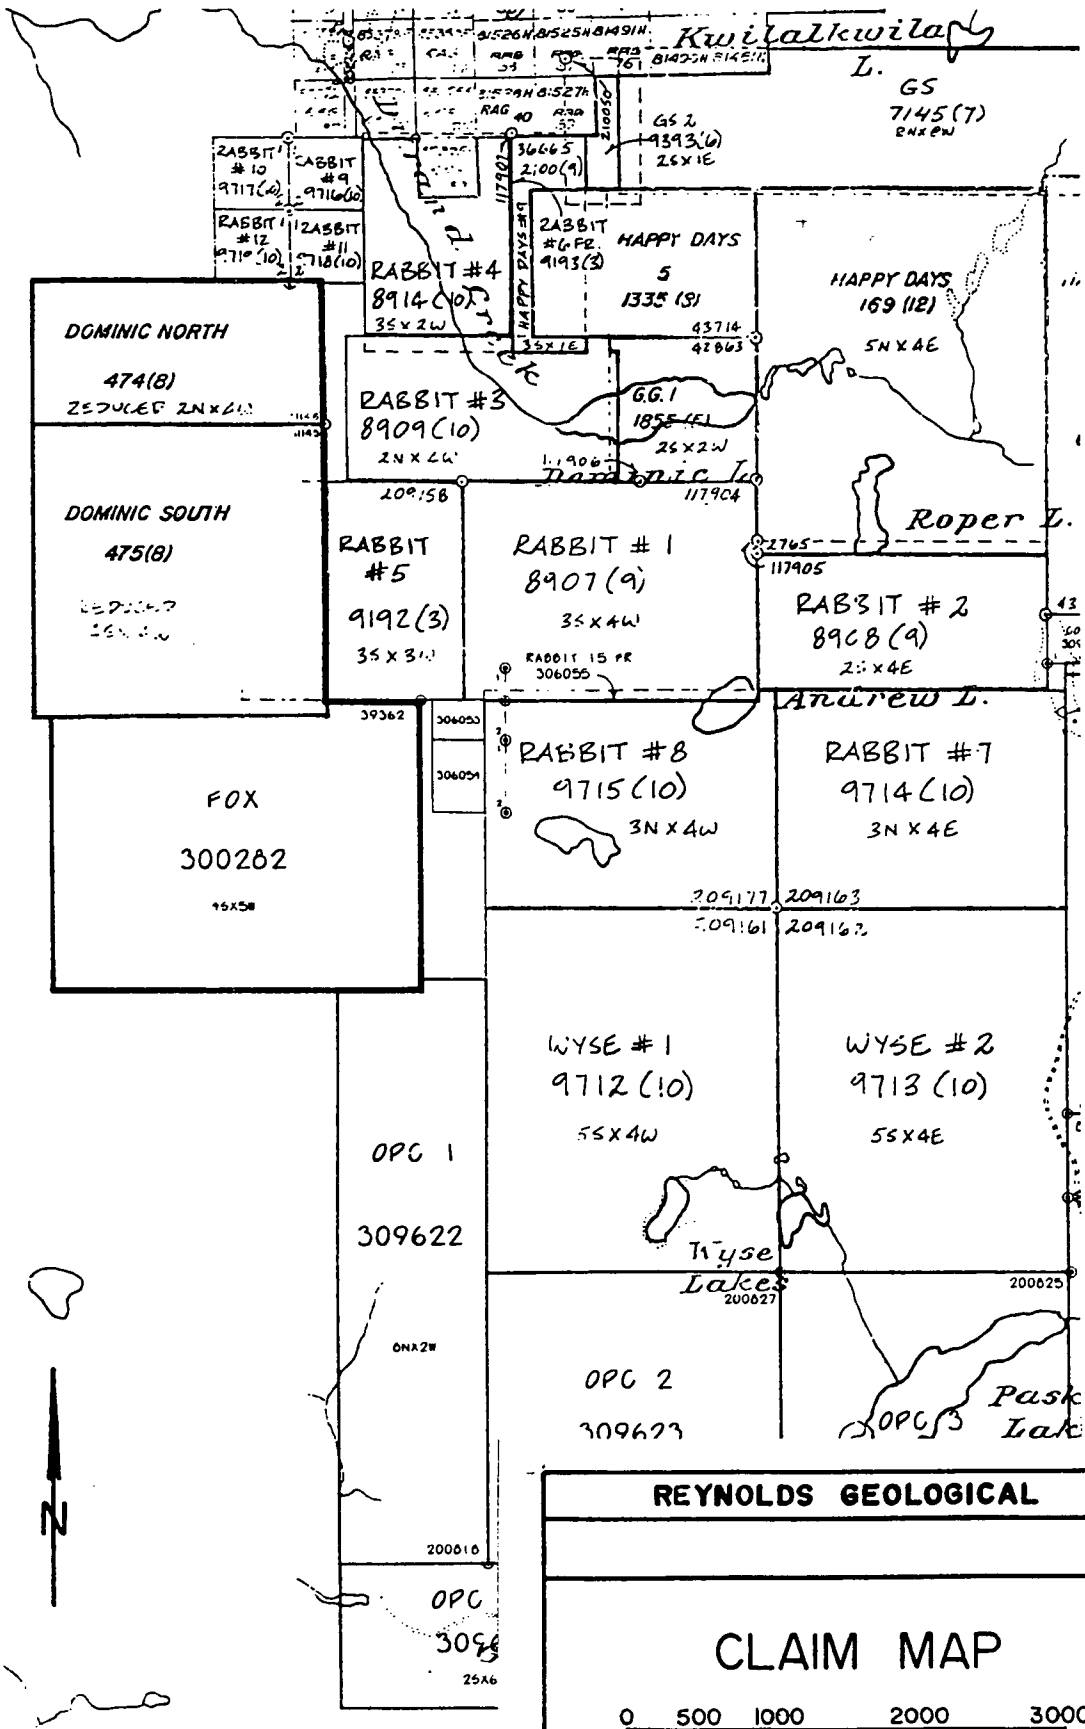

50° 30' N  
 120° 45' W

**REYNOLDS GEOLOGICAL**

**CLAIM MAP**

0 500 1000 2000 3000  
 METRES

KAMLOOPS M. D. NTS: 0921/10E


SCALE AS SHOWN	DRAWN: P.R.	MAY '83	FIG. NO. 2
----------------	-------------	---------	------------

## 6. GEOLOGY

- 6.1 The Dominic claims lie within the Quesnel Trough, a 30 to 60 kilometre wide belt of Lower Mesozoic volcanic and related sedimentary rocks bounded by older sedimentary rocks of the Cache Creek Group to the east and younger Coast Intrusions to the west. In the area of the Dominic claims the Quesnel Trough is dominated by Upper Triassic Nicola Group andesites, basalts, tuffs and argillites. The Nicola Group is intruded by Upper Triassic - Lower Jurassic diorite, syenite and monzonite of the Iron Mask Batholith. This batholith represents a major northwest trending structure that crosscuts the north-northwesterly trending Nicola volcanics. Portions of this area are obscured by later plateau lavas.
- 6.2 Bedrock exposure in this area amounts to only about ten percent, the rest being covered by glacial drift deposited from Pleistocene ice sheets that moved from northwest to southeast.
- 6.3 No systematic, property scale geological mapping has been carried out on the property. The Dominic South claim is underlain by andesite of the Nicola Group. Alteration of the Nicola Andesite consists of propylitization. The resultant alteration products consist of hematite, chlorite, epidote and calcite.

## 7. PERCUSSION DRILLING

- 7.1 During the period August 15 to August 18, 1994 three percussion drill holes were completed on the Fox claim. The holes were drilled vertically to test for sulphide mineralization within an area outlined by anomalous geophysical signatures as defined in previous surveys. The drill hole locations are plotted on Figure 4.
- 7.2 Drilling and sampling was supervised by Mr. Charles Boitard, the present owner of the claims. Samples were taken every three metres (ten feet). Samples were obtained by riffing the chips down to approximately five kilograms of sample. A grab of this material was then sent to Rossbacher Laboratory Ltd., in Burnaby B.C., for analysis by 31 element ICP. None of the samples were assayed for gold. Exact analytical procedures are listed in appendix III. The holes were logged by Mr. Brian Meyer, P. Geol., on November 13, 1994. Drill logs are included in appendix II.
- 7.3 Percussion drill hole 94-1 was drilled to a depth of 128 metres, hole PDH 94-2 was drilled to a depth of 46 metres and PDH 94-3 was drilled to a depth of 131 metres. All three holes intersected Nicola andesites for the entire length. The andesite was propylitically altered throughout. A few siliceous zones were noted but no significant sulphide mineralization was encountered.

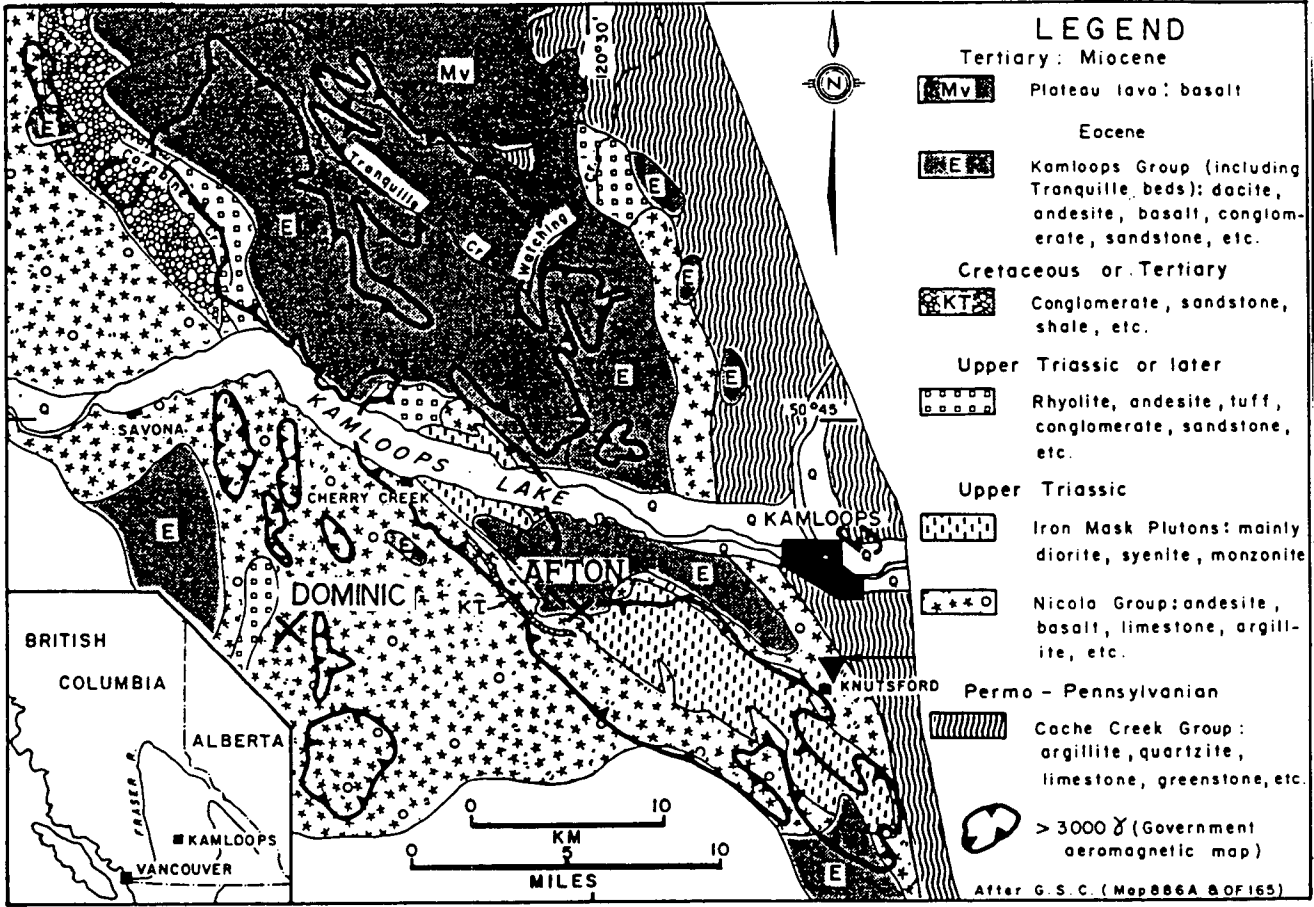

REYNOLDS GEOLOGICAL

REGIONAL GEOLOGY

KAMLOOPS M. D.

NTS: 0921/10E

SCALE AS SHOWN

DRAWN: P.R.


MAY '93

FIG. NO. 3

8. CONCLUSION AND RECOMMENDATIONS

- 8.1 The 1994 percussion drilling program failed to delineate any significant copper mineralization. It is recommended that all previous work be compiled on to one database and be reviewed by qualified personnel. In conjunction with the above, property scale geological mapping should be completed.

Respectfully Submitted,



PROFESSIONAL  
PAUL S. REYNOLDS  
BRITISH COLUMBIA  
GEOSCIENTIST  
14 Nov 94

Paul Reynolds, B.Sc., P. Geo.  
PAUL S. REYNOLDS

9. REFERENCES

Carr, J.M. and Reed, A.J. Afton: A Supergene Copper Deposit. Part of C.I.M., Special Volume 15: Porphyry Deposits of the Canadian Cordillera. 1976.

Cockfield, W.E. Geology and Mineral Deposits of Nicola Map Area, British Columbia. Geological Survey of Canada, Memoir 249, 1961.

La Rue, John P. Assessment Report on Geophysical Survey Conducted on the Dominic Group for Charles Boitard. October 5, 1991.

Mark, David G. Geophysical - Geochemistry Report on Induced Polarization and Soil Sample Surveys over the Dominic Claim Group for Green Valley Mine Inc. March 20, 1979.

10. **CERTIFICATE**

I, Paul Reynolds, of the city of Vancouver in the province of British Columbia do hereby certify that:

- 1) I am a Professional Geoscientist registered with the Association of Professional Engineers and Geoscientists of British Columbia.
- 2) I am a graduate of the University of British Columbia with a B.Sc. degree in geology.
- 3) I have practiced my profession as exploration geologist since graduation in 1987.
- 4) This report is based on a review of previous reports and on drill logs completed by Mr. Brian Meyer, P. Geol., while employed by Reynolds Geological Ltd.
- 5) I have no interest, directly or indirectly, in the Dominic property or in the securities of any company controlled by Mr. Charles Boitard, nor do I expect to receive any interest in the future.
- 6) Permission is hereby granted to Mr. Charles Boitard to use this report in support of any filing to be submitted to the Ministry of Energy, Mines and Petroleum Resources of the Province of British Columbia for the purpose of filing assessment on the Dominic mineral claims.

Dated this 14th day of November, 1994.




## CERTIFICATE

I, Brian Meyer, of the city of Burnaby in the province of British Columbia do hereby certify that:

- 1) I am a Professional Geologist registered with the Association of Professional Engineers, Geologists and Geophysicists of Alberta.
- 2) I am a graduate of the University of Alberta with a B.Sc. degree in geology.
- 3) I have practiced my profession as exploration geologist since graduation in 1979.
- 4) I logged percussion drill holes 94-1, 94-2 and 94-3 on November 13, 1994 while employed by Reynolds Geological Ltd.
- 5) I have no interest, directly or indirectly, in the Dominic property or in the securities of any company controlled by Mr. Charles Boitard, nor do I expect to receive any interest in the future.

Dated this 14th day of November, 1994.

  
Brian Meyer, B.Sc., P.Geol.

**APPENDIX I**  
**STATEMENT OF COSTS**

**STATEMENT OF COSTS**

August 15 - 18, 1994

Percussion Drilling	305 metres @ \$30/metre	9,150
Mob/Demob.		1,000
Transportation, supervision, room and board.		2,000
Assaying		550
<u>Draughting and reporting</u>		<u>1,500</u>
<b>TOTAL</b>		<b>\$14,200</b>



**APPENDIX II**

**DRILL LOGS**

PERCUSSION DRILL LOG

DRILL HOLE: FOX 94-1  
 Drill Depth: 128.5 meters

Page 1 of 2

DEPTH (meters)		INTERVAL meters	DESCRIPTION
From	To		
0	36.59	36.59	no samples
36.59	39.63	3.04	altered andesite(?): strong pervasive propylitization (chlorite-epidote), 5% clear quartz, trace strong limonitized grains.
39.63	42.68	3.05	andesite: mainly moderate-strong propylitic alteration, part green-grey, with weak pervasive silicification; trace quartz grains.
42.68	45.73	3.05	as above.
45.73	48.78	3.05	as above; rare scattered very fine grained pyrite.
48.78	51.83	3.05	as above.
51.83	54.88	3.05	as above.
54.88	57.93	3.05	as above.
57.93	60.98	3.05	altered propylitized andesite as above; trace brick red silicified grains, possibly contact-metamorphosed.
60.98	64.02	3.04	as above.
64.02	67.07	3.05	altered andesite: strong propylitization, no sulfides observed.
67.07	70.12	3.05	as above.
70.12	73.17	3.05	as above.
73.17	76.22	3.05	mainly propylitized andesite as above; part grey moderately silicified; 5-10% milky-clear quartz grains.
76.22	79.27	3.05	as above; rare pyrite-chalcopyrite grains.
79.27	82.32	3.05	as above.
82.32	85.37	3.05	as above; trace red hematized-silicified grains.

DEPTH (meters)		INTERVAL meters	DESCRIPTION
From	To		
85.37	88.41	3.04	as above; rare scattered pyrite-pyrolusite(?) grains.
88.41	91.46	3.05	andesite: moderate-strong propylitization (chlorite-epidote), part light grey with weak-moderate silicification; minor red hematized-silicified grains; trace quartz grains; no sulfides observed.
91.46	94.51	3.05	as above; rare pyrolusite(?).
94.51	97.56	3.05	as above.
97.56	100.61	3.05	andesite as above; increasing hematized-silicified grains; trace fine-grained granitic grains (intrusive veinlets?); no sulfides observed.
100.61	103.66	3.05	as above.
103.66	106.71	3.05	andesite: moderate-strong propylitization; minor red hematized-silicified grains; no observed sulfides.
106.71	109.76	3.05	as above.
109.76	112.80	3.04	as above.
112.80	115.85	3.05	as above.
115.85	118.90	3.05	as above.
118.90	121.95	3.05	andesite: moderate-strong propylitization; minor hematized-silicified grains; minor clear-white quartz grains (stringers?); rare pyrite.
121.95	125.00	3.05	as above.
125.00	128.05	3.05	as above.

E.O.H.

B. G. M.

PERCUSSION DRILL LOG

DRILL HOLE: FOX 94-2  
 Drill Depth: 45.73 meters

Page 1 of 1

DEPTH (meters)		INTERVAL meters	DESCRIPTION
From	To		
0	33.54	33.54	no samples.
33.54	36.59	3.05	andesite: strong pervasaive propylitic alteration (chlorite-epidote); trace limonitic grains; rare pyrite grains.
36.59	39.63	3.04	as above; minor clear-white quartz grains (stringer?).
39.63	42.68	3.05	as above.
42.68	45.73	3.05	as above.

E.O.H.

B.G.M.

PERCUSSION DRILL LOG

DRILL HOLE: FOX 94-3  
 Drill Depth: 131.1 meters

Page 1 of 2

DEPTH (meters)		INTERVAL meters	DESCRIPTION
From	To		
0	36.59	36.59	no sample.
36.59	39.63	3.04	andesite: moderate-strong propylitic alteration; trace clear-milky quartz grains; no sulfides observed.
39.63	42.68	3.05	andesite: mainly altered as above; part light grey-green, silicified; rare pyrite grains.
42.68	45.73	3.05	as above.
45.73	48.78	3.05	andesite: moderate-strong propylitic alteration (mainly chlorite, minor epidote); no sulfides observed.
48.78	51.83	3.05	as above; trace clear-milky quartz.
51.83	54.88	3.05	as above.
54.88	57.93	3.05	as above.
57.93	60.98	3.05	as above.
60.98	64.02	3.04	andesite: moderate-strong propylitic alteration (mainly chlorite, minor epidote), part weakly silicified, no sulfides observed.
64.02	67.07	3.05	as above; trace quartz stringers; trace pyrite.
67.07	70.12	3.05	as above.
70.12	73.17	3.05	as above.
73.17	76.22	3.05	as above.
76.22	79.27	3.05	andesite: moderate-strong propylitization (chlorite-epidote); trace clear-white quartz grains; rare very fine pyrite grains.
79.27	82.32	3.05	as above; increasing quartz content (5-10%).
82.32	85.37	3.05	as above; trace pyrolusite(?).

DRILL HOLE: FOX 94-3

Page 2 of 2

DEPTH (meters)		INTERVAL meters	DESCRIPTION
From	To		
85.37	88.41	3.04	as above; trace clear-white quartz grains.
88.41	91.46	3.05	andesite: moderate-strong propylitization (chlorite-epidote); trace minor red hematized-silicified grains.
91.46	94.51	3.05	as above.
94.51	97.56	3.05	andesite: moderate-strong propylitization (chlorite-epidote); trace pyrolusite(?); trace quartz grains.
97.56	100.61	3.05	as above.
100.61	103.66	3.05	as above.
103.66	106.71	3.05	andesite: altered as above; trace red hematized-silicified grains.
106.71	109.76	3.05	as above; trace pyrolusite(?).
109.76	112.80	3.04	as above.
112.80	115.85	3.05	as above; increasing red hematized-silicified grains.
114.85	118.90	3.05	andexite: moderate-strong propylitization (chlorite-epidote); minor red hematized-silicified grains; trace clear-milky quartz grains.
118.90	121.95	3.05	as above; rare pyrite.
121.95	125.00	3.05	as above.
125.00	128.05	3.05	as above.
128.05	131.10	3.05	as above.

E.O.H.

B.2/M

**APPENDIX III**  
**ANALYTICAL RESULTS**

REYNOLDS GEOLOGICAL  
 DRILL SAMPLE RECORD SHEET

HOLE NO. 92-1  
 PROPERTY: FOX

SAMPLE NO.	FROM (m)	TO (m)	Cu (ppm)	Au (ppb)		
F 94-1	120	130	36.59	39.63	69	N/A
F 94-1	130	140	39.63	42.68	84	N/A
F 94-1	140	150	42.68	45.73	86	N/A
F 94-1	150	160	45.73	48.78	76	N/A
F 94-1	160	170	48.78	51.83	67	N/A
F 94-1	170	180	51.83	54.88	68	N/A
F 94-1	180	190	54.88	57.93	79	N/A
F 94-1	190	200	57.93	60.98	93	N/A
F 94-1	200	210	60.98	64.02	103	N/A
F 94-1	210	220	64.02	67.07	95	N/A
F 94-1	220	230	67.07	70.12	93	N/A
F 94-1	230	240	70.12	73.17	99	N/A
F 94-1	240	250	73.17	76.22	88	N/A
F 94-1	250	260	76.22	79.27	84	N/A
F 94-1	260	270	79.27	82.32	69	N/A
F 94-1	270	280	82.32	85.37	67	N/A
F 94-1	280	290	85.37	88.41	70	N/A
F 94-1	290	300	88.41	91.46	66	N/A
F 94-1	300	310	91.46	94.51	64	N/A
F 94-1	310	320	94.51	97.56	70	N/A
F 94-1	320	330	97.56	100.61	67	N/A
F 94-1	330	340	100.61	103.66	73	N/A
F 94-1	340	350	103.66	106.71	80	N/A
F 94-1	350	360	106.71	109.76	87	N/A
F 94-1	360	370	109.76	112.80	87	N/A
F 94-1	370	380	112.80	115.85	81	N/A
F 94-1	380	390	115.85	118.90	78	N/A
F 94-1	390	400	118.90	121.95	75	N/A
F 94-1	400	410	121.95	125.00	77	N/A
F 94-1	410	420	125.00	128.05	84	N/A

REYNOLDS GEOLOGICAL  
DRILL SAMPLE RECORD SHEET

HOLE NO. 92-2

PROPERTY: FOX

SAMPLE NO.			FROM (m)	TO (m)	Cu (ppm)	Au (ppb)
F 94-2	110	120	33.54	36.59	67	N/A
F 94-2	120	130	36.59	39.63	74	N/A
F 94-2	130	140	39.63	42.68	78	N/A
F 94-2	140	150	42.68	45.73	84	N/A

REYNOLDS GEOLOGICAL  
 DRILL SAMPLE RECORD SHEET

HOLE NO. 92-3  
 PROPERTY: FOX

SAMPLE NO.			FROM (m)	TO (m)	Cu (ppm)	Au (ppb)
F 94-3	120	130	36.59	39.63	85	N/A
F 94-3	130	140	39.63	42.68	84	N/A
F 94-3	140	150	42.68	45.73	82	N/A
F 94-3	150	160	45.73	48.78	98	N/A
F 94-3	160	170	48.78	51.83	95	N/A
F 94-3	170	180	51.83	54.88	99	N/A
F 94-3	180	190	54.88	57.93	118	N/A
F 94-3	190	200	57.93	60.98	122	N/A
F 94-3	200	210	60.98	64.02	109	N/A
F 94-3	210	220	64.02	67.07	111	N/A
F 94-3	220	230	67.07	70.12	112	N/A
F 94-3	230	240	70.12	73.17	115	N/A
F 94-3	240	250	73.17	76.22	120	N/A
F 94-3	250	260	76.22	79.27	111	N/A
F 94-3	260	270	79.27	82.32	89	N/A
F 94-3	270	280	82.32	85.37	80	N/A
F 94-3	280	290	85.37	88.41	85	N/A
F 94-3	290	300	88.41	91.46	78	N/A
F 94-3	300	310	91.46	94.51	80	N/A
F 94-3	310	320	94.51	97.56	85	N/A
F 94-3	320	330	97.56	100.61	83	N/A
F 94-3	330	340	100.61	103.66	78	N/A
F 94-3	340	350	103.66	106.71	79	N/A
F 94-3	350	360	106.71	109.76	78	N/A
F 94-3	360	370	109.76	112.80	79	N/A
F 94-3	370	380	112.80	115.85	71	N/A
F 94-3	380	390	115.85	118.90	81	N/A
F 94-3	390	400	118.90	121.95	81	N/A
F 94-3	400	410	121.95	125.00	76	N/A
F 94-3	410	420	125.00	128.05	78	N/A
F 94-3	420	430	128.05	131.10	77	N/A

# ROSSBACHER LABORATORY LTD.

2225 Springer Avenue  
Burnaby , B.C.  
Canada

## GEOCHEMICAL ANALYTICAL METHOD DESCRIPTIONS 1993

### A. SAMPLE PREPARATION

#### Soil and Silts :

Samples are dried and sifted to minus 80 mesh using nylon or stainless steel screens.

#### Rock samples :

Samples are dried, crushed to 1/8 inch , split , and pulverized to minus 100 mesh .

### B. METHOD OF ANALYSIS

#### Multi element Atomic Absorption :

0.5 gram of sample is digested with a 15:85 mixture of Nitric-Perchloric acid for four hours . The resulting extract is analyzed by Atomic Absorption Spectroscopy for any, or all of the following elements : Mo, Cu, Ni, Co, Mn, Fe, Ag, Zn, Pb, Cd, As.

#### ICP Emission Spectroscopy :

0.5 Gram of sample is digested with Aqua Regia, and the resulting extract analyzed for 30 elements .

# ROSSBACHER LABORATORY LTD.

## CERTIFICATE OF ANALYSIS

2225 Springer Ave., Burnaby,  
British Columbia, Can. V5B 3N1  
Ph:(604)299-6910 Fax:299-6252


To: MENIKA MINING LTD.,  
2245 W 13TH AVE.,  
VANCOUVER, B.C.

Project: FOX  
Type of Analysis: ICP

Certificate: 94263  
Invoice: 50344  
Date Entered: 94-11-04  
File Name: MEN94263.I  
Page No.: 1

PRE FIX	SAMPLE NAME	PPM MO	PPM CU	PPM PB	PPM ZN	PPM AG	PPM NI	PPM CO	PPM MN	% FE	PPM AS	PPM U	PPM AU	PPM HG	PPM SR	PPM CD	PPM SB	PPM BI	PPM V	% CA	% P	PPM LA	PPM CR	% MG	PPM BA	% TI	% AL	% NA	% K	% SI	PPM W	PPM BE
P	94.1 120-130	2	69	29	43	0.6	19	9	723	3.45	42	5	ND	ND	78	1	1	2	110	2.81	0.13	7	43	1.06	151	0.16	1.59	0.09	0.15	0.21	2	1
P	94.1 130-140	2	84	21	55	0.3	20	12	866	4.02	32	5	ND	ND	103	1	1	3	139	2.79	0.14	6	38	1.34	157	0.21	2.09	0.13	0.18	0.23	1	1
P	94.1 140-150	3	86	31	56	0.3	30	11	936	4.09	32	5	ND	ND	150	1	1	1	143	2.88	0.14	8	36	1.56	203	0.22	2.27	0.18	0.24	0.24	1	1
P	94.1 150-160	2	76	34	54	0.3	46	11	836	3.76	33	5	ND	ND	146	1	2	1	117	2.69	0.15	9	40	1.81	146	0.19	1.92	0.15	0.22	0.20	1	1
P	94.1 160-170	2	67	27	52	0.6	84	14	884	3.87	31	5	ND	ND	209	1	1	1	108	3.15	0.16	11	59	2.51	148	0.18	1.93	0.15	0.22	0.27	1	1
P	94.1 170-180	2	68	28	56	0.2	109	15	862	4.03	32	5	ND	ND	188	1	1	1	109	2.83	0.16	12	53	2.64	148	0.19	1.87	0.16	0.28	0.24	1	2
P	94.1 180-190	1	79	21	62	0.2	70	14	958	4.25	30	5	ND	ND	177	1	1	1	133	3.42	0.16	11	47	2.22	287	0.24	2.16	0.21	0.31	0.25	1	1
P	94.1 190-200	1	93	25	54	0.2	30	11	914	4.25	24	5	ND	ND	117	1	1	1	141	3.79	0.16	7	28	1.48	168	0.19	2.25	0.13	0.22	0.22	1	1
P	94.1 200-210	1	103	29	57	0.2	23	13	1028	4.54	27	5	ND	ND	108	1	2	1	166	3.58	0.15	6	30	1.59	131	0.22	2.50	0.10	0.17	0.19	1	1
P	94.1 210-220	2	95	21	59	0.3	22	13	1015	4.41	33	5	ND	ND	92	1	1	1	153	3.07	0.14	5	28	1.71	167	0.21	2.58	0.08	0.10	0.19	1	1
P	94.1 220-230	1	93	21	52	0.2	20	13	1030	4.47	32	5	ND	ND	97	1	1	2	152	3.33	0.14	6	30	1.61	191	0.22	2.41	0.10	0.13	0.24	3	1
P	94.1 230-240	2	99	22	54	0.2	18	14	1183	4.80	28	5	ND	ND	142	1	1	1	151	4.82	0.15	6	32	1.82	300	0.20	2.41	0.10	0.15	0.24	1	1
P	94.1 240-250	2	88	27	56	0.2	17	13	1177	4.40	29	5	ND	ND	163	1	2	1	111	6.09	0.13	5	26	1.71	439	0.12	1.70	0.07	0.16	0.17	1	1
P	94.1 250-260	2	84	25	53	0.2	12	14	1318	4.61	25	5	ND	ND	177	1	2	1	87	6.69	0.13	6	19	1.83	605	0.05	1.19	0.05	0.18	0.10	1	1
P	94.1 260-270	1	69	9	53	0.3	11	13	1243	4.29	21	5	ND	ND	181	1	1	1	86	7.82	0.12	7	20	1.58	437	0.05	1.27	0.07	0.18	0.11	1	1
P	94.1 270-280	2	67	26	52	0.2	8	14	1224	4.44	31	5	ND	ND	161	1	1	1	113	6.57	0.13	8	25	1.55	411	0.12	1.50	0.06	0.15	0.11	1	1
P	94.1 280-290	1	70	17	56	0.1	13	12	1200	4.62	27	5	ND	ND	157	1	1	1	127	6.36	0.14	9	30	1.53	467	0.17	1.96	0.08	0.18	0.15	1	1
P	94.1 290-300	2	66	21	53	0.1	16	12	1108	4.53	25	5	ND	ND	141	1	1	1	135	5.40	0.15	9	30	1.42	412	0.22	1.88	0.09	0.13	0.18	1	1
P	94.1 300-310	1	64	21	53	0.1	17	14	1091	4.63	28	5	ND	ND	146	1	3	1	134	5.00	0.14	9	31	1.41	385	0.17	1.76	0.09	0.16	0.17	1	1
P	94.1 310-320	2	70	22	54	0.1	17	13	1027	4.63	28	5	ND	ND	152	1	1	1	141	4.52	0.14	9	31	1.39	351	0.21	1.79	0.11	0.15	0.23	2	1
P	94.1 320-330	2	67	19	47	0.2	16	13	956	4.33	29	5	ND	ND	137	1	1	1	132	4.29	0.13	8	27	1.30	291	0.21	1.72	0.10	0.18	0.23	2	1
P	94.1 330-340	1	73	28	49	0.1	18	15	1047	4.56	25	5	ND	ND	142	1	1	1	141	4.63	0.14	9	29	1.47	292	0.22	1.90	0.09	0.16	0.21	1	1
P	94.1 340-350	3	80	19	55	0.1	19	15	1078	4.63	28	5	ND	ND	152	1	1	1	158	4.30	0.14	9	33	1.54	365	0.30	2.30	0.10	0.14	0.26	1	1
P	94.1 350-360	1	87	22	55	0.2	20	13	1045	4.53	32	5	ND	ND	140	1	1	1	154	4.08	0.14	9	33	1.46	318	0.31	2.34	0.10	0.10	0.24	2	1
P	94.1 360-370	1	87	21	51	0.1	16	13	1050	4.66	25	5	ND	ND	151	1	1	1	168	4.29	0.14	9	36	1.50	337	0.33	2.49	0.13	0.13	0.36	1	1
P	94.1 370-380	1	81	29	55	0.1	18	14	1037	4.39	31	5	ND	ND	135	1	1	1	156	4.07	0.14	9	33	1.44	438	0.29	2.37	0.10	0.10	0.23	2	1
P	94.1 380-390	2	78	26	54	0.2	19	12	1156	4.53	24	5	ND	ND	137	1	2	1	162	4.49	0.13	9	34	1.39	328	0.29	2.57	0.12	0.10	0.37	1	1
P	94.1 390-400	2	75	18	54	0.1	18	13	1119	4.38	24	5	ND	ND	158	1	1	1	154	4.15	0.13	9	32	1.44	235	0.27	2.44	0.12	0.11	0.36	1	1
P	94.1 400-410	2	77	27	56	0.2	21	14	1153	4.53	25	5	ND	ND	162	1	1	1	152	4.13	0.14	9	37	1.51	204	0.25	2.34	0.12	0.15	0.32	1	1
P	94.1 410-420	2	84	18	58	0.2	18	16	1131	4.29	30	5	ND	ND	149	1	1	1	121	4.06	0.14	9	31	1.53	185	0.15	2.15	0.07	0.15	0.20	1	1
P	94.2 110-120	3	67	26	46	0.1	17	11	799	3.74	28	5	ND	ND	88	1	1	1	122	3.01	0.14	7	44	1.08	175	0.17	1.71	0.09	0.15	0.21	2	1
P	94.2 120-130	2	74	20	55	0.2	22	11	889	3.99	29	5	ND	ND	97	1	1	2	131	3.28	0.16	7	37	1.20	199	0.19	1.95	0.09	0.14	0.20	2	1
P	94.2 130-140	2	78	25	59	0.1	18	15	942	4.12	25	5	ND	ND	96	1	1	1	140	3.35	0.16	7	36	1.29	211	0.21	2.12	0.11	0.17	0.24	3	1
P	94.2 140-150	2	84	27	63	0.2	17	17	1008	4.33	22	5	ND	ND	99	1	1	1	154	3.66	0.16	7	33	1.43	221	0.24	2.30	0.10	0.13	0.22	1	1
P	94.3 120-130	3	85	14	60	0.1	17	14	985	4.34	27	5	ND	ND	104	1	1	1	158	3.94	0.16	8	38	1.33	183	0.25	2.15	0.12	0.14	0.26	1	1
P	94.3 130-140	2	84	17	56	0.1	20	14	936	4.21	26	5	ND	ND	97	1	1	1	148	3.79	0.17	8	32	1.25	165	0.24	2.22	0.12	0.14	0.34	3	1
P	94.3 140-150	2	82	22	66	0.1	19	16	1018	4.29	31	5	ND	ND	109	1	1	1	155	4.10	0.16	7	37	1.32	187	0.27	2.29	0.12	0.15	0.32	1	1
P	94.3 150-160	1	98	20	64	0.1	13	17	1150	4.82	28	5	ND	ND	103	1	1	1	168	4.59	0.16	6	29	1.62	147	0.30	2.41	0.11	0.16	0.25	1	1
P	94.3 160-170	1	95	11	68	0.1	17	19	1156	4.81	19	5	ND	ND	107	1	1	1	140	5.54	0.16	8	27	1.52	103	0.14	2.39	0.08	0.21	0.18	1	1
P	94.3 170-180	1	99	25	67	0.1	15	18	1131	4.74	24	5	ND	ND	126	1	1	1	143	4.55	0.16	7	30	1.65	97	0.15	2.23	0.05	0.18	0.10	1	1

CERTIFIED BY:

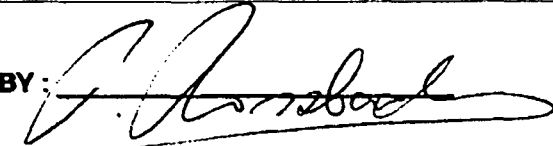

# ROSSBACHER LABORATORY LTD.

## CERTIFICATE OF ANALYSIS


2225 Springer Ave., Burnaby,  
British Columbia, Can. V5B 3N1  
Ph:(604)299-6910 Fax:299-6252


To: MENIKA MINING LTD.,  
2245 W 13TH AVE.,  
VANCOUVER, B.C.

Project: FOX  
Type of Analysis: ICP





Certificate: 94263  
Invoice: 50344  
Data Entered: 94-11-04  
File Name: MEN94263.I  
Page No.: 2

PRE FIX	SAMPLE NAME	PPM MO	PPM CU	PPM PB	PPM ZN	PPM AG	PPM NI	PPM CO	PPM MN	% FE	PPM AS	PPM U	PPM AU	PPM HG	PPM SR	PPM CD	PPM SB	PPM BI	PPM V	% CA	% P	PPM LA	PPM CR	% MC	PPM BA	% TI	% AL	% NA	% K	% SI	PPM W	PPM BE
P	94.3 180-190	1	118	28	71	0.1	20	22	1228	5.17	30	5	ND	ND	152	1	1	1	191	4.42	0.17	6	40	1.95	166	0.26	2.76	0.10	0.14	0.25	1	1
P	94.3 190-200	1	122	32	86	0.1	18	22	1277	5.27	27	5	ND	ND	130	2	1	2	194	3.66	0.17	6	42	2.12	123	0.23	2.76	0.07	0.09	0.16	1	1
P	94.3 200-210	1	109	30	69	0.1	13	19	1325	5.14	30	5	ND	ND	122	1	1	1	173	4.66	0.16	6	31	1.97	193	0.21	2.75	0.09	0.12	0.26	1	1
P	94.3 210-220	1	111	32	71	0.2	14	19	1282	5.04	28	5	ND	ND	130	1	1	1	184	4.64	0.17	6	24	1.66	209	0.31	2.79	0.10	0.09	0.25	1	1
P	94.3 220-230	1	112	36	70	0.2	16	19	1351	5.21	29	5	ND	ND	167	1	1	1	180	4.84	0.17	6	28	1.84	486	0.25	2.84	0.08	0.14	0.18	1	1
P	94.3 230-240	1	115	30	72	0.1	10	23	1454	5.37	21	5	ND	ND	148	1	1	1	142	5.19	0.18	8	27	2.02	486	0.08	2.74	0.07	0.17	0.15	3	1
P	94.3 240-250	1	120	32	61	0.2	8	17	1263	4.75	22	5	ND	ND	142	1	1	1	131	5.33	0.16	8	28	1.63	554	0.08	2.37	0.08	0.15	0.15	2	1
P	94.3 250-260	1	111	27	67	0.2	14	19	1403	5.02	24	5	ND	ND	136	1	1	1	130	5.27	0.16	7	28	2.00	346	0.05	2.33	0.07	0.16	0.17	1	1
P	94.3 260-270	2	89	21	69	0.2	10	16	1543	4.74	24	5	ND	ND	172	1	1	1	100	7.20	0.12	6	23	1.99	545	0.05	1.43	0.06	0.17	0.14	1	1
P	94.3 270-280	1	80	14	60	0.1	11	18	1353	4.53	26	5	ND	ND	128	1	1	1	125	5.31	0.14	7	22	1.62	354	0.15	1.74	0.06	0.12	0.12	1	1
P	94.3 280-290	2	85	27	66	0.1	17	21	1335	4.83	31	5	ND	ND	130	1	1	1	149	4.86	0.16	8	26	1.70	311	0.24	2.20	0.08	0.14	0.15	1	1
P	94.3 290-300	2	78	17	60	0.1	14	17	1261	4.70	26	5	ND	ND	120	1	1	1	131	4.86	0.15	10	31	1.65	417	0.14	2.00	0.08	0.14	0.18	1	1
P	94.3 300-310	1	80	26	83	0.1	13	19	1480	4.82	25	5	ND	ND	132	1	1	1	134	5.83	0.15	10	28	1.68	380	0.13	2.23	0.09	0.15	0.18	1	1
P	94.3 310-320	2	85	34	68	0.1	14	21	1480	4.93	17	5	ND	ND	127	1	1	1	146	5.55	0.16	9	25	1.71	297	0.17	2.44	0.08	0.13	0.16	1	1
P	94.3 320-330	2	83	26	64	0.1	12	18	1343	4.73	14	5	ND	ND	132	1	1	1	138	5.41	0.15	9	25	1.54	242	0.17	2.35	0.07	0.19	0.18	1	1
P	94.3 330-340	1	78	25	59	0.1	12	17	1303	4.57	28	5	ND	ND	154	1	1	1	134	5.51	0.15	8	28	1.46	385	0.18	2.18	0.07	0.16	0.24	1	1
P	94.3 340-350	2	79	27	65	0.1	18	19	1201	4.75	26	5	ND	ND	165	1	1	1	156	4.82	0.15	9	31	1.42	310	0.27	2.39	0.12	0.17	0.38	1	1
P	94.3 350-360	2	78	32	67	0.1	18	17	1104	4.52	24	5	ND	ND	151	1	1	1	153	4.49	0.15	9	32	1.42	280	0.29	2.38	0.12	0.13	0.39	1	1
P	94.3 360-370	3	79	28	64	0.1	19	18	1072	4.56	40	5	ND	ND	149	1	1	1	157	4.22	0.15	9	34	1.43	245	0.30	2.43	0.12	0.13	0.35	1	2
P	94.3 370-380	2	71	17	54	0.2	12	17	1015	4.25	37	5	ND	ND	130	1	1	2	145	3.96	0.13	8	33	1.37	188	0.29	2.16	0.07	0.08	0.20	2	1
P	94.3 380-390	2	81	19	52	0.1	12	17	1073	4.46	23	5	ND	ND	146	1	1	1	147	4.43	0.14	9	32	1.41	295	0.30	2.42	0.09	0.16	0.22	1	1
P	94.3 390-400	2	81	20	47	0.1	12	14	1026	4.37	16	5	ND	ND	142	1	1	1	149	4.18	0.14	10	28	1.22	316	0.30	2.48	0.09	0.17	0.24	1	1
P	94.3 400-410	1	76	13	49	0.1	10	14	1214	4.43	17	5	ND	ND	134	1	1	1	144	4.97	0.13	9	24	1.17	210	0.24	2.14	0.08	0.20	0.14	1	1
P	94.3 410-420	2	78	18	60	0.1	13	16	1268	4.53	16	5	ND	ND	136	1	1	1	136	5.07	0.14	10	26	1.34	191	0.21	2.43	0.13	0.20	0.55	1	1
P	94.3 420-430	1	77	13	60	0.1	13	18	1257	4.80	27	5	ND	ND	127	1	1	1	150	4.77	0.13	9	30	1.48	158	0.23	2.46	0.13	0.19	0.54	1	1

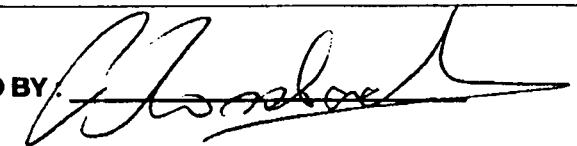CERTIFIED BY: 

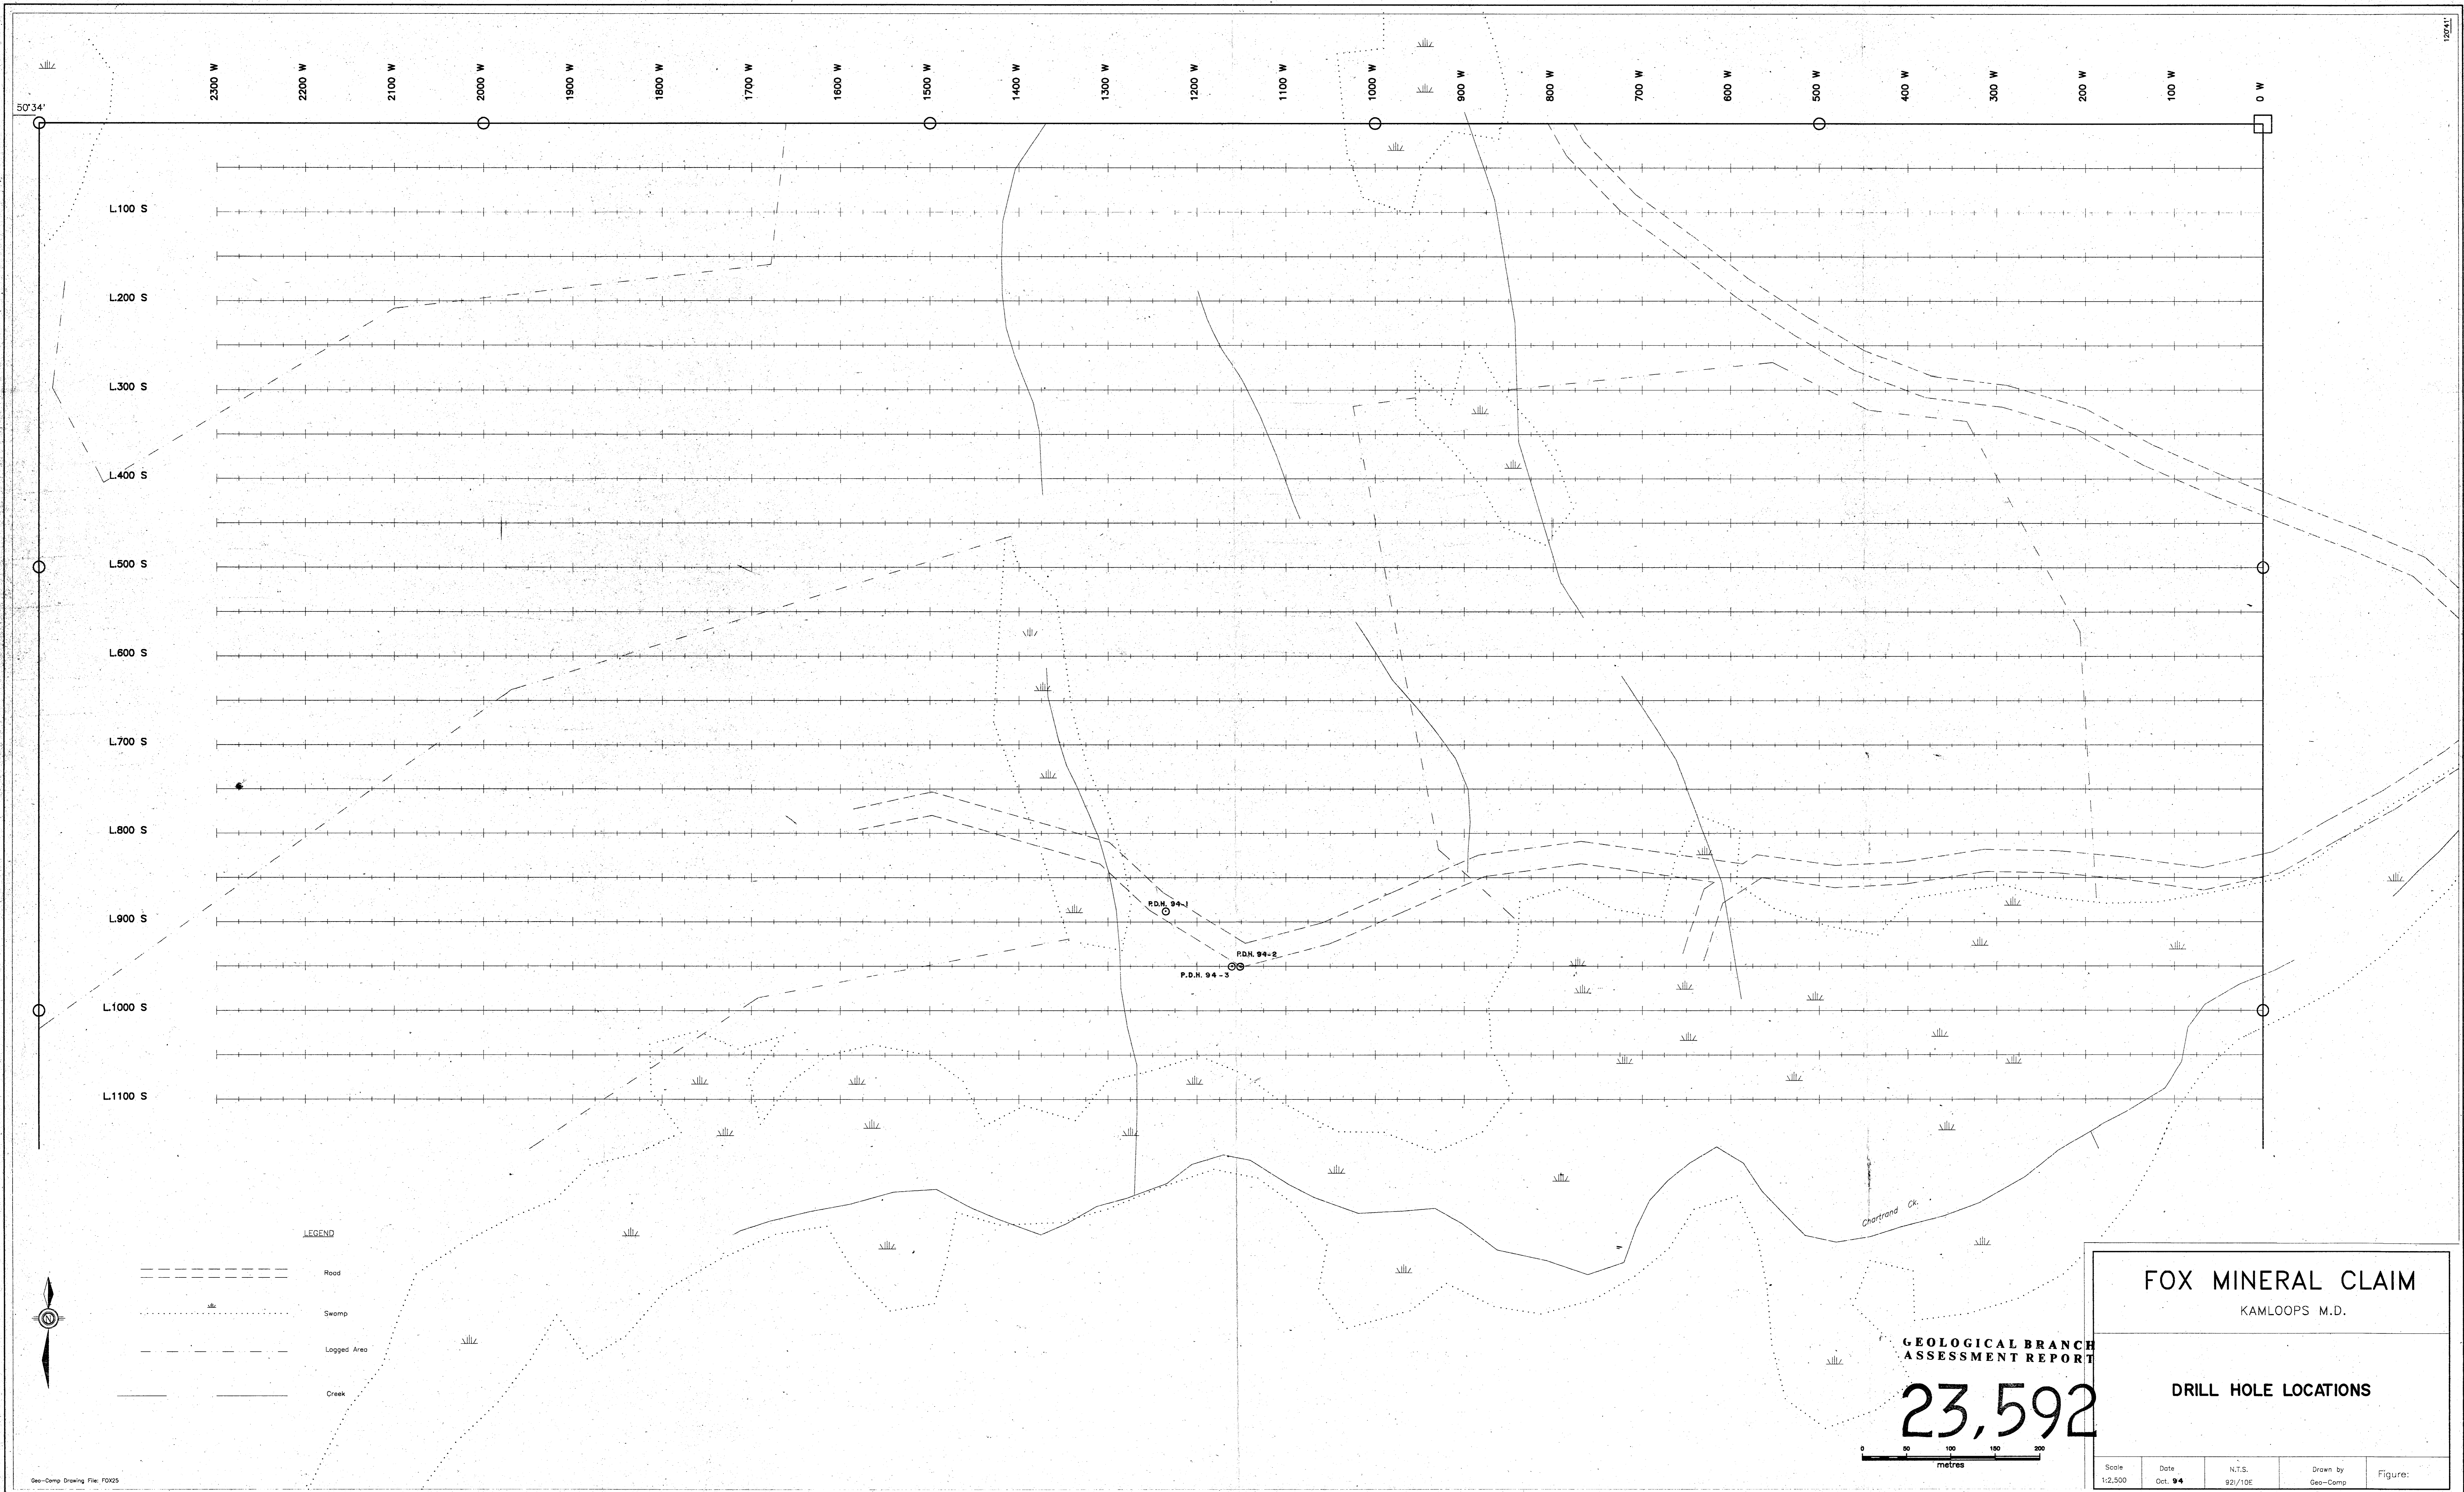


**LEGEND**

-  Road
-  Swamp
-  Logged Area
-  Creek

**GEOLOGICAL BRANCH  
ASSESSMENT REPORT**

**23,592**

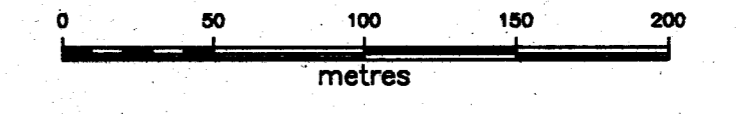

**FOX MINERAL CLAIM**  
KAMLOOPS M.D.

**DRILL HOLE LOCATIONS**

Scale 1:2,500	Date Oct. 94	N.T.S. 92/10E	Drawn by Geo-Camp	Figure:
------------------	-----------------	------------------	----------------------	---------