

LOGISTICAL REPORT
INDUCED POLARIZATION AND MAGNETOMETER SURVEYS

QCM PROPERTY, MANSON CREEK AREA, B.C.

on behalf of

CANADIAN GOLD HUNTER CORP.
2101 - 885 West Georgia Street
Vancouver, B.C. V6C 3E8

Survey performed: August 20 to September 3, 2004

by

Alan Scott, Geophysicist
SCOTT GEOPHYSICS LTD.
4013 West 14th Avenue
Vancouver, B.C. V6R 2X3

September 7, 2004

"APPENDIX III"
LOGISTICAL REPORT
"SCOTT GEOPHYSICS LTD."

RECEIVED
MAY 3 - 2005
Gold Commissioner's Office
VANCOUVER, B.C.

27804
PART 2 of 2

LOGISTICAL SURVEY BRANCH
ASSESSMENT REPORT
27-804

TABLE OF CONTENTS

1	Introduction	page 1
2	Survey coverage and procedures	1
3.	Personnel	1
4.	Instrumentation	1
Appendix		
	Statement of Qualifications	rear of report
Accompanying Maps		
	Chargeability/Resistivity Pseudosections with Magnetometer Profiles	map pocket
	Lines 0N, 100N, 200N, and 300N (1:2500 scale)	1
	Lines 500N, 700N, 900N, and 1100N (1:2500 scale)	1
	Lines 1300N, 1500N, 1700N, and 1900N (1:2500 scale)	1
	Chargeability contour plan – Triangular Filtered Values (1:5000 scale)	2
	Resistivity contour plan – Triangular Filtered Values (1:5000 scale)	2
	Magnetometer contour plan (1:5000 scale)	3
	Magnetometer profiles (1:5000 scale)	3
	Magnetometer data postings (1:5000 scale)	3
Accompanying Data Files		
	One (1) compact disk with all survey data	4

1. INTRODUCTION

Induced polarization (IP) and magnetometer surveys were performed at the QCM Property, Manson Creek Area, B.C., within the period August 20 to September 3, 2004. The surveys were performed by Scott Geophysics Ltd. on behalf of Canadian Gold Hunter Corp. This report describes the instrumentation and procedures, and presents the results, of the surveys.

2. SURVEY COVERAGE AND PROCEDURES

A total of 21.1 line km of IP and magnetometer survey was completed at the QCM Property. The pole dipole array was used for the IP survey at an "a" spacing of 25 metres and "n" separations of 1 to 5. The on line current electrode was located to the west of the potential electrodes on all survey lines.

The chargeability and resistivity results are presented on the accompanying pseudosections and contour plan maps. The magnetometer survey results are presented as profiles at the top of the pseudosections and as contour, profile, and data posting plans.


3. PERSONNEL

Ken Moir was the crew chief on the survey on behalf of Scott Geophysics Ltd. Jan Christoffersen was the representative on behalf of Canadian Gold Hunter Corp.

4. INSTRUMENTATION

A Scintrex IPR12 receiver and TSQ4 transmitter were used for the IP survey. Readings were taken in the time domain using a 2 second on/2 second off alternating square wave. The chargeability values plotted on the accompanying pseudosections and plan maps is for the interval 690 to 1050 msec after shutoff. A Scintrex ENVI was used for the magnetometer survey. All data was corrected for diurnal drift with reference to a Scintrex ENVI base station cycling at 10 second intervals..

Respectfully Submitted,

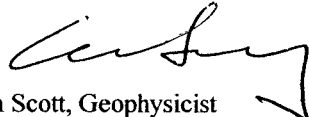
Alan Scott, Geophysicist

Statement of Qualifications

for

Alan Scott, Geophysicist

of

4013 West 14th Avenue
Vancouver, B.C. V6R 2X3

I, Alan Scott, hereby certify the following statements regarding my qualifications and involvement in the program of work on behalf of Canadian Gold Hunter Corp. on the QCM Property, B.C., as presented in this report of September 7, 2004.

The work was performed by individuals sufficiently trained and qualified for its performance.


I have no material interest in the property under consideration in this report.

I graduated from the University of British Columbia with a Bachelor of Science degree (Geophysics) in 1970, and with a Master of Business Administration in 1982.


I am a member of the Association of Professional Engineers and Geoscientists of the Province of British Columbia.

I have been practicing my profession as a Geophysicist in the field of Mineral Exploration since 1970.

Respectfully submitted,

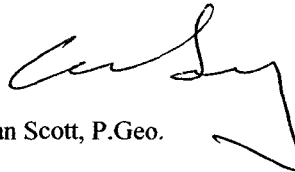A handwritten signature in black ink, appearing to read 'Alan Scott', with a stylized flourish at the end.

Alan Scott, P.Geol.

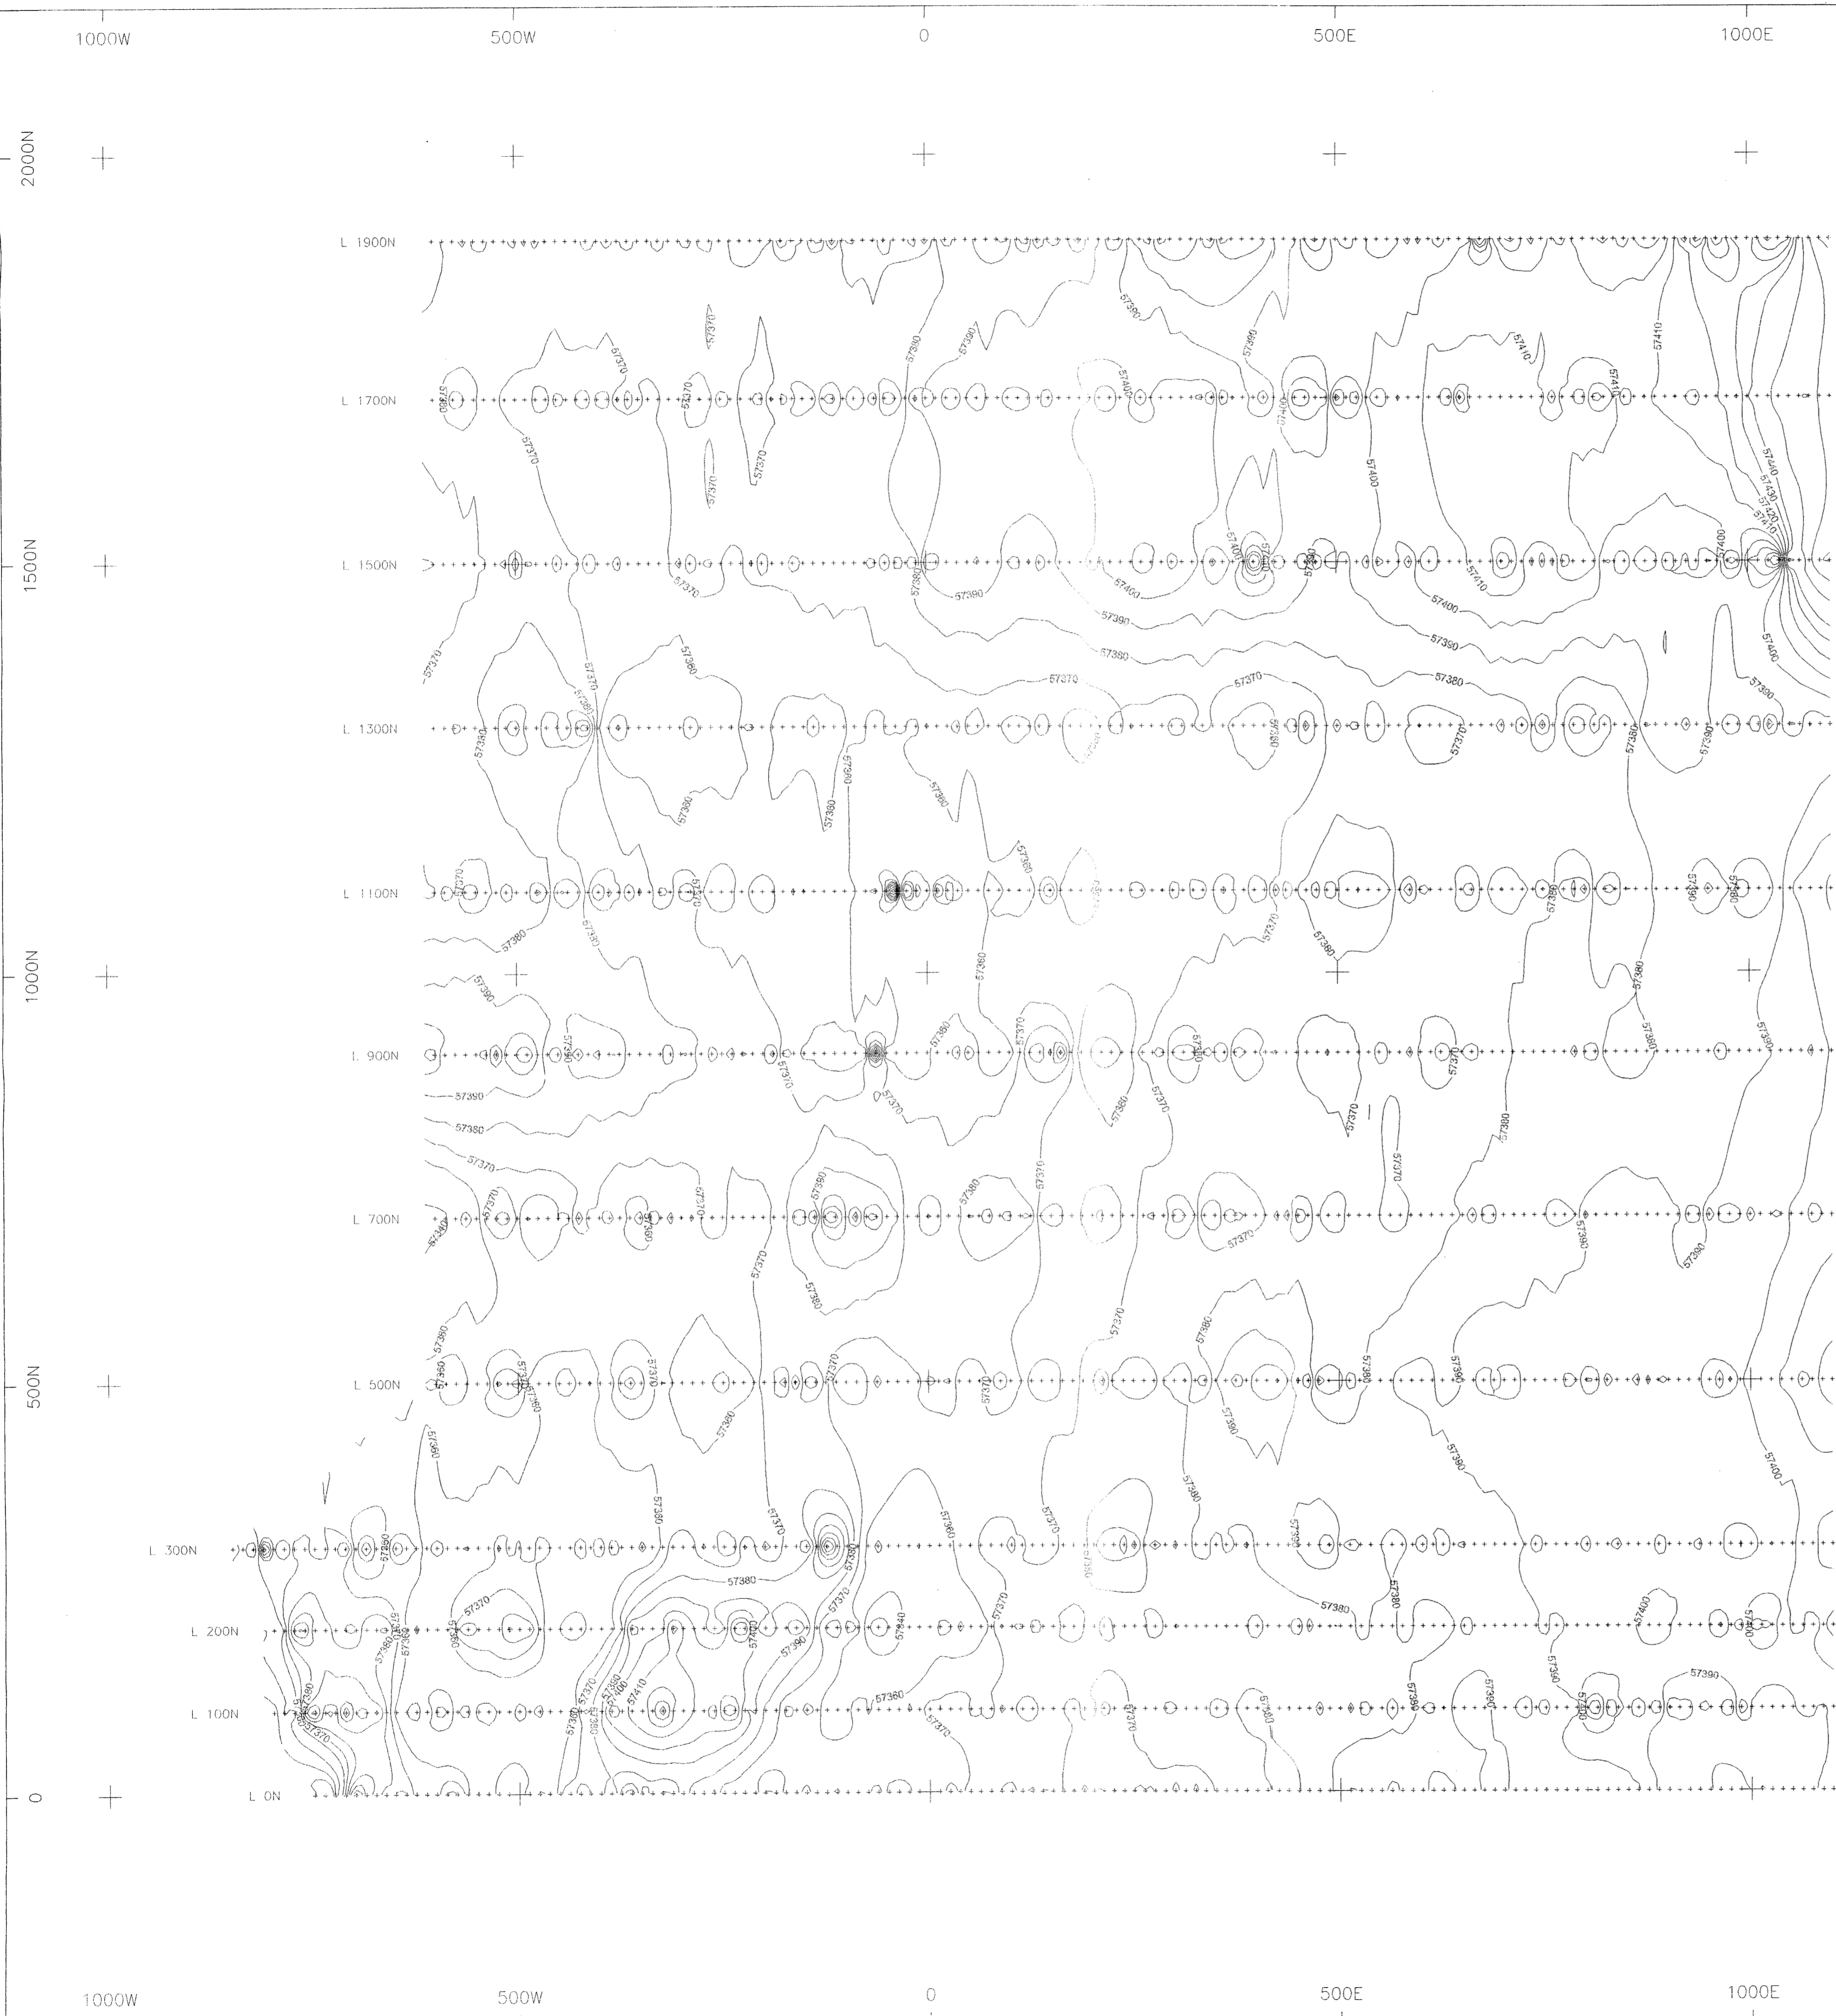


SURVEY SPECIFICATIONS

survey performed August/04
 survey magnetometer Scintrex ENVI
 base magnetometer Scintrex ENVI
 type proton
 measurement total field
 units nanoTeslas
 diurnal corrections base station
 data interval 12.5 metres

contour intervals:
 57300 - 57360 20 nT
 57360 - 57440 10 nT
 57440 - 57500 20 nT

GEOLOGICAL SURVEY BRANCH
 ASSESSMENT REPORT


27,004

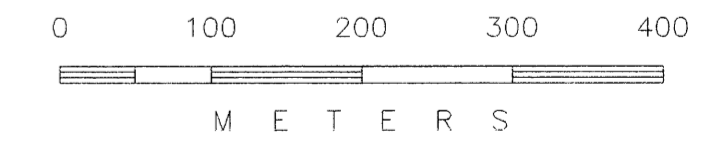

CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Magnetometer Survey
 Contour Plan (nanoTeslas)


DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

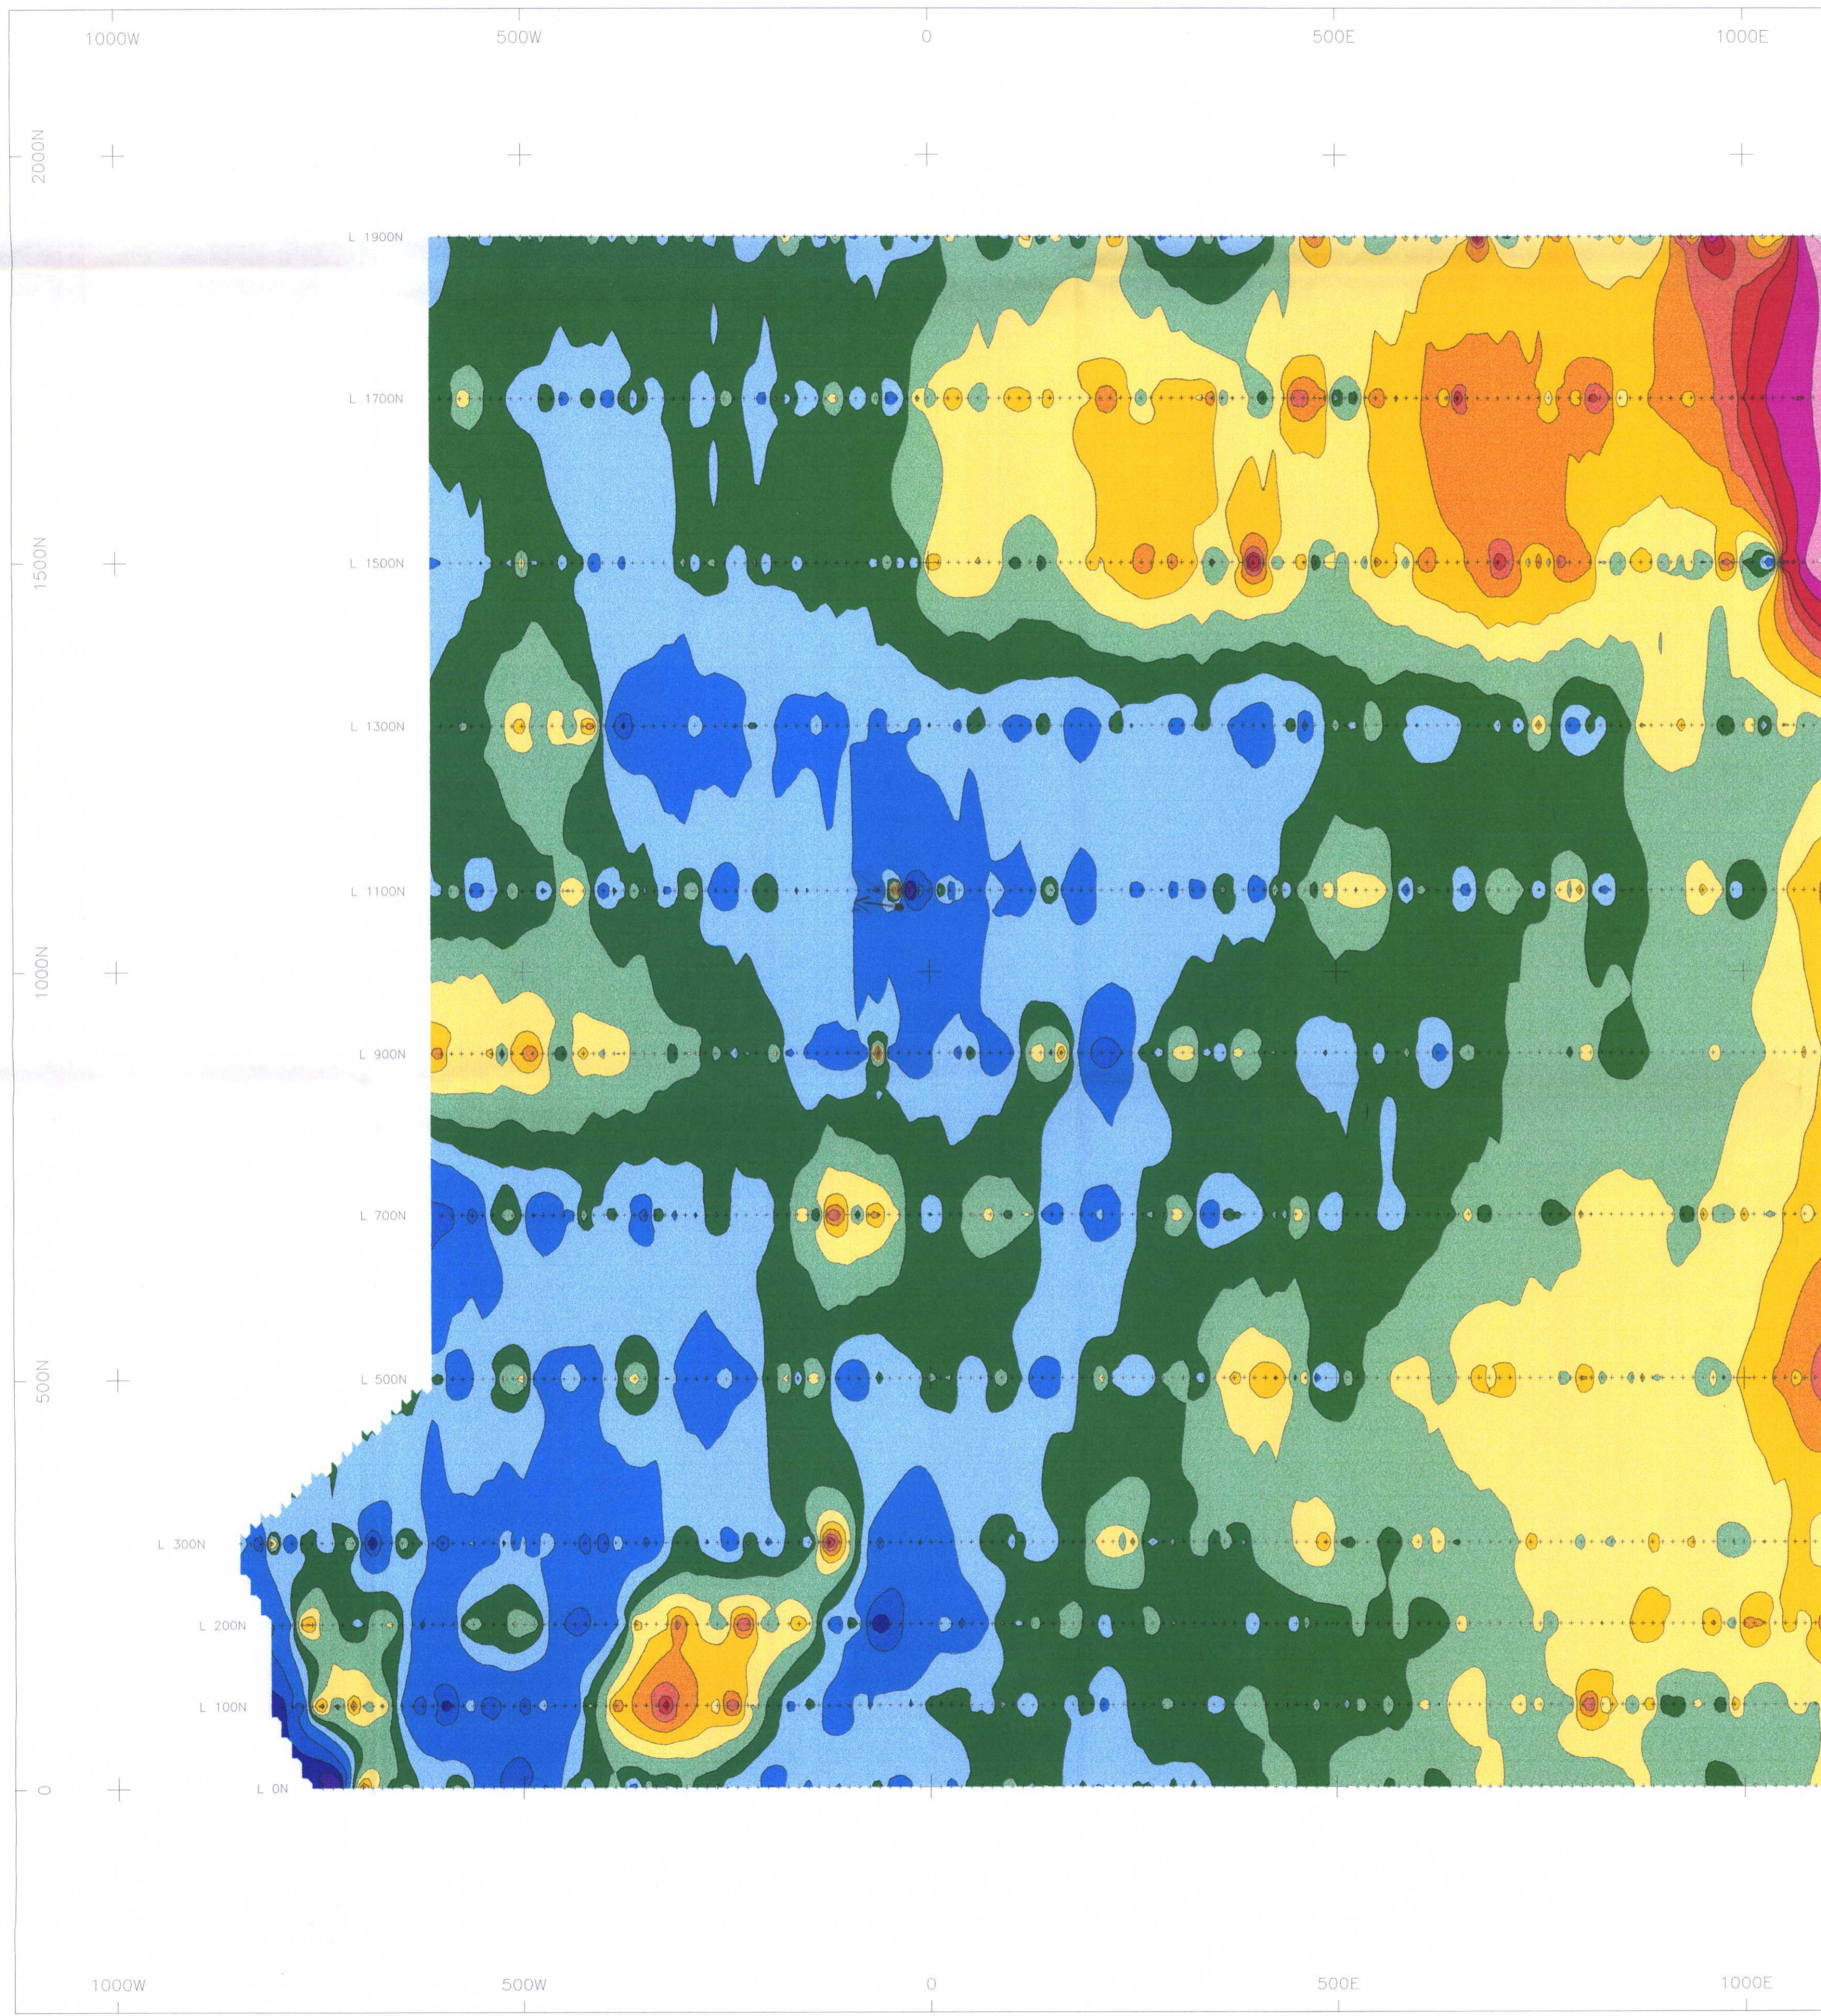

SURVEY SPECIFICATIONS

survey performed August/04
 survey magnetometer Scintrex ENVI
 base magnetometer Scintrex ENVI
 type proton
 measurement total field
 units nanoTeslas
 diurnal corrections base station
 data interval 12.5 metres

contour intervals:
 57300 - 57360 20 nT
 57360 - 57440 10 nT
 57440 - 57500 20 nT

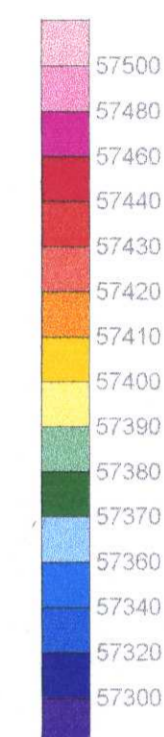


Geological Survey Branch
 Management Report
 27.001
 No adjusted graph



CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Magnetometer Survey
 Contour Plan (nanoTeslas)

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

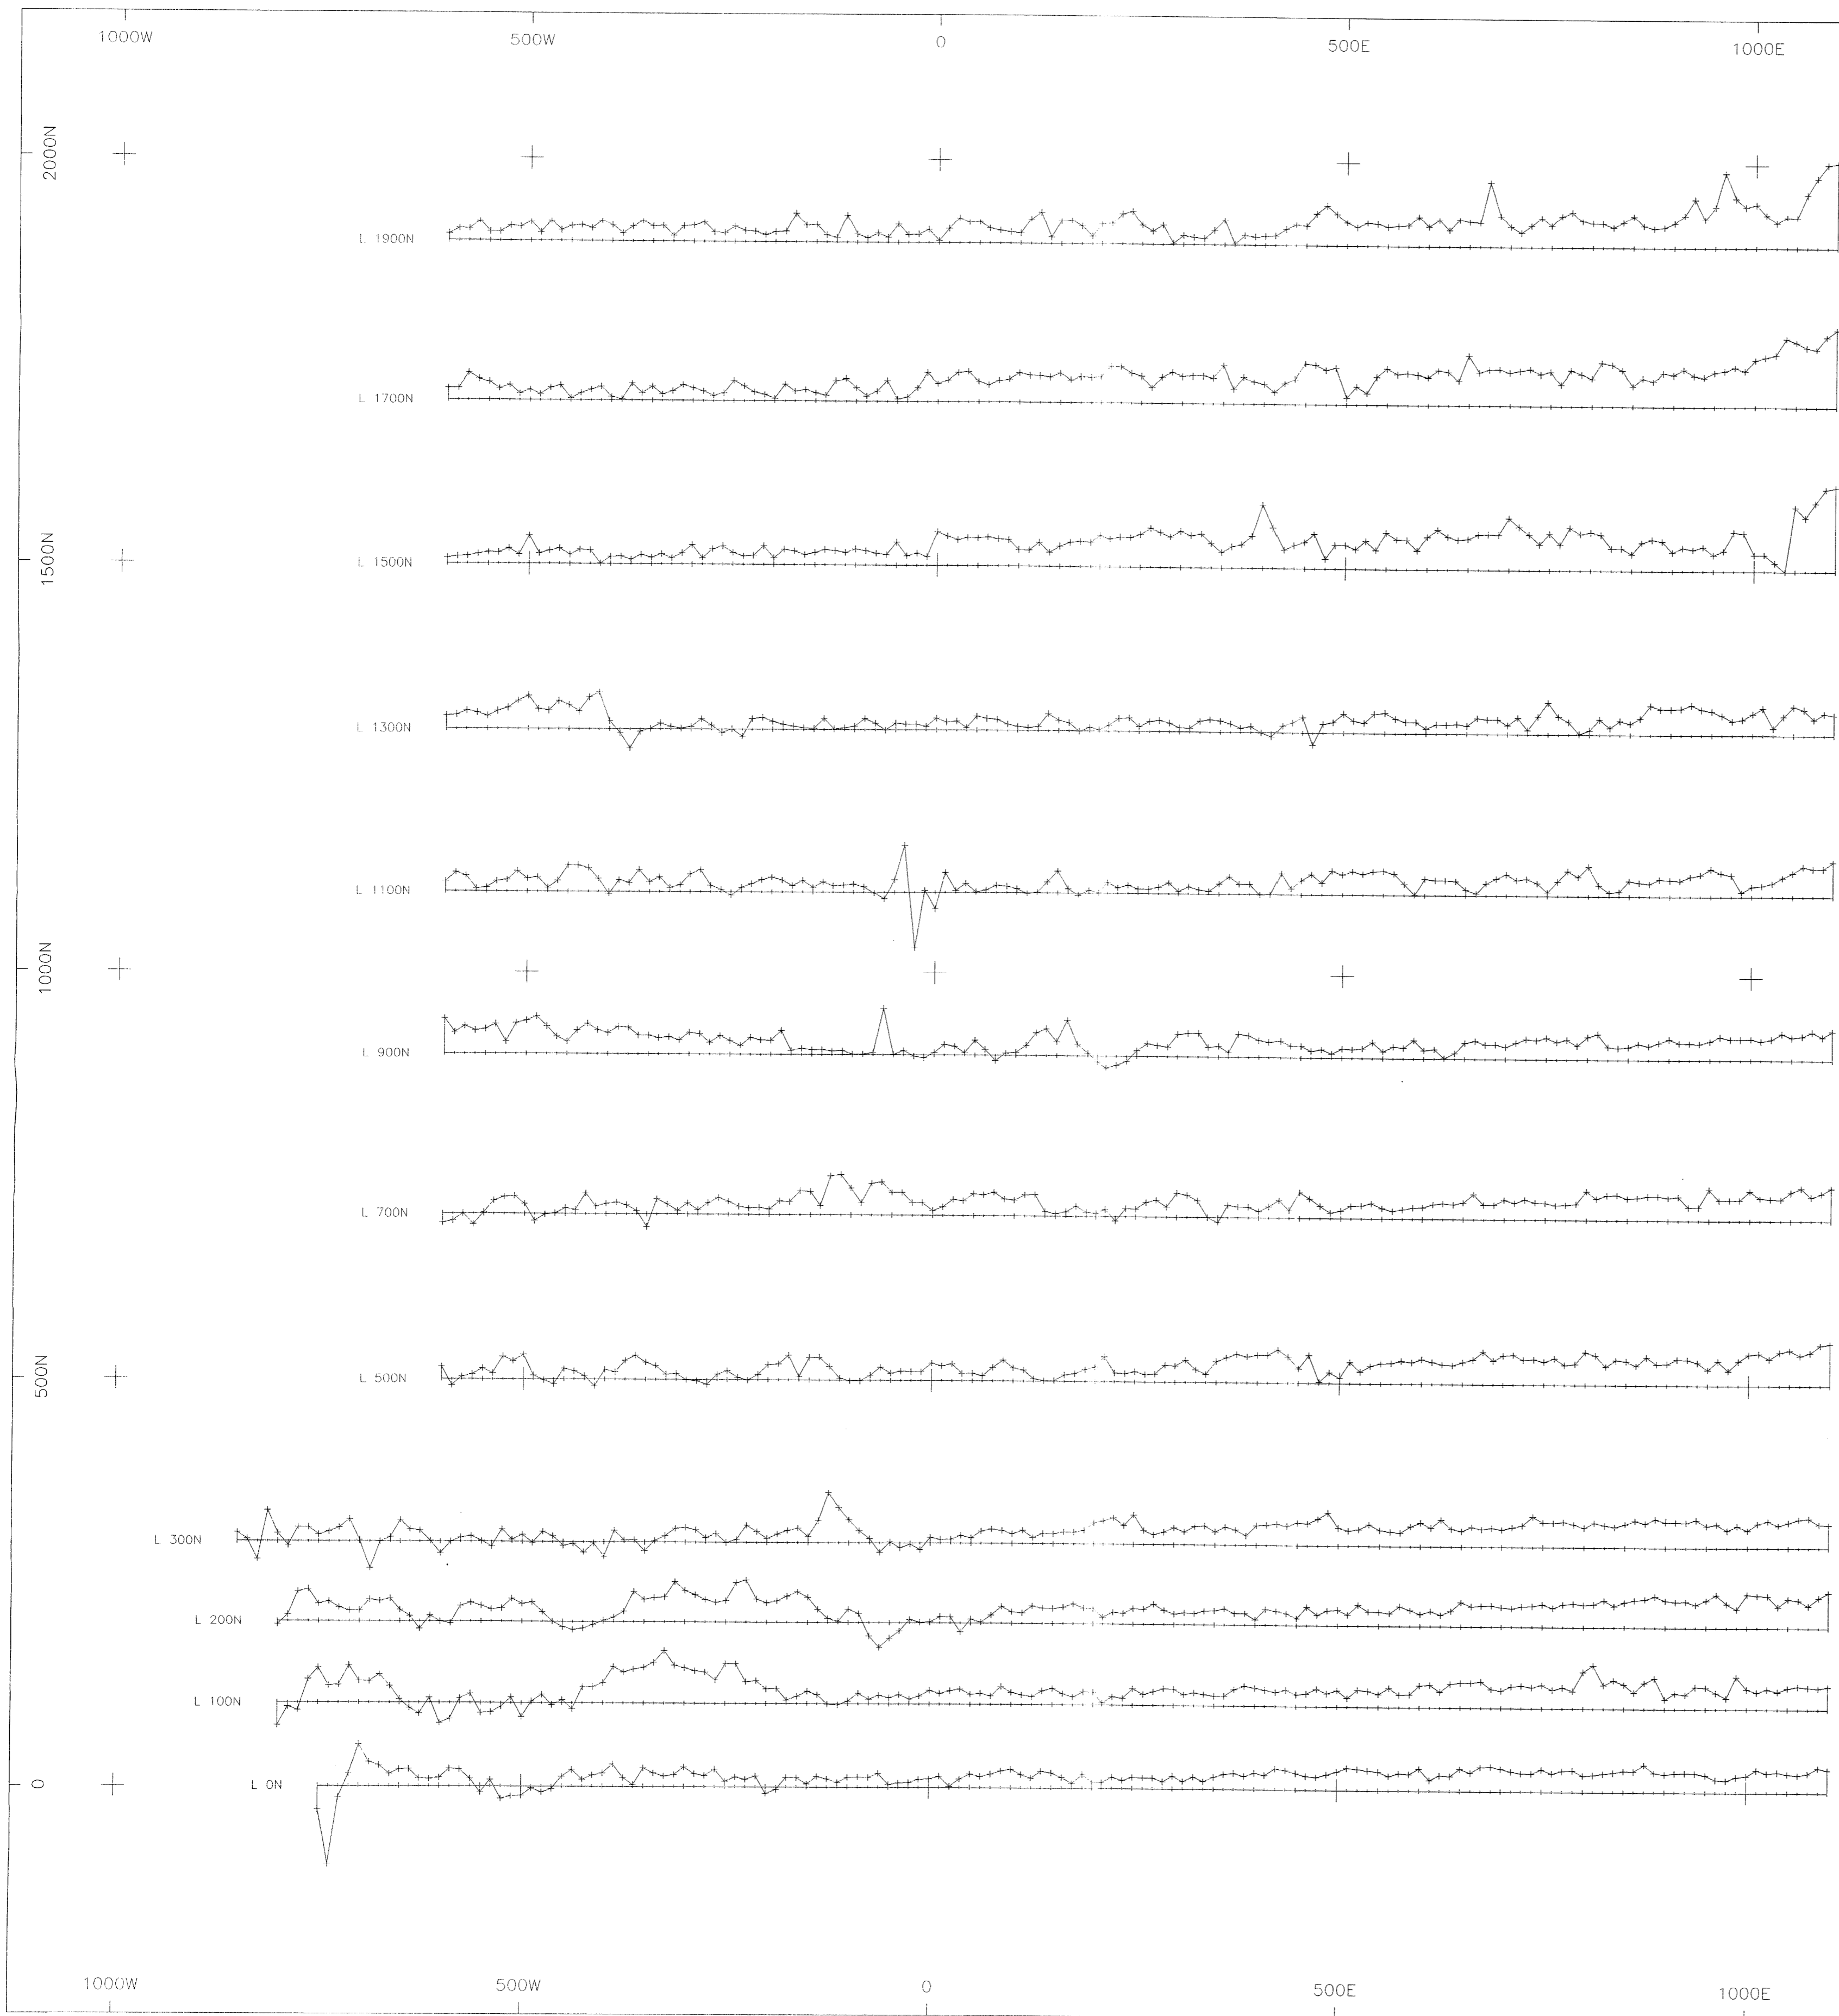


SURVEY SPECIFICATIONS

survey performed August/04
 survey magnetometer Scintrex ENVI
 base magnetometer Scintrex ENVI
 type proton
 measurement total field
 units nanoTeslas
 diurnal corrections base station
 data interval 12.5 metres

profile base 57350 nT
 profile scale 75 nT/cm
 (at 1:5000 scale)

GEOLOGICAL SURVEY BRANCH
 DOCUMENT REPORT


27,804

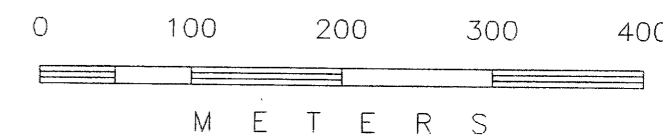

CANADIAN GOLD HUNTER CORP.


QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Magnetometer Profiles
 Profile base = 57350 nT
 Profile scale = 75 nT/cm

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

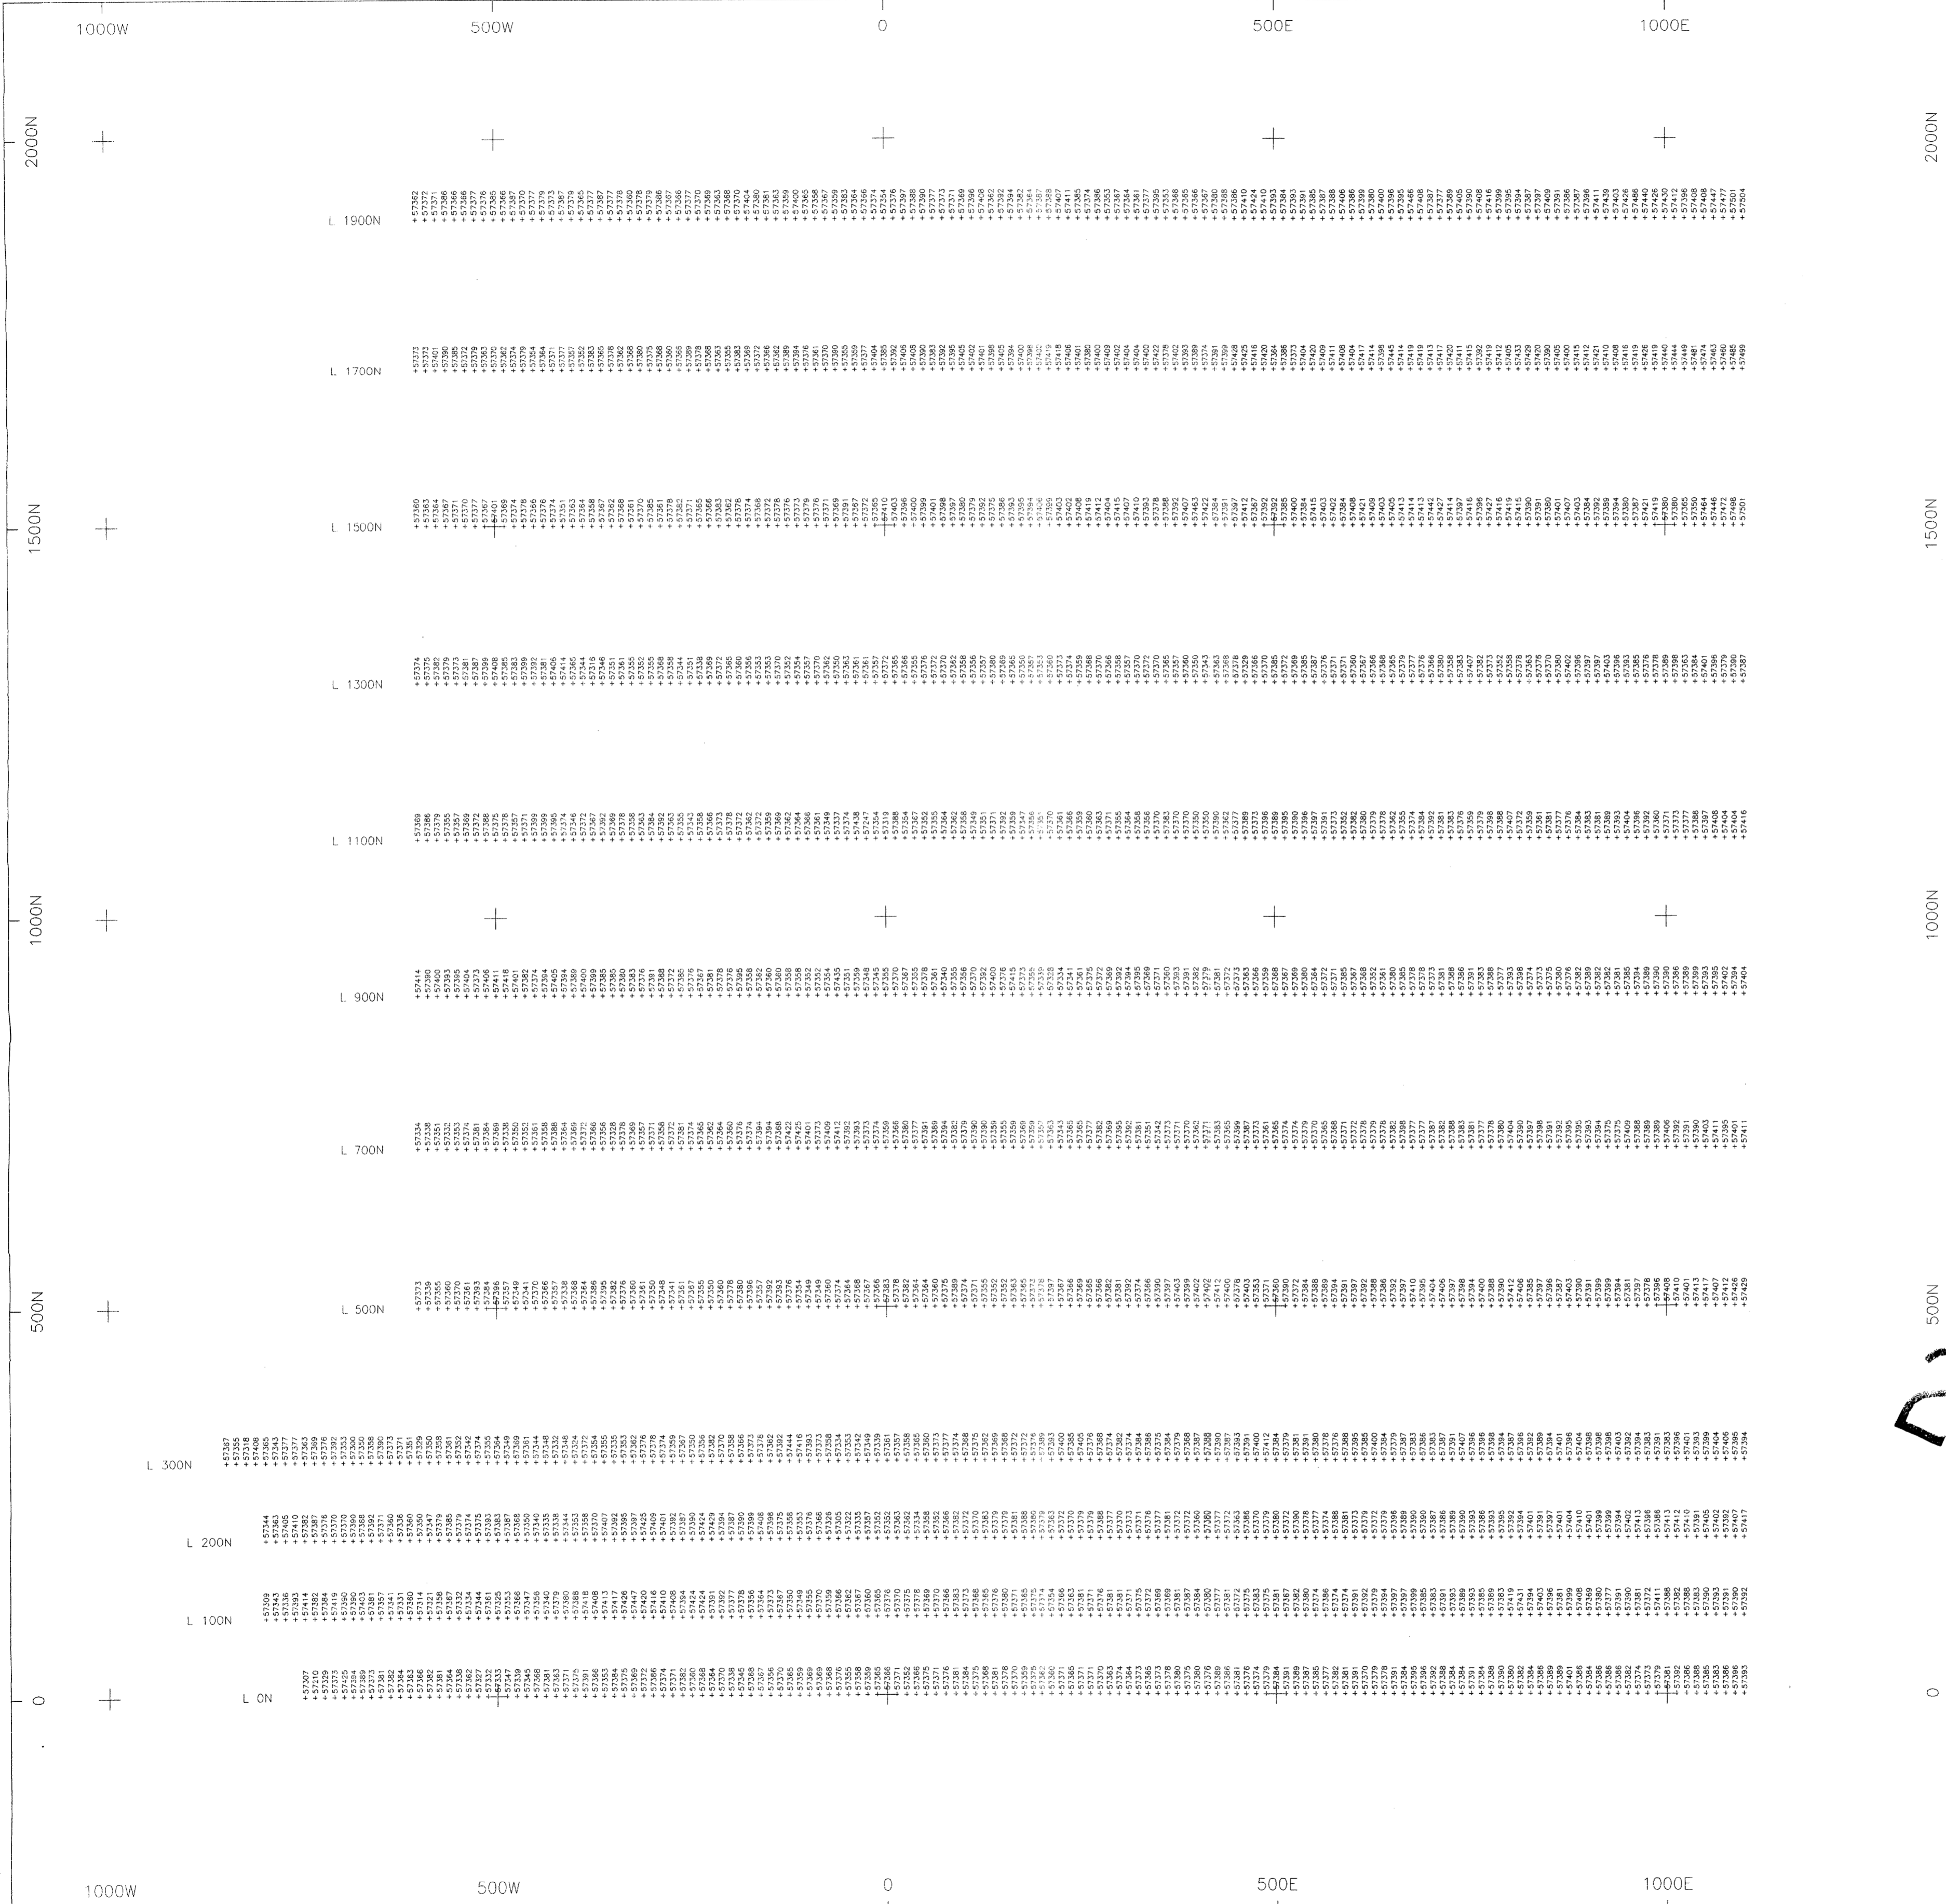

SURVEY SPECIFICATIONS


survey performed	August/04
survey magnetometer	Scintrex ENVI
base magnetometer	Scintrex ENVI
type	proton
measurement	total field
units	nanoTeslas
diurnal corrections	base station
data interval	12.5 metres

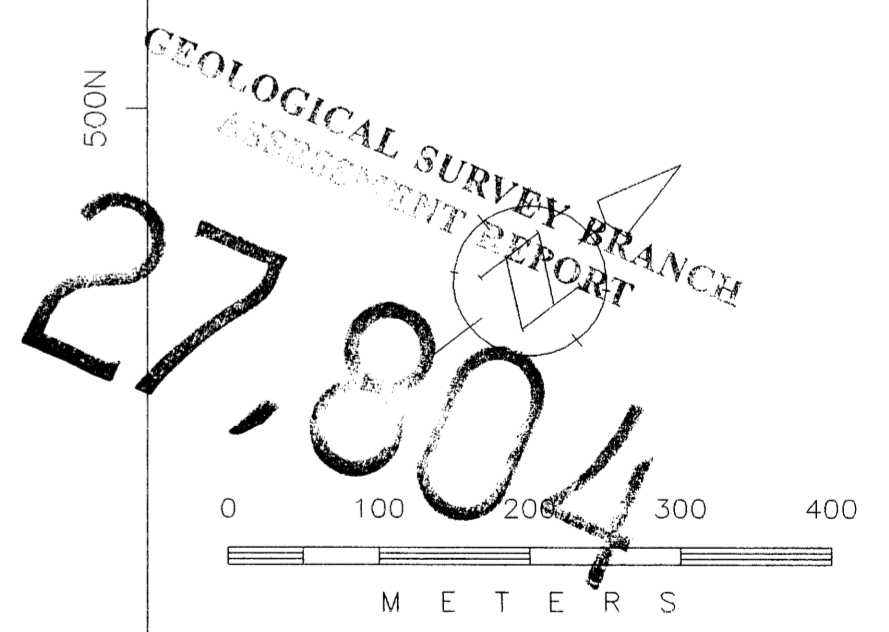

CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Magnetometer Survey
 Data Postings (nanoTeslas)

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

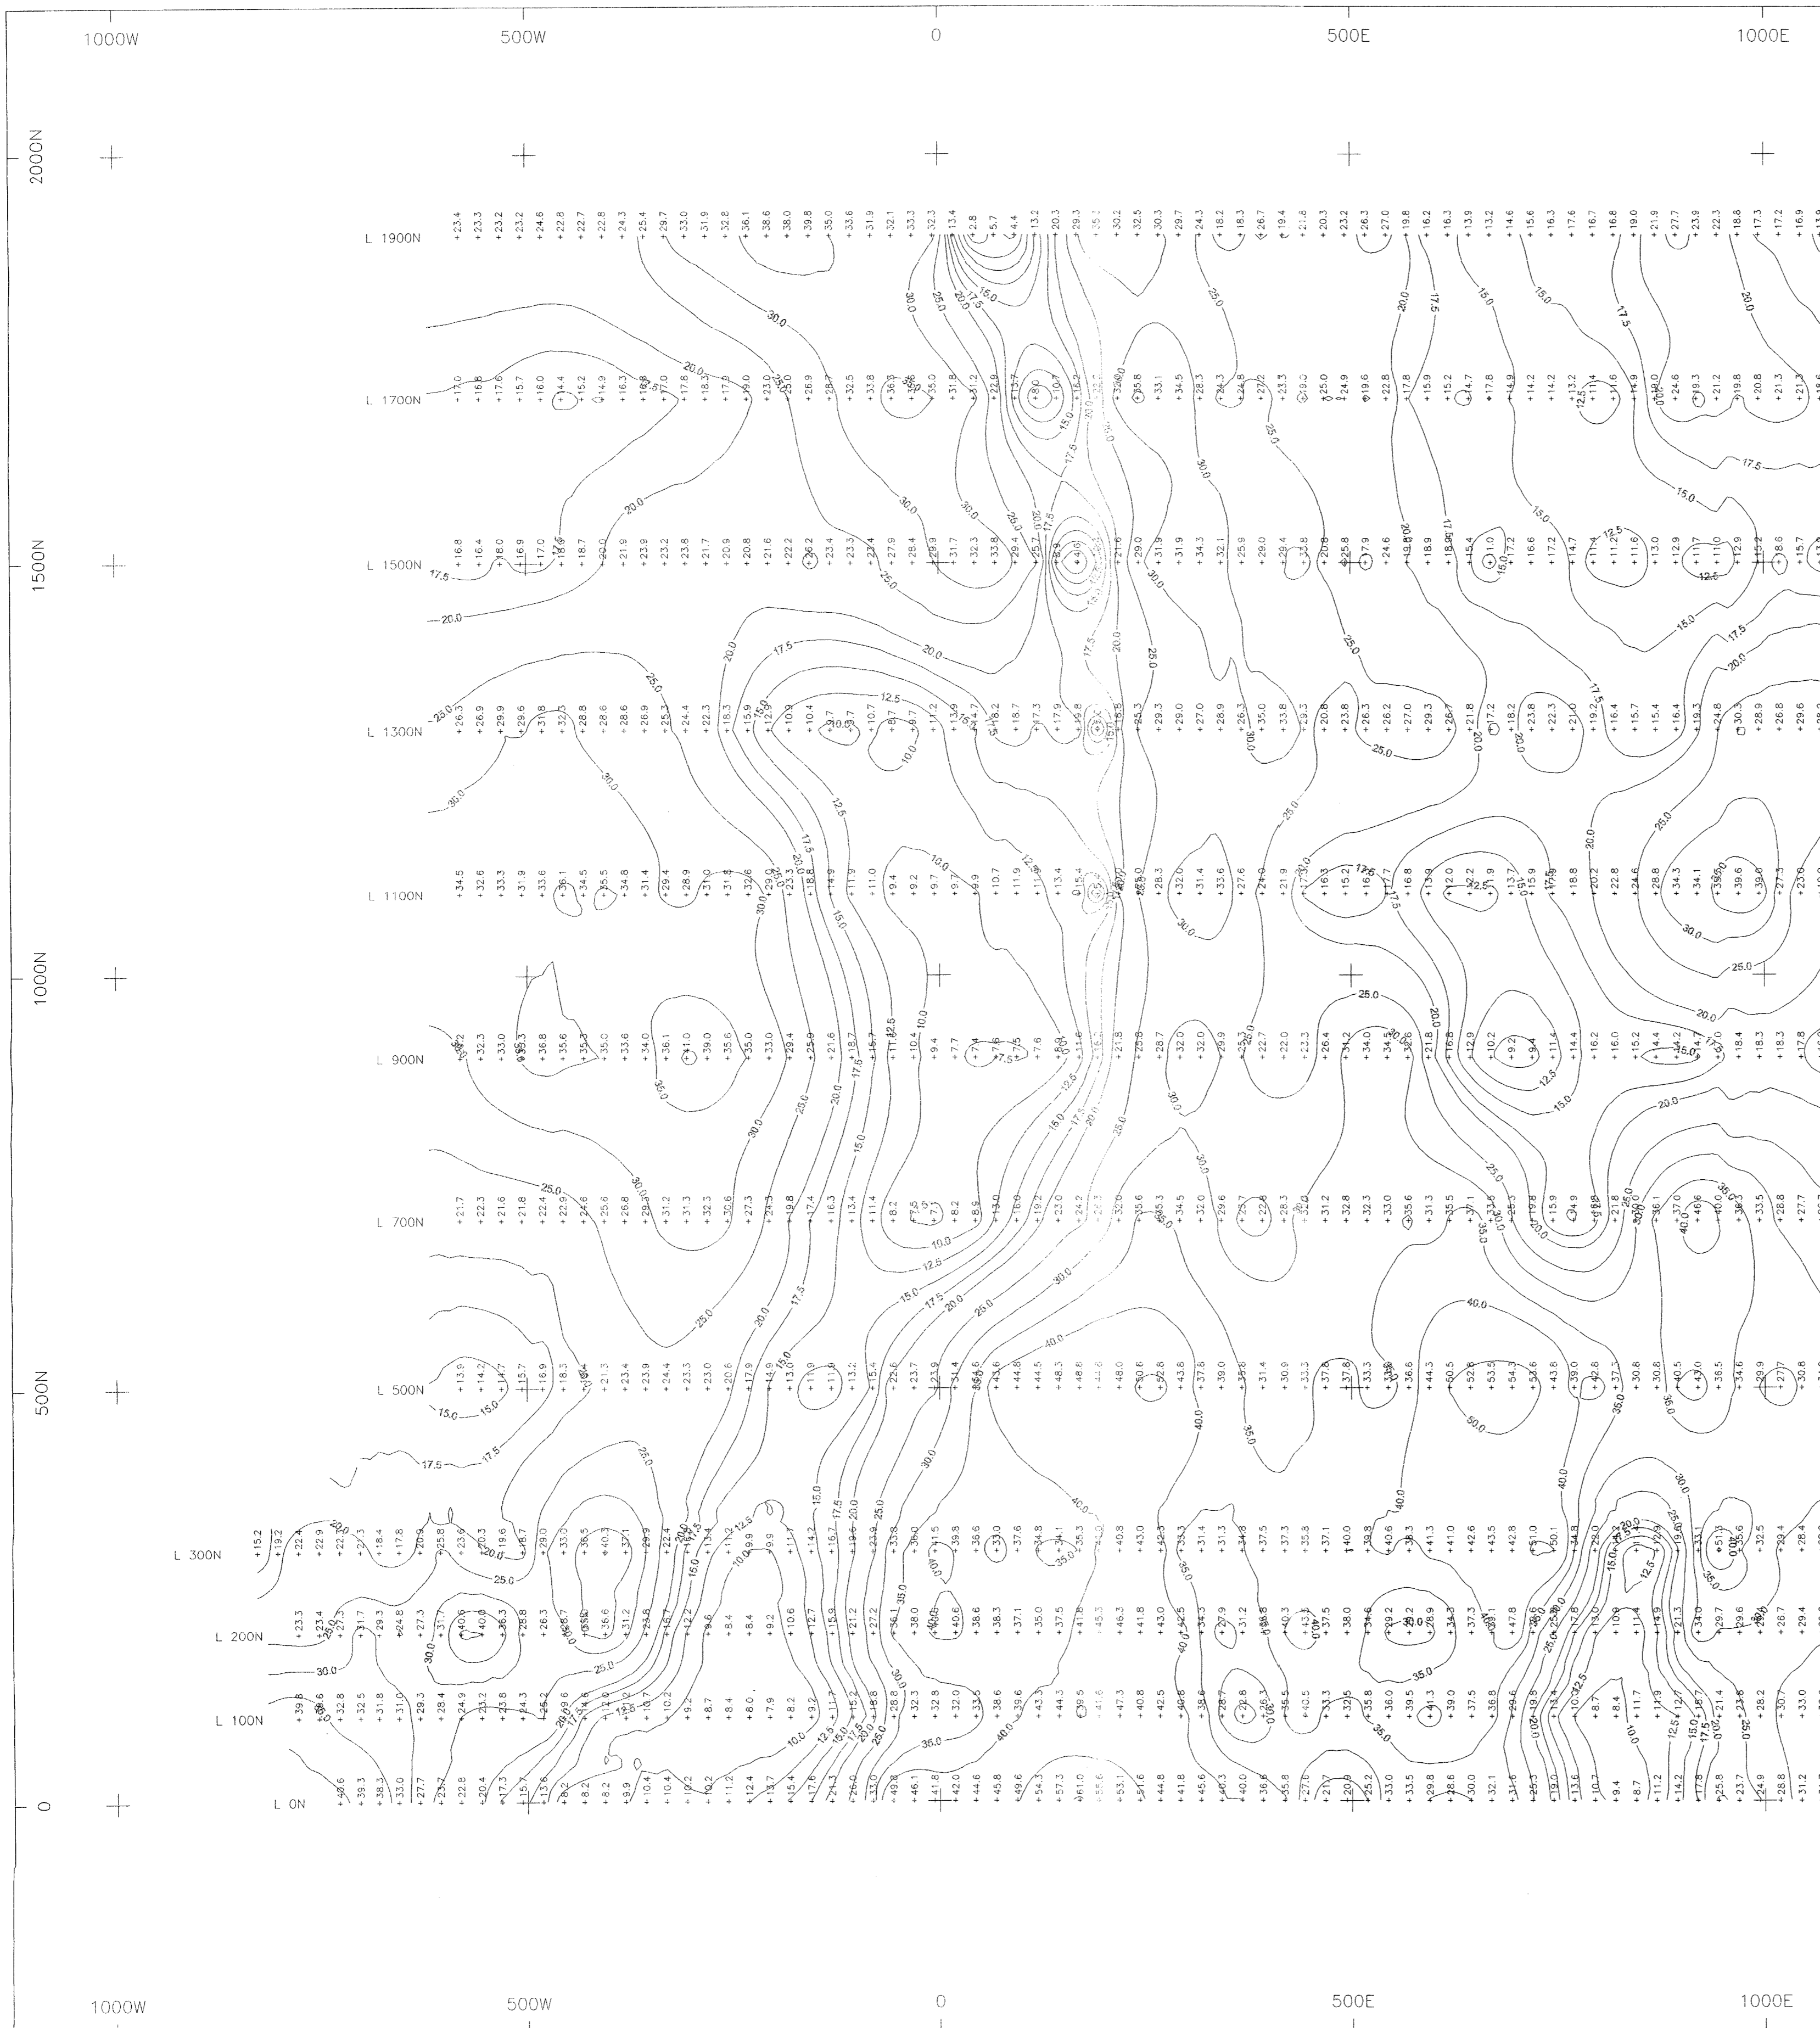

SURVEY SPECIFICATIONS

survey performed August/04
 receiver Scintrex IPR12
 transmitter Scintrex TSQ4
 pulse time 2 seconds
 Mx receive window 690-1050 msec


array pole dipole
 a spacing 25 metres
 n separations 1, 2, 3, 4, 5
 current electrode W of potentials

Contoured value Filtered chargeability
 Filtered values n = 1 to 5

Contour intervals:
 0, 2.5, 5, 7.5, 10, 12.5, 15, 17.5,
 20, 25, 30, 35, 40, 50, 60 (mV/Volt)

Note: The filter applied to this data is the standard Fraser triangular filter whereby one value is selected at n=1, two values at n=2, three values at n=3, etc. The plotted value is the average of the average values of the n separations and is plotted at the n=1 data point. The filtered values give only general trends. The pseudosections must be referred to to assess specific features.


GEOLOGICAL SURVEY BRANCH
 ASSESSMENT REPORT
27-304

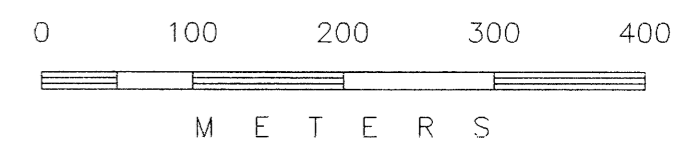

CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Chargeability Contour Plan
 Triangular Filtered Values
 First to Fifth Separations

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

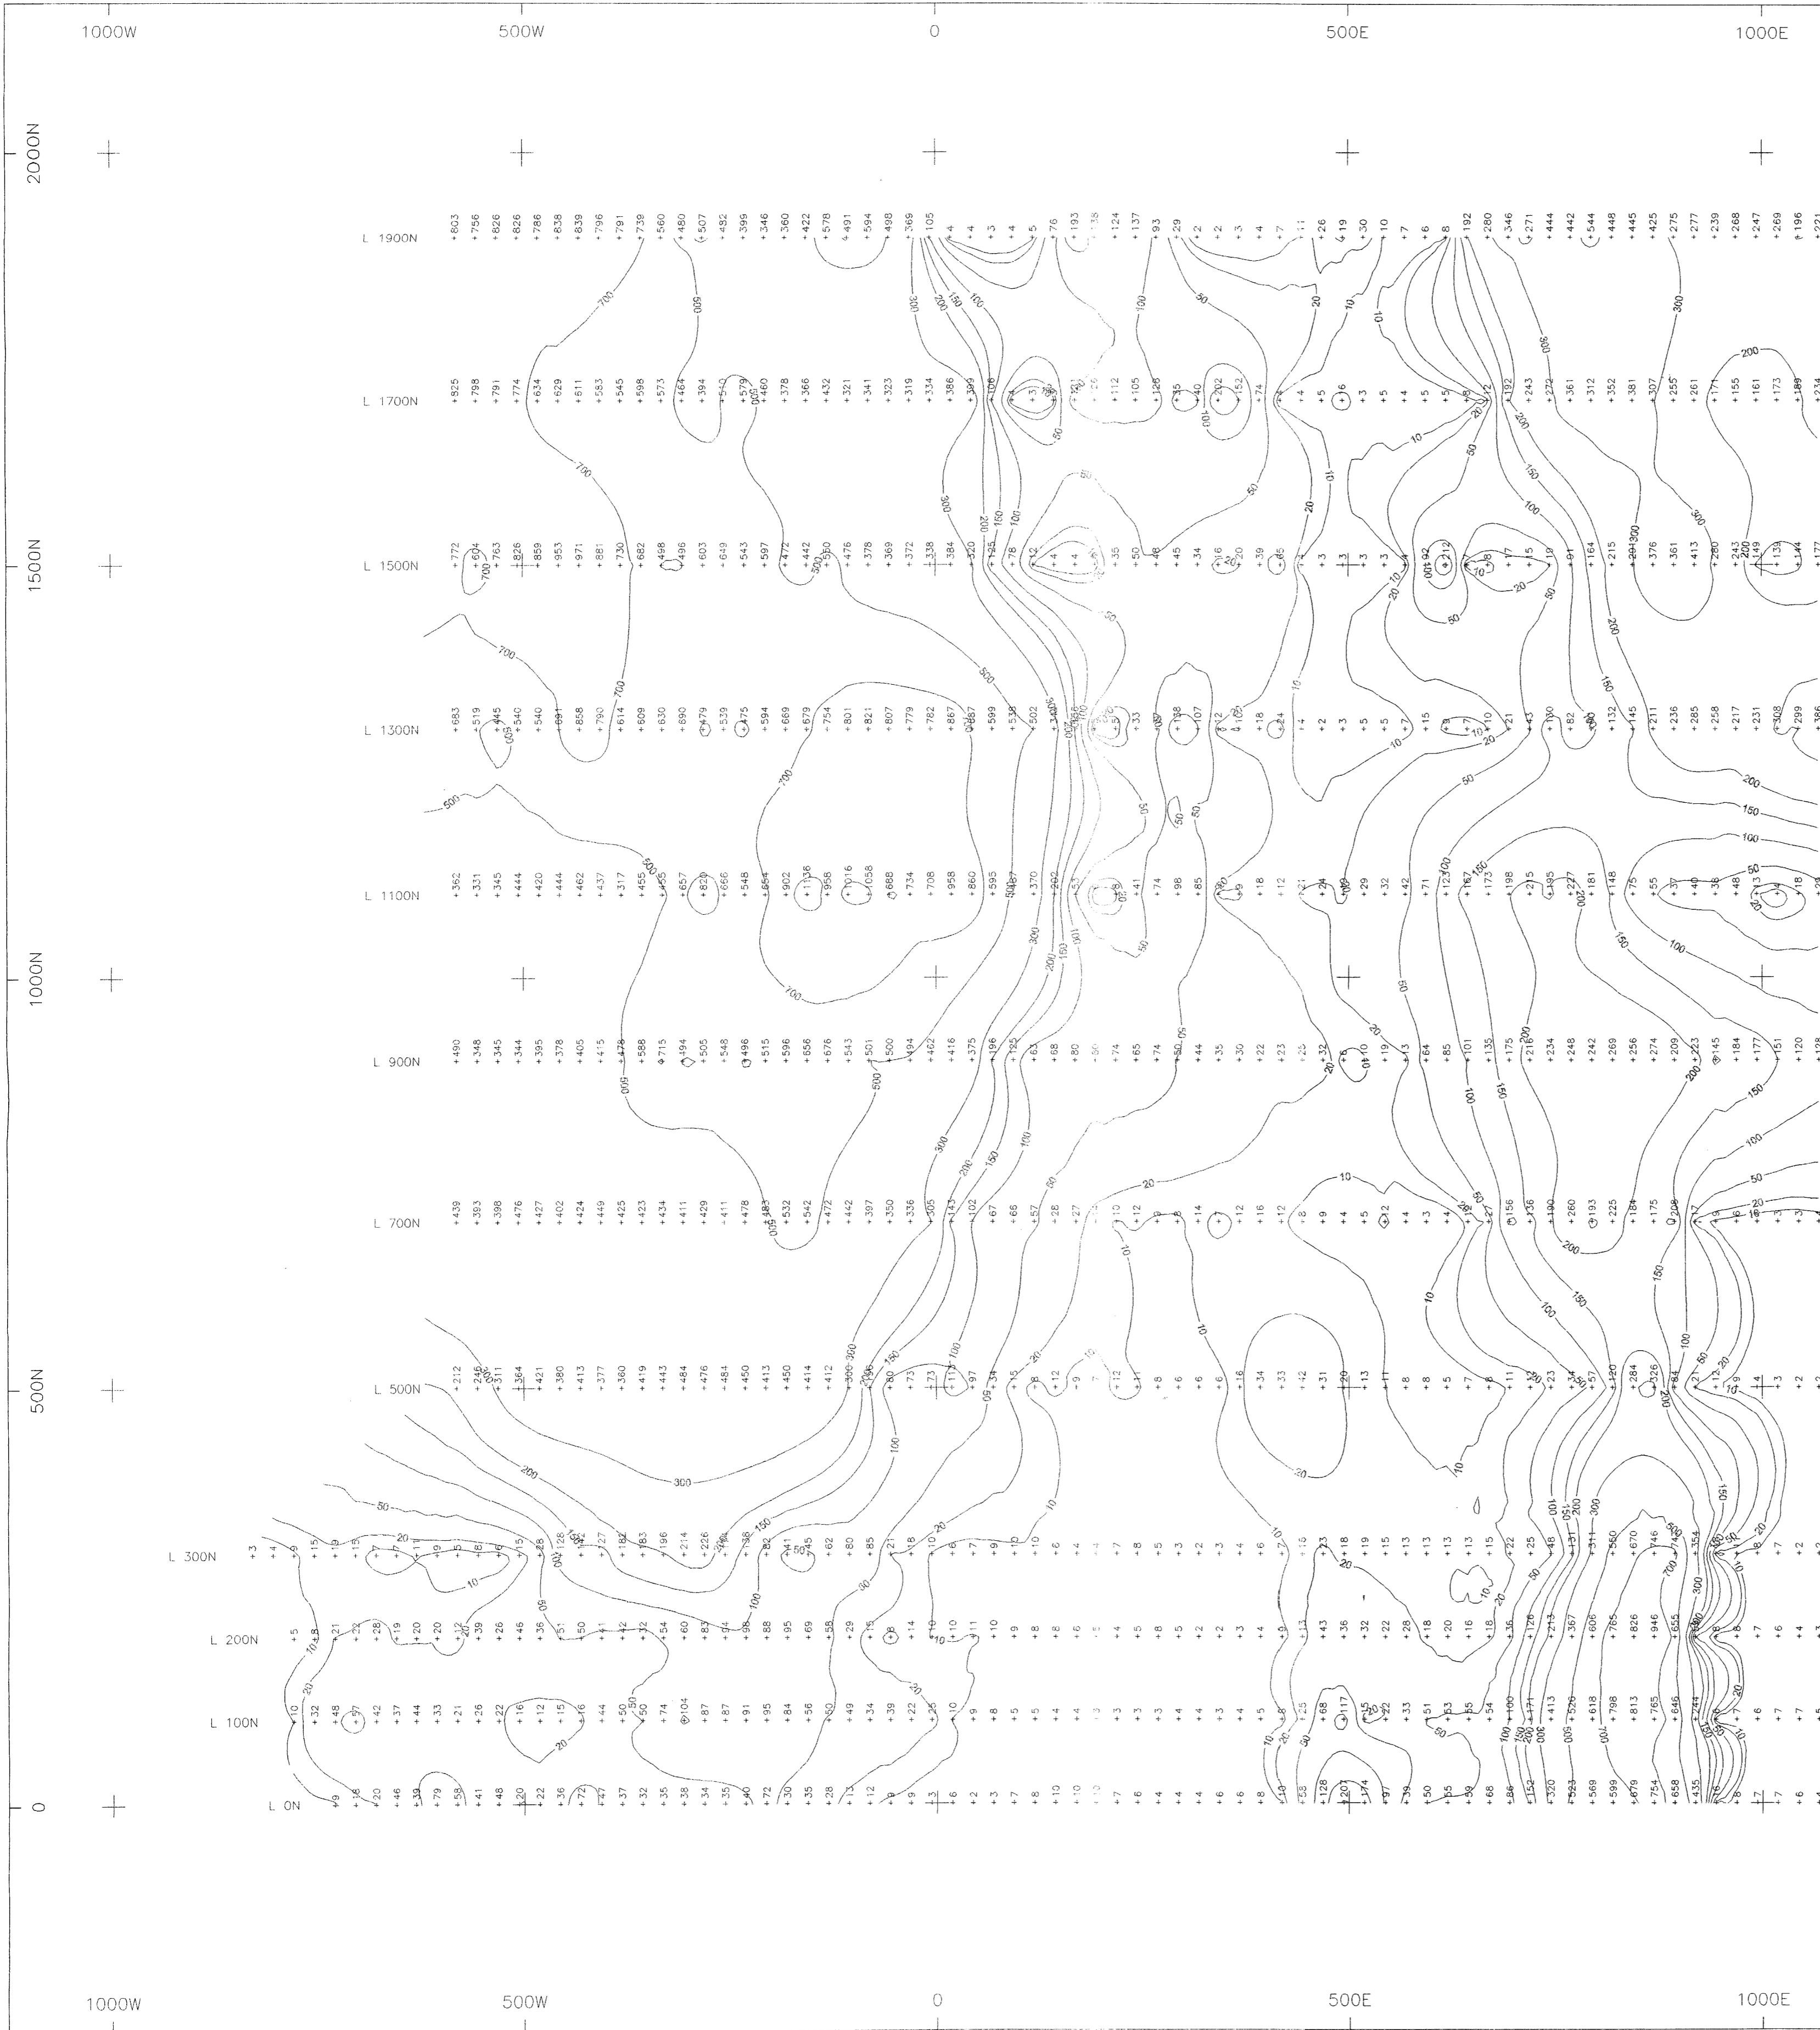

SURVEY SPECIFICATIONS


survey performed August/04
 receiver Scintrex IPR12
 transmitter IRIS VIP3000
 pulse time 2 seconds
 Mx receive window 690-1050 msec

array pole dipole
 a spacing 25 metres
 n separations 1, 2, 3, 4, 5
 current electrode W of potentials

Contoured value Filtered resistivity
 Filtered values n = 1 to 5

Log contour intervals:
 10, 20, 50, 100, 150, 200, 300,
 500, 700, 1000, 1500 (ohm-m)





Note: The filter applied to this data is the standard Fraser triangular filter whereby one value is selected at n=1, two values at n=2, three values at n=3, etc. The plotted value is the average of the average values of the n separations and is plotted at the n=1 data point. The filtered values give only general trends. The pseudosections must be referred to to assess specific features.




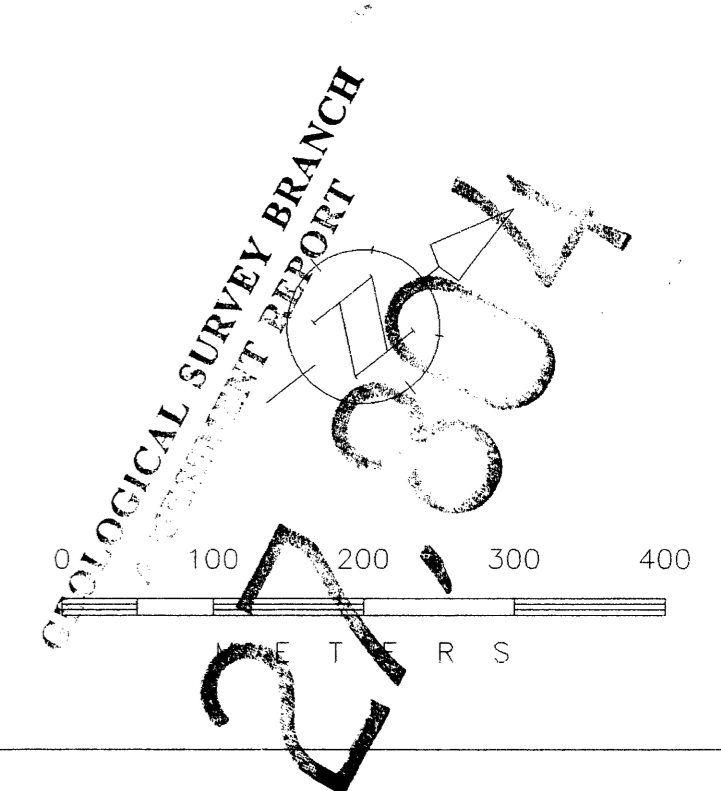






CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Resistivity Contour Plan
 Triangular Filtered Values
 First to Fifth Separations


DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

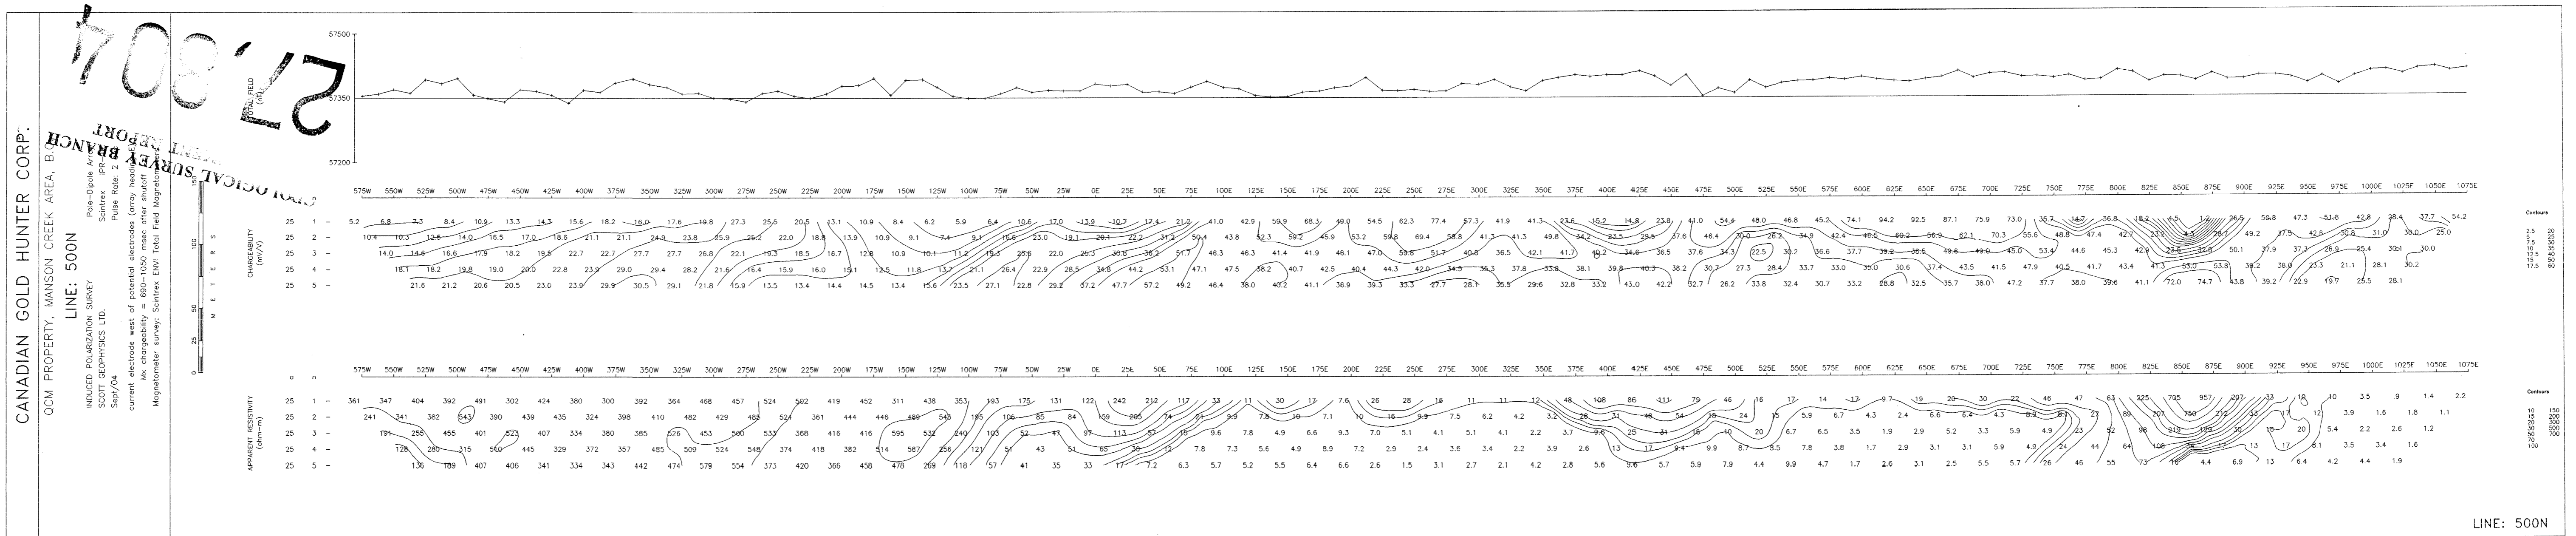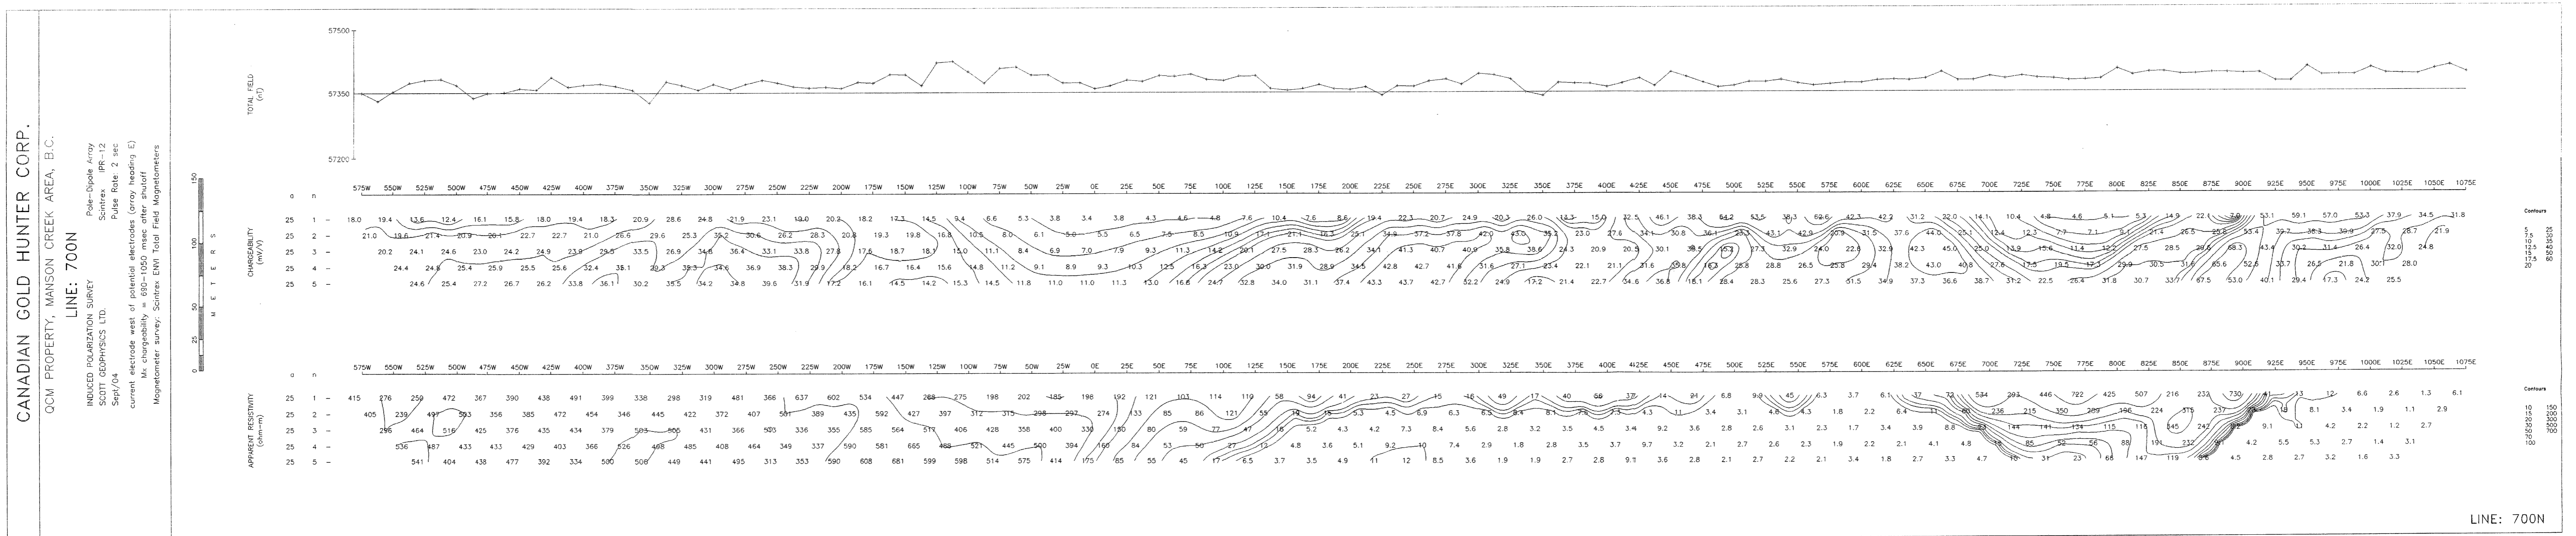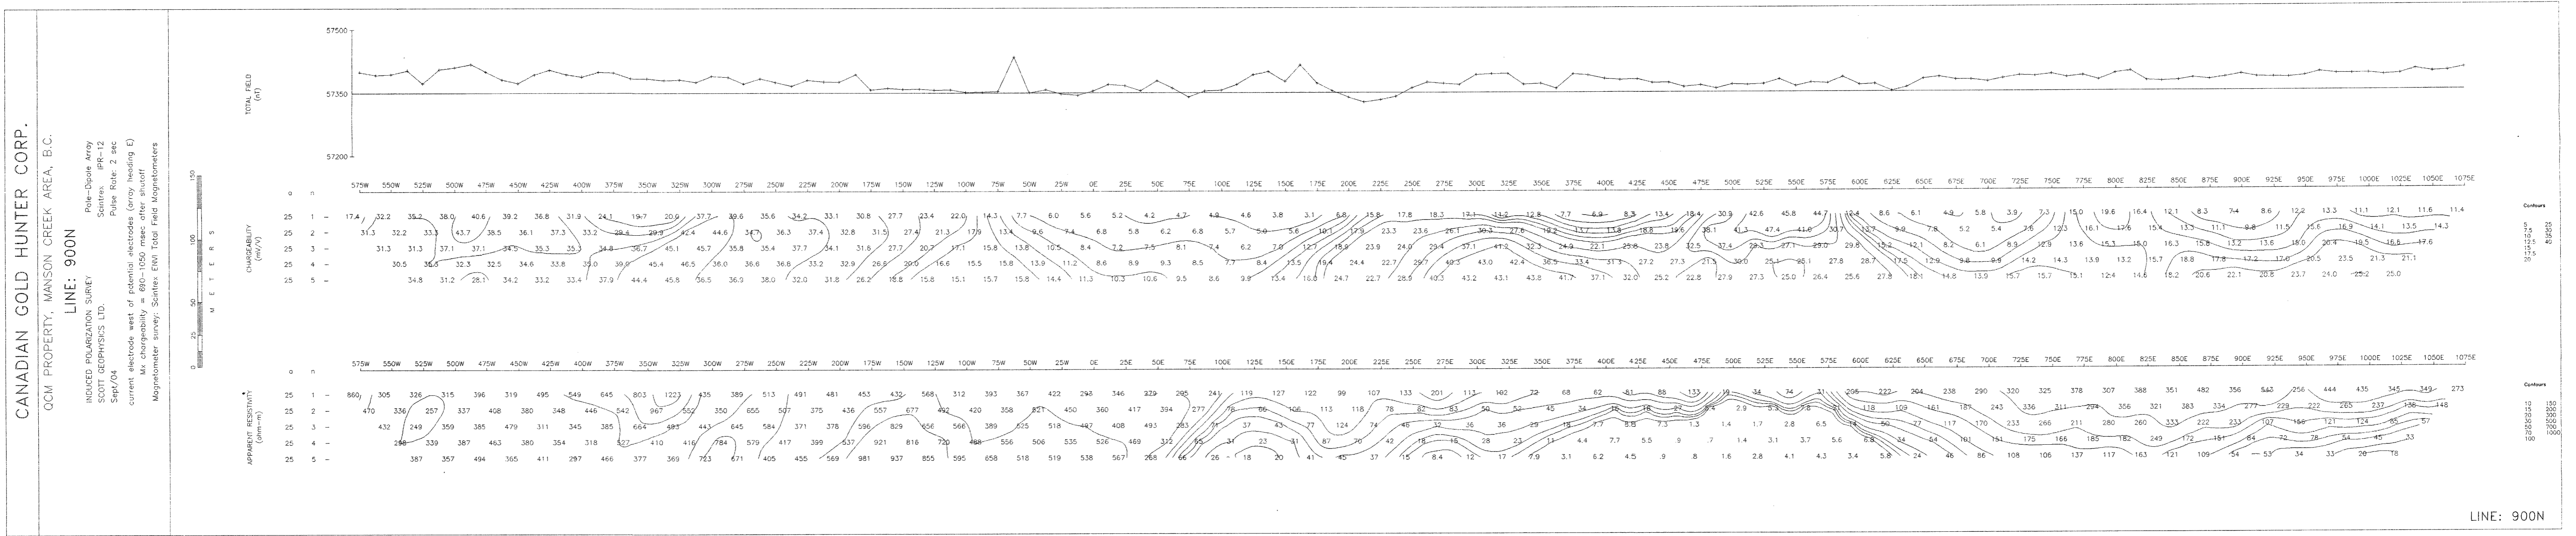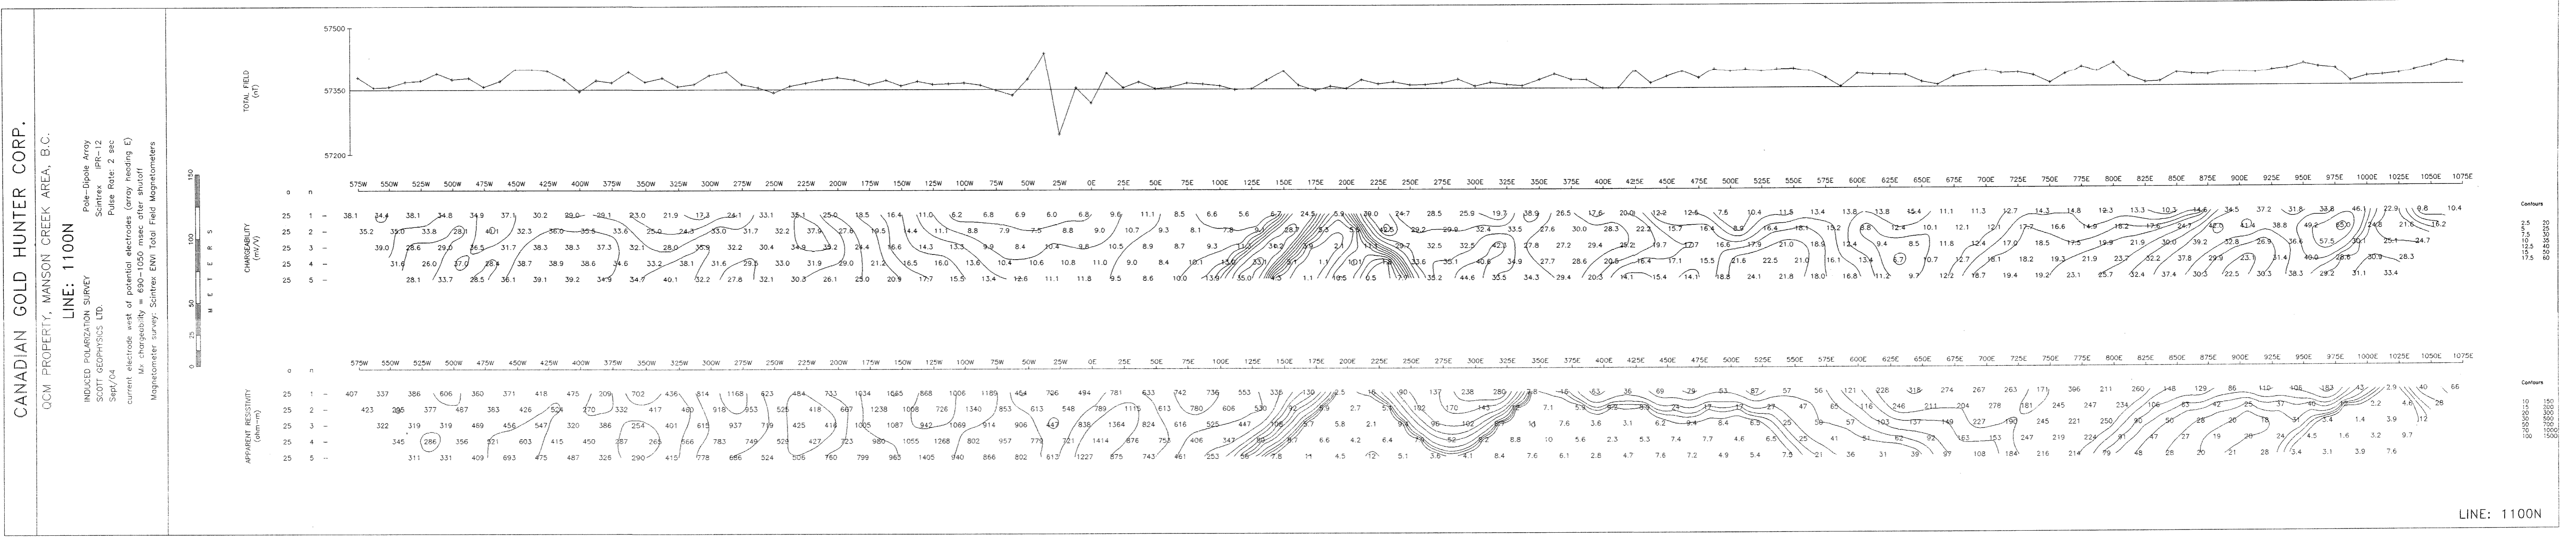

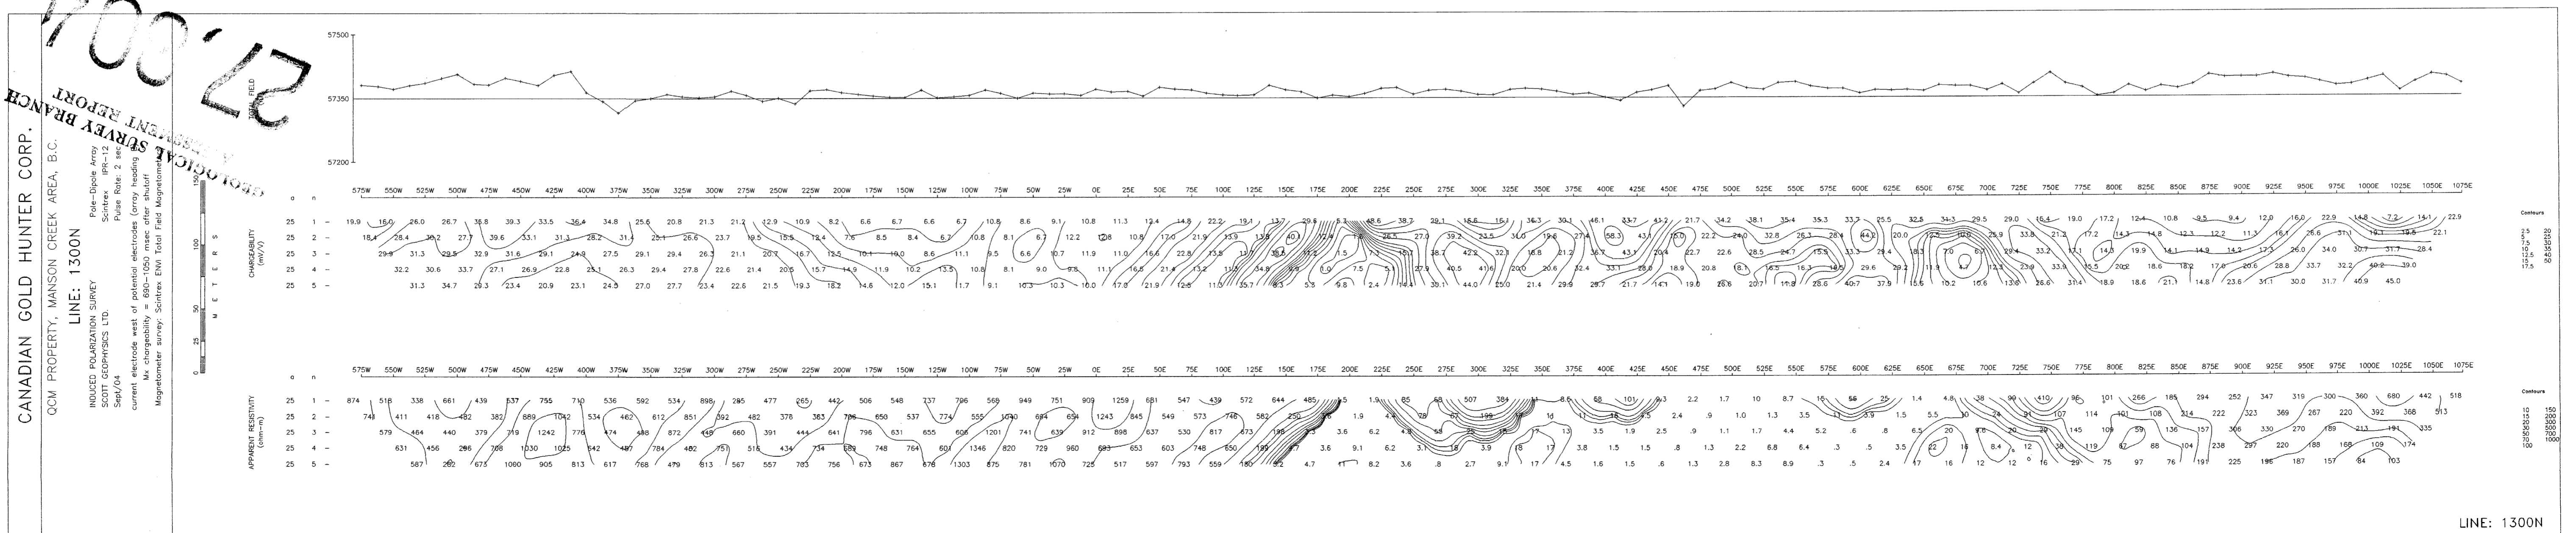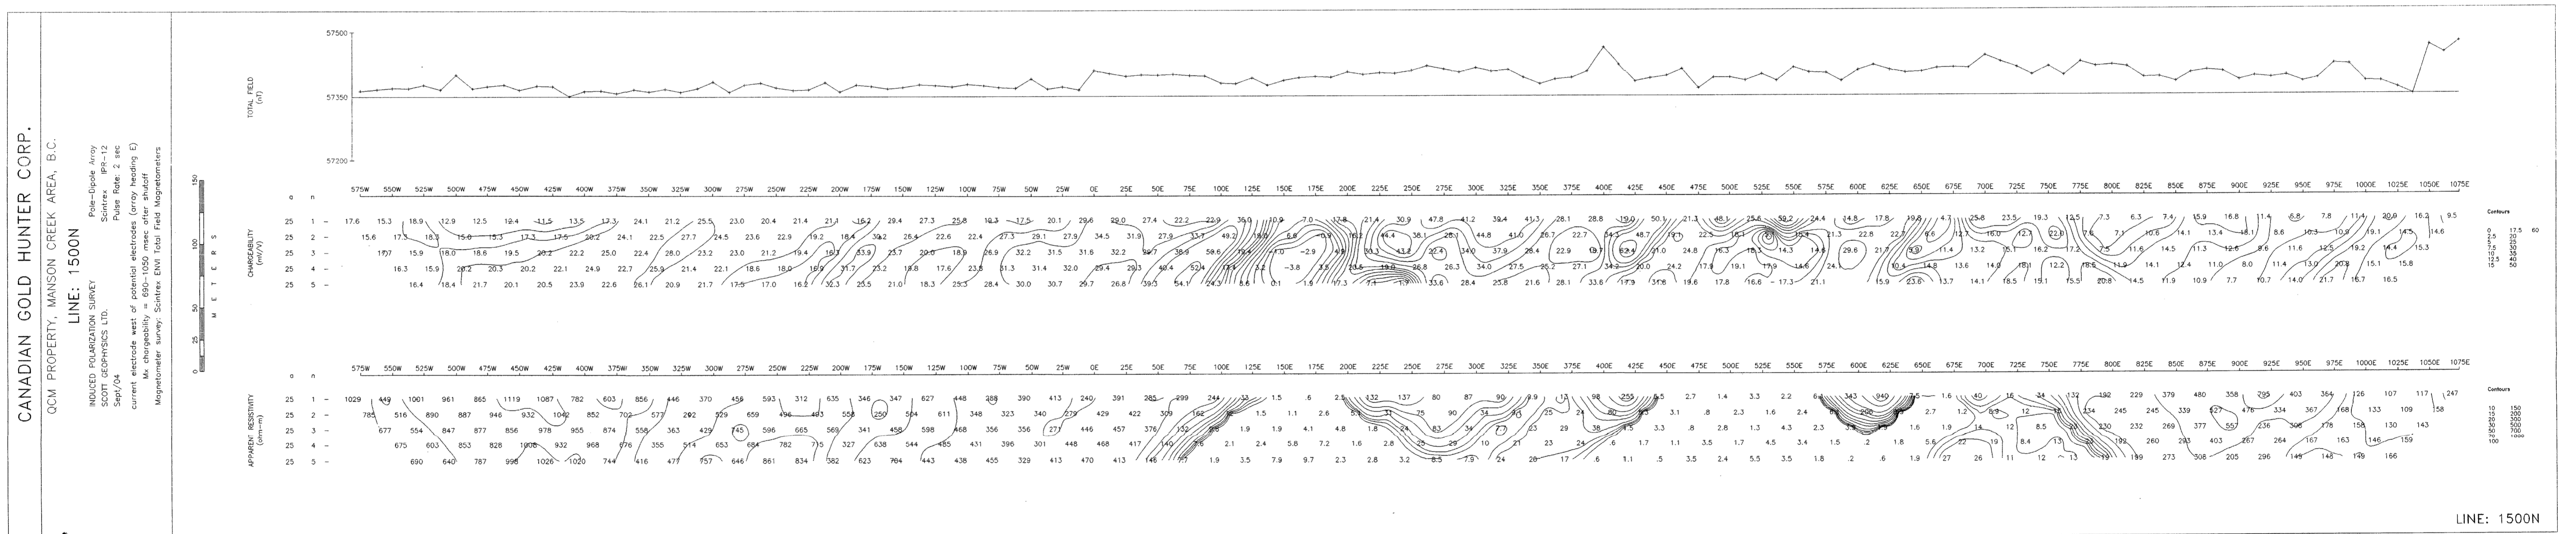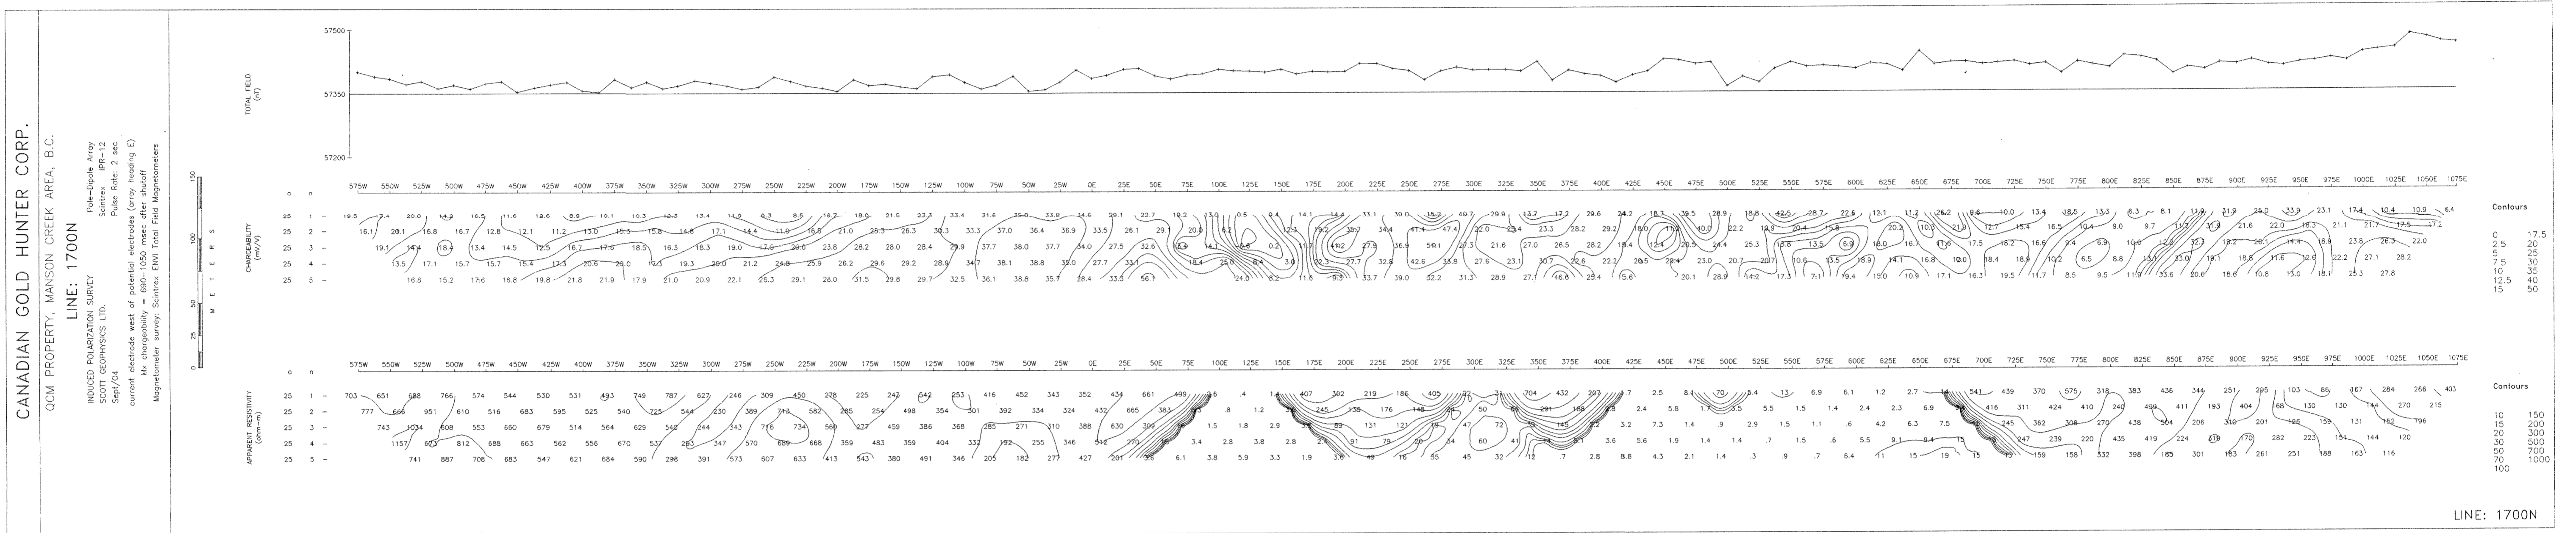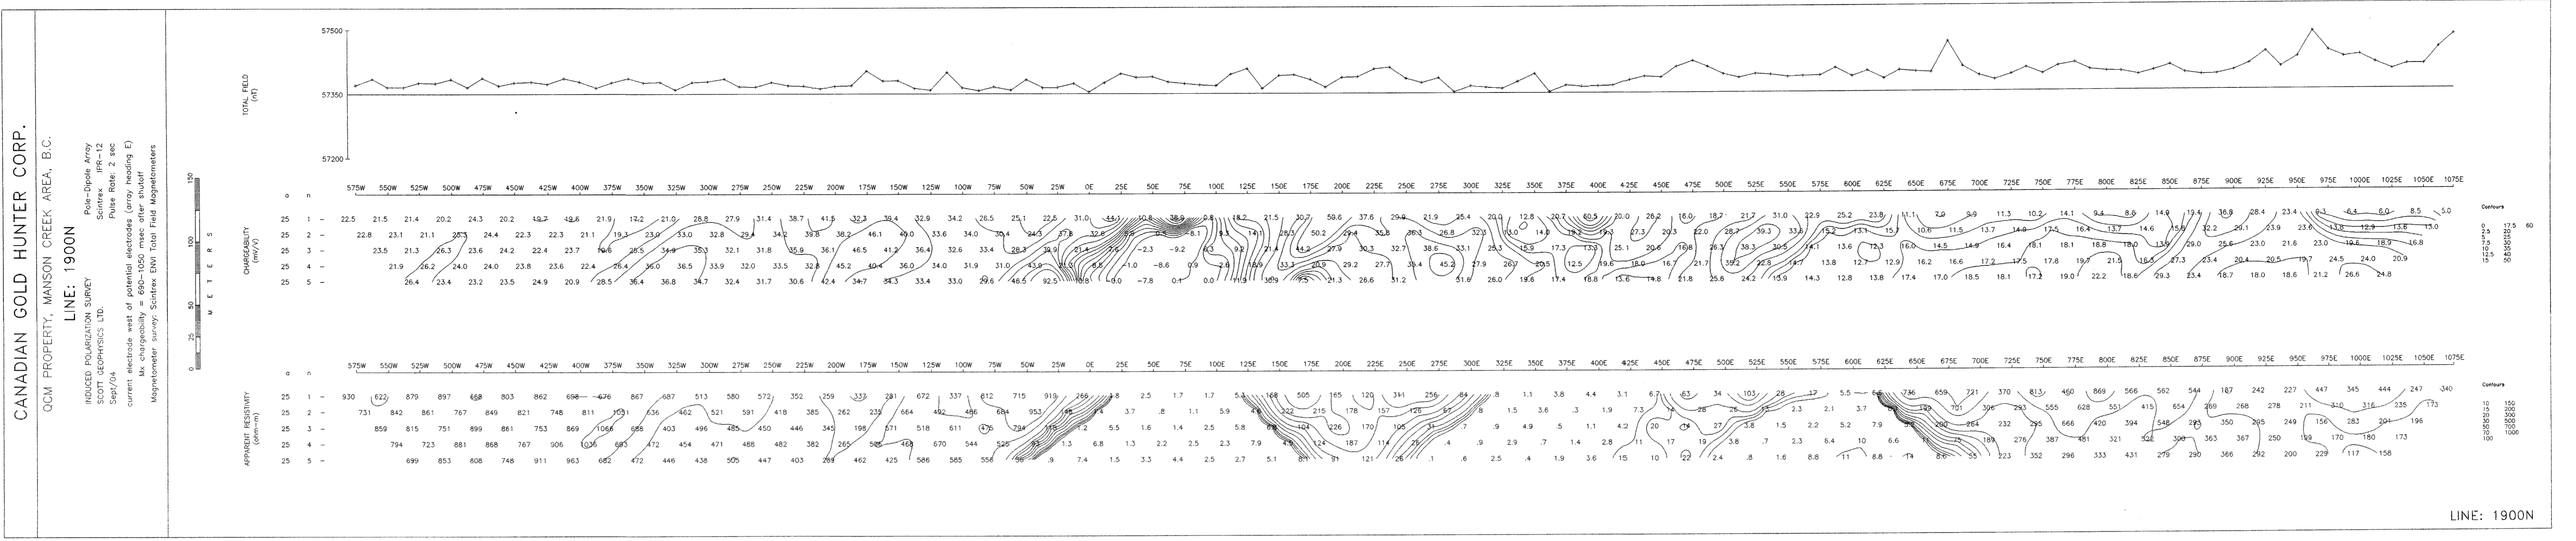

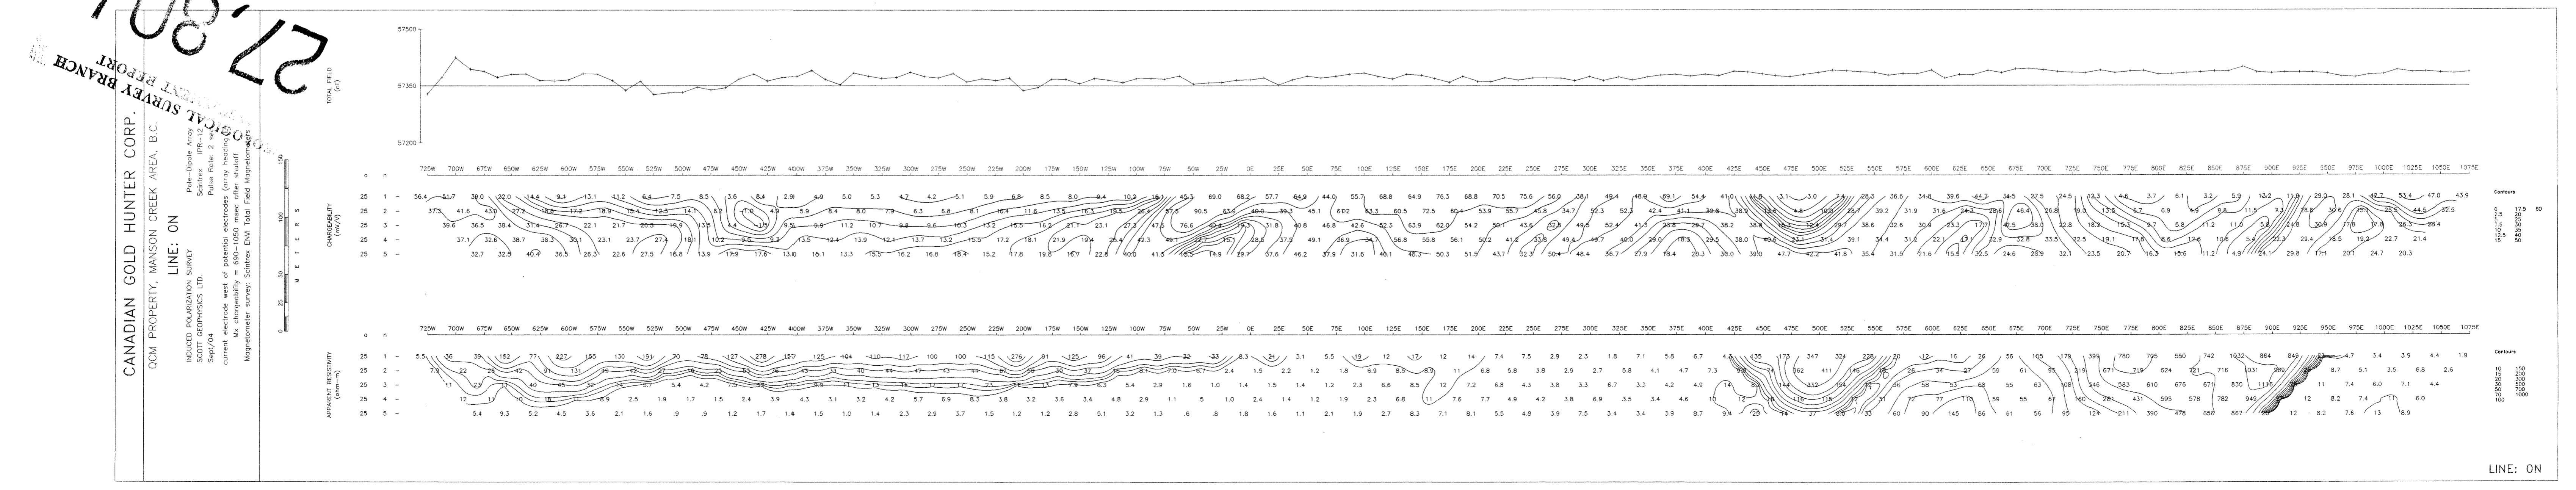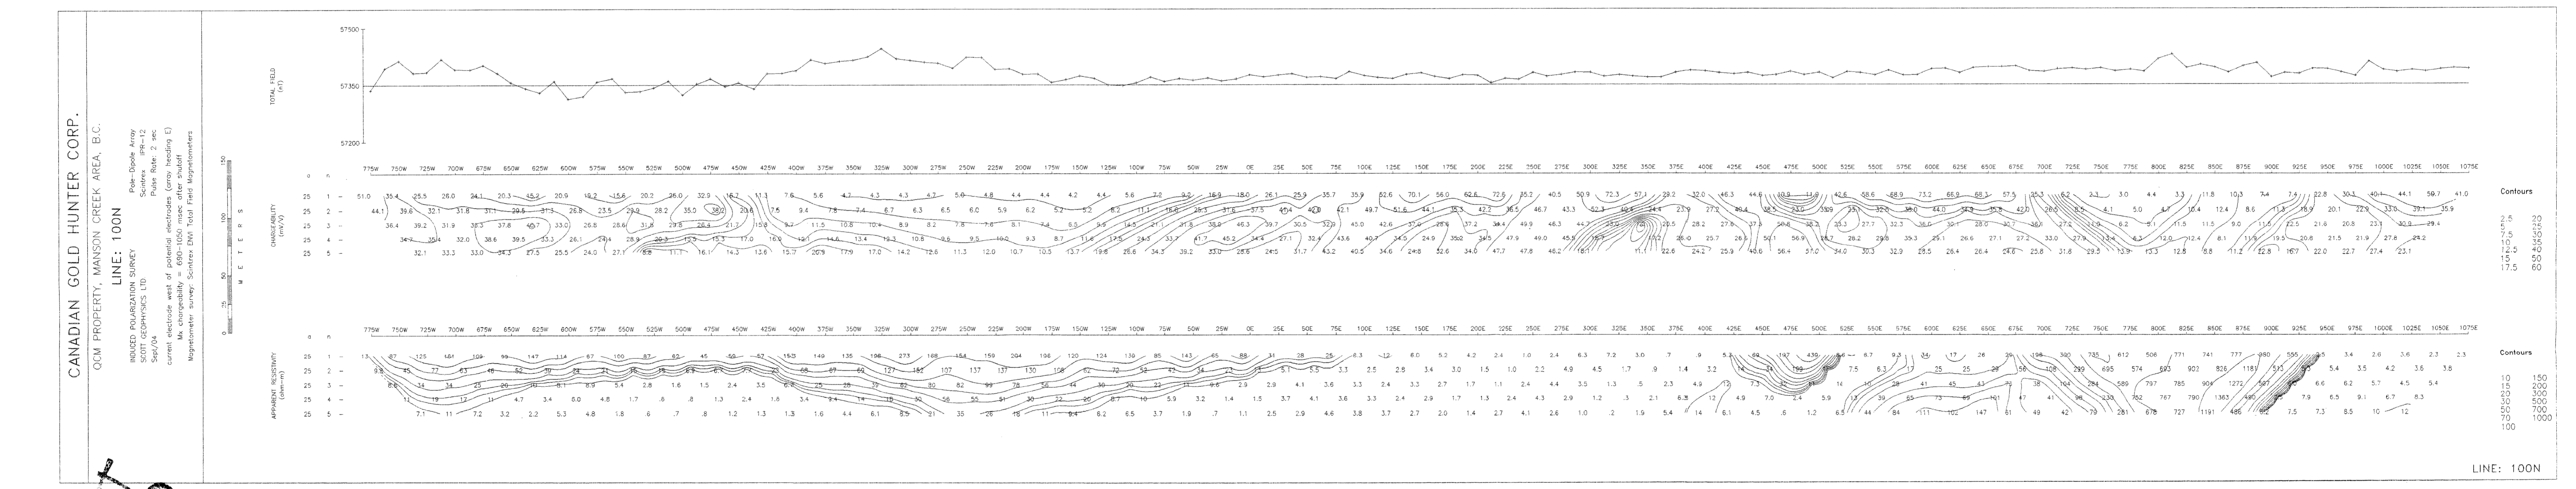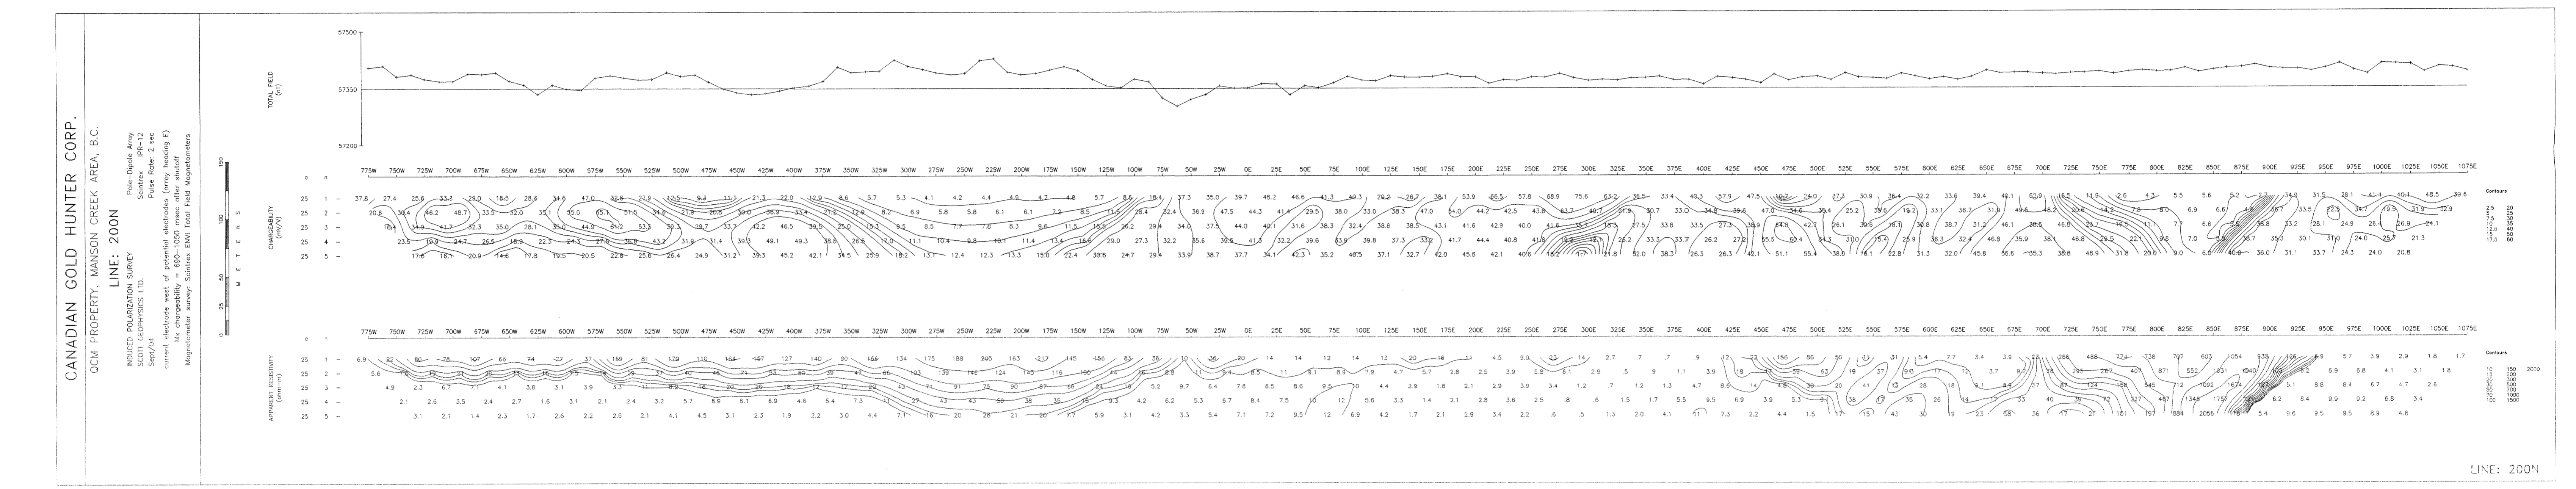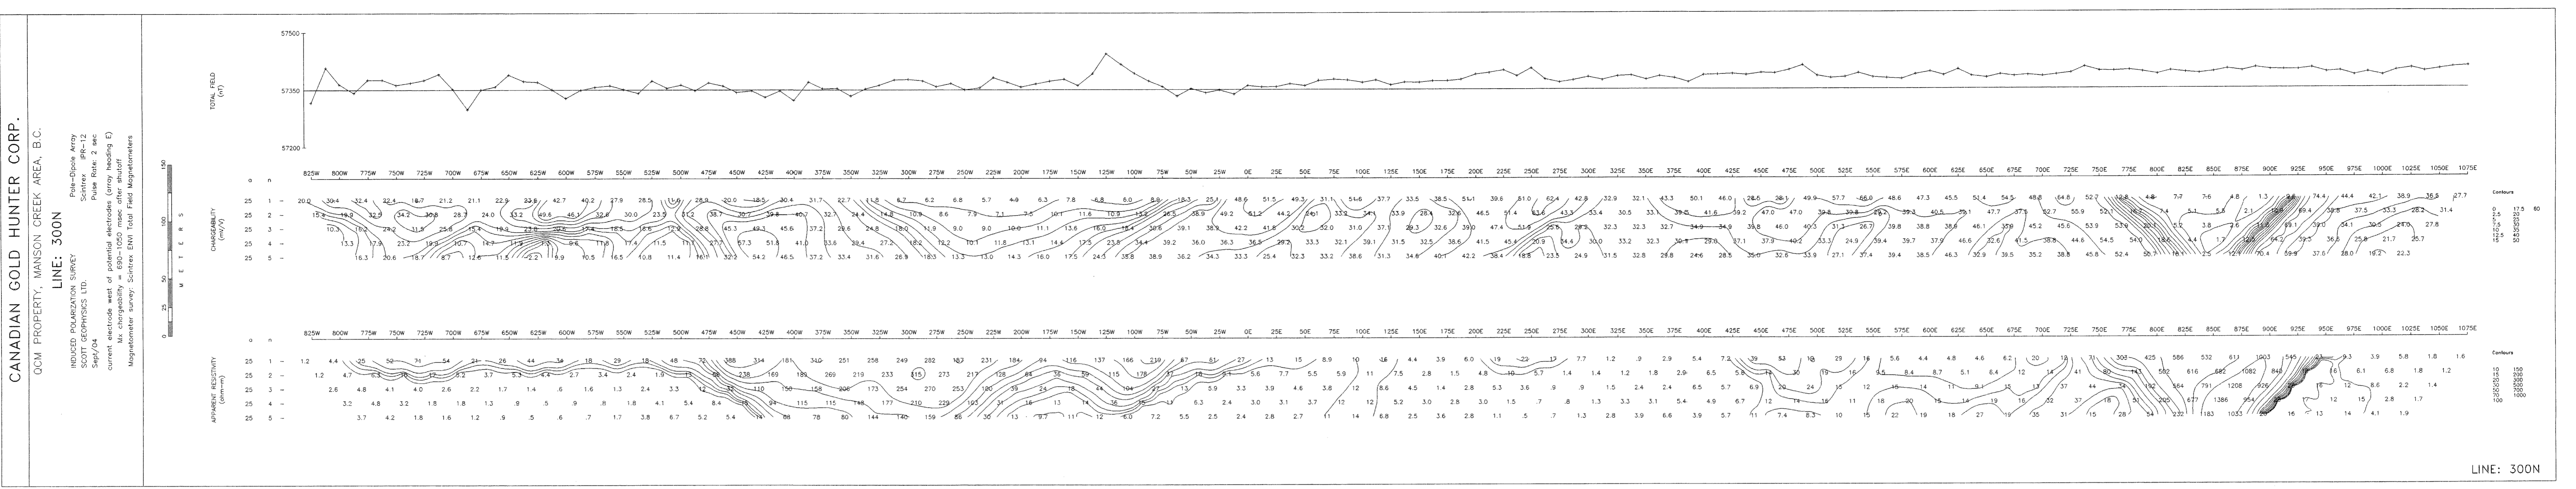

27.8014
GEOLOGICAL SURVEY BRANCH
NATIONAL SURVEY REPORT

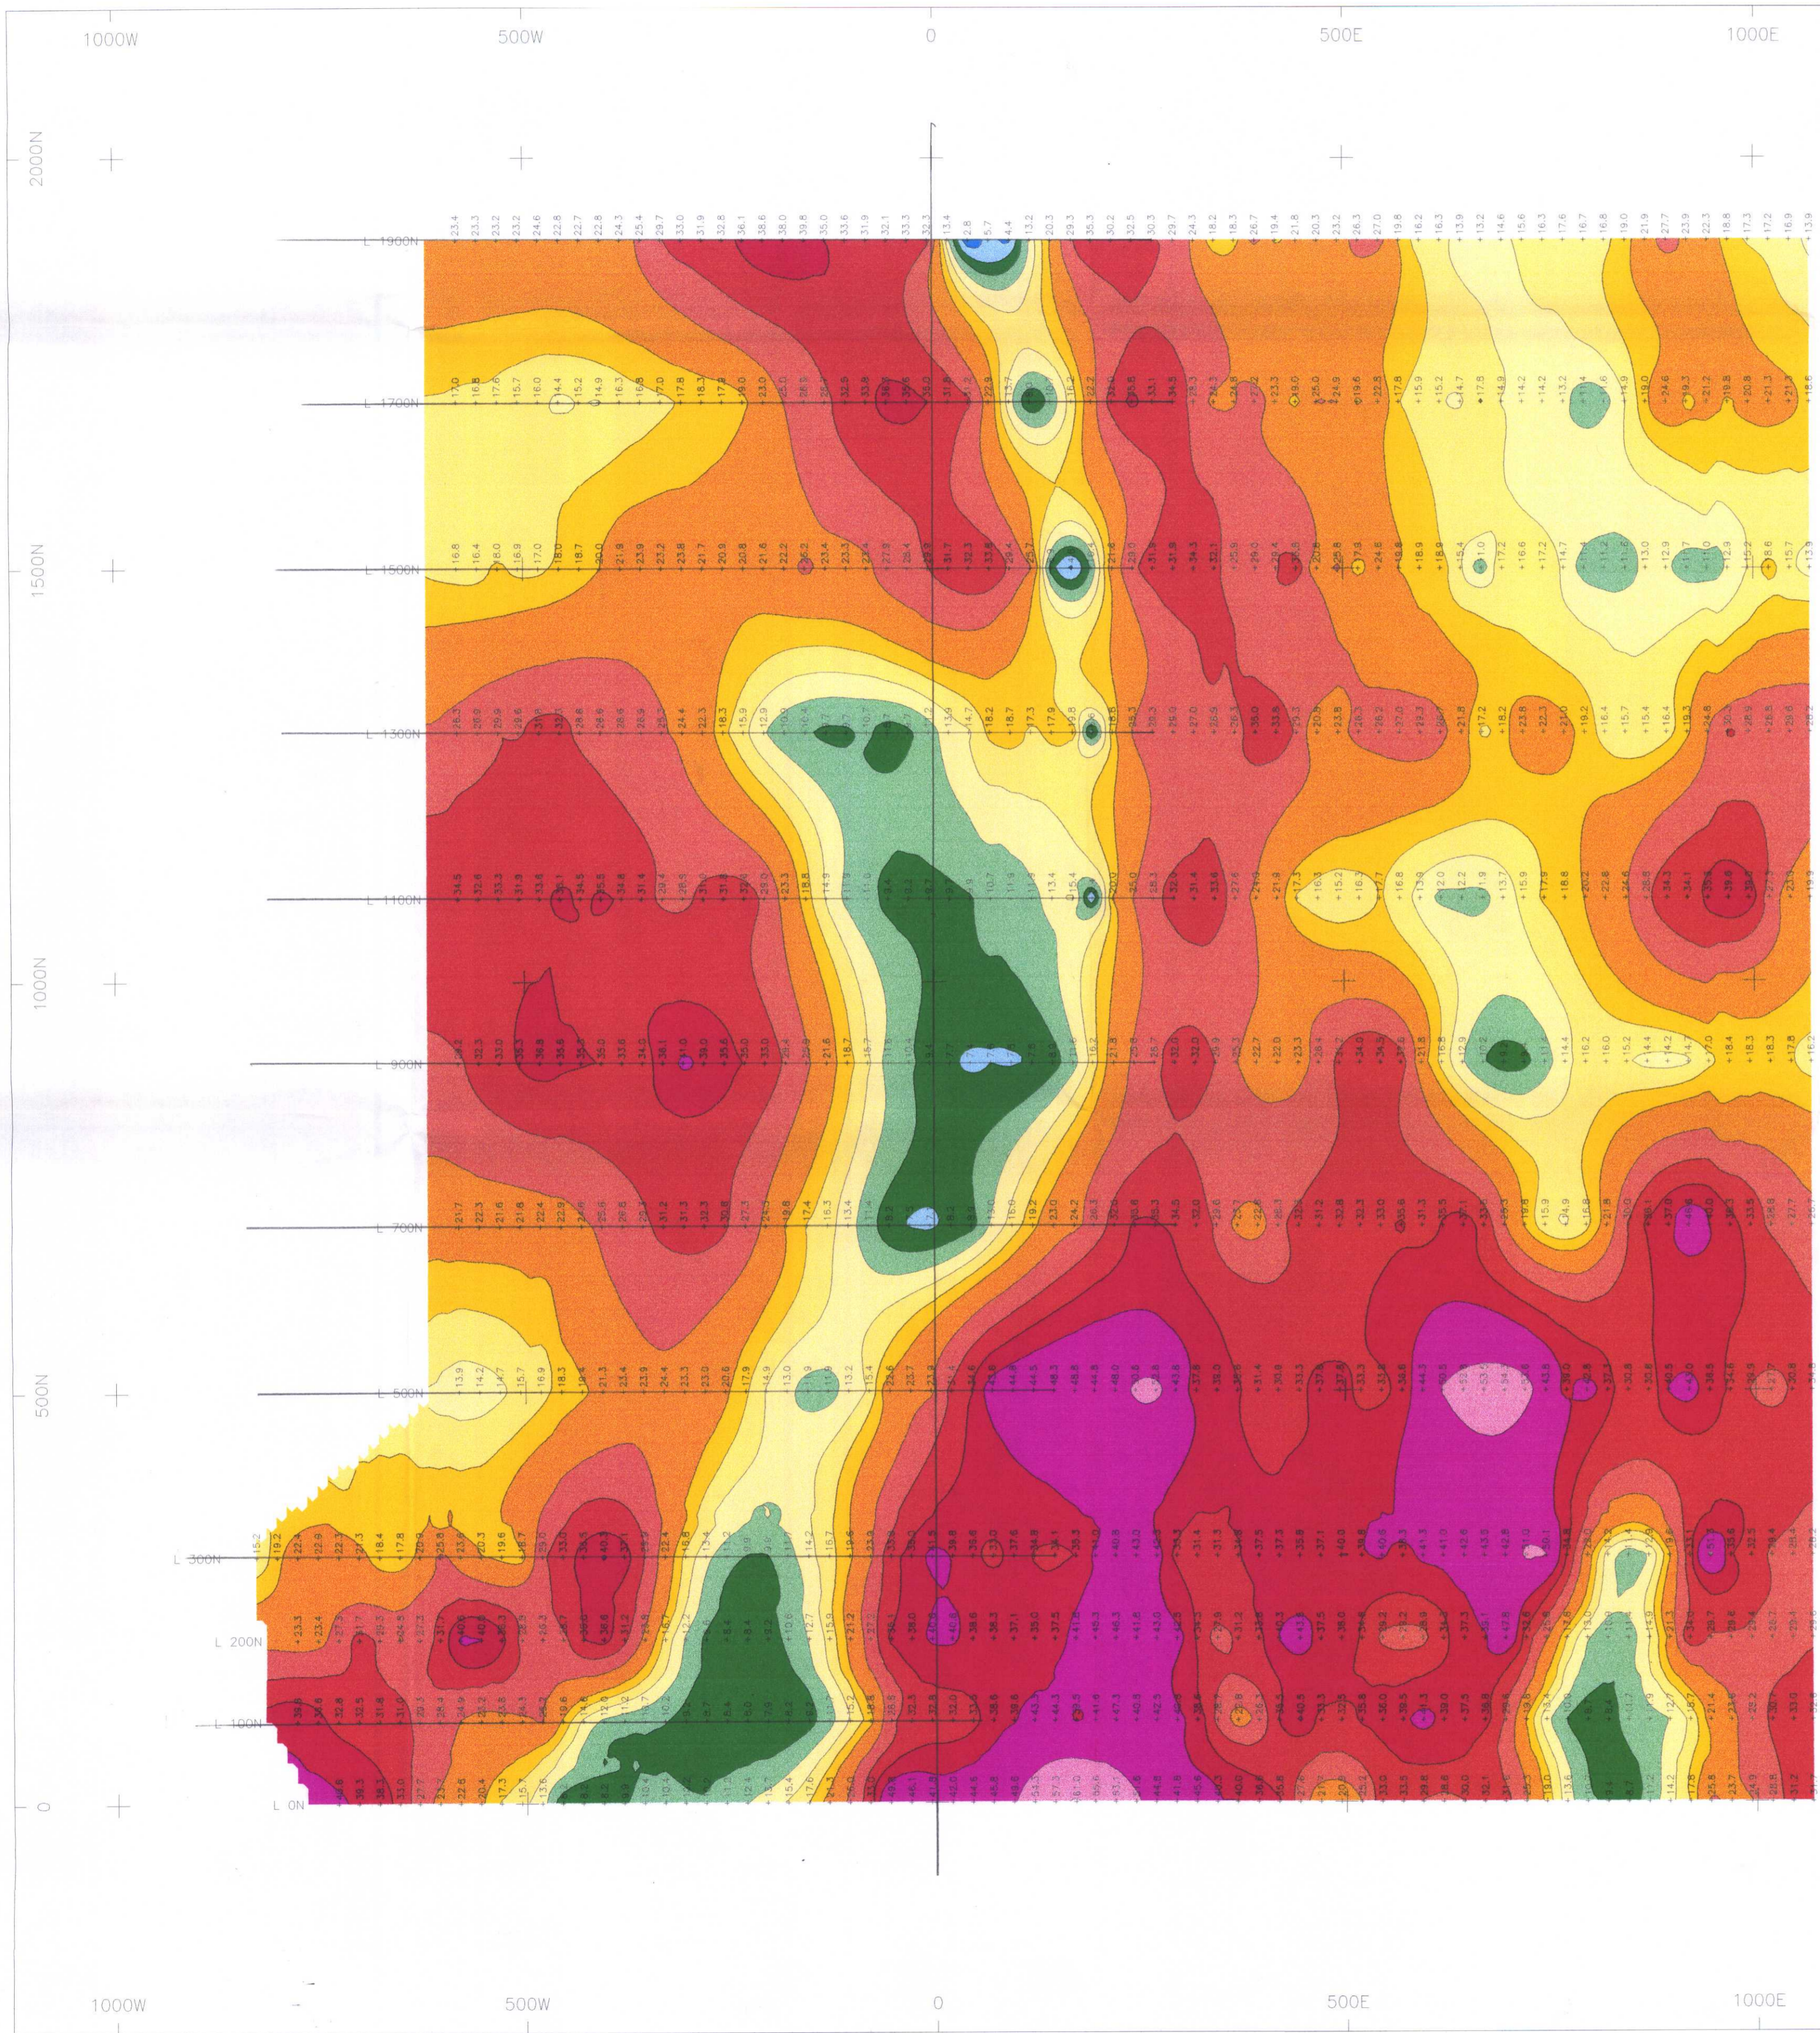

SURVEY SPECIFICATIONS


survey performed August/04
 receiver Scintrex IPR12
 transmitter Scintrex TS04
 pulse time 2 seconds
 Mx receive window 690-1050 msecs

array pole dipole
 a spacing 25 metres
 n separations 1, 2, 3, 4, 5
 current electrode W of potentials

Contoured value Filtered chargeability
 Filtered values n = 1 to 5

Contour intervals:
 0, 2.5, 5, 7.5, 10, 12.5, 15, 17.5,
 20, 25, 30, 35, 40, 50, 60 (mV/Volt)

Note: The filter applied to this data is the standard Fraser triangular filter whereby one value is selected at n=1, two values at n=2, three values at n=3, etc. The plotted value is the average of the average values of the n separations and is plotted at the n=1 data point. The filtered values give only general trends. The pseudosections must be referred to to assess specific features.

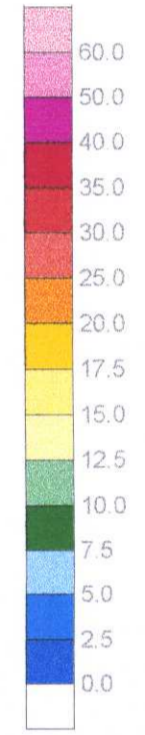


Geological Survey Branch
 Assessment Report
 27,804
 Non-adjusted grid.

10 200 300 400
 METERS

CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Chargeability Contour Plan
 Triangular Filtered Values
 First to Fifth Separations

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.

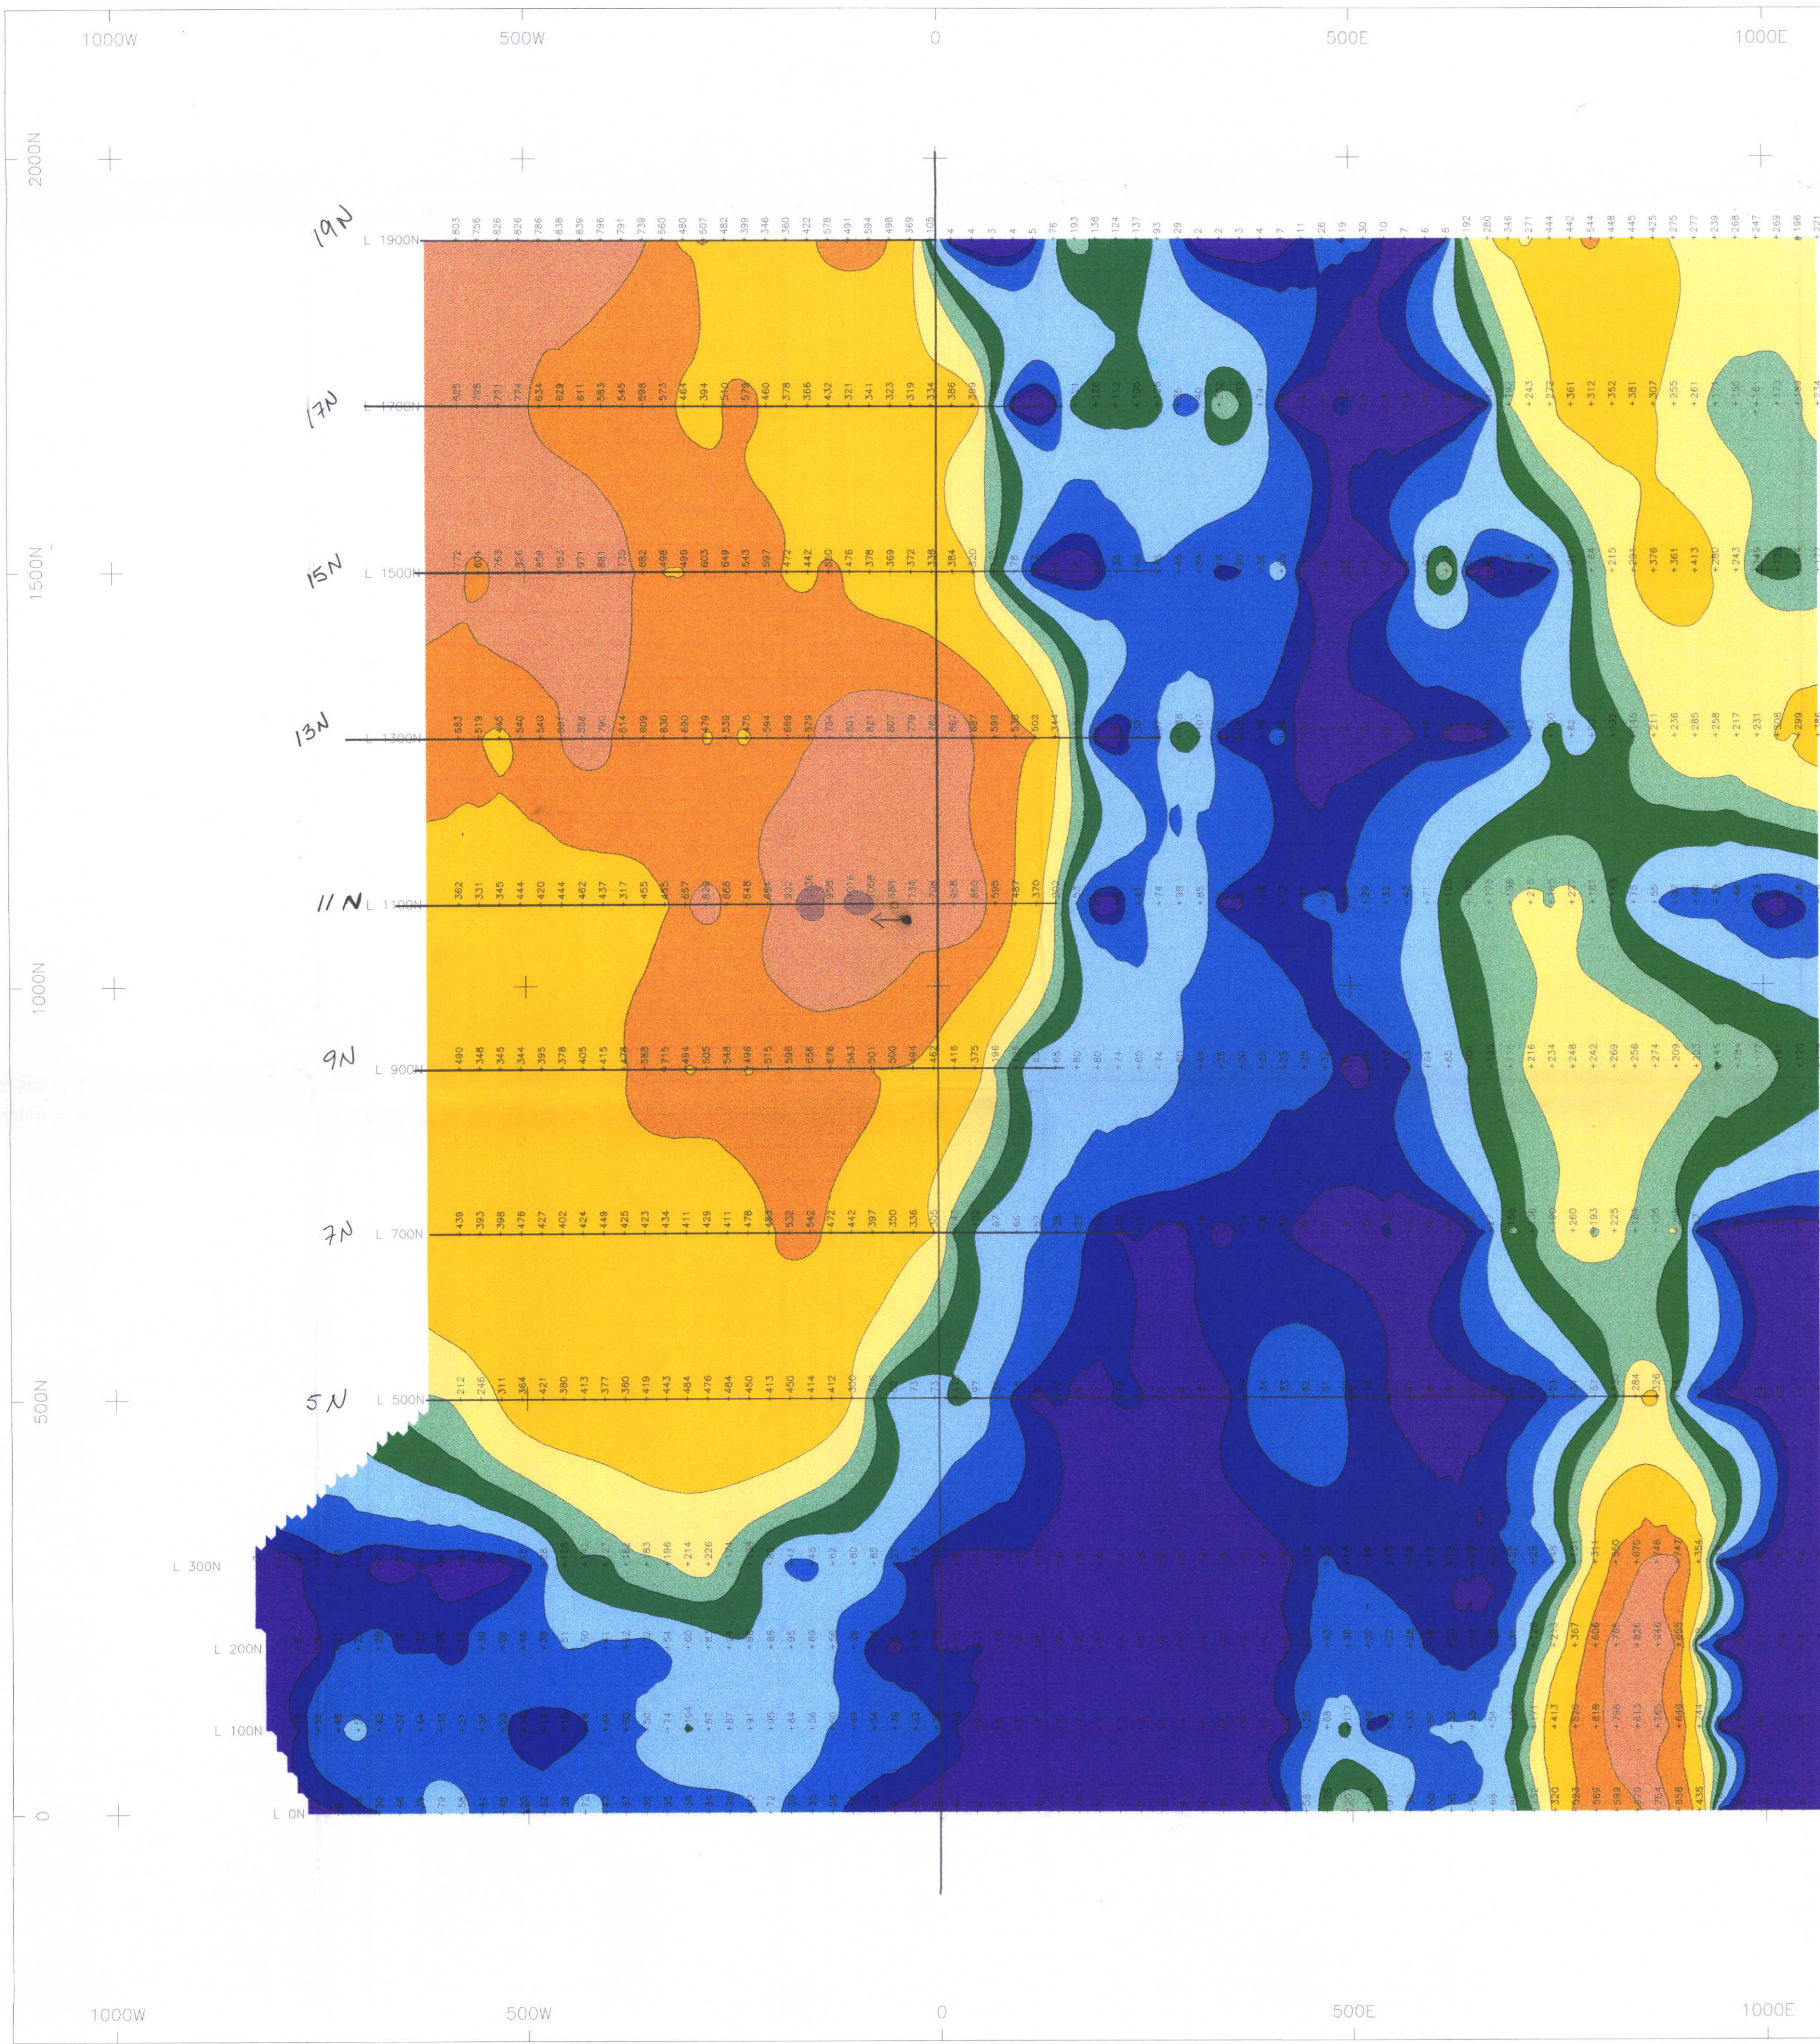

SURVEY SPECIFICATIONS


survey performed August/04
 receiver Scintrex IPR12
 transmitter IRIS VIP3000
 pulse time 2 seconds
 Mx receive window 690-1050 msecs

array pole dipole
 a spacing 25 metres
 n separations 1, 2, 3, 4, 5
 current electrode W of potentials

Contoured value Filtered resistivity
 Filtered values n = 1 to 5


Log contour intervals:
 10, 20, 50, 100, 150, 200, 300,
 500, 700, 1000, 1500 (ohm-m)

Note: The filter applied to this data is the standard Fraser triangular filter whereby one value is selected at n=1, two values at n=2, three values at n=3, etc. The plotted value is the average of the average values of the n separations and is plotted at the n=1 data point. The filtered values give only general trends. The pseudosections must be referred to to assess specific features.

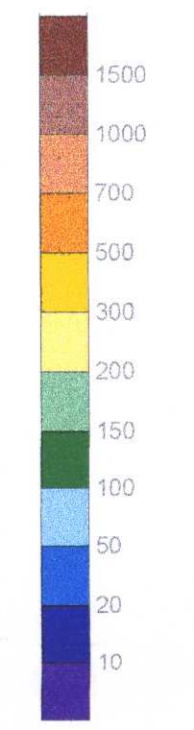

GEOLOGICAL SURVEY BRANCH
ASSESSMENT REPORT

27,004
non-adjusted grid.

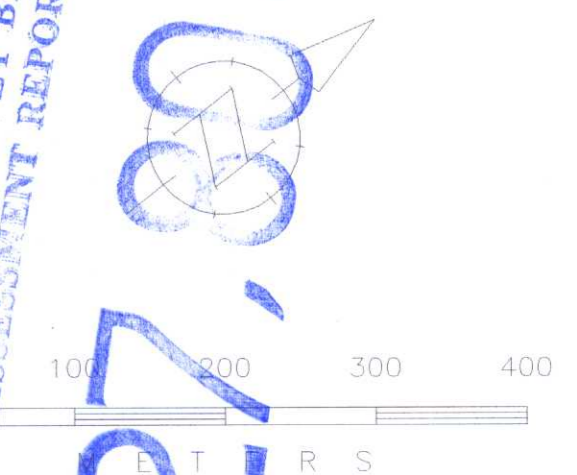

CANADIAN GOLD HUNTER CORP.

QCM PROPERTY
 MANSON CREEK AREA, B.C.
 Resistivity Contour Plan
 Triangular Filtered Values
 First to Fifth Separations

DRAWN BY: ars DATE: Sept/04
 SCOTT GEOPHYSICS LTD.