

# ASSESSMENT REPORT

on the

## Taseko Lakes Project

Clinton Mining Division, B.C. N.T.S. 92O/4

Latitude:  $51^{\circ} 12' N$ , Longitude:  $123^{\circ} 43' W$

### Galore Resources Inc.

Vancouver, B.C.

Canada

by

E. Trent Pezzot, B. Sc., P. Geo.

S.J.V. Consultants Ltd.

Date of Work: July - August, 2005

Date of Report: January 15, 2006

GEOLOGICAL SURVEY BRANCH  
CLINTON DIVISION



20,305

## Table of Contents

	page
<b>1 INTRODUCTION.....</b>	<b>1</b>
<b>2 LOCATION AND ACCESS.....</b>	<b>2</b>
<b>3 PROPERTY.....</b>	<b>3</b>
3.1 HUB CLAIM GROUP.....	5
3.2 NORTHWEST COPPER CLAIM GROUP.....	6
3.3 MAGIC TWIN CLAIM GROUP.....	7
<b>4 GEOLOGY.....</b>	<b>9</b>
4.1 REGIONAL GEOLOGY.....	9
4.2 LOCAL GEOLOGY AND MINERALIZATION.....	9
4.2.1 Hub.....	9
4.2.2 Charlie Prospect.....	10
4.2.3 Northwest Copper.....	10
4.2.4 Twin Creeks.....	10
<b>5 HISTORY AND PREVIOUS WORK.....</b>	<b>10</b>
5.1 HUB PROSPECT.....	10
5.2 CHARLIE PROSPECT.....	11
5.3 NORTHWEST COPPER.....	11
5.4 TWIN CREEKS.....	11
<b>6 FIELD WORK AND GEOPHYSICAL INSTRUMENTATION.....</b>	<b>11</b>
<b>7 EXPLORATION TECHNIQUES.....</b>	<b>12</b>
7.1 MAGNETIC SURVEY METHOD.....	12
7.2 VLF-EM METHOD.....	13
7.3 SOIL GEOCHEMISTRY METHOD.....	14
<b>8 DATA PRESENTATION.....</b>	<b>14</b>
8.1 STACKED PROFILES.....	14
8.2 STACKED PROFILE PLAN MAPS.....	15
8.3 CONTOUR PLAN MAPS.....	15
8.4 COMPILATION AND INTERPRETATION MAP.....	15
8.5 THEMATIC MAPS.....	15
<b>9 DISCUSSION OF RESULTS.....</b>	<b>15</b>
9.1 HUB.....	15
9.2 CHARLIE PROSPECT.....	18
9.3 NORTHWEST COPPER.....	20
9.4 TWIN CREEKS.....	22
9.4.1 Ridge Peak.....	23
9.4.2 Ridge Slide (Line 45N).....	23
9.4.3 Ridge River.....	24
9.5 PROPERTY VISITS.....	24
9.5.1 Battlement.....	25
9.5.2 Empress.....	25
9.5.3 Twin Creeks.....	25

9.5.4	<i>Charlie Vein</i> .....	26
9.5.5	<i>Fisham Lake</i> .....	26
9.5.6	<i>Red Hill</i> .....	26
9.5.7	<i>Taseko Mountain</i> .....	27
<b>10</b>	<b>SUMMARY &amp; CONCLUSIONS</b> .....	<b>27</b>
<b>11</b>	<b>RECOMMENDATIONS</b> .....	<b>28</b>
<b>12</b>	<b>APPENDIX 1</b> .....	<b>29</b>
12.1	STATEMENT OF QUALIFICATIONS .....	29
<b>13</b>	<b>APPENDIX 2</b> .....	<b>30</b>
13.1	REFERENCES .....	30
<b>14</b>	<b>APPENDIX 3 - COST BREAKDOWN</b> .....	<b>31</b>
<b>15</b>	<b>APPENDIX 4: INSTRUMENT SPECIFICATIONS</b> .....	<b>33</b>
15.1	GSM-19 MAGNETOMETER / GRADIOMETER .....	33
15.2	GSM-19 VLF .....	33
<b>16</b>	<b>APPENDIX 5 – DATA PROFILES</b> .....	<b>34</b>
16.1	HUB PROSPECT .....	34
16.2	CHARLIE PROSPECT .....	79
16.3	NORTHWEST COPPER PROSPECT .....	93
16.4	RIDGE PROSPECT .....	98
<b>17</b>	<b>APPENDIX 6 – GEOCHEMICAL ASSAYS</b> .....	<b>104</b>

## List of Plates and Figures

Plate	Description	Location
Figure 1	Location Map	Page 2
Figure 2	Field Surveys and Property Visit Location Map	Page 3
Figure 3	Claim Groups Map	Page 4
Figure 4	Regional Geology & Mineralization	Page 8
Figure 5	Hub Grid –Total Magnetic Field Intensity Colour Map – Shadow Enhanced by sun angle from northeast.	Page 3
Figure 6	N-S Profile across Charlie Grid – magnetic, vlf-em (inphase, quadrature, field strength)	Page 20
Figure 7	Northwest Copper Area - 1999 Dighem airborne magnetic survey (background) with detailed ground survey	Page 21
Figure 8	Photograph of outcrop along north facing cirque at Twin Creeks prospect	Page 26
Plate: G1a	Hub Grid Geophysical Survey Grid Geochemical Sampling Location Map	Pocket
Plate G1b	Hub Grid Total Magnetic Field Intensity False Colour Contour Map Stacked Profile Map	Pocket
Plate G1c	Hub Grid Stacked Profile Map VLF-EM Inphase, Quadrature (Seattle)	Pocket
Plate G1d	Hub Grid Geophysical Interpretation Map	Pocket
Plate G1e	Hub Grid Soil Geochemical Survey Thematic Map (Copper)	Pocket
Plate G1f	Hub Grid Soil Geochemical Survey Thematic Map (Molybdenum)	Pocket
Plate G1g	Hub Grid Soil Geochemical Survey Thematic Map (Cobalt)	Pocket
Plate G2a	Charlie Project Survey Grid Map	Pocket
Plate G2b	Charlie Project Total Magnetic Field Intensity (nTs) False Colour Contour Map Stacked Profile Map	Pocket
Plate G2c	Charlie Project Seattle VLF-EM (24.8 kHz) Inphase and Quadrature Components Stacked Profile Map	Pocket



Plate	Description	Location
Plate G2d	Charlie Project Geophysical Interpretation	Pocket
Plate G3a	Northwest Copper Project Survey Grid Map Geochemical Sample Location Map	Pocket
Plate G3b	Northwest Copper Project Total Magnetic Field Intensity False Colour Contour Map Stacked Profile Map	Pocket
Plate G3c	Northwest Copper Project Seattle VLF-EM (24.8 kHz) Inphase and Quadrature Components Stacked Profile Map	Pocket
Plate G3d	Northwest Copper Project False Colour Contour Magnetic Map Stacked Profile Map (Seattle inphase) Geophysical Interpretation	Pocket
Plate G3e	Northwest Copper Project Soil Geochemistry Copper (ppm) Thematic Map	Pocket
Plate G3f	Northwest Copper Project Soil Geochemistry Gold (ppb) Thematic Map	Pocket
Plate G3g	Northwest Copper Project Soil Geochemistry Arsenic (ppm) Thematic Map	Pocket
Plate G4a	Twin Creeks Area Ridge-Peak, Ridge-Slide, Ridge-River Survey Grid Map Geochemical Sampling Location Map	Pocket
Plate G4b	Twin Creeks Area Ridge-Peak, Ridge-Slide, Ridge-River Total Magnetic Field Intensity Stacked Profile Map	Pocket
Plate G4c	Twin Creeks Area Ridge-Peak, Ridge-Slide, Ridge-River VLF-EM Inphase, Quadrature Stacked Profile Map	Pocket
Plate G4d	Twin Creeks Area Ridge River Grid Stacked Profiles (mag, vlf-em) Interpretation	Pocket
Plate G4e	Twin Creeks Area Ridge River Grid Soil Geochemistry Gold (ppb) Thematic Map	Pocket

## 1 Introduction

S.J.V. Consultants Ltd. was commissioned by Galore Resources Inc. to act as an exploration consultant for their Taseko Lakes Project located in south central British Columbia. Galore Resources currently owns and/or options most of the mineral claims on map sheets 92 O/4E and 92 O/3W (Figure 1) and is in the process of optioning additional properties. Their holdings include several documented mineral occurrences, including the Pellaire, Charlie, Hub, Northwest Copper, Magic, Tax, Bat, Moly, Twin Creek, Battlement and Spokane showings. These showings are in various stages of exploration, from grass roots to past production.

After a review and compilation of previous exploration documents a program of reconnaissance airborne and ground geophysical surveys was recommended. The airborne surveys are intended to serve as general mapping tools to evaluate the large ground holdings. Ground survey recommendations varied for individual project areas, depending on the current stage of the exploration program.

From July 26 to August 16, 2005, ground magnetometer and vlf-electromagnetometer surveys and soil geochemical sampling were completed on 4 project areas: Hub, Charlie, Northwest Copper and Twin Creeks (also referred to as the Ridge). The majority of the work was focused on the Hub property and was designed to confirm and extend similar data recorded in the 1980's. Reconnaissance test surveys were run across the other areas to determine whether a geophysical and/or geochemical signature could be associated with known geological features.

During the same general time period, the project supervisor, John Hajek, and myself conducted two helicopter supported visits to the property. During the first visit, on July 11, 2005 efforts were focused on investigating several sites in the Northwest Copper area. Details concerning this visit are documented in a separate assessment report. The second visit, on July 28, 2005 was timed to coincide with the early stages of the geophysical survey. Efforts were focused on reviewing the first couple of days of survey data and organizing the geophysical program. Helicopter support was used to visit several other project areas including the Empress mine site, Battlement Ridge, Charlie vein, Fisham Lake, Red Hill and Taseko Mountain.

## 2 Location and Access

The Taseko Lakes project covers a large area (approximately 30 km x 20 km) that generally follows the Taseko River in the Cariboo Mining District and NTS 92O/4 and 92O/3. The approximate geographic coordinates near the center of the project area is latitude 51° 08'N and longitude 123° 25'W. (Figure 1)

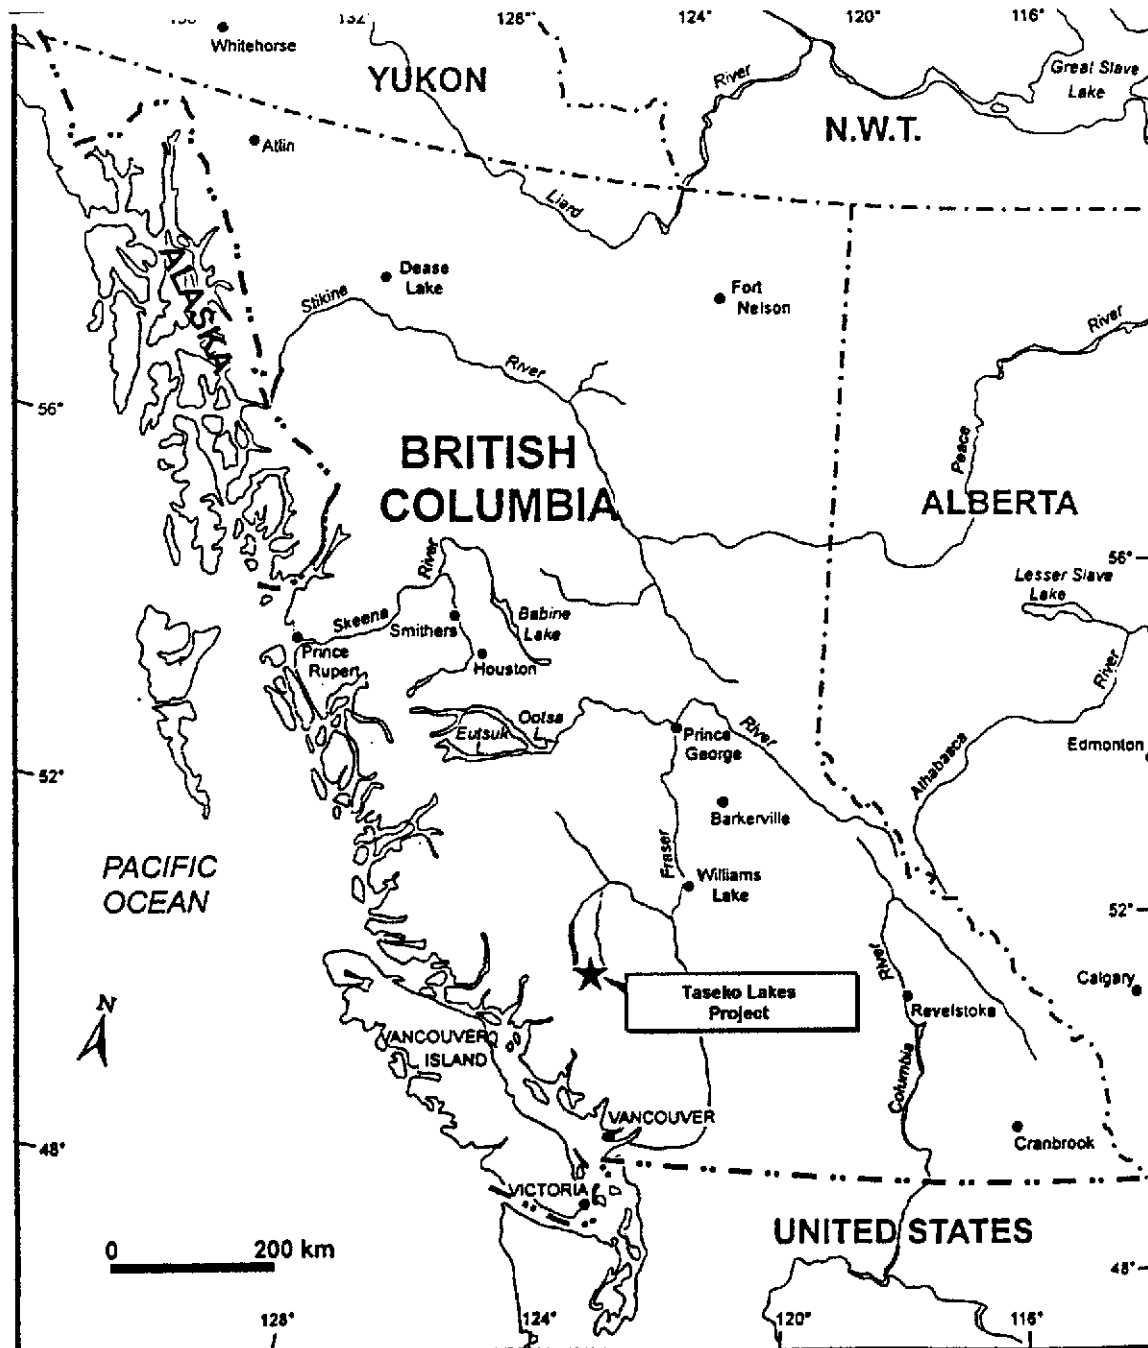


Figure 1: Location Map

Access to the property is either by road or air. One day property visits were facilitated through Pemberton Helicopters and involved a 45 minute helicopter trip between the airport in Pemberton B.C. and Galore's permanent camp located on Falls River, approximately 6.5 km southwest of the southern end of Upper Taseko Lake.

Road access is from Williams Lake over the Bella Coola road to Hanceville and then southerly for about 82 km along the Nemiah-Taseko road to the junction with the Lord River Mine road. From this junction a 60 km section of road runs southerly to the Falls River camp which is situated at the base of the Pellaire ridge. The road distance from Williams Lake to the Falls River camp is approximately 260 km. A network of old forestry and mining roads provides access from the base camp to various portions of the property.

The locations of the areas discussed in this report are illustrated below as figure 2.

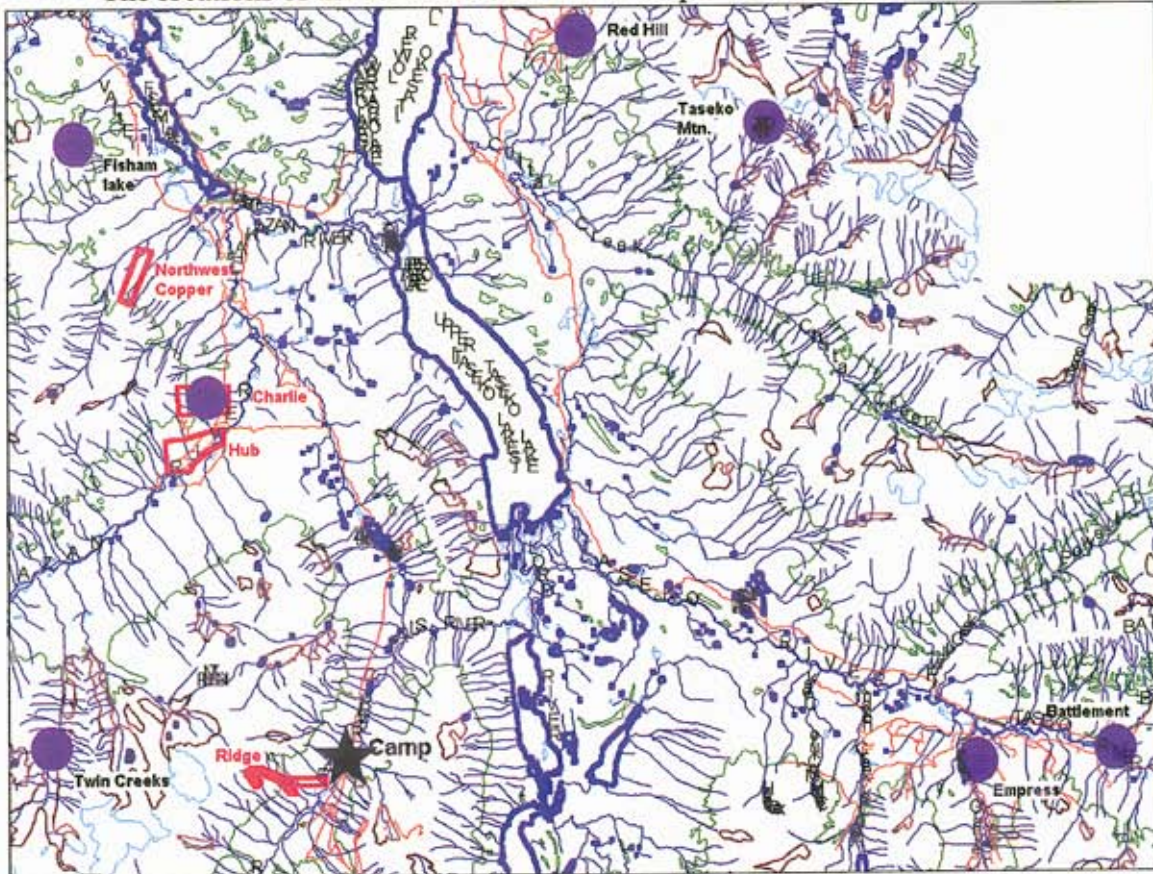


Figure 2: Field Survey (Red) and Property Visit (Purple) Location Map

### 3 Property

The Taseko Lakes Project includes several groups of claims. This work was completed on 3 of these claim groups, as discussed below and illustrated on Figure 3.

### 3.1 Hub Claim Group

The Hub property claims are owned by Zelon Enterprises Ltd. Titles have been transferred to TRW Resources Inc. which subsequently changed its name to Galore Resources Inc. Both the Hub and Charlie prospects are included within this claim group.

CLAIM	RECORD	ownership %	AREA IN HECTARES
COUGAR	354051	90	500
COUGAR #7	354057	90	450
ZC #1	415583	90	400
ZC #2	415584	90	400
MICE #2	514685	90	547
MICE #5	416352	90	450
No name	514685	90	547
RIVER	511775	100	304
NO name update	511777	100	121
(COUGAR #9)	511778	90	567
RAT	511780	90	<u>365</u>
			4,104ha
<b>6 CROWN GRANTED CLAIMS:</b>			
WASH	7831		36.45 acres
CLEAN UP	7832		51.65
BEAR	7833		51.65
GRIN	7834		51.65
STAKES FRACTION	7835		17.59
HAM	7836		<u>51.53</u>
Sub total:			260.52 a.      105 ha

**TOTAL: 16 claims covering:      APPROX. 10,911 acres or 4,364 ha.**

### 3.2 Northwest Copper Claim Group

The Northwest Copper property claims are owned by Valor Mines Inc. Titles have been transferred to TRW Resources Inc. which subsequently changed its name to Galore Resources Inc. While this property includes a large number of claims, the ground work completed during this exercise was limited to the Cougar 3 claim.

CLAIM	RECORD #	% OWNER	AREA IN HECTARES
COUGAR #2	354052	90	500
COUGAR #3	354053	90	500
COUGAR #4	354054	90	500
COUGAR #5	354055	90	450
COUGAR #6	354056	90	500
HW #2-8 replaced by 514541		90	870
SUN A replaced by 514547	358626	90	567
SUN 1-2 replaced by 514621	358624-358625	90	60 hect.
GUNS 1-5 replaced by 514544	371528-371532	90	283 hect.
GUNS 6-10 replaced by 514544	371533-371537	90	
(NO NAME)	512785	100	404
MAG	513765	100	101
LINK	513932	100	101
PAT	517935	100	20
PAT2	517936	100	81
ROAD	514565	100	20
RIM	514629	100	80
LOW	514630	100	20
RCAF	514677	100	<u>364</u>
TOTAL:			5,441 Ha

**TOTAL: 19 Claims covering 13,552 acres or 5,441 Ha.**



### 3.3 Magic Twin Claim Group

The Twin Creeks property claims are included in the Magic Twin option group and are owned by Valor Resources Ltd. Titles have been transferred to TRW Resources Inc. which subsequently changed its name to Galore Resources Inc. The survey work was completed on a portion of the Twin Claim Group.

#### **TWIN CLAIM GROUP:**

CLAIM	RECORD #	% OWNER	AREA IN HECTARE
ZC #4	415586	90	365
ZC #3, replaced by	514691	90	400
P#1, P#2, replaced	358613	90	25
P#2, replaced	358614	90	25
CAT, 397748 replaced by	514569	90	405
MICE #3 replaced	514689	90	385
No name (MICE #4)	511779	90	588
	510770	90	405
	514566	90	426
	514699	90	121

**Sub total: 10 claims covering 3,245 Ha.**

#### **MAGIC CLAIM GROUP:**


CLAIM	RECORD #	% OWNER	AREA IN HECTARE
DIS #4, 375862 replaced	514571	90	709
SCREE, 375963 replaced	514572	90	486
DIS #7, 376122 replaced	514744	90	629
DIS #8	376123		500
DIS #10, 376204 replaced	514557	90	609
LORD	511319		487

**Sub total: 6 claims covering 3,420 Ha.**

---

**TOTAL: 16 CLAIMS COVERING:  
APROX.16,662 acres or 6,665 hectares**



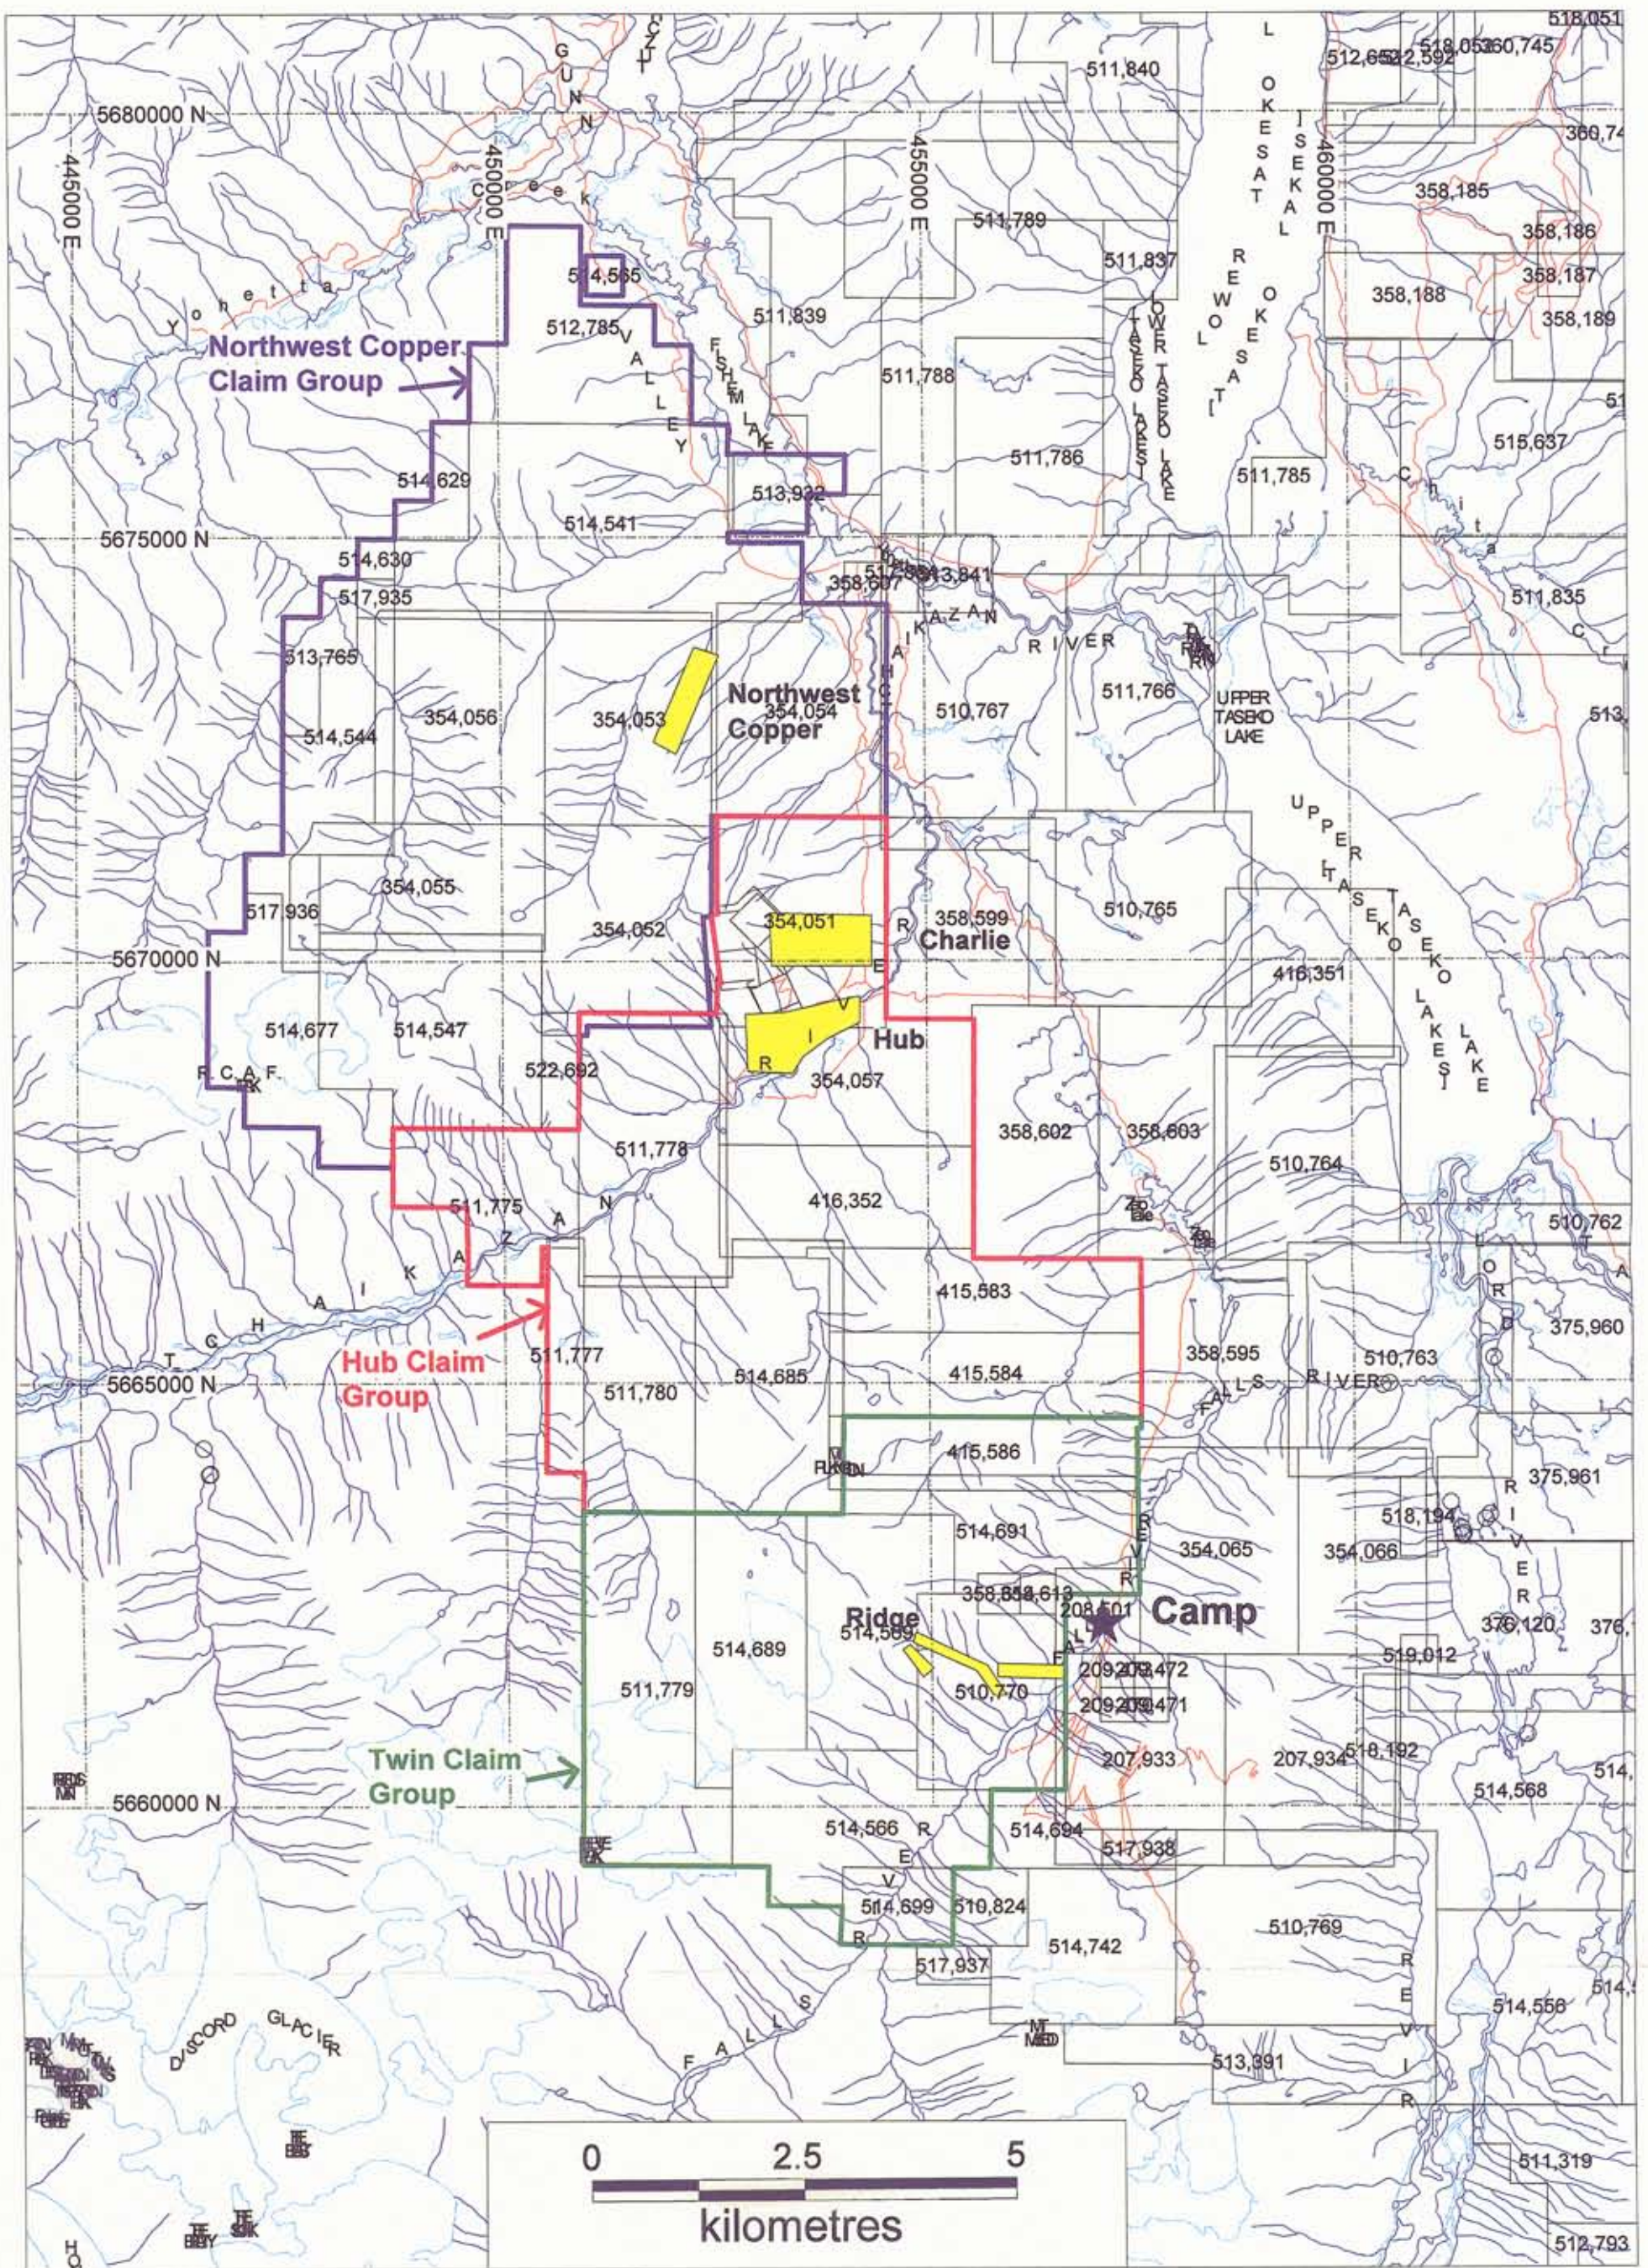

**Galore Resources Inc.  
Taseko Lakes Projects**

**Claim Groups Map**




 Ground Survey Area

UTM Coordinates NAD83, Zone 10N

October, 2005

Figure 3



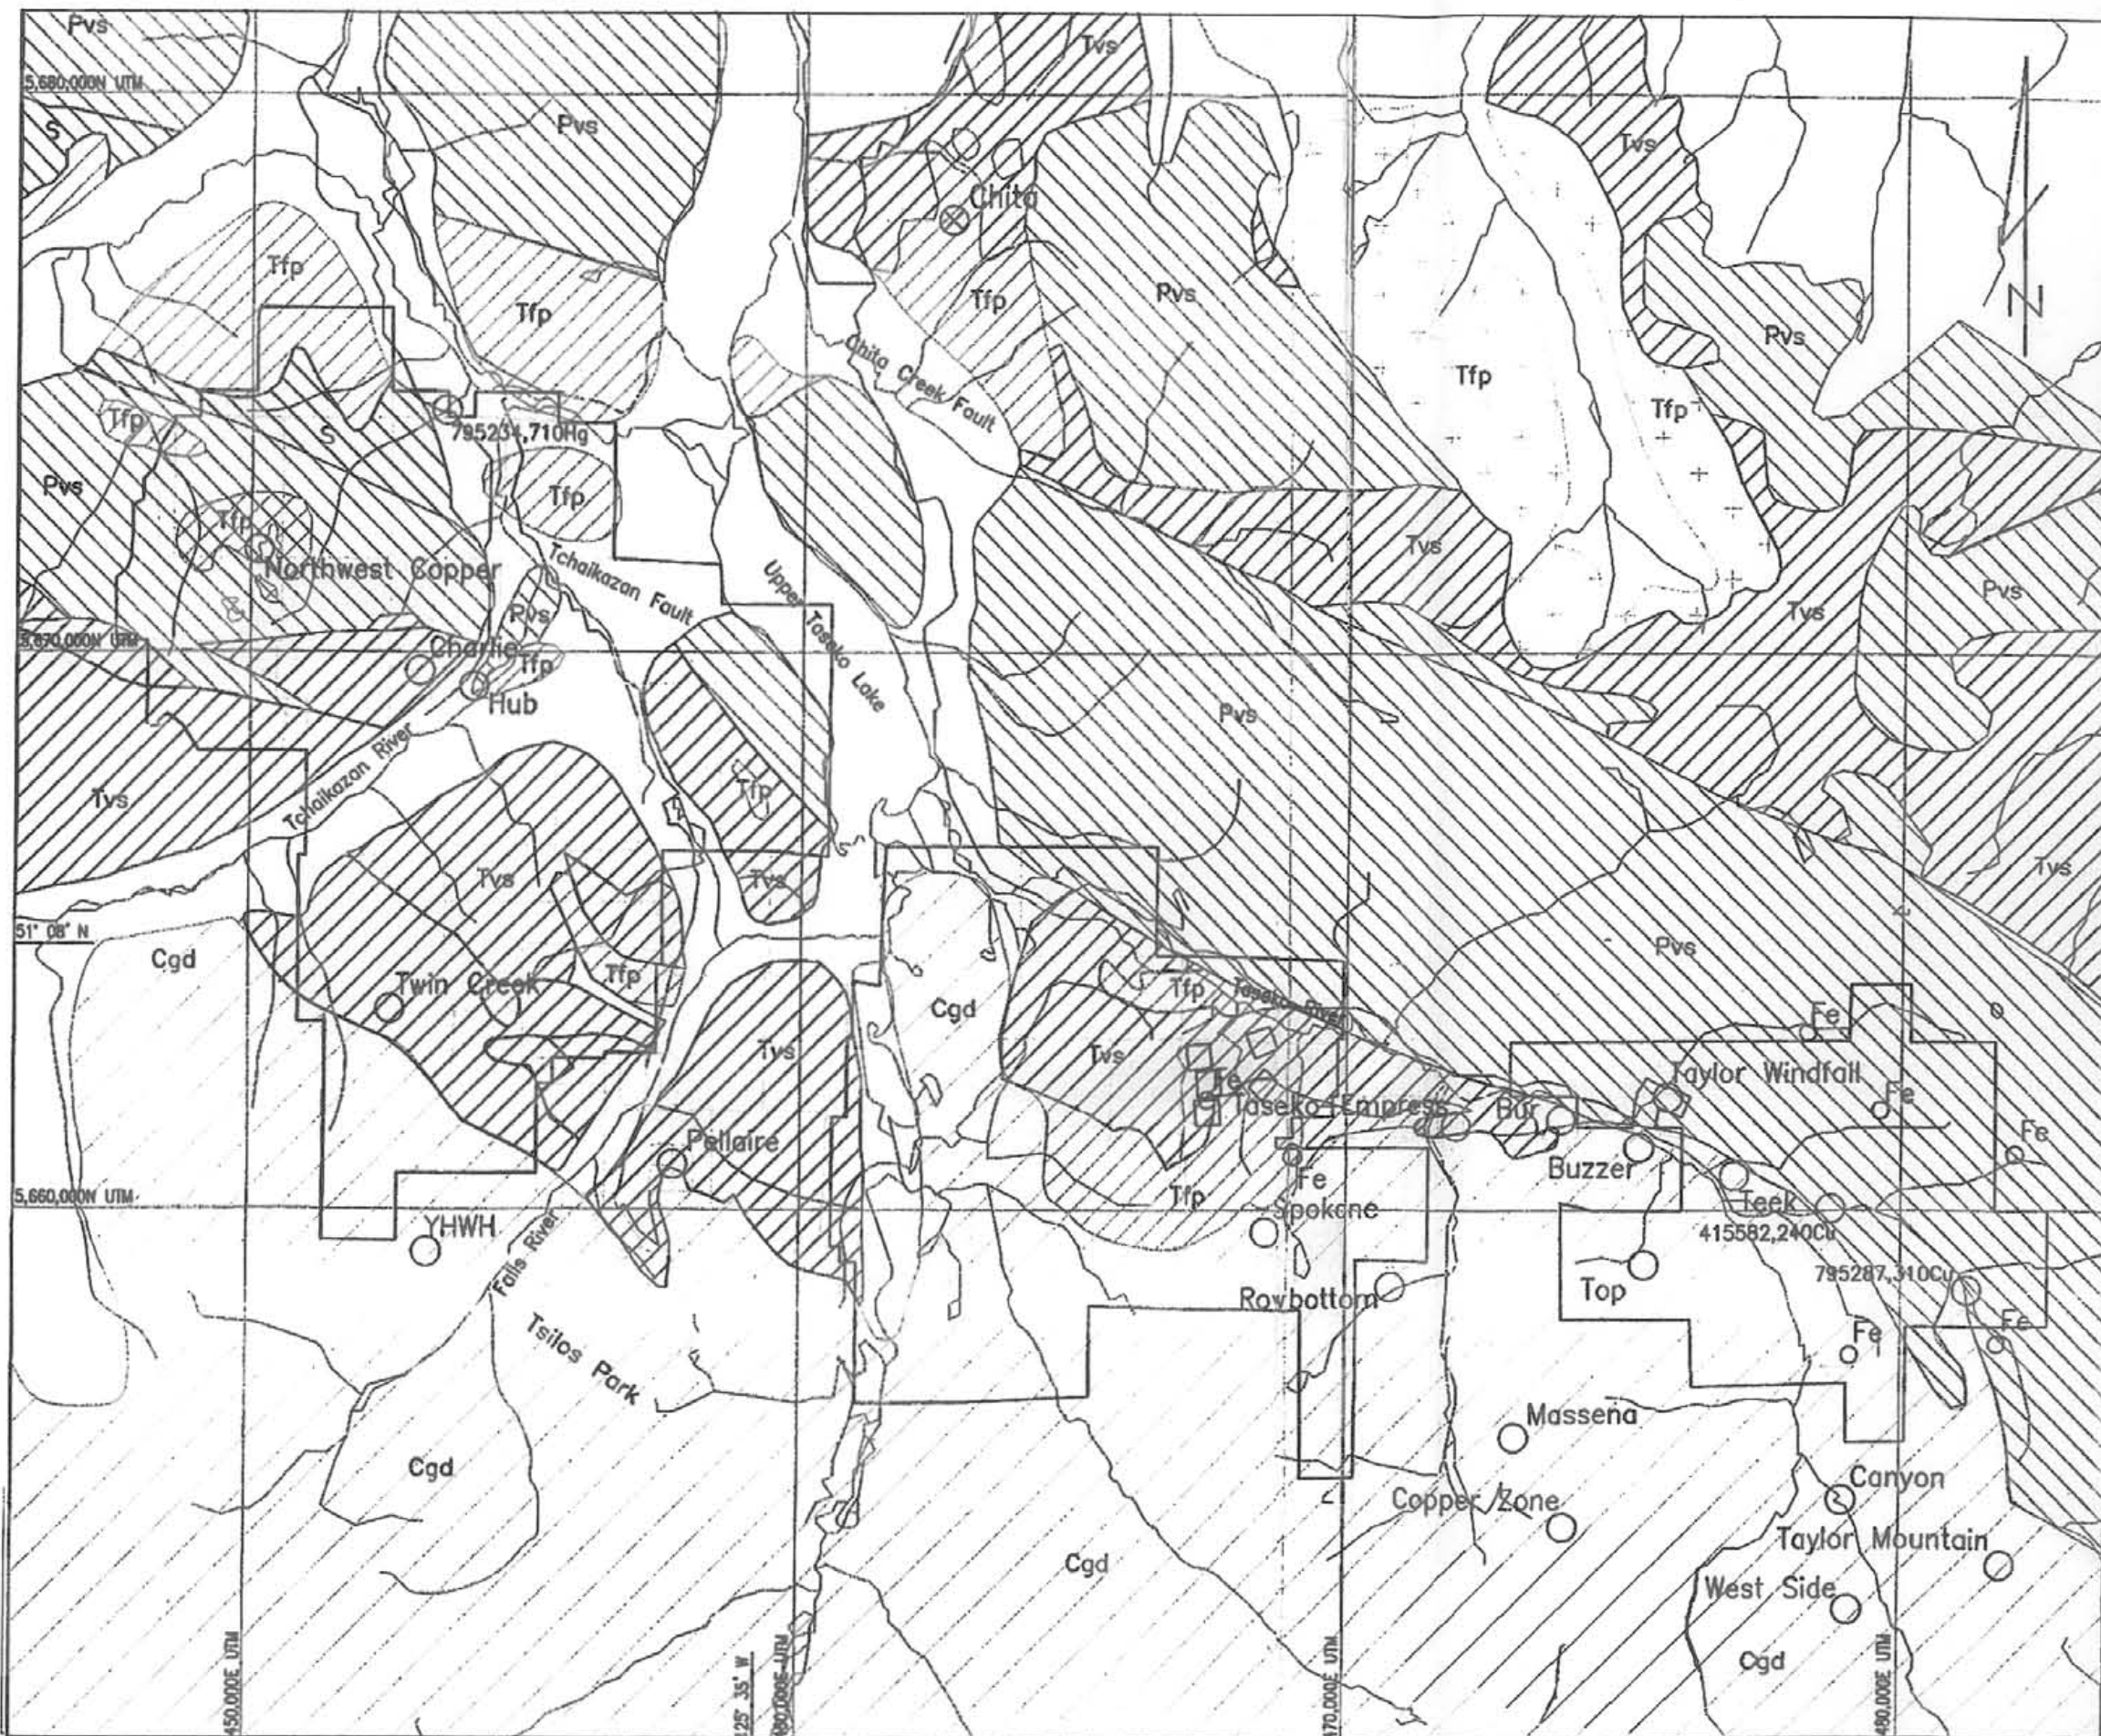

## Legend

### Geology

#### Tertiary

**Tfp** Felsic intrusive, feldspar porphy

**Tfp** Felsic intrusive, granodioritic.

#### Cretaceous

**Cgd** Granitic; lesser gneiss.

#### Powell Creek Group

**Pvs** Intermediate volcanic, volcanic breccia, tuff, flows, sediments.

#### Taylor Creek Group

**Tvs** Felsic to mafic volcanics, tuff, flows; argillite, siltstone, sandstone.

#### Relay Mountain Group

**Rs** Argillite, siltstone, sandstone,

**S** Argillite, greywacke, sandstone, conglomerate.

#### Note

Data after Israel 2000, McLaren 1990, BC Min Energy & Mines, Minfile.

### Symbols

**Hub** Mineral occurrence; Minfile name; Fe, limonite occurrence.

Geological contact

Fault

Geochemical stream sediment sample; number, ppm

Road

Taseko property boundary.

Mineral claim.

Note UTM Coordinates NAD83

## Galore Resources Inc.

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

### Taseko Lakes Projects

### Regional Geology & Mineralization



## **4 Geology**

### **4.1 Regional Geology**

The properties straddle the eastern margin of the Intermontane Super-Terrane and the Coast Range pluton and older gneissic rocks to the west, (Umhoefer et al 2002). The property and adjacent area is underlain by granitic intrusives of the Coast Range Intrusive of Cretaceous to possibly Tertiary age and by volcanics and metasediments of Jurassic to Cretaceous age within the Tyaughton trough to the east, (McLaren, 1990).

West north-westerly striking faults extend through the area; displacement on these faults is estimated to be from thirty to more than one hundred kilometers, (McLaren, 1985); north side of the faults are displaced easterly. Faults of this type include: Yalakom Fault, Tchaikazan Fault and possibly Twin Creek Fault.

Granitic stocks of Jurassic to Tertiary age intrude rocks of the Tyaughton Trough and sediment and volcanics to the east. Copper mineralized deposits exist within and adjacent to granitic stocks at the Poison Mountain deposit, sixty kilometers easterly from the property and at the Prosperity deposit, thirty-five kilometers northerly from the property.

### **4.2 Local Geology and Mineralization**

The local geology is described separately for the four areas tested during this exploration program

#### **4.2.1 Hub**

At the Hub prospect, on the north bank of the Tchaikazan River, a series of porphyritic granodiorite outcrop and cut altered volcanics of unit LKtc (Lower Cretaceous Taylor Group). Both rock types are mineralized with copper and molybdenum sulphides. Potassic, phyllic and propylitic alteration assemblages, believed to be associated with an underlying copper-molybdenum porphyry system, were identified in the surrounding rocks and in drill core at depth.

#### **4.2.2 Charlie Prospect**

At the Charlie prospect gold mineralized quartz veins and sulphidic zones exist within an area of 300 m by 350 m. Mineralization comprises hessite and tetrahedrite and chip samples contain up to 22.18 g/t gold over 0.12 metres. This vein occurrence is considered to be a mesothermal or transitional mesothermal to epithermal type and peripheral to the porphyry system at the Hub prospect.

#### **4.2.3 Northwest Copper**

There is no detailed geological information available in the small area within the larger project block that was tested during this exploration program. The regional mapping suggests the area is underlain by intermediate volcanics of the Powell Creek Group.

#### **4.2.4 Twin Creeks**

At Twin Creeks silicification and quartz carbonate fractures exist within volcanic tuffs and sediments close to a contact with granitic rocks of Coast Range intrusive. Realgar and orpiment exist within a silicified north-northwesterly striking zone. The northwesterly striking Twin Creek Fault extends through the area.

### **5 History and Previous Work**

#### **5.1 Hub Prospect**

The Hub copper-molybdenum mineralized area, on the floor of the Tchaikazan River valley, was discovered as a consequence of exploration carried out peripheral to the Charlie gold-silver veins which are located high up on Charlie ridge, 600 metres above the valley bottom.

Successive explorations programs were undertaken by Falconbridge (1967), Rio Tinto (1973) and Suncor and Zelon Chemicals (1981, 1983). They utilized geochemical soil and rock sampling, geophysical surveys consisting of induced polarization, vlf-em and magnetics and diamond drilling.

## **5.2 Charlie Prospect**

This property was originally explored for gold-silver vein mineralization in 1946 by H.V. Warren. It has subsequently been included within an expanded claims area in several exploration programs during the 1960's, 1970's and 1980's which were focused on porphyry copper-molybdenum mineralization at the Hub Prospect adjacent to and downslope to the south.

## **5.3 Northwest Copper**

There is no record of any ground investigations over the area tested during this program. The area was selected as being a priority target based on a re-interpretation of an airborne magnetic and EM survey conducted in 1999.

## **5.4 Twin Creeks**

There is no record of any ground investigations over the area tested during this program. The area was selected by Galore Resources Inc. based on geological prospecting and the proximity to the Twin Creeks prospect.

## **6 Field Work and Geophysical Instrumentation**

The geophysical surveys were conducted from July 26 to August 16, 2005, which included 2 mob-demob days, 1 stand-by day and 17 production days (excluding 2 days working on separate project). The geophysical crew consisted of technicians Alex Visser and Greg Amos and was supervised by geophysicist E. Trent Pezzot. The client supplied 2 helpers, Daniel Hajek and George Byrd, to assist with the survey. A discussion of the geophysical methods used on this survey is included in Section 7."Geophysical Techniques."

Survey lines were established by Galore Resources personnel using compass and chain working directly in advance of the geophysical operators. The location and orientation of the survey lines and station increments were determined by Galore Resources depending on the local targets.

Line and station labels were written on flagging, nominally at 20 metre increments along the lines. The numerical line and station labels do not necessarily conform to any local grid coordinate system. Station labels were typically organized as "0" at the start of the survey line and incremented by the distance and direction moved along the line. UTM coordinates were recorded at the ends of lines and at various points

along lines using hand held GPS units. Slope measurements were taken along the survey lines.

Two GEM Systems GSM-19 instruments were used to record magnetic and vlf-em measurements at 5, 10 or 20 metre increments along the survey lines. Technical specifications for these instruments are included in Appendix 4. As a general rule, one (sometimes two) offset line(s) were also recorded. Station locations for these offsets were determined by pacing 10 metres to the side(s) of the flagged survey line. Total magnetic field intensity measurements were recorded and corrected for diurnal variations by time synchronization to a magnetic base station. Vlf-em measurements for the inphase, quadrature, field strength (x-direction), field strength (y-direction) and total field strength were recorded at each station occupied. These measurements were usually gathered for 2 vlf-em frequencies; typically Seattle and one of Cutler, Hawaii or France, depending on the available signals and line orientations.

The GEM system digitally records the geophysical data, along with line and station label information. The data is downloaded to field computers at the end of each day for subsequent processing and plotting. While the data processing was completed in various proprietary and technique specific software packages, the final results have all been transcribed into MapInfo formatted files for final plotting. This geophysical data can be overlain or directly compared with the other topographic, geological or geochemical data available in the same format.

## **7 Exploration Techniques**

### **7.1 Magnetic Survey Method**

Magnetic intensity measurements are taken along survey traverses (normally on a regular grid) and are used to identify metallic mineralization that is related to magnetic materials (normally magnetite and/or pyrrhotite). Magnetic data are also used as a mapping tool to distinguish rock types, identify faults, bedding, structure and alteration zones. Line and station intervals are usually determined by the size and depth of the exploration targets.

The magnetic field has both an amplitude and a direction and instrumentation is available to measure both components. The most common technique used in mineral exploration (which was used on this project) is to measure just the amplitude component using a proton precession magnetometer. The instrument digitally records the survey line,

station, total magnetic field and time of day at each station. This information is typically downloaded to a computer at the end of each day for archiving and further processing.

The earth's magnetic field is continually changing (diurnal variations) and field measurements must be adjusted for these variations. The most accurate technique is to establish a stationary base station magnetometer that continually monitors and records the magnetic field for the duration of the survey. The base station and field magnetometers are synchronized on the basis of time and computer software is used to correct the field data for the diurnal variations.

## **7.2 Vlf-em Method**

The VLF method uses powerful radio transmitters set up in different parts of the world for military communications. In radio communications terminology, VLF stands for very low frequency, about 15 to 25 kHz. This is actually very high relative to frequencies generally used in geophysical exploration.

The signals from these powerful radio transmitters induce electric currents in conductive bodies thousands of miles away. Induced currents produce secondary magnetic fields which can be detected at surface through deviations of the normal VLF field.

Successful use of VLF requires that the strike of the conductor be in the direction of the VLF station so that the lines of magnetic field from the VLF signal cut the conductor at close to right angles. The secondary field (from the conductor) is added to the primary field (from the transmitter) so that the resultant field is tilted up on one side of the conductor and down on the other. A VLF receiver measures the tilt of the resultant field. Some receivers measure other parameters such as the relative amplitude of the total field (or any component) and the phase between any two components. The tilt angle is sometimes referred to as the in phase component. The phase difference is sometimes referred to as the out of phase or quadrature component.

Interpretation is quite simple and usually conducted on profile plots that compare the component data to the horizontal locations along the survey line. A conductor will be located at the inflection point marking the crossover from positive tilt to negative tilt and the maximum in field strength. One cannot make reliable estimates of conductor quality. A rule of thumb depth estimate can be made from the distance between the positive and negative peaks in the tilt angle profile.



The major disadvantage of the VLF method is that the high frequencies result in a multitude of anomalies from unwanted sources such as swamp edges, creeks and topographic highs. It is sometimes impossible to get a powerful enough VLF station to be near the strike of the expected conductor. One way to compensate for this later problem is with the use of portable VLF transmitters. These units have limited power and therefore limited range, but can be positioned to provide optimum geometry for localized surveys.

The major advantages of the VLF method are that it is relatively inexpensive, fast and can be a useful prospecting tool. The tendency for VLF to respond to poor conductors aids in the mapping of faults and rock contacts.

### **7.3 Soil Geochemistry Method**

Soil samples were gathered at selected stations that were occupied by the geophysical surveys. Wherever possible, samples were taken from the “B” soil horizon. In some areas this required using hand augers or digging pits to depths of up to 5 feet. Samples were saved in paper bags and labelled with sample numbers as well as line and station coordinates from the geophysical survey grid.

The samples were then dried and shipped to Acme Analytical Laboratories Ltd. in Vancouver, B.C. where 15 gram samples were leached with 90 mL of 2-2-2-HCL-HNO<sub>3</sub>-H<sub>2</sub>O at 95<sup>0</sup> C for 1 hour, diluted to 300 mL and analysed by ICP-MS. Concentrations for 36 elements were calculated and reported in a digital ascii file format.

A more complete description of the techniques used is included along with the results of the geochemical analysis in Appendix 6 at the back of this report.

## **8 Data Presentation**

The geophysical and geochemical data from this survey are displayed in five different formats, as indicated below.

### **8.1 Stacked Profiles**

Stacked profiles comparing the total field magnetic and 3 components of the vlf-em signal (inphase, quadrature, total field amplitude) are presented for each line in a page-sized format in appendices attached to this report. These plots are all oriented with the western or southernmost stations on the left side of the plot. The station labels along the horizontal axis represent the station label as written on the flagging in the field.

## **8.2 Stacked Profile Plan Maps**

Stacked profiles comparing the total field magnetic and one or more selected vlf-em components are presented on a plan topographic base map. This display shows the location of the responses relative to the NAD 83, Zone 10N UTM coordinate system.

## **8.3 Contour Plan Maps**

Where applicable the geophysical data is presented as false colour contour or line contour maps displayed over a topographic base.

## **8.4 Compilation and Interpretation Map**

Interpreted trends are highlighted over a topographic base. In some cases, this display is merged with one of the other plan maps.

## **8.5 Thematic Maps**

The geochemical analysis is presented in spreadsheet form in Appendix 6 at the back of this report. Selected elements (Copper, Molybdenum, Cobalt, Arsenic and Gold) are also plotted as thematic maps over the topographic base maps and geophysical survey grids where appropriate.

# **9 Discussion of Results**

The results of the geophysical surveys are discussed below. The geochemical analysis is being studied by John Hajek. While selected elements are plotted as thematic symbols with the geophysics, a discussion of their significance will be treated in a separate report.

## **9.1 Hub**

The Hub prospect is located along the northern bank of the Tchaikazan River centred near UTM coordinates 453550E and 5668950N (latitude 51.17<sup>0</sup>N, longitude 123.66<sup>0</sup>W). It exhibits the attributes of a copper-molybdenum porphyry system. Although previous exploration has included geological mapping, trenching, geochemical soil sampling, geophysical surveying (including magnetometer, vlf-em and induced polarization) and drilling, the stratigraphy and structure of the volcanics and interbedded sediments is poorly understood.



Survey lines were established approximately east-west, paralleling previous work completed by Suncor in the 1980's. The survey extended up a talus covered slope from the northern bank of the Tchaikazan River. A couple of well cut lines (250N, 500N) from the Suncor survey were found. This latest survey attempted to use the same grid labelling scheme and based the line number (85S to 600N) on the distance from Suncors' line 250N. For the purposes of this survey, the grid was divided into east and west halves, separated by baseline 0E. Field notes refer to grid A to the west of the baseline and grid B to the east. Line and station numbers were established separately for these two "subgrids".

The west grid ("A") is comprised of 40 east-west lines (85S to 500N) averaging about 500m in length for a total of ~19 km. The east grid ("B") is comprised of 42 east-west lines (25N to 600N) ranging in length between 80m and 700m for a total of ~18 km. Survey lines were nominally spaced at 25 metre intervals and in most cases, paralleled by an offset line, established by pacing 10 metres from the cut line. The geophysical data, as described above, were gathered at 10m station intervals on most of these lines.

As illustrated on the coloured magnetic contour map below, the bulk survey area is underlain by relatively quiet magnetic responses (green), that fall within a 500 nT range between 55,000 and 55,500 nTs. There is a significant increase in magnetic amplitude (>56,000) to the south of line 200N (red). A second major magnetic high appears as a northwesterly striking band, approximately 75m wide and 400m long, near the centre of the grid. There are two areas that exhibit significantly lower magnetic amplitudes (blue). One is a roughly elliptical shaped feature, approximately 200m E-W by 150m N-S located along the western edge of the grid (centred on line 201N, station 120E of the west grid). The other is located on the eastern ends of lines 425N to 600N (east grid) and is considered open to the north and east. These relatively large magnetic features are likely reflecting discrete lithological units. The westernmost magnetic low is enclosed within a larger feature characterized by high spatial frequency magnetic variations. This character is often indicative of volcanic rocks. One possible interpretation is that the magnetic low reflects the centre core of a buried porphyry system while the larger halo represents an overlying cover of volcanic rocks.

There are a number of smaller fluctuations superimposed over these larger magnetic responses. While some of these smaller responses are single line features, most are observed across several lines tend to align to form northwesterly to northeasterly trending lineations. Some are defined by breaks or disruptions in the regional trends

while others appear to be discrete magnetic bodies. These localized responses are most likely reflections of faults, veins or other types of narrow, linear bodies. A detailed examination of the magnetic profiles, correlated with geochemical and geological data will be required to determine whether any of these “localized” features have any specific exploration interest. The colour enhanced shadow image below illustrates many of these trends.

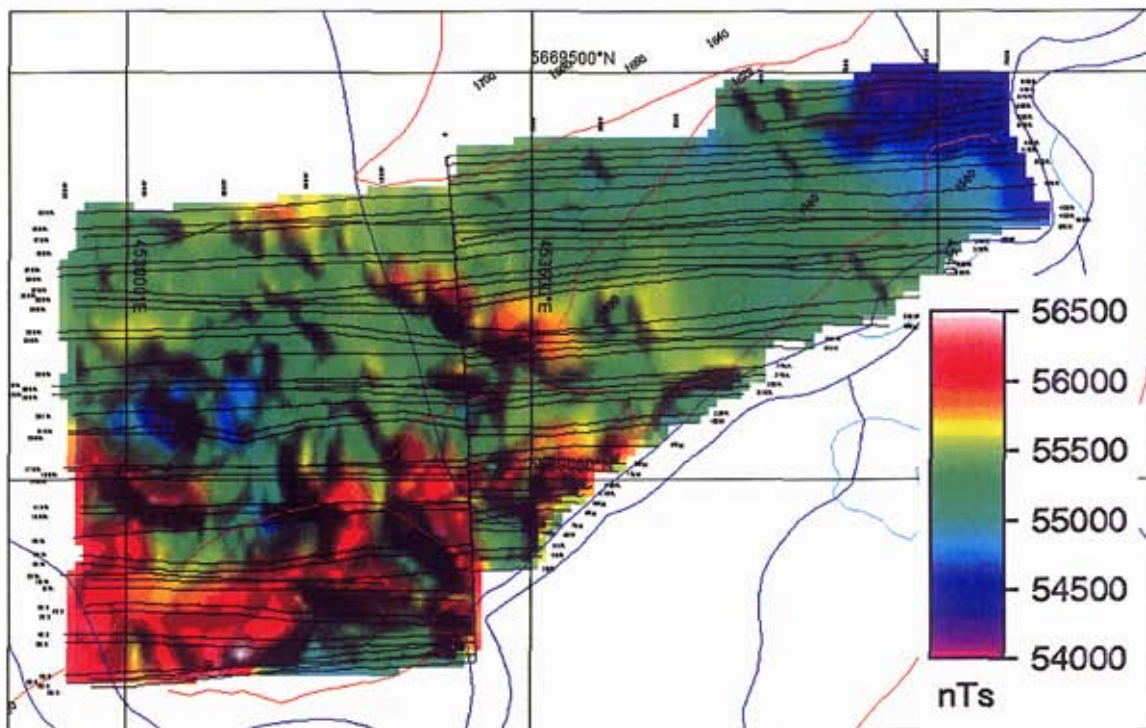


Figure 5: Hub Grid – Total Magnetic Field Intensity Colour Map – Shadow Enhanced by sun angle from northeast.

There is a distinct change in the character of the vlf-em signal across the survey area. At the higher altitudes the vlf-em signal is significantly noisier than at the lower elevations. This is likely related to thicker overburden (talus) at the higher elevations. Vlf-em responses at the lower elevations are more likely related to the underlying geology.

There are two primary orientations of vlf-em defined conductors evident. One set typically parallels the regional topography, striking close to N45°E. The second set strikes from north to NNW. The former group could easily be related to the topography. The later group is less easily dismissed. While the NNW striking drainages could be the source of some of these responses, most are likely related to the underlying geology.

The strongest indications of conductivity on the property occur at the northeast end of the grid on the east ends of lines 425N to 600N, coincident with the large magnetic low described above. These sometimes appear as the response to one large, deep conductor and sometimes as a series of closely spaced, near surface conductors. These various representations are likely due to interference patterns. These conductivity indications are likely associated with the Tchaikazan River, or possibly a fault zone that influences the location of the river. The survey lines would need to be extended to the east, across the Tchaikazan River to fully delineate the vlf-em responses.

The bulk of the NNW trending vlf-em conductors coincide with the large magnetic high covering the southern portion of the grid. More specifically, many of these conductors coincide with breaks in this magnetic unit. As with the magnetic data, these small conductors will need to be correlated with the geological and geochemical data to determine their exploration significance.

## 9.2 Charlie Prospect

The Charlie prospect is a gold-silver quartz vein occurrence, situated close to the Hub prospect and is considered a mesothermal precious metal vein prospect peripheral to the porphyry prospect. It is located ~ 1 km north of the Hub prospect, centred near UTM coordinates 453700E, 5670300N (latitude 51.18° N, longitude 123.66° W).

The mineralogy of the gold - telluride (hessite) - silver mineralization at Charlie is similar to that observed at the Pellaire prospect and it is surmised that the Charlie veins also persist to depth, along with their relatively high precious metal grades. It is also assumed that the Charlie showing lies within a shallower part of the hydrothermal mineralising system that introduced the copper-molybdenum sulphides at a deeper level at the Hub showing. The Charlie prospect lies near a major transcurrent fault zone.

Eight survey lines (1200N to 1550N) were established across the Charlie prospect, heading uphill and west from an access road near UTM coordinate 454,250E. Four of these lines were also surveyed with 10m offsets to both sides and the other four with a single 10m offset, bringing the total to 20 lines, varying between 700m and 1000m in length. In addition, 8 closely spaced lines were set up at the northwest corner of the grid to provide detail cover over a 130m x 100m block. In total, some 18.1 line kilometers of magnetic and vlf-em surveying was completed, with data gathered at 20m and 10m station intervals.

The magnetic data is relatively quiet, with the bulk of the readings falling within a 250 nT range between 55,000 and 55,250 nTs. The general fabric of the magnetic data suggests that the underlying geology trends WNW, nearly parallel to the survey lines. The data is punctuated with 3 localized magnetic highs (> 55,400 nTs) and 4 localized magnetic lows (< 54,900 nTs) which are likely mapping small, near surface lithology changes.

Two of the magnetic highs, at 1540N/105W and 1540N/745W are flanked by sharp magnetic lows. This dipolar character is indicative of a source with a limited depth extent, possibly a localized pod of high susceptibility material or the edge of shallowly dipping layer. The third magnetic high anomaly is a bit larger and observed on lines 1540N and 1550N between stations 840W and 880W. All three of these anomalies are considered open to the north and further surveying in that direction will be required to interpret the structural characteristics of the sources.

The east-west orientation of the survey lines coupled best with the Seattle vlf-em transmitter to detect northerly trending conductors. Vlf-em data were gathered at the Seattle frequency across the entire grid and for either Cutler or Hawaii as a secondary frequency. There are numerous conductivity type responses observed in the data however they are all very weak and close to the noise levels of the survey. Several of the responses coincide with surface drainages which are the likely source. Some of the responses coincide with weak magnetic trends and these are more likely associated with geological features.

One of the most interesting responses in the data is the change observed in the inphase component between survey lines. On the southern lines (1190N to 1410N) the background inphase component is around +10%. To the north, this value progressively decreases, becoming close to -50% on the northernmost line (1550N). This dramatic change could be caused by an easterly trending conductor crossing the northern portion of the grid. North-south survey lines, measuring the Cutler frequency, will be required map that type of unit. An attempt to show this response is shown on the profile below (Figure 6). This profile was constructed from the Cutler frequency data taken from adjacent survey lines along the 454000E utm coordinate (close to 1700m elevation). The profile shows an inflection in the inphase component that could be indicative of a conductor. The profile does not extend far enough to the north to fully define the response but the impression is that the conductor would be located in the vicinity of 5,670,400N. This location coincides with a major easterly trending drainage which also



appears to follow a magnetic low lineation. It is very likely that these easterly striking geophysical trends are mapping the transcurrent fault mentioned in the previous geological reports.

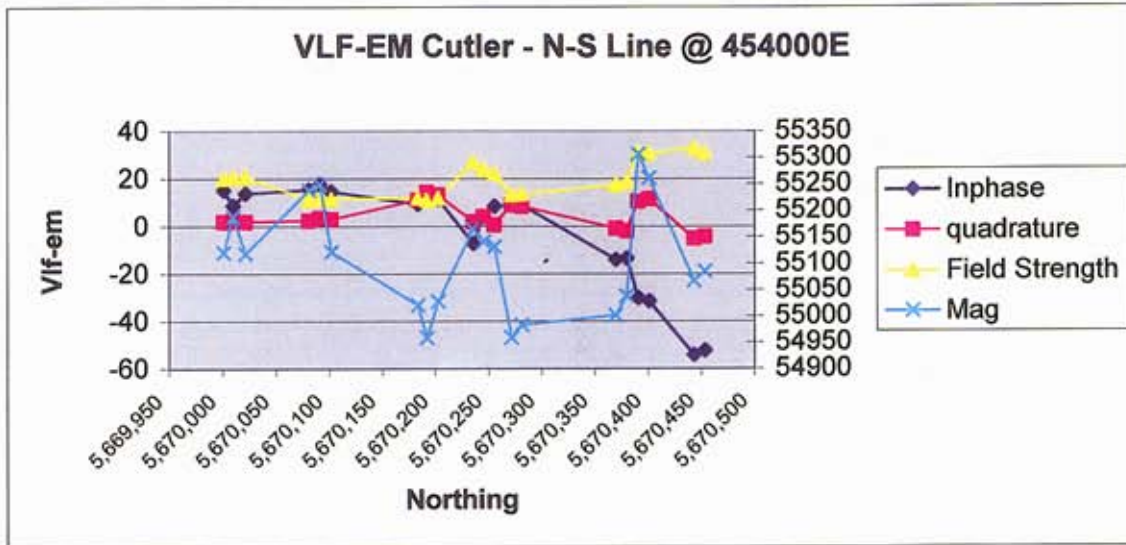


Figure 6: N-S Profile across Charlie Grid – magnetic, vlf-em (inphase, quadrature, field strength)

There are no magnetic or vlf-em responses that suggest the presence of any narrow veins in the detail survey grid at the NW corner of the study area.

### 9.3 Northwest Copper

Four NE-SW trending survey lines, nominally spaced 25 metres apart and centred near 452200E, 5673150N, were established to cross a WNW striking magnetic feature delineated in the 1999 airborne magnetic and EM survey covering the large NW copper prospect area. This regional lineation is thought to be associated with the Tchaikazan fault.

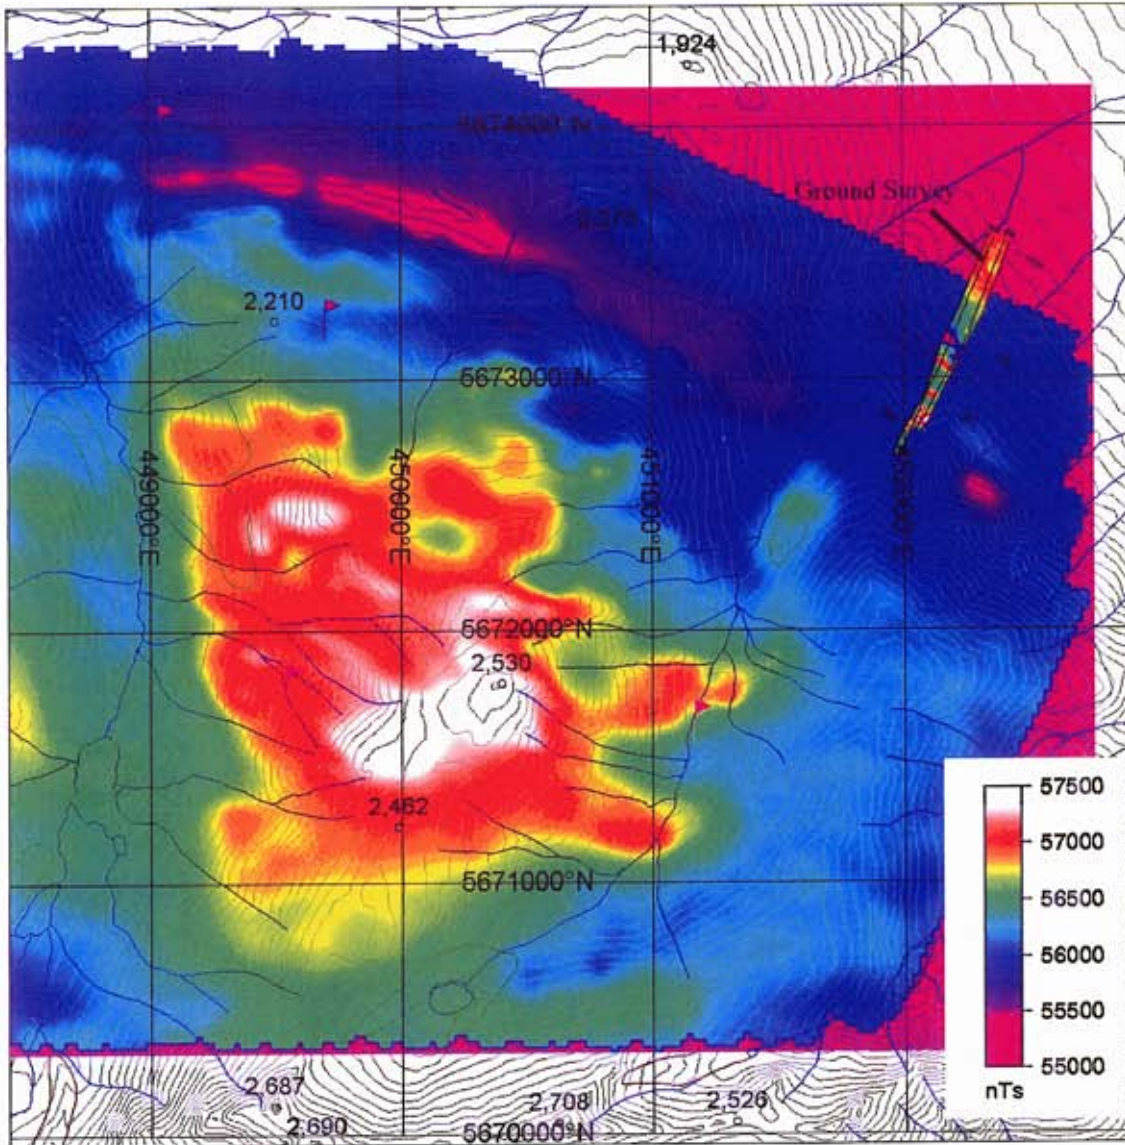


Figure 7: Northwest Copper Area - 1999 Dighem airborne magnetic survey (background) with detailed ground survey

A total of approximately 3.7 line kilometers of data, gathered at 20 metre station intervals was recorded on the 4 survey lines.

The detailed ground survey exhibits good correlation with the regional airborne data. Both the high and low NW oriented magnetic trends evident in the airborne data are reflected in the ground data. The ground data suggests that these magnetic sources are relatively narrow (25m to 100m wide) zones and have well-defined edges, suggesting the sources are at or very near ground surface. This suggests that there is only a relatively thin layer of overburden in the area. Due to the limited surveying it is difficult to determine the precise strike and extent of these features. It is also apparent that there are

more magnetic features present in the ground data than were resolved by the airborne survey.

Based on the orientation of the survey lines and the strikes evident from the airborne survey, it is suspected that the Cutler vlf-em transmitter would have provided the best coupling to any narrow conductive zones. Unfortunately, that data was not recorded and the Seattle frequency served as the primary vlf-em signal. Regardless, there are several conductive zones evident in the Seattle data that likely originate from near surface, geological units. The precise line to line correlation of these responses is unclear, primarily due to the poor coupling angle to the transmitter signal. Conductivity responses are observed on all 4 lines in the vicinity of station 500W, coincident with a 100 metre wide magnetic low and also near station 600W, coincident with a narrower (25m) magnetic high that flanks the low. There are vlf-em conductors mapped near the southern end of lines 75S and 50S but these are likely caused by surface drainages.

It is apparent from this limited amount of surveying that these techniques would likely provide very useful information that would help the geological mapping of this area.

#### **9.4 Twin Creeks**

The Ridge grids were located near the Twin Creek showing. This area contains a mercury-arsenic showing which is thought to represent a high level mineral indication of a mineralized fracture system which may contain precious metal bearing veins at depth. A second copper showing with anomalous gold and silver values occurs to the west. The intervening area, between the two showings, is therefore highly prospective for precious and base metal occurrences.

The Ridge area is a block of ground ~ 1800m east-west by 700m north-south, covering a portion of the steep, southeasterly facing ridge along the northern flank of Falls River. This block is centred about UTM coordinates 455650E and 5661650N. Magnetometer and vlf-em test surveys were run across 3 areas within this block, identified as the Ridge Peak, Ridge Slide and Ridge River. The Ridge peak study area is near the top of the ridge and included two parallel lines, each about 250m in length running along a southeasterly trending splay off the main ridge and a shorter (125m) tie line. The ridge slide area was surveyed by a single line that followed a steep southeasterly trending drainage. It extended for ~ 1.2 km, starting to the north of the Ridge Peak lines and ending near the base of the steepest portion of the ridge, approximately 500m from



and 100m above Falls River. The Ridge river area was covered by 4 easterly trending survey lines. They started ~ 250m north of the SE end of the Ridge slide line and extended between 550m and 700m in length terminating at Falls River. These lines crossed the more gentle slope between Falls River and the base of the steep cliffs.

The study area, particularly along the ridge slide line, is very steep and consequently the data (especially the vlf-em data) has limited use. Under these conditions it is very difficult to determine the attributes of the source of any anomalous readings. The primary vlf-em signal normally aligns itself parallel to the ground surface, but in areas of steep terrain it is typically at irregular orientations. Because the interpretation is based on the angles and phase of this signal, it is often impossible to distinguish between changes due to underlying geology from those due to topography. Under normal circumstances, the local magnetic variations are due to inhomogeneities in the underlying rocks. In these circumstances, anomalies could be generated from rocks to the side or above the magnetic sensor and the polarity of the anomaly could be reversed from the norm. While the magnetic and vlf-em data may include some anomalous responses that are due to nearby variations in the rocks, it may not be possible to precisely locate the sources.

#### **9.4.1 Ridge Peak**

The ridge peak was covered with two SE trending lines (40N and 50N) that follow a narrow ridge and short tie line between them (49N).

The magnetic data show a gentle inflection in the vicinity of station 110E (line 50N) that could be a buried geological contact.

The vlf-em data is extremely noisy and there are no clear indications of any conductive zones in the area.

#### **9.4.2 Ridge Slide (Line 45N)**

The ridge slide area was surveyed with a single profile, heading southeasterly along a steep drainage. There is an abrupt change in the line direction near station 1000E (from 115 to 150 degrees).

There are several shifts in the magnetic amplitude that could be indicative of a local lithology change. Specifically, the inflections at stations 240E, 330E, 500E, 760E and 940E could be reflecting geological contacts.



While the vlf-em data is generally quite noisy, there are a few interesting responses. Strong positive inphase and negative quadrature values are located from stations 240E to 330E and from 770E to 810E. These anomalies are both coincident with areas where two drainages converge and could be reflecting a relatively thin layer of conductive overburden. It is also noted that these responses coincide with magnetic inflections so an interpretation of a geological contact is also possible.

#### **9.4.3 Ridge River**

The ridge river lines (9800N, 9820N, 9880N and 9900N) cross a more gentle slope than the ridge peak and ridge slide lines and consequently both the magnetic and vlf-em data is less noisy. There are several magnetic inflections indicative of geological contacts and three discrete zones (40-60m wide) of anomalously higher magnetic intensities. These geological features are likely within 10-20 metres of the ground surface.

There are 5 vlf-em responses indicative of narrow, higher conductivity lenses. Four of these coincide with the edges of the anomalous magnetic responses.

Based on these results, it is likely that the magnetic and vlf-em techniques would provide useful exploration information along more gentle slopes near the Falls River valley bottom (Ridge River area). These techniques will have very limited use and are not recommended for the steeper slopes in this area.

### **9.5 Property Visits**

John Hajek, the chief project geologist guided me on two visits to the property, on July 11 and July 28, 2005. The primary intention of these visits was to provide me with a first hand examination of the area to assist in the geophysical interpretation of the existing data and to formulate recommendations for future work. Both property visits were completed with helicopter support.

The visit on July 11<sup>th</sup> included flying over the entire Northwest Copper property as well as landing at 5 sites recommended as “areas of interest” from my interpretation of the 1999 airborne survey. Details concerning these visits are described in a separate assessment report.

The visit on July 28<sup>th</sup> accomplished two tasks. First, it occurred 2 days after the geophysical crew arrived and provided me with an opportunity to review the initial data for quality control and to establish a procedure for data archiving and field processing.

Second, it allowed time for myself and John Hajek to examine the ground conditions and/or mineralogy on 7 sites being considered for further exploration.

#### **9.5.1 Battlement**

We flew around the Battlement creek / Taseko River confluence looking for evidence of the old minesite. There are unconfirmed reports of an old cabin still standing but we could not spot any cultural evidence from the air.

#### **9.5.2 Empress**

We flew around the Empress mine area and landed near the core storage area where we found core boxes stacked and in good shape. Most are labelled with metal tags and those that are not still seem to be shelved in proper sequence. There are a total of 11 racks, 9 columns/18 rows per rack (162 boxes per rack), 4 rows @ 6' per box (24' core). The mine site appears to have been taken over by outfitters and there are new sheet metal roofs on some buildings.

#### **9.5.3 Twin Creeks**

After using the helicopter to ferry the geophysical crew to the top of the Ridge grid we landed at the Twin Creeks site, to the west of the geophysical grid and on the opposite side of the ridge. We landed in an area with gossan staining recently exposed at the foot of a glacier.

In situ rocks are mostly black, fine grained sediments that have been metamorphosed to gneiss. They are cut by quartz veins and contain fine grained pyrite and copper mineralization. .

Talus rocks are mostly coarse-grained volcanics, diorites grading to granodiorites to granites with hornblende throughout and some pink material (possibly K-spar).

In looking at the surrounding cirque faces we see clear evidence of structures. (see photograph) A gentle basin is evident on the SE face. Antiformal folding is evident on south face. The SW face shows NW dipping beds and some thrust type faulting. The general impression is that the whole area appears to have been pushed up from below, possibly from an intrusion.



*Figure 8: Stitched photograph of outcrop along north facing cirque at Twin Creeks prospect-structures highlighted in red.*

#### **9.5.4 Charlie Vein**

We landed on a road cut above the Charlie vein and I hiked down the road and around first switchback (several hundred metres). There was limited outcrop but I was able to find several samples showing the fine grained mineralized (tetrahedrite ?) quartz veins described in the literature. At the eastern end of the traverse I found in situ quartz veining with much coarser and well developed crystals, likely marking the edge of the system.

The terrain is relatively steep (60% slope) with minor vegetation and scrub brush. We should be able to run a magnetic survey but production will likely be slow. The vlf-em will likely be of limited use in the steep terrain.

#### **9.5.5 Fisham Lake**

We flew around the hills immediately west of Fisham Lake. Most of the area is covered with trees but there are some grassy and/or bare hilltops showing light brown soils but no outcrop. There is an easterly trending, steeply sided gorge cutting the area that apparently ties to geological fault. There was significant gossan / red weathering seen along this gorge but no convenient landing sites in the vicinity.

#### **9.5.6 Red Hill**

This mountaintop to the east of Lower Taseko Lake is covered by extensive red gossans. We were searching for trenching in the area that reportedly returned very high copper values but could not find it. We landed near the top of the mountain. The rocks were highly friable and weathered. They contained significant amounts of pyrite and

some indications of copper. Several samples were taken for chemical analysis. Those results are pending.

#### **9.5.7 Taseko Mountain**

There is a copper showing reported on the eastern flank of this mountain. We flew around the mountain and spotted several red gossan zones but none were convenient to suitable landing sites.

### **10 Summary & Conclusions**

In July and August, 2005, SJ Geophysics Ltd. conducted a program of magnetic and vlf-em surveying over 4 targets on Galore Resources Inc.'s Taseko Lake Project. The bulk of the work was completed on the Hub Project and included ~ 37 line km of detailed surveying on lines spaced 10 – 25 metres apart with stations occupied at 5 to 10 metre intervals. This survey confirmed the results from earlier (1981) surveys and extended coverage to the north and west. The magnetic data clearly reflects the dominant northeasterly trending geological strike and outlines several lithological or facies changes in the area. One of the most interesting responses is a circular magnetic low in the western section of the grid that is associated with highly variable magnetic fluctuations. This response could be reflecting a volcanic layer overlying an intrusive body and therefore represents a high priority exploration target. Several smaller northwesterly trending magnetic and vlf-em lineations cut the dominant geological trends and could be representing veins or faulting. Soil geochemical samples were gathered and are currently being analysed.

On the Charlie prospect, 1 km north of and uphill from the Hub, ~ 18 line kilometres of surveying was completed. East-west lines were established to accommodate the steep southeasterly facing slopes. The dominant magnetic and vlf-em trends appear to strike easterly and are likely related to a major transcurrent fault. There are no obvious geophysical responses from the east-northeasterly striking mineralized veining however this might be due to the survey line orientations.

A small area in the northeastern portion of the Northwest Copper prospect was tested with 4 lines of magnetic and vlf-em surveying and limited geochemical sampling. The survey lines were set up to test a NNW trending magnetic lineation, identified in the 1999 airborne survey, that parallels the Tchaikazan Fault. Several strong magnetic gradients were detected in the ground survey suggesting a more complex geological

pattern than is evident from the airborne data. The vlf-em data indicate that several of these contact type anomalies are associated with significant increases in conductivity.

The southeasterly facing slope to the east of the Twin Creeks prospect was tested in 3 areas. Lines along the top of the ridge and following a very steep drainage gully produced some magnetic gradients that are likely related to geological contacts, however the terrain is too severe to establish a regular survey grid. Surveying along a series of 4 closely spaced lines extending from the base of the cliffs to Falls River provided more interpretable results. Both the magnetic and vlf-em data mapped several contact type responses that are likely related to the underlying geology.

## 11 Recommendations

These magnetic and vlf-em results should be correlated with geological mapping to determine whether any of the subtle geophysical anomalies can be directly associated with known mineralization or mineralized events. A similar correlation will be required once the geochemical analysis has been completed.

These geophysical tests have confirmed that these techniques are likely to be effective mapping tools and support the earlier recommendation to use an airborne magnetic and electromagnetic survey as a reconnaissance mapping tool.

The survey across the Hub prospect has detected a circular magnetic anomaly to the northwest of the mineralized outcrop that fits the exploration target and could be mapping a buried porphyry system. Once the geological and geochemical results are correlated, it is likely that this anomaly will be upgraded to a high priority target. Induced polarization techniques might be an effective technique for delineating zonations within the porphyry system.

Respectfully submitted

per S.J.V. Consultants Ltd.

  
E. Trent Pezza, P. Eng. Geol.

Geophysics, Geology


## 12 APPENDIX 1

### 12.1 Statement of Qualifications

I, E. Trent Pezzot, of the city of Surrey, Province of British Columbia, hereby certify:

- I graduated from the University of British Columbia in 1974 with a B.Sc. degree in the combined Honours Geology and Geophysics program.
  
- I have practised my profession continuously from that date.
  
- I am a registered member of the Association of Professional Engineers and Geoscientists of British Columbia.
  
- I hold no direct or indirect interest in Galore Resources Inc., nor expect to receive any benefits from the mineral property or properties described in this report.

January 15, 2006

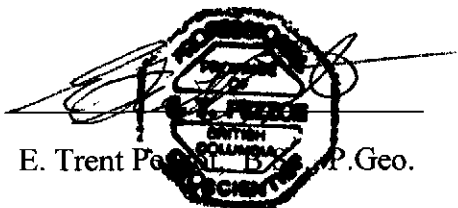A circular professional seal for the Association of Professional Engineers and Geoscientists of British Columbia. The seal features a central emblem with a gear and a compass, surrounded by the text "ASSOCIATION OF PROFESSIONAL ENGINEERS AND GEOSCIENTISTS OF BRITISH COLUMBIA". The name "E. TRENT PEZZOT" is stamped across the seal, and "P. Geo." is written to its right.

E. Trent Pezzot P. Geo.

## **13 Appendix 2**

### **13.1 References**

Beckett, Robert J., TRW Resources Inc. Taseko Project, Summary Report, January, 2005

McConnell, Doug, Dighem Survey for International Jaguar Equities Inc., Northwest Copper Project, British Columbia; June 11, 1999.

Meixner, Henry M., Report on the Geology and Exploration Potential of the Mineral Prospects on the Lord River Project Claims for International Jaguar Equities Inc., April 1998.

Pezzot, E, Trent, Progress Report on the Geophysical Exploration program on the Taseko Lakes Projects for Galore Resources Inc., May 30, 2005

## 14 Appendix 3 - Cost Breakdown

The costs are divided into three categories. The first group includes costs incurred by SJ Geophysics Ltd. to complete the field surveys. The second includes costs by S.J.V. Consultants Ltd. for data processing, interpretation and report compilation. The third group includes costs incurred directly by Galore Resources Inc. The items and descriptions listed in this last category were provided to the author for inclusion in this report.

### SJ Geophysics Ltd. Costs ---Survey (personnel and equipment)

Mobilization/demob (2 days @ \$812.50/day) .....	\$ 1,725.00
Production (13 days @ 1150/day).....	\$ 14,950.00
Production (4 days @ 650/day).....	\$ 2,600.00
Standby ( 1 day @ \$812.50/day) .....	\$ 862.50
Liability Insurance (20 days @ 25/day).....	\$ 500.00
Spare magnetometer (2 days @ 50/day).....	\$ 100.00
4 x 4 vehicle (20 days @ 150/day).....	\$ 3,000.00
Spare 2 <sup>nd</sup> magnetometer (20 days @ 50/day).....	\$ 1,000.00
Field Expenses .....	\$ 361.39
SubTotal .....	\$ 28,098.89

### S.J.V. Consultants Ltd.

Trim Maps (8 sheets) .....	\$ 2,265.17
Data Processing, Interpretation (165 hrs @ \$95/hr)...	\$ 1,995.00
Field Property visit (July 27-28, 2005)	
Senior geophysicist (2 days @ \$850/day).....	\$ 1,700.00
Expenses (auto, gas, meals) .....	\$ 183.09
Assessment Report Compilation .....	\$ 3,500.00
plotting, reproduction, binding .....	\$ 600.00
SubTotal .....	\$ 10,243.26





## 15 Appendix 4: Instrument Specifications

### 15.1 GSM-19 MAGNETOMETER / GRADIOMETER


Resolution:	0.01 nT, magnetic field and gradient.
Accuracy:	0.2 nT over operating range.
Gradient Tolerance:	up to 5000 nT/metre.
Operating Interval:	4 seconds minimum, faster optional.
Reading:	Initiated by keyboard depression, external trigger or carriage return via RS-232C.
Input/Output:	6 Pin weatherproof connector, RS-232C, and optional analog output
Power Requirements:	12v 300 mA peak(during polarization), 35 mA standby, 600 mA peak in gradiometer
Power Source:	Internal 12v, 1.9ah sealed lead-acid battery standard, other optional External 12v power source can be used.
Battery Charger:	Input: 110/220 VAC, 50/60 Hz and/or 12VDC. Output: 12v dual level charging.
Operating Ranges	-40o C to +600 C
Temperature:	
Battery Voltage:	10v min. to 15v max.
<b>Dimensions:</b>	Console: 223 x 69 x 240 mm. Sensor staff: 4 x 450 mm sections. Sensor: 170 x 71 mm diameter.
<b>Weights:</b>	Console: 2.1 kg Staff: 0.9 kg. Sensor: 1.1 kg each.

### 15.2 GSM-19 VLF


Frequency Range:	15 - 30 kHz in 0.1 kHz steps.
Parameters measured:	Vertical In-Phase and Out-of-Phase components as percentage of total field. 2 components of horizontal field.
Resolution:	0.5%.
Number of Stations:	Up to 3 at a time.
Storage:	Automatic with time, coordinates, magnetic field/gradient, slope, frequency, in- and out-of-phase vertical and both horizontal components for each selected station.
Terrain Slope Range:	0 - 90 (entered manually).
Sensor Dimensions:	14 x 15 x 9 cm(5.5 x 6 x 3").
Sensor Weight:	1.0 kg (2.2 lb).



## **16 Appendix 5 – Data Profiles**

### **16.1 Hub Prospect**

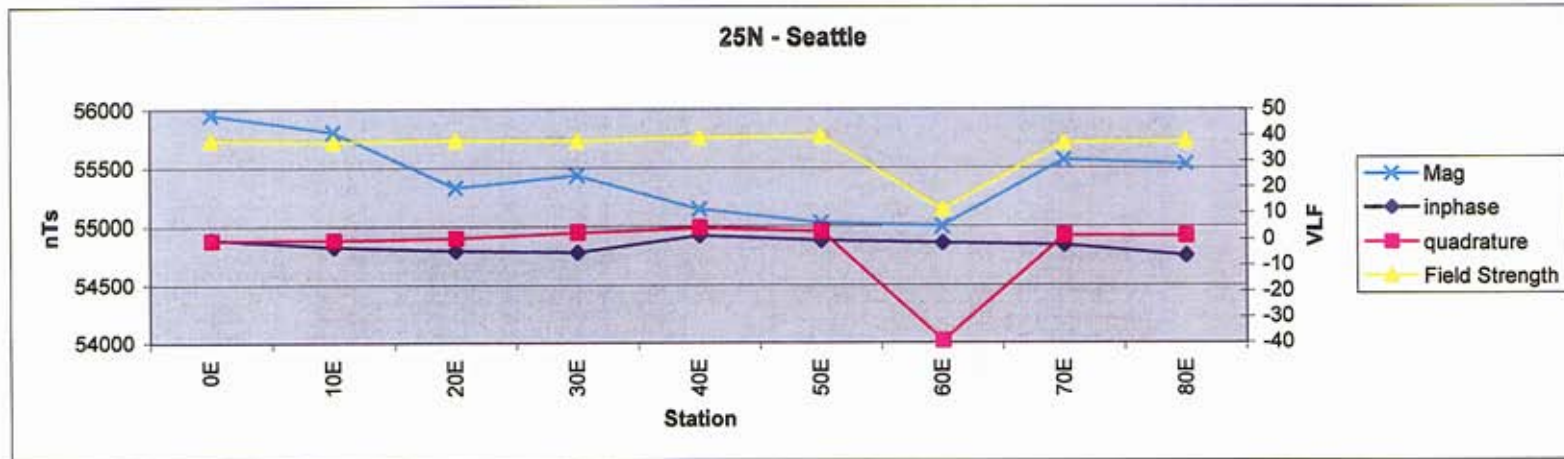




Magnetic – VLF-EM Profiles

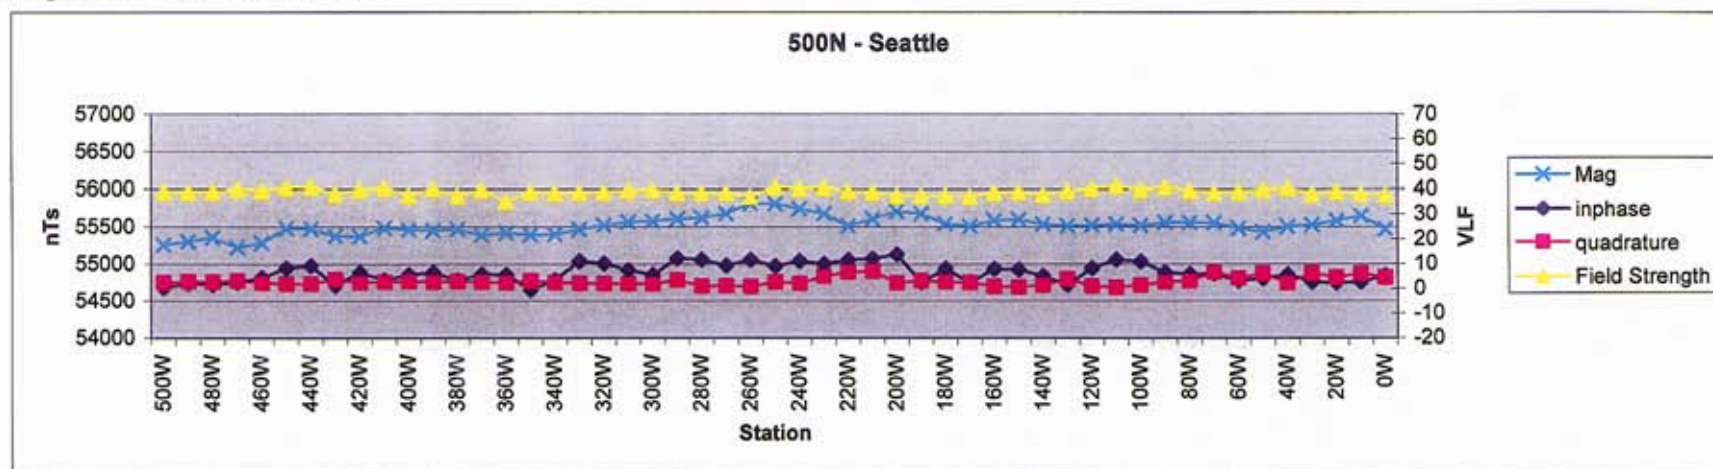

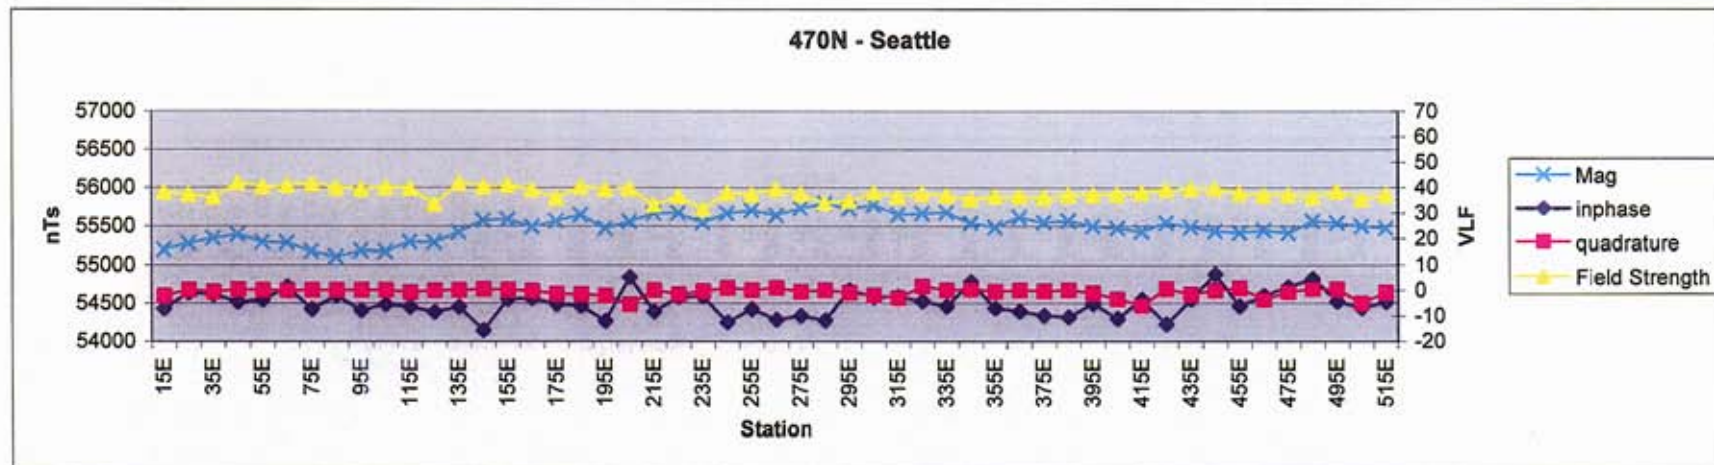
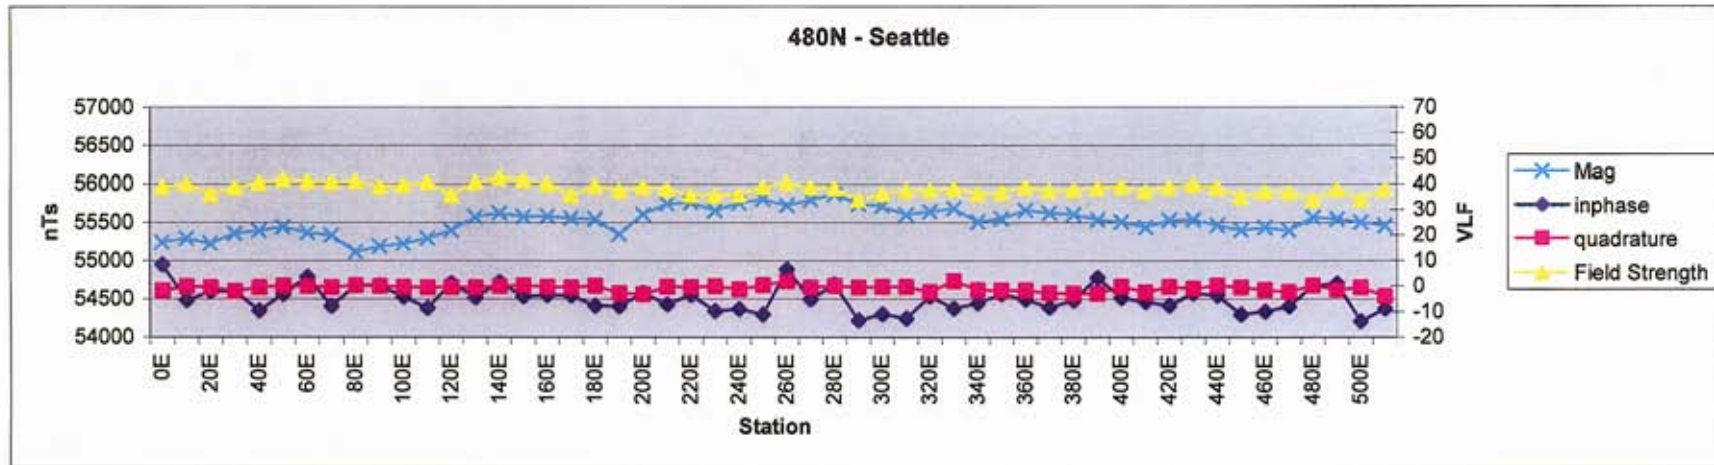






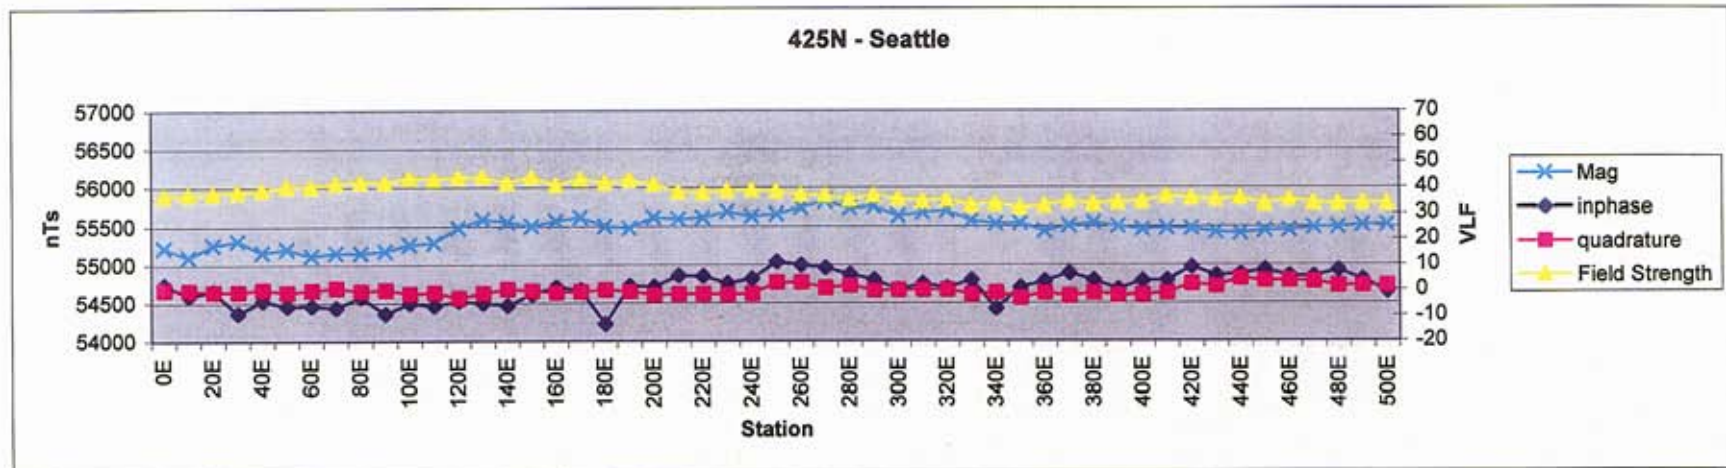

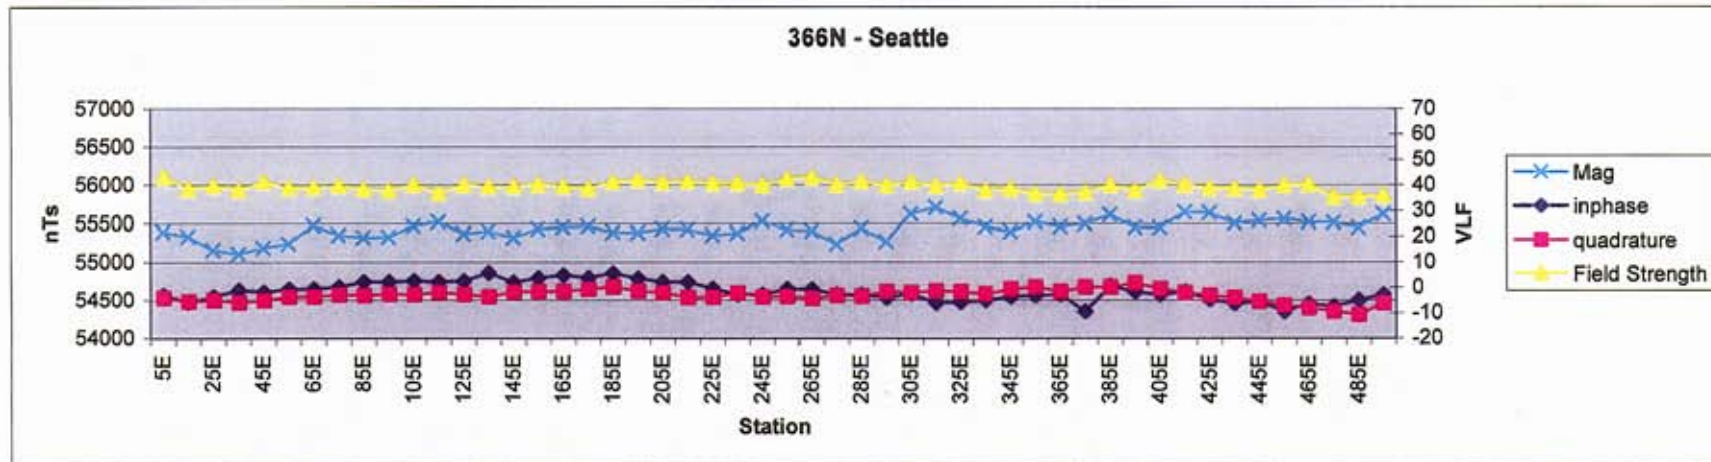
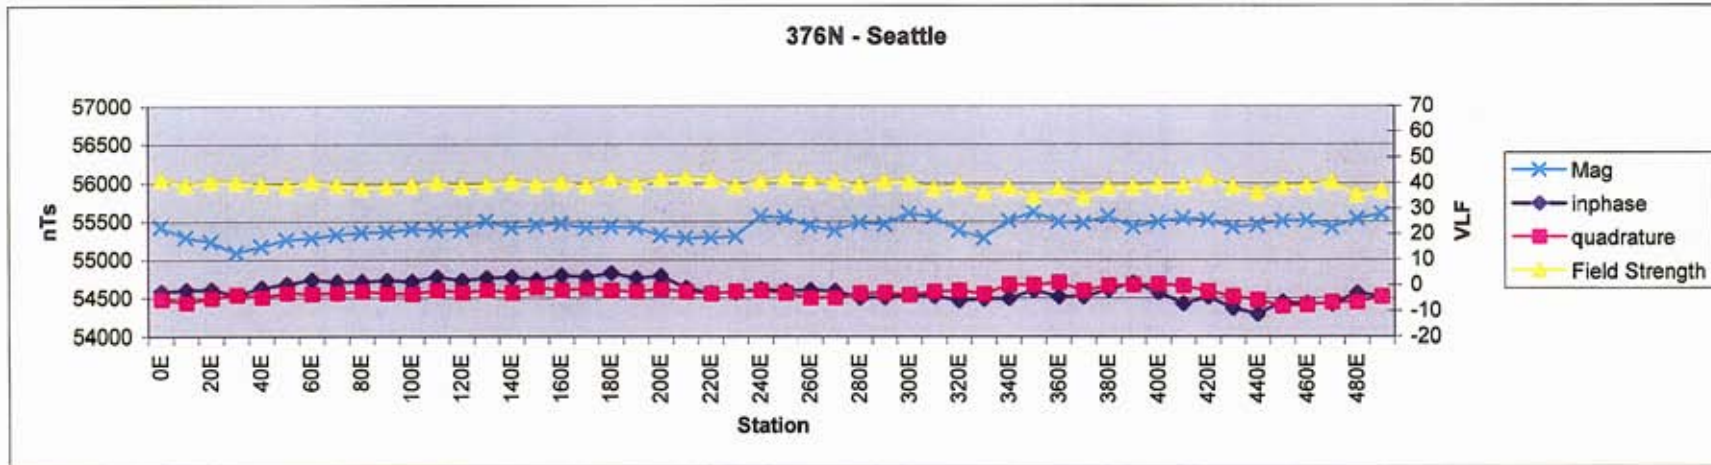





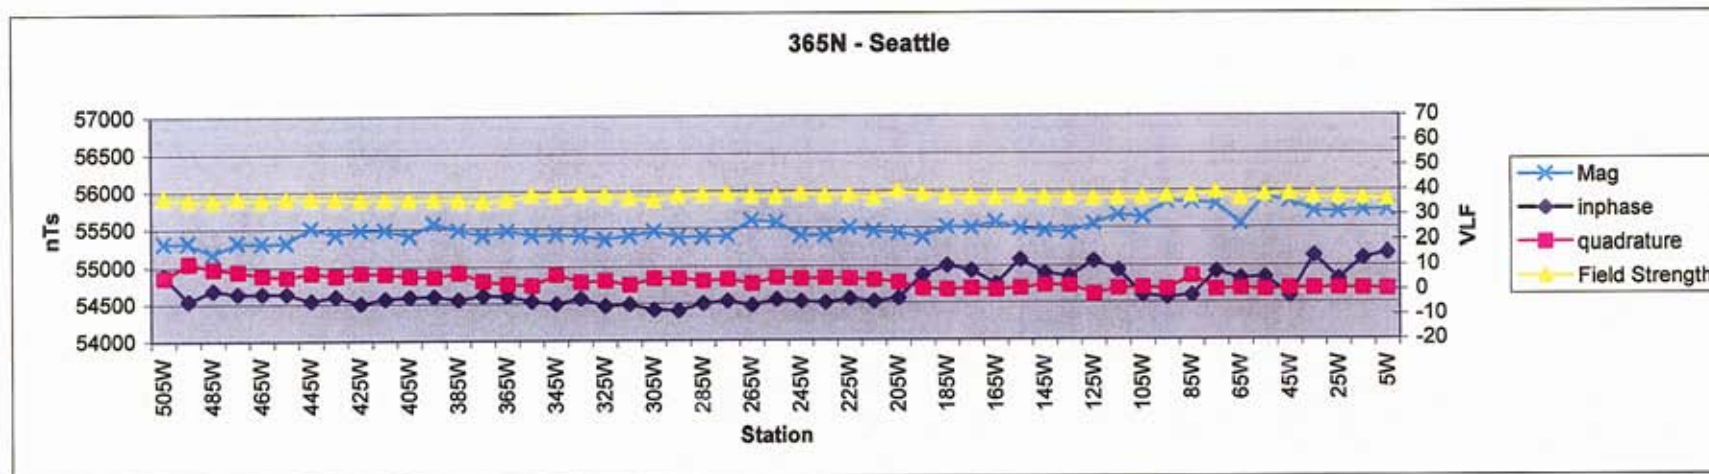
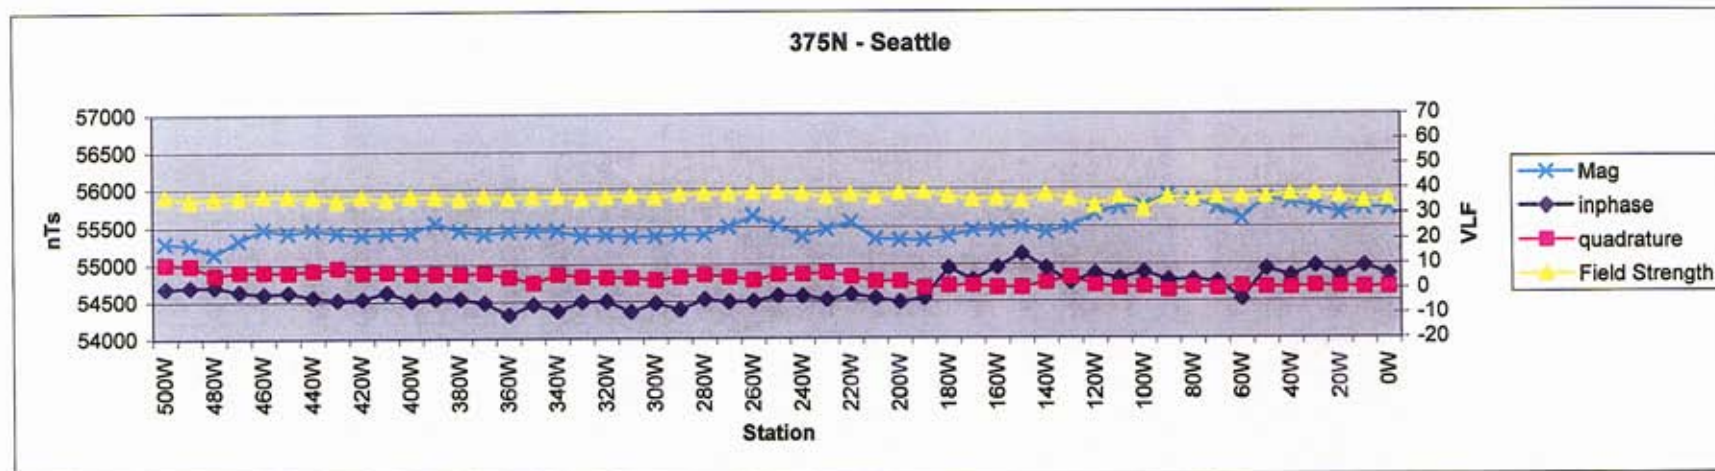


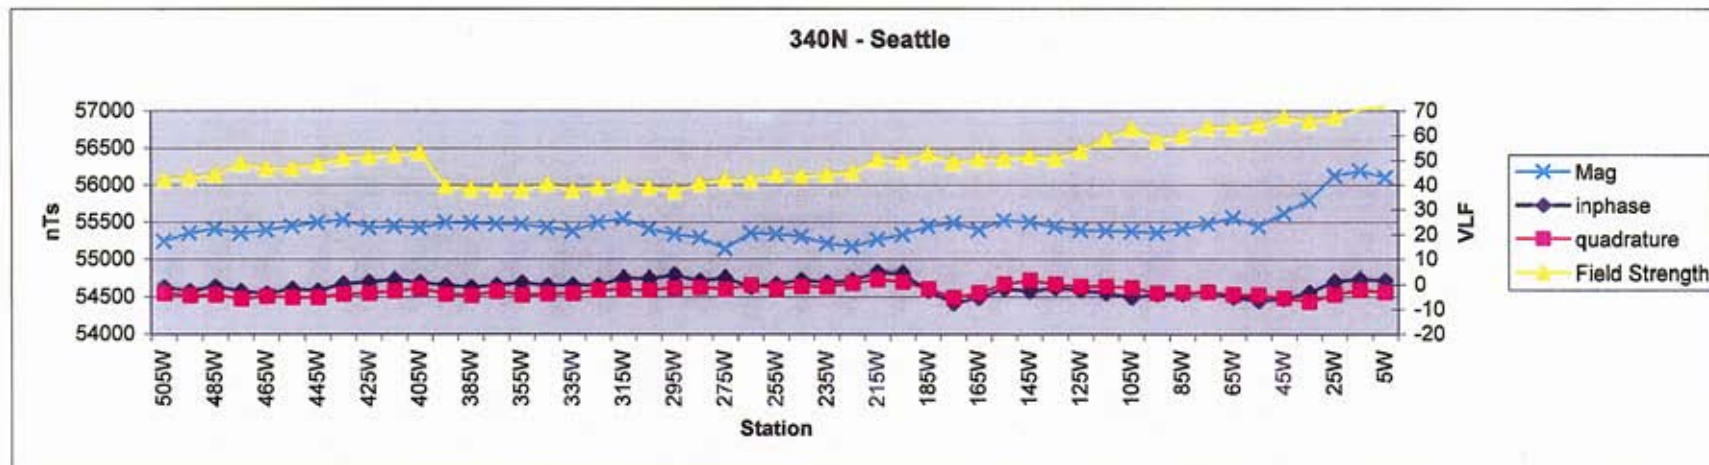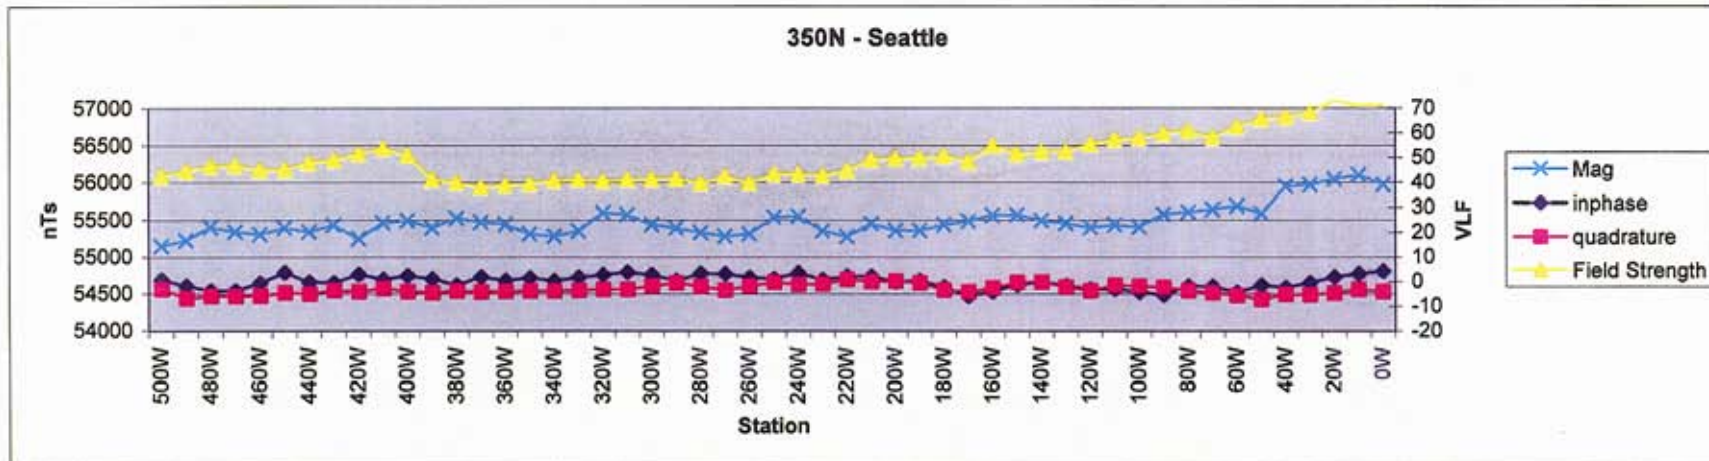





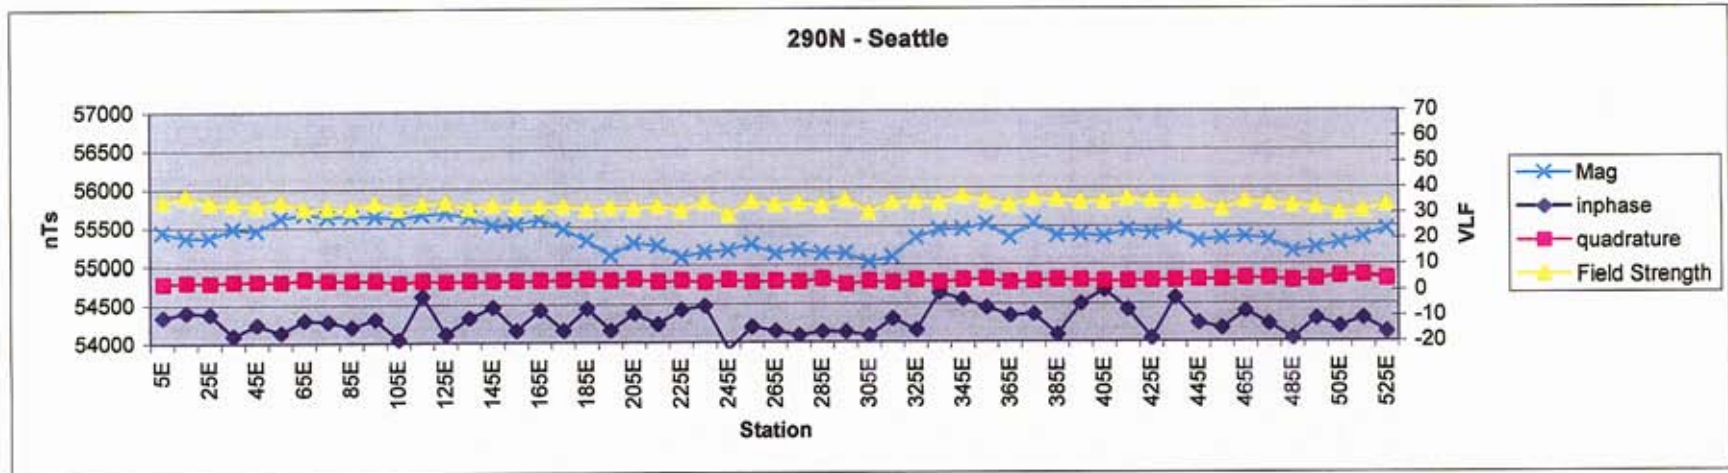
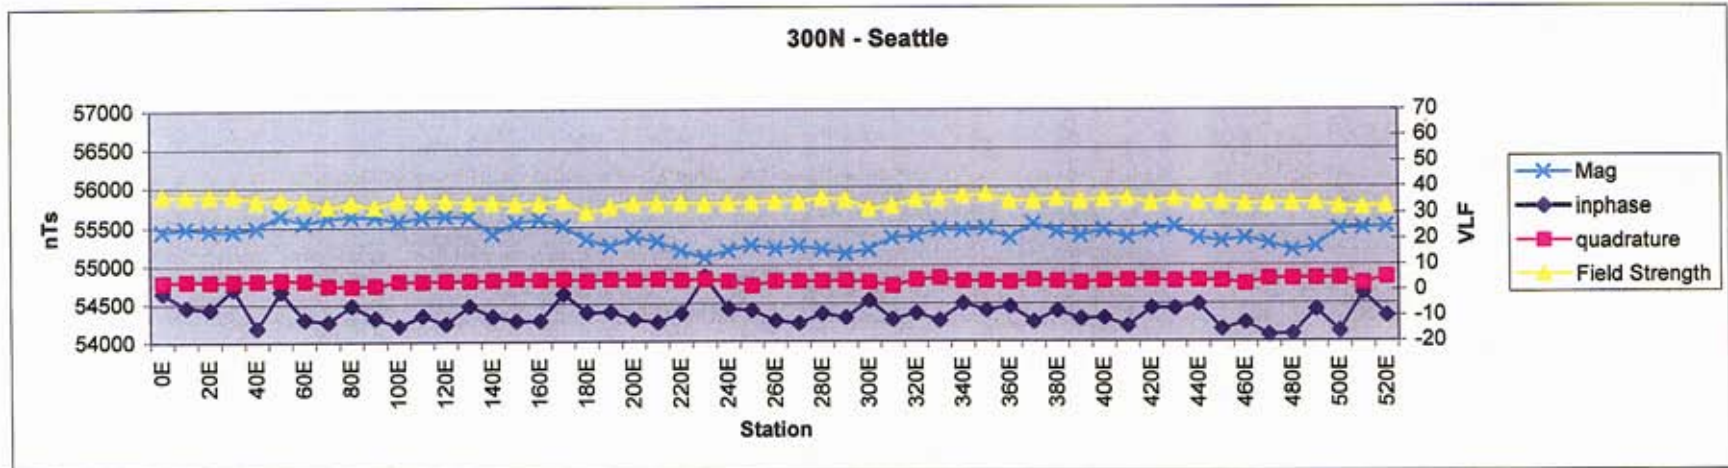


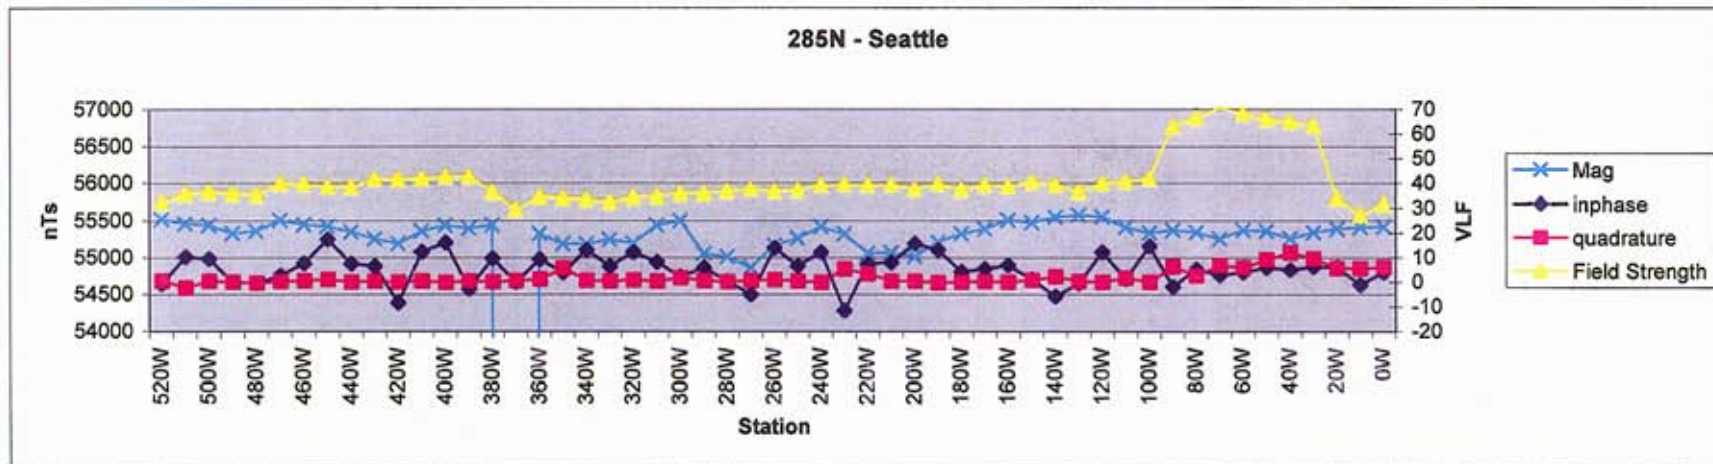

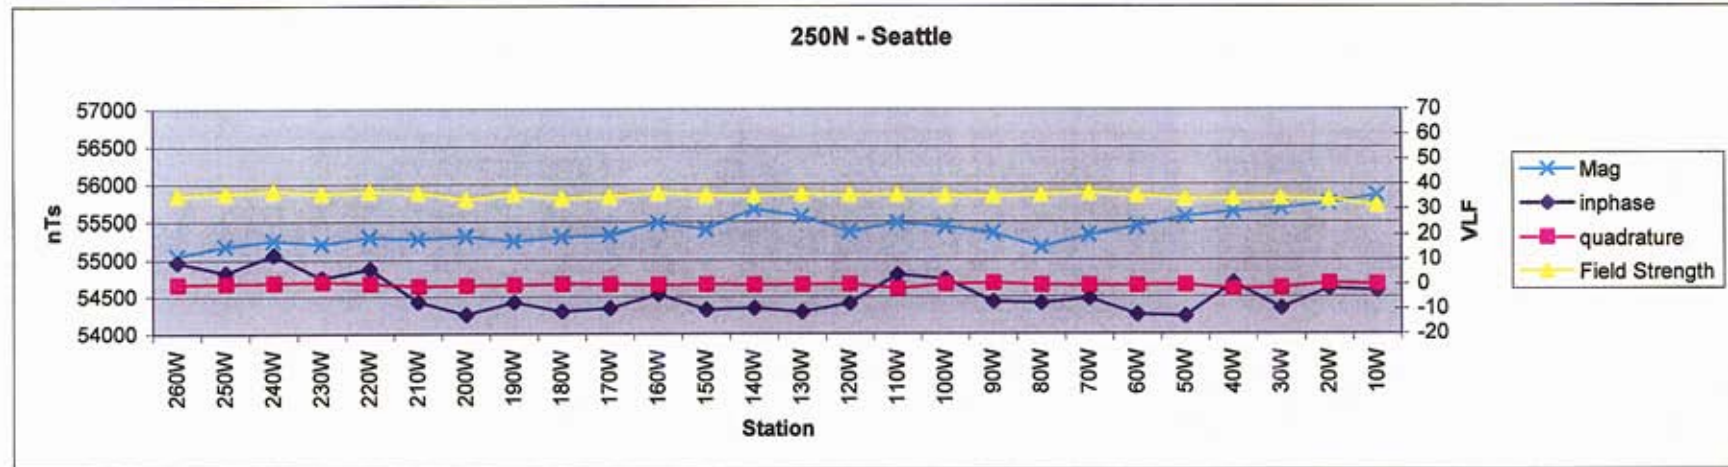
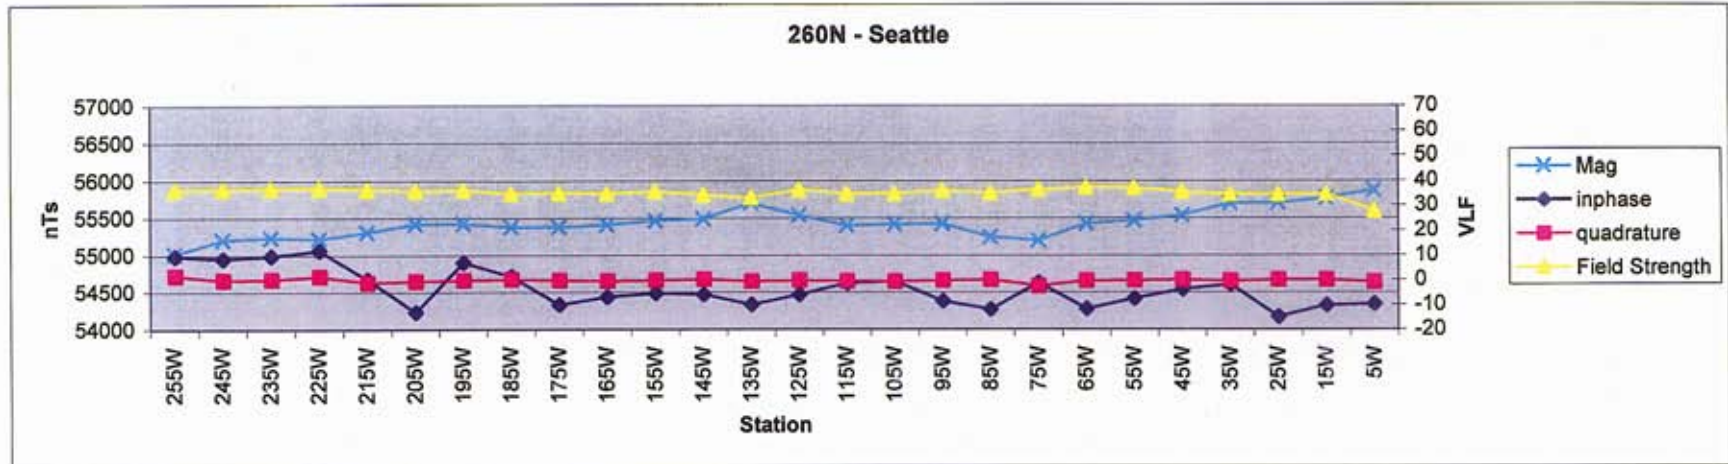




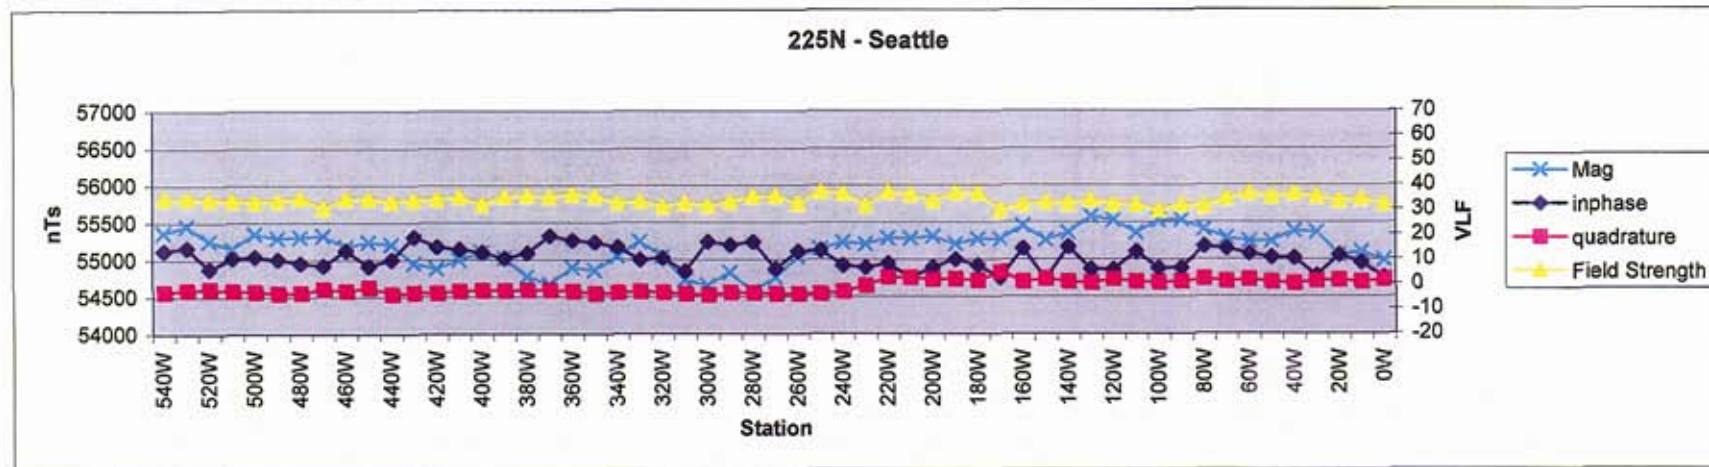
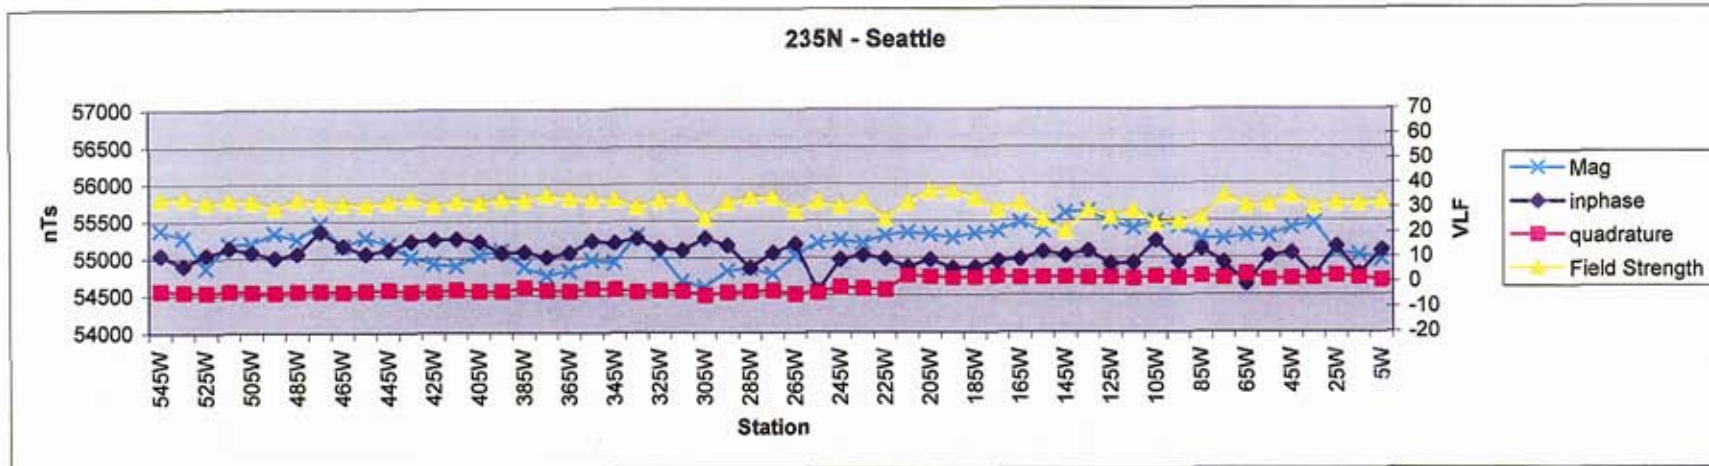


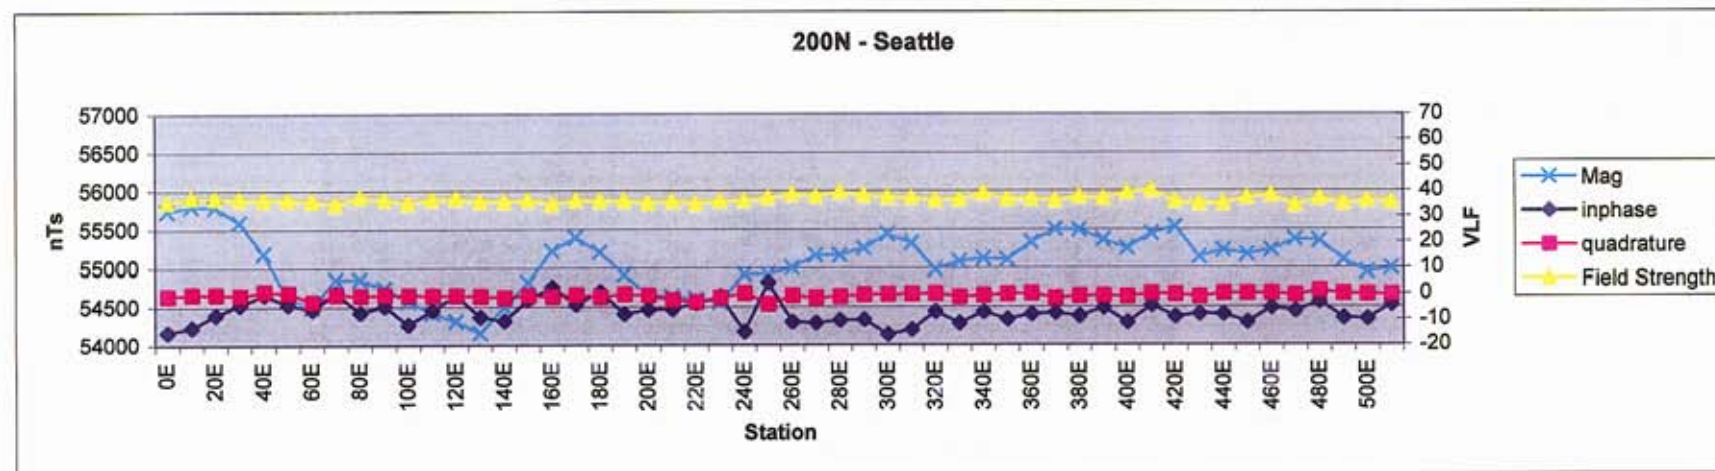
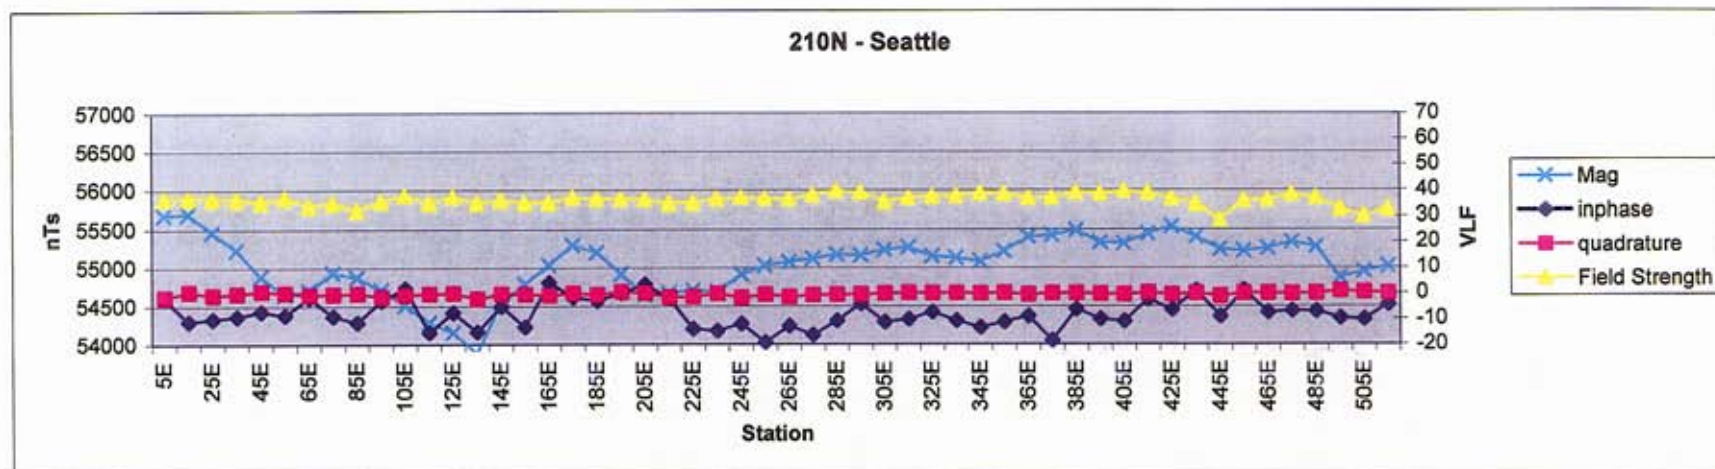





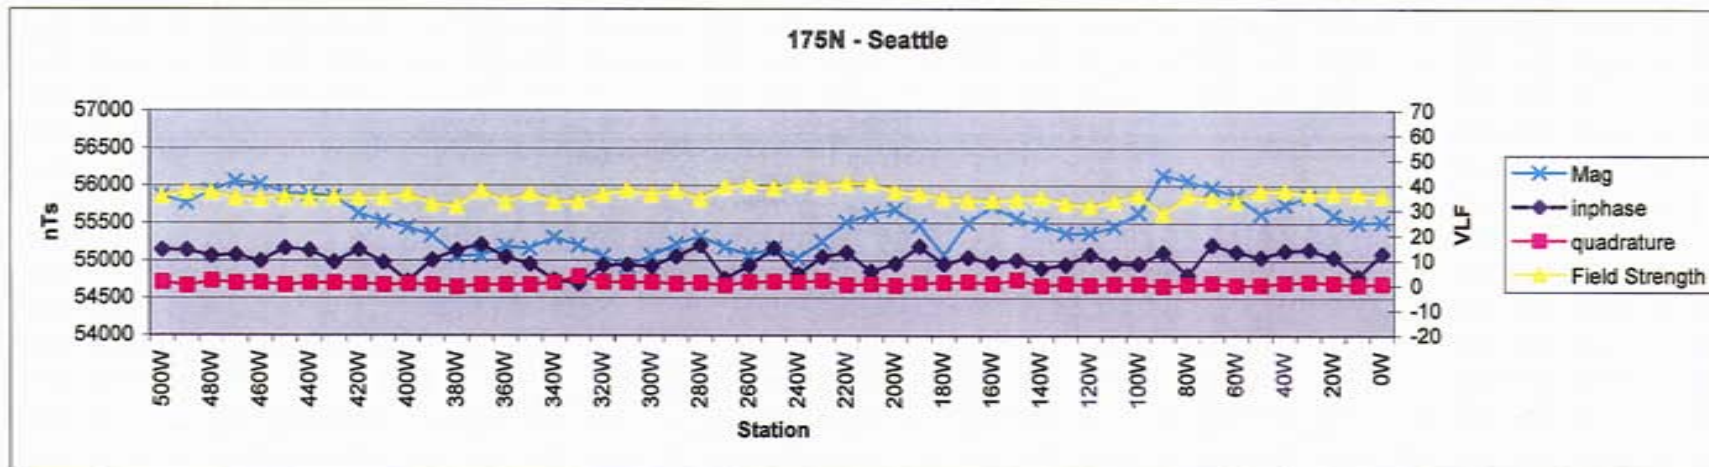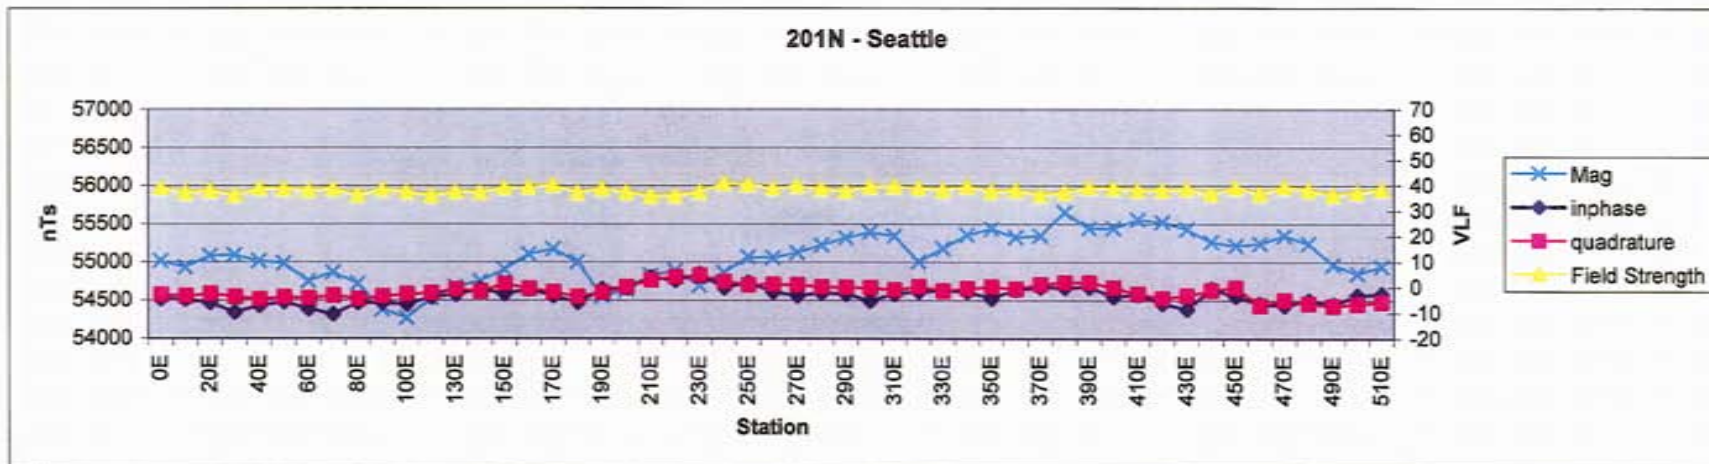





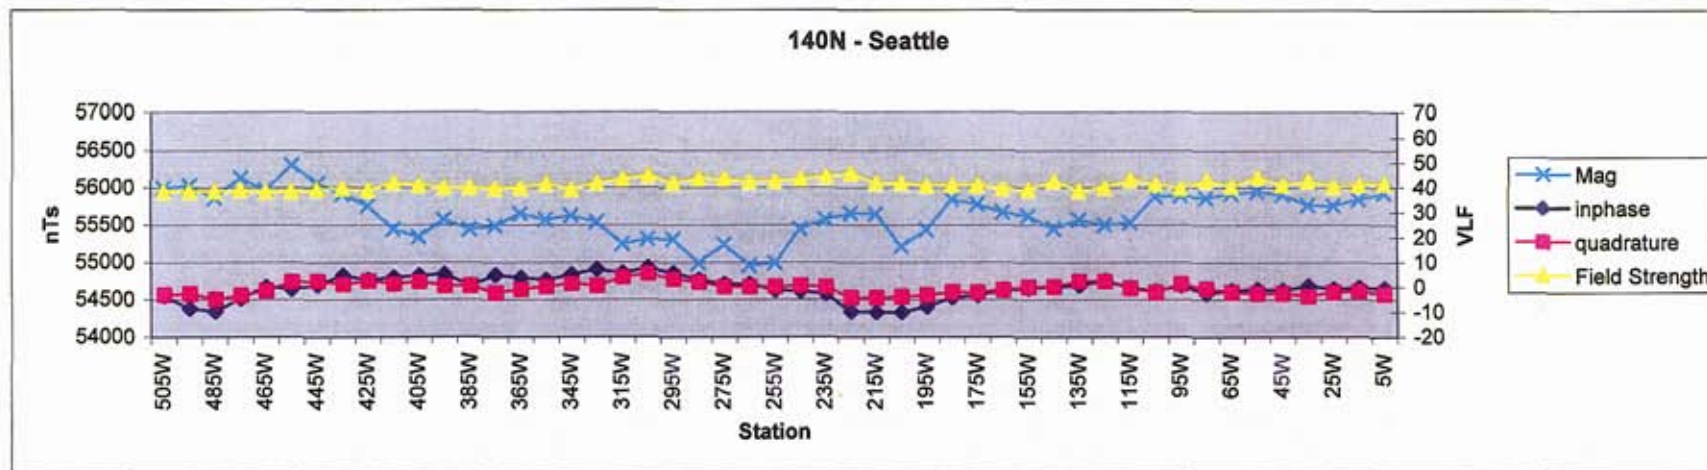
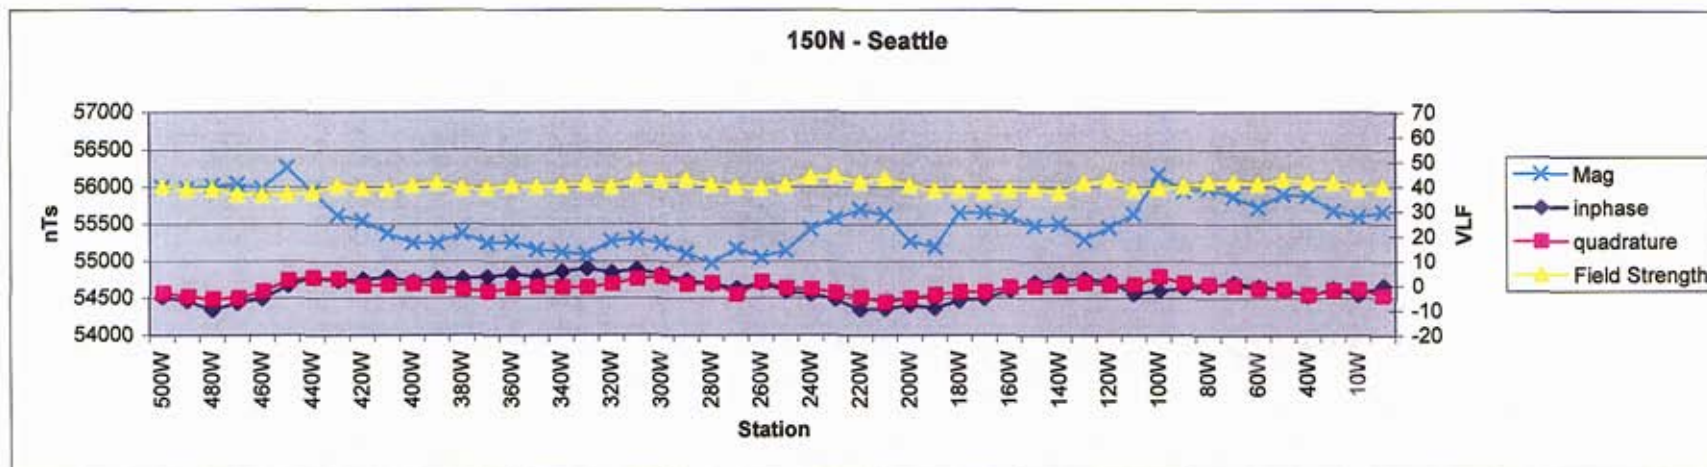


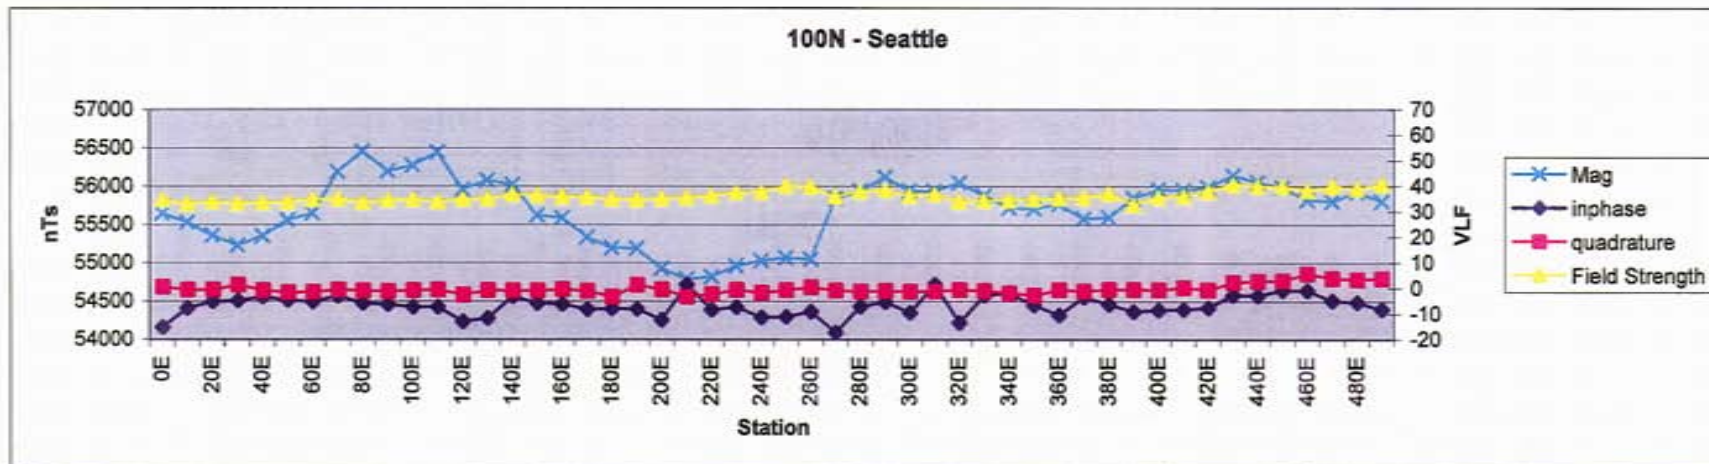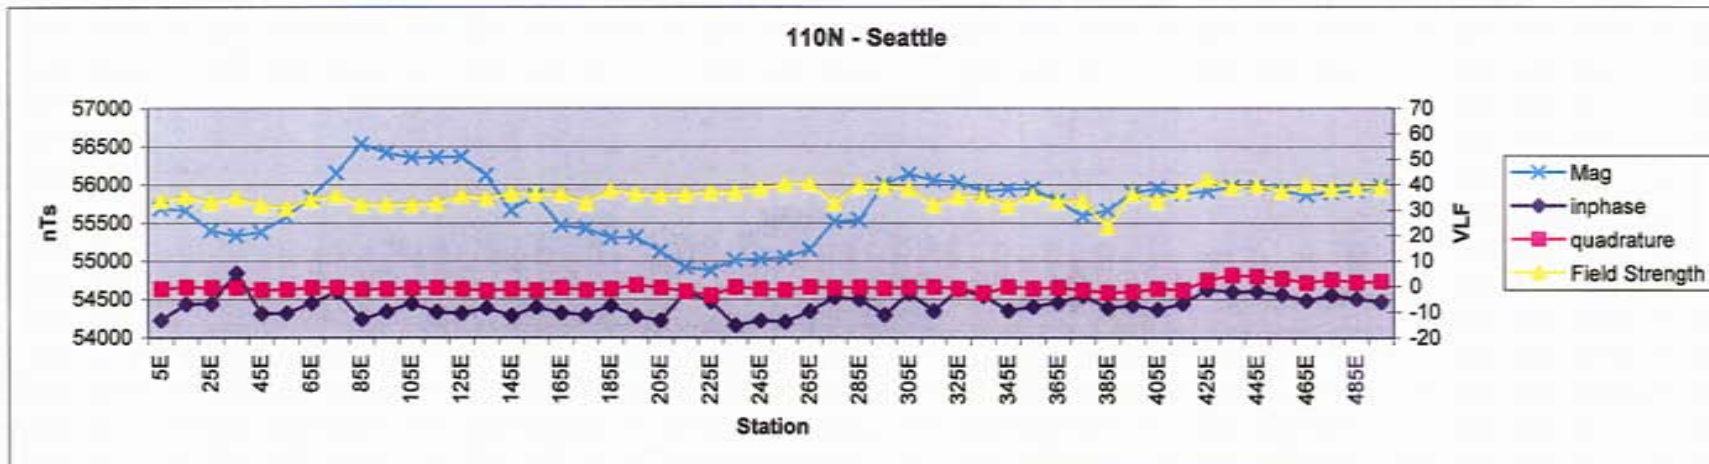


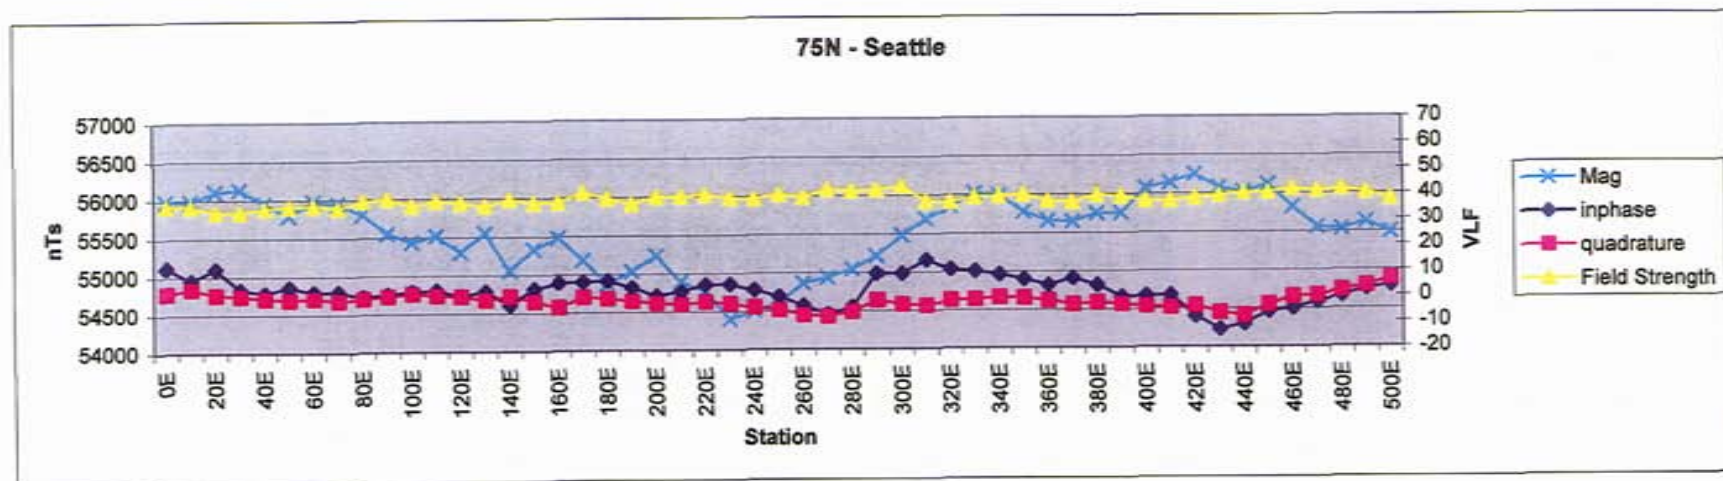






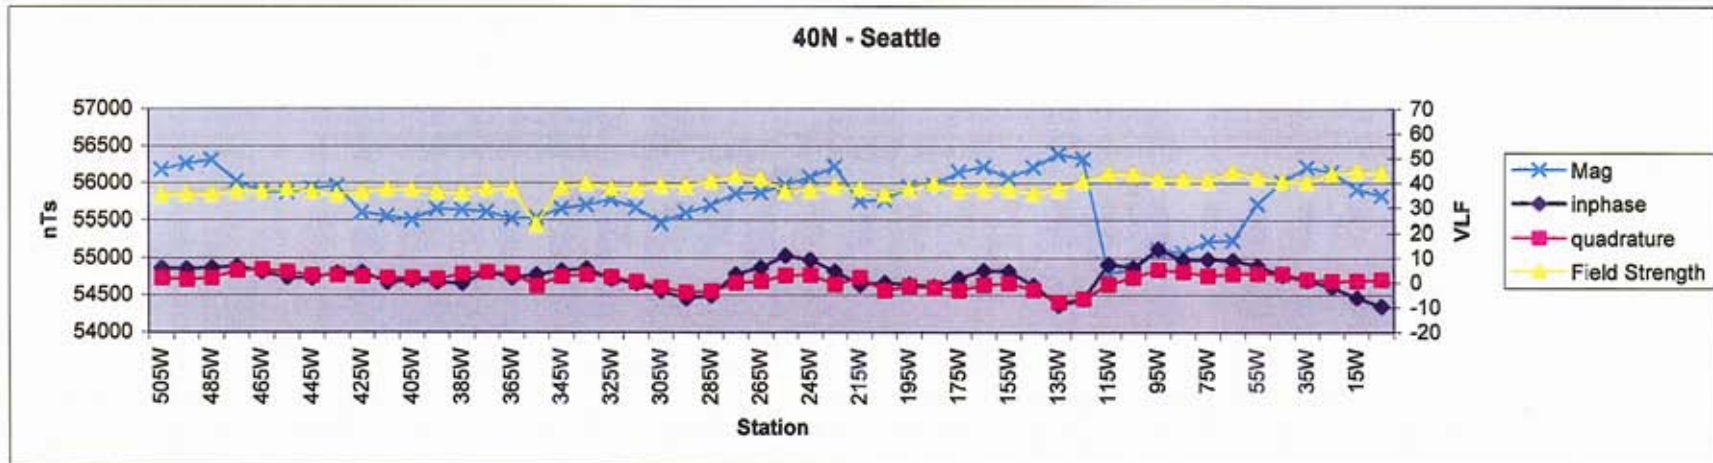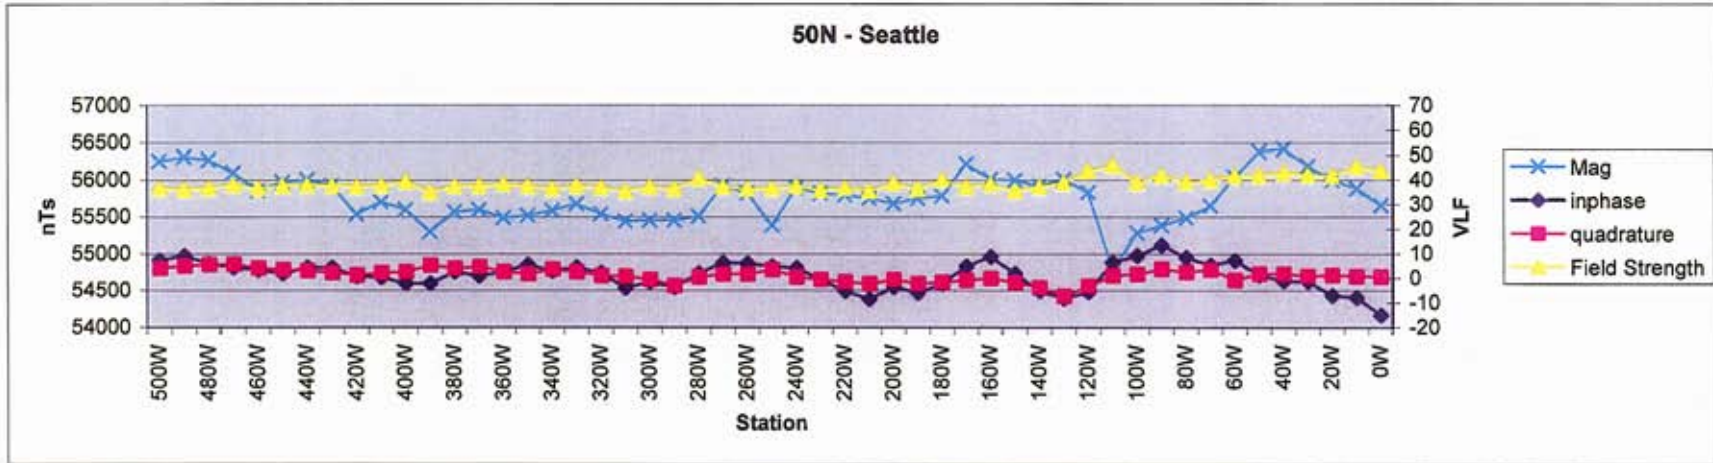

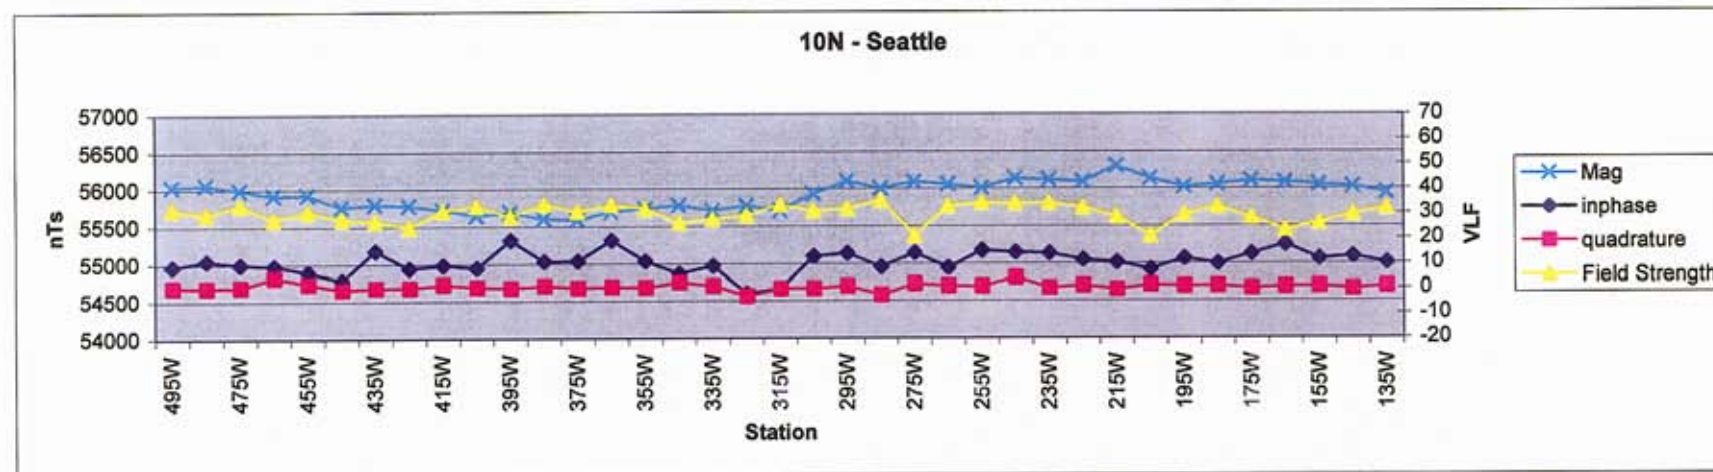
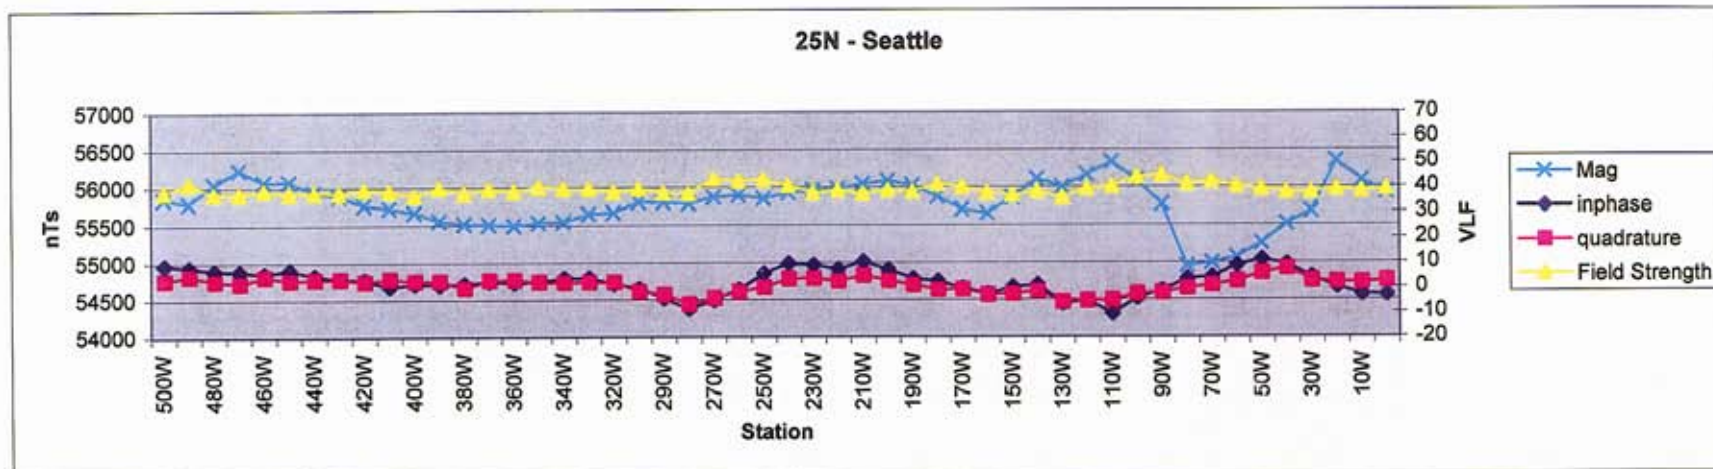






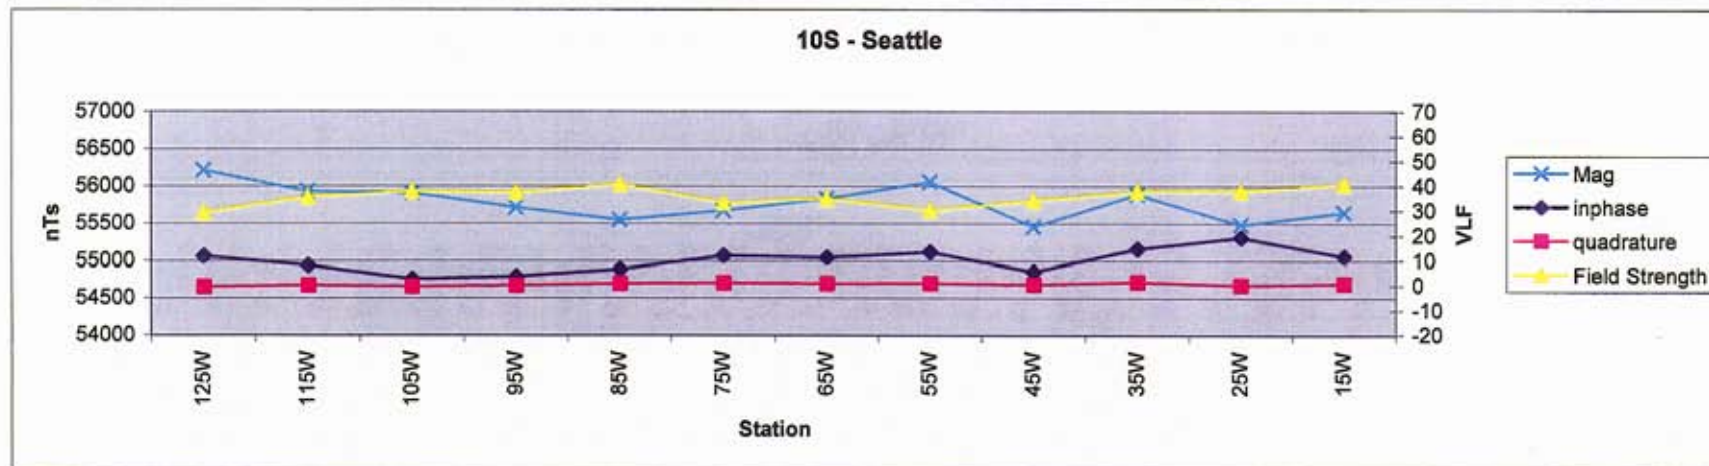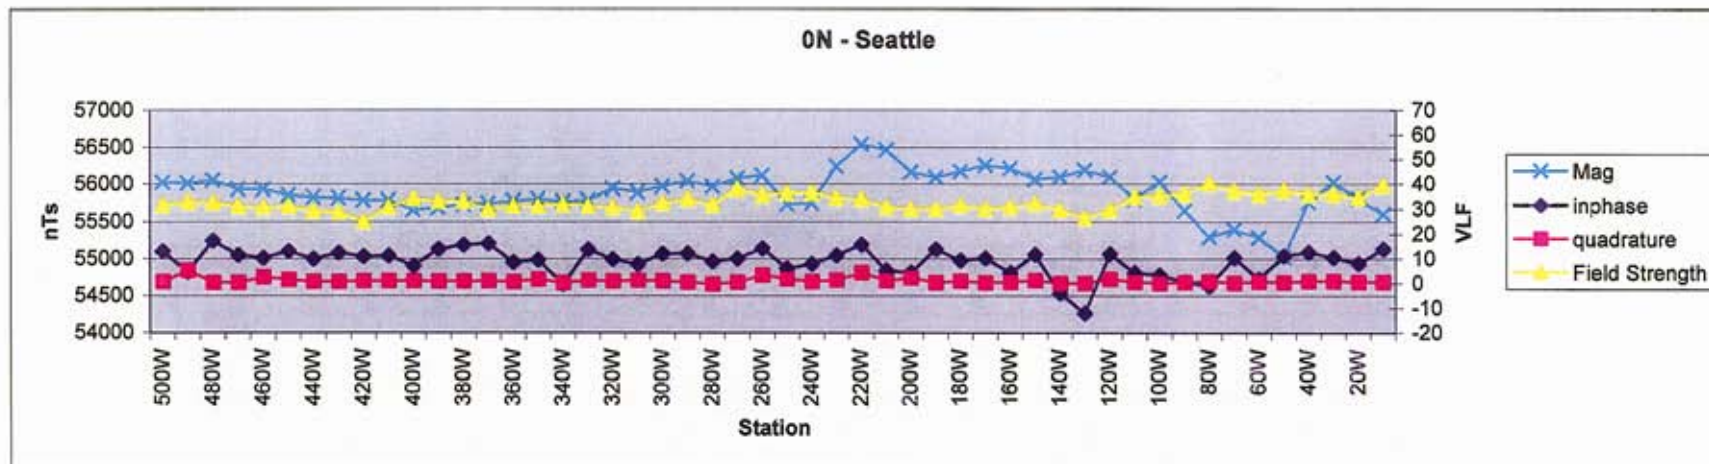

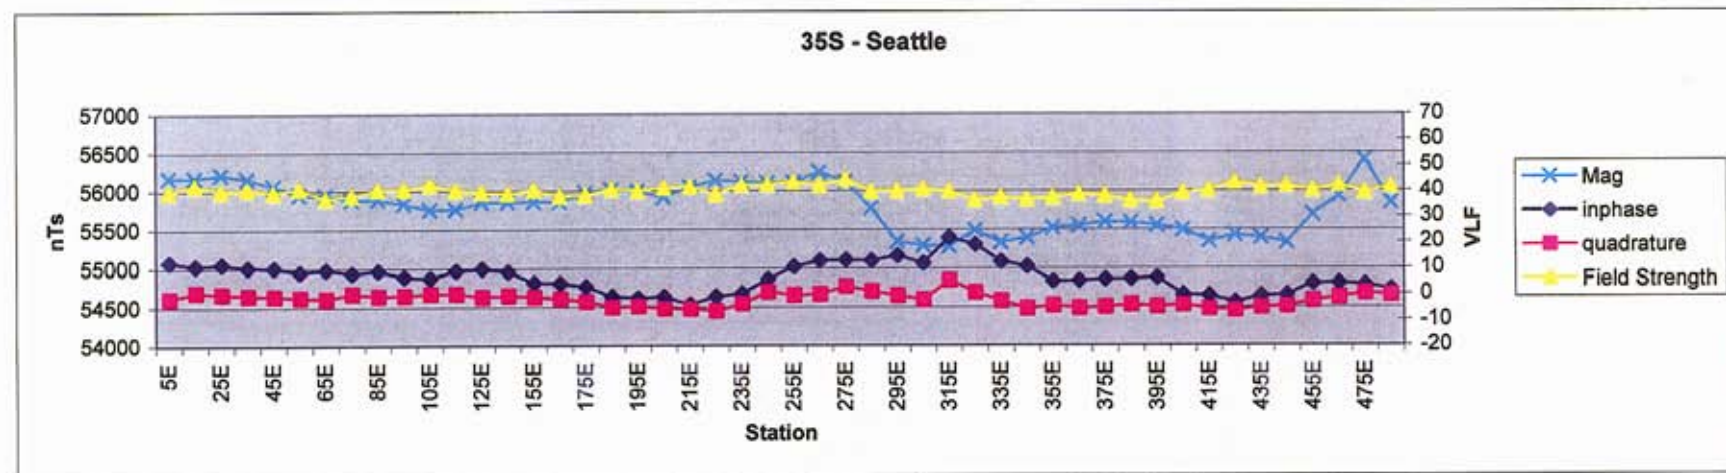
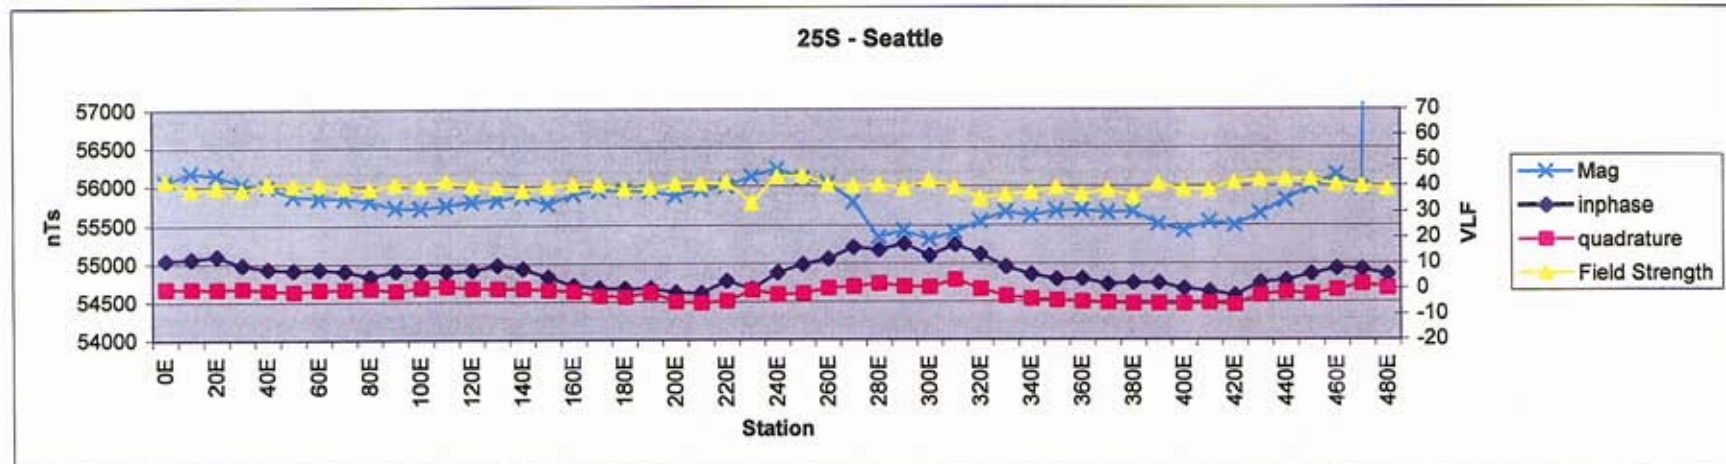






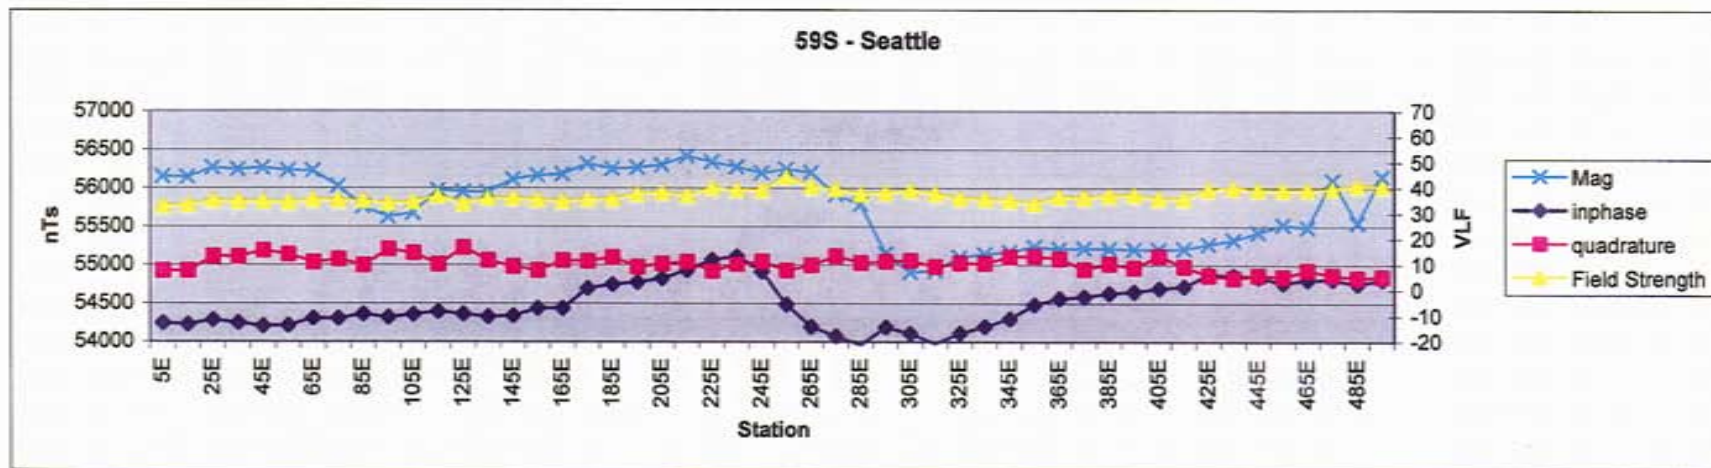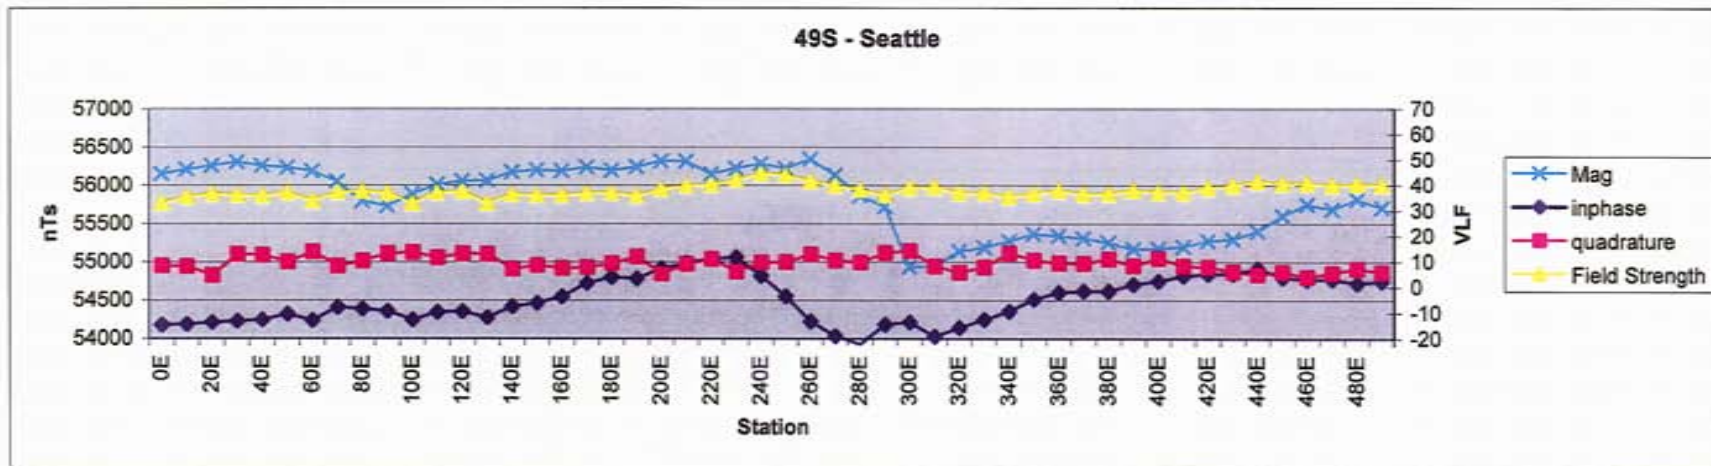

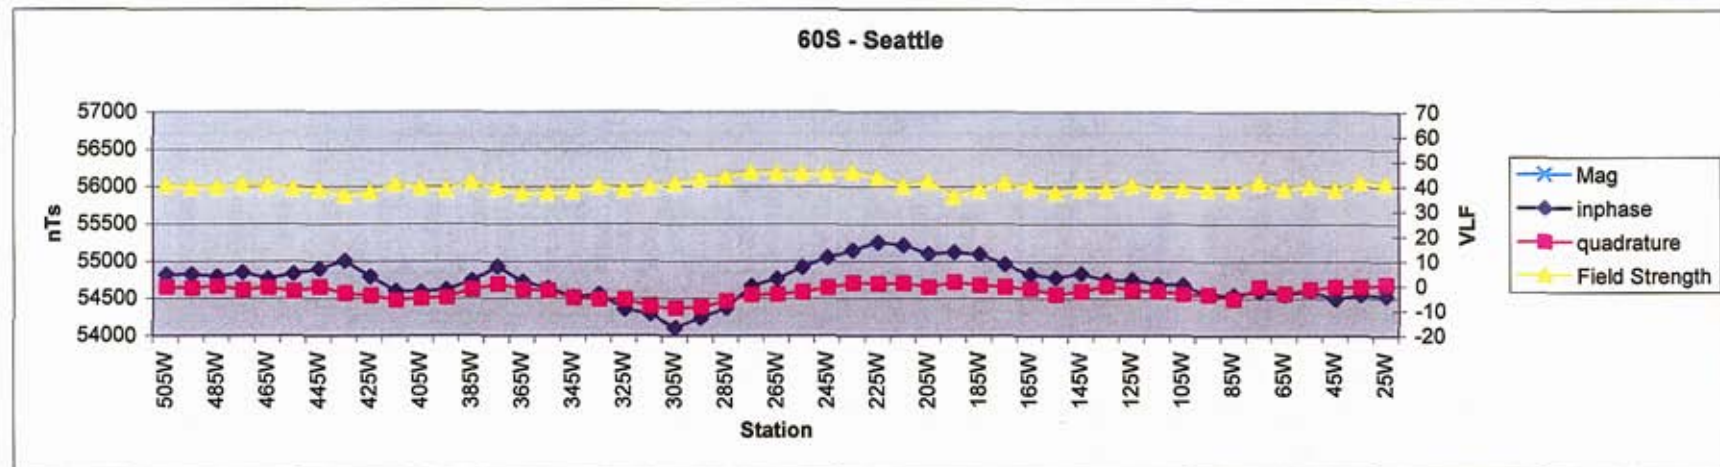
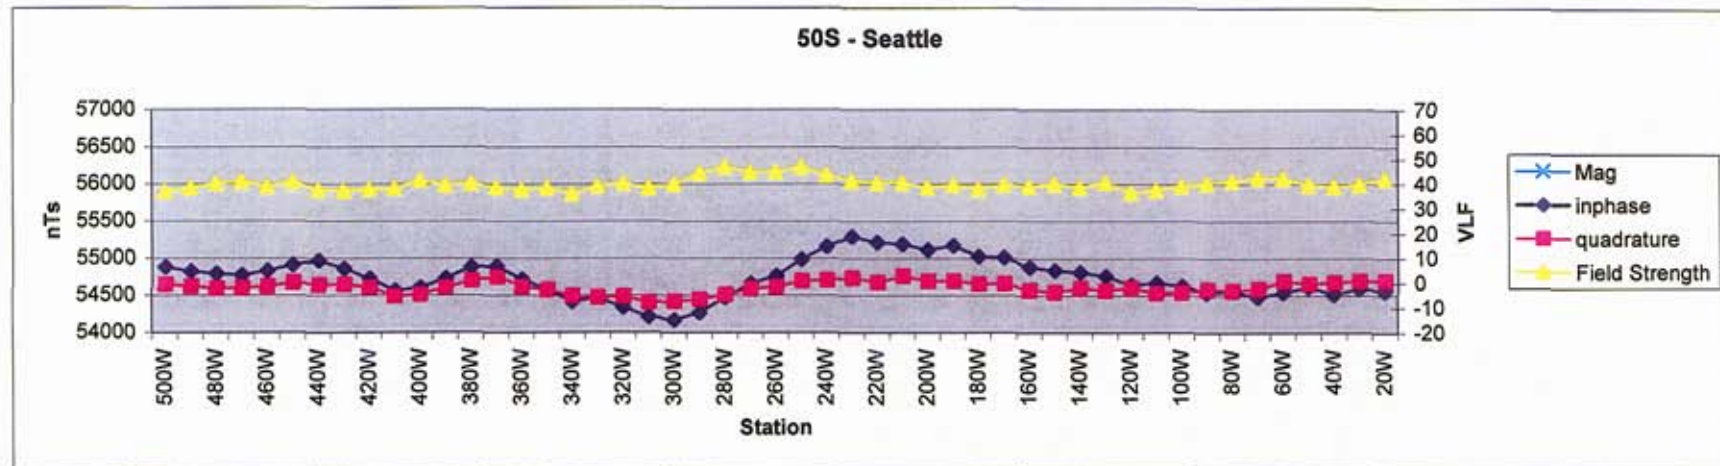




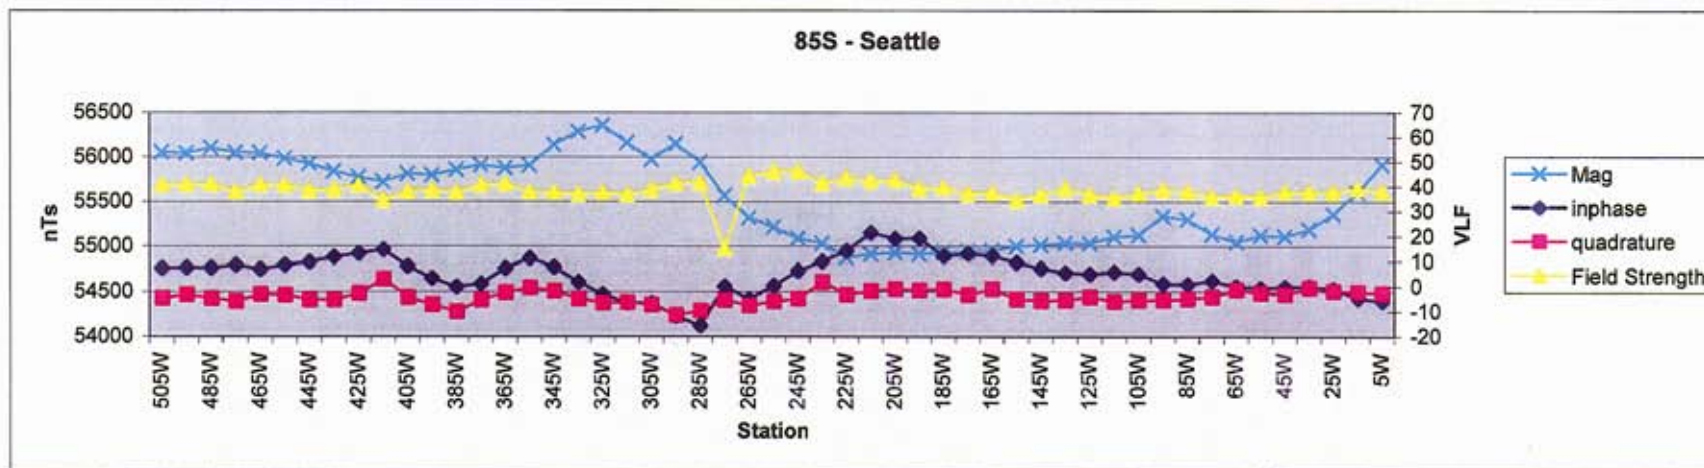
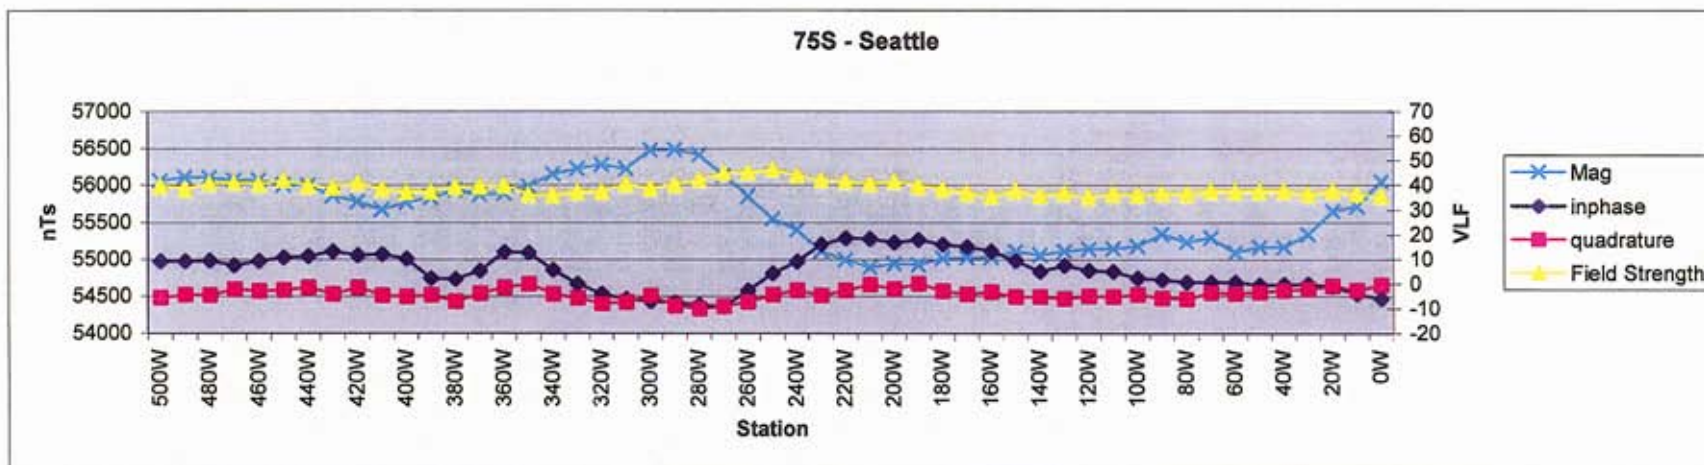


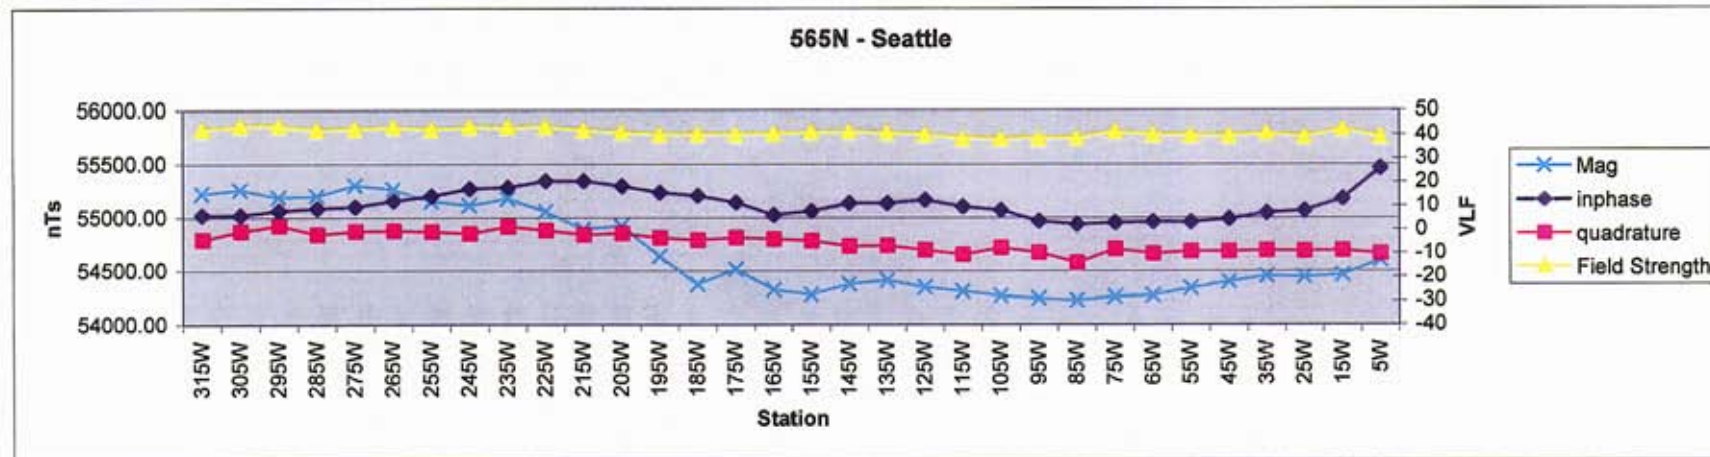
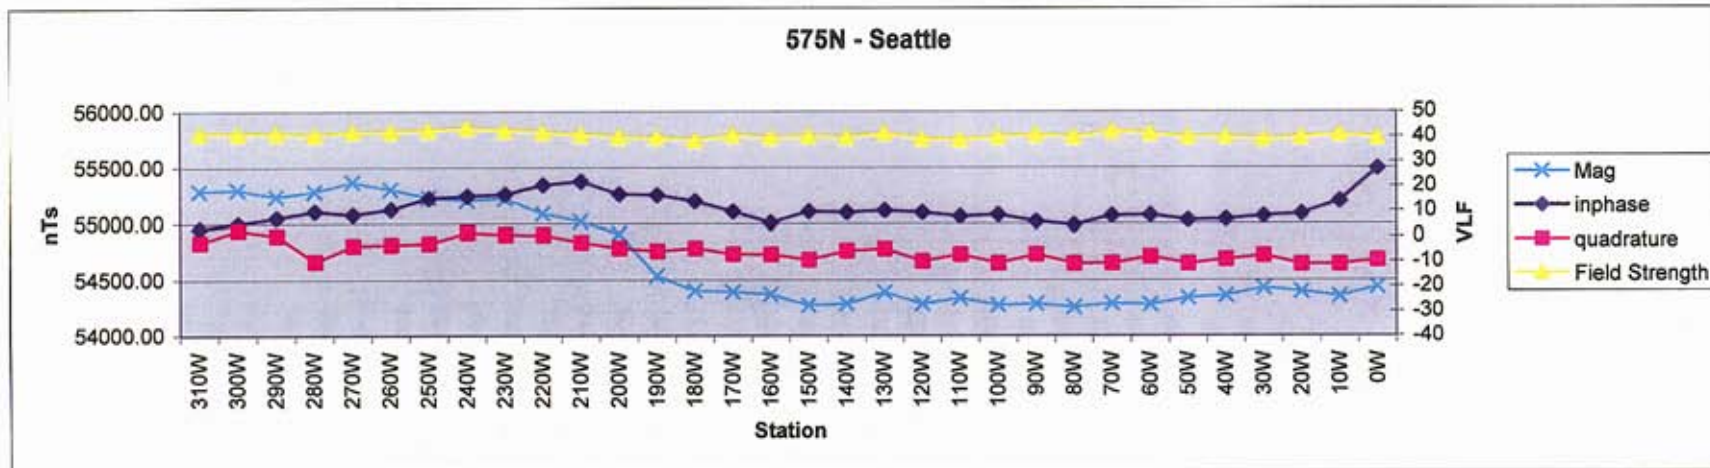




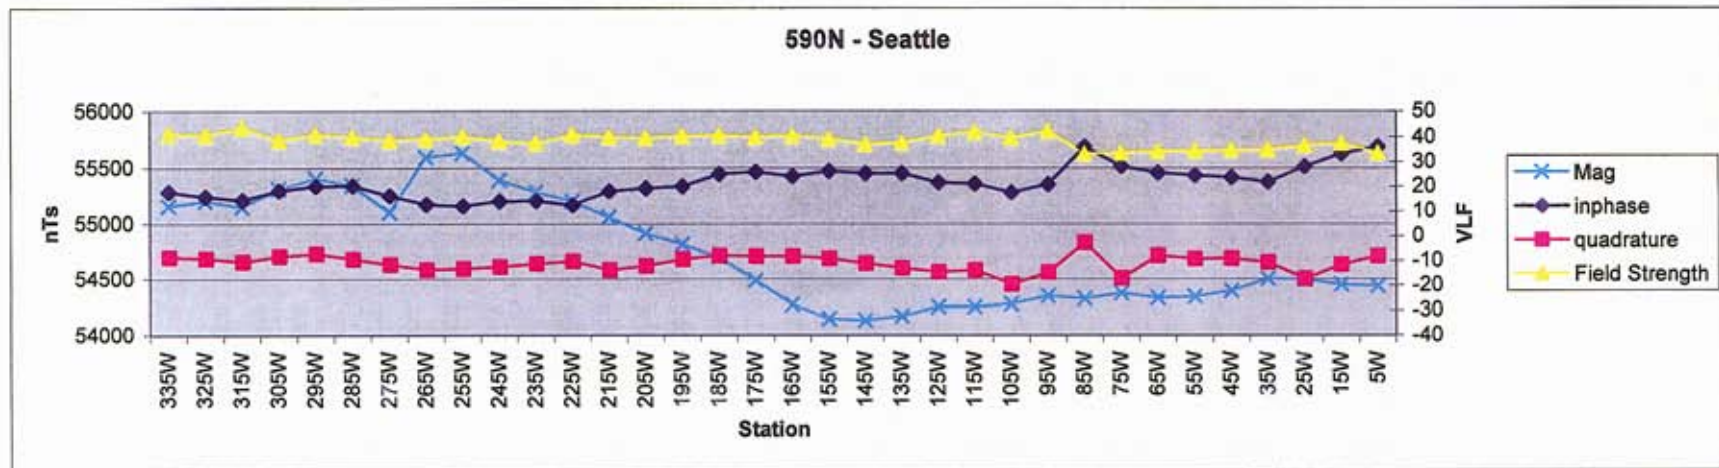
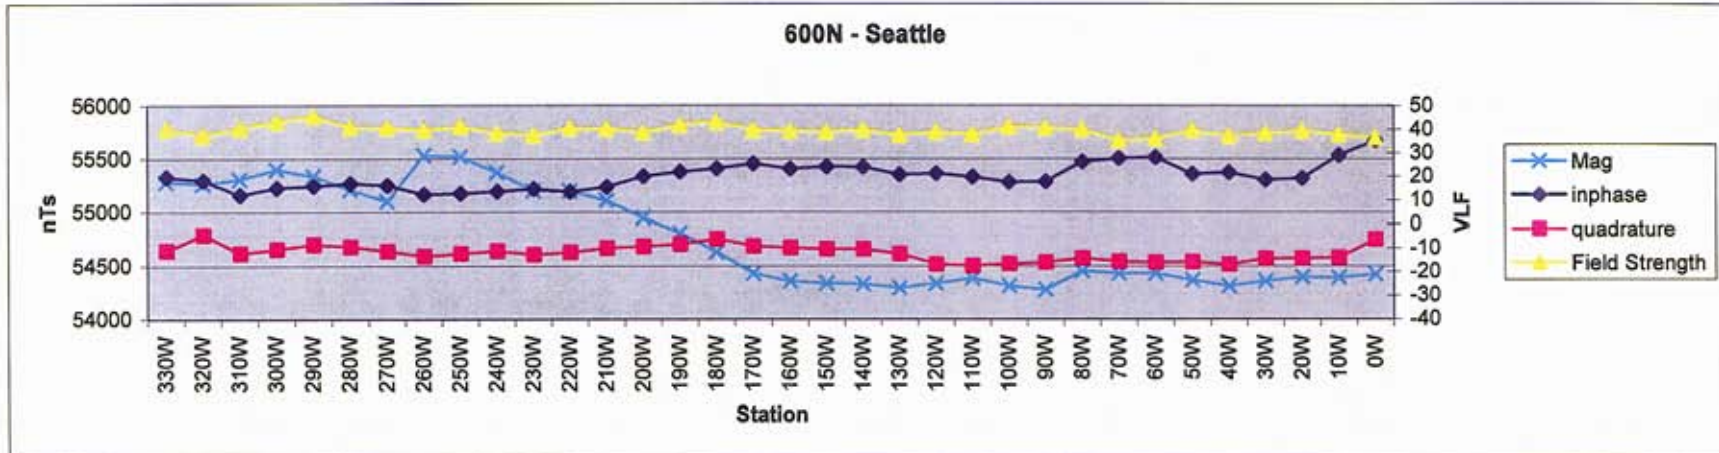






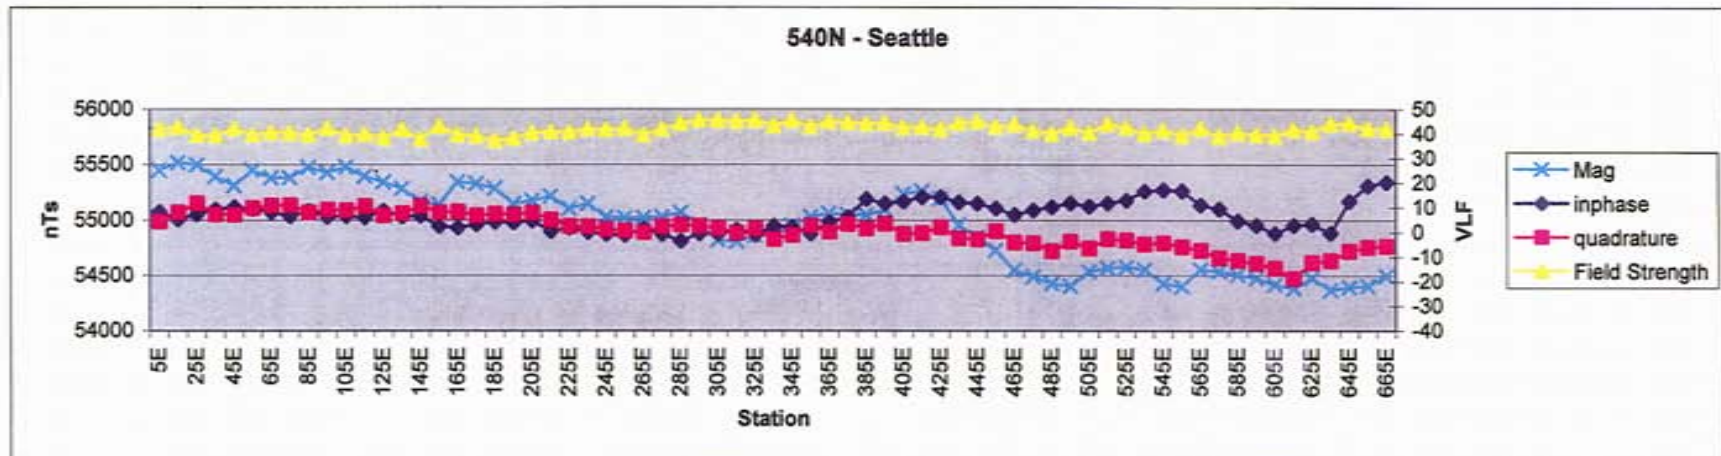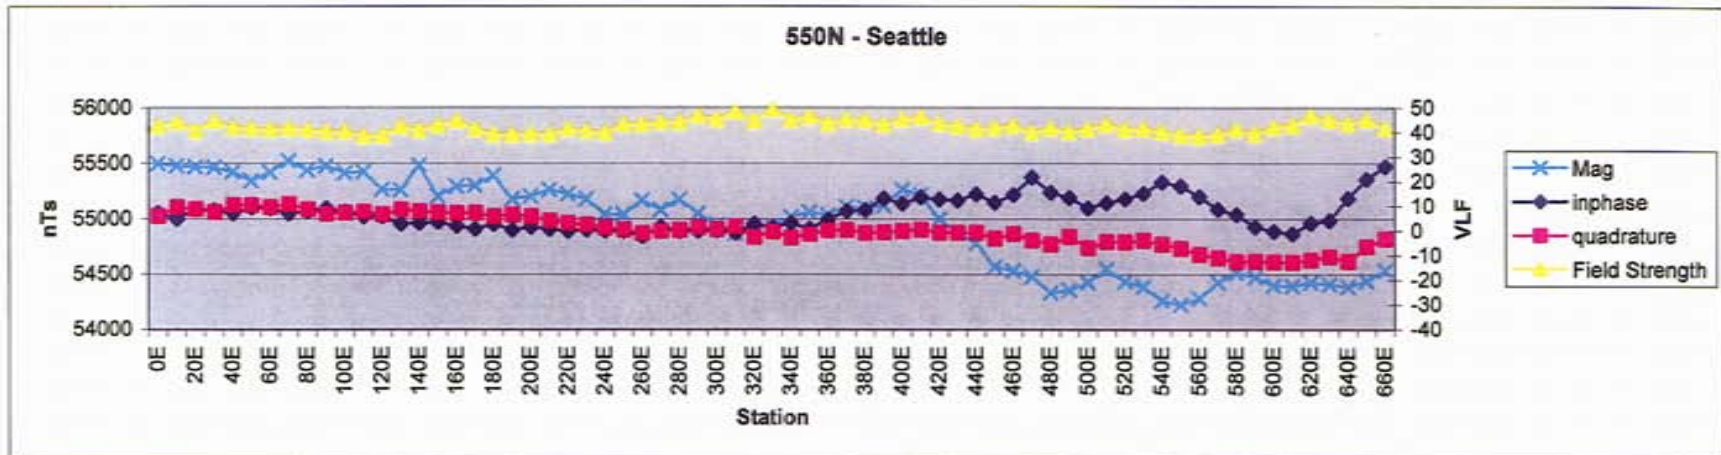

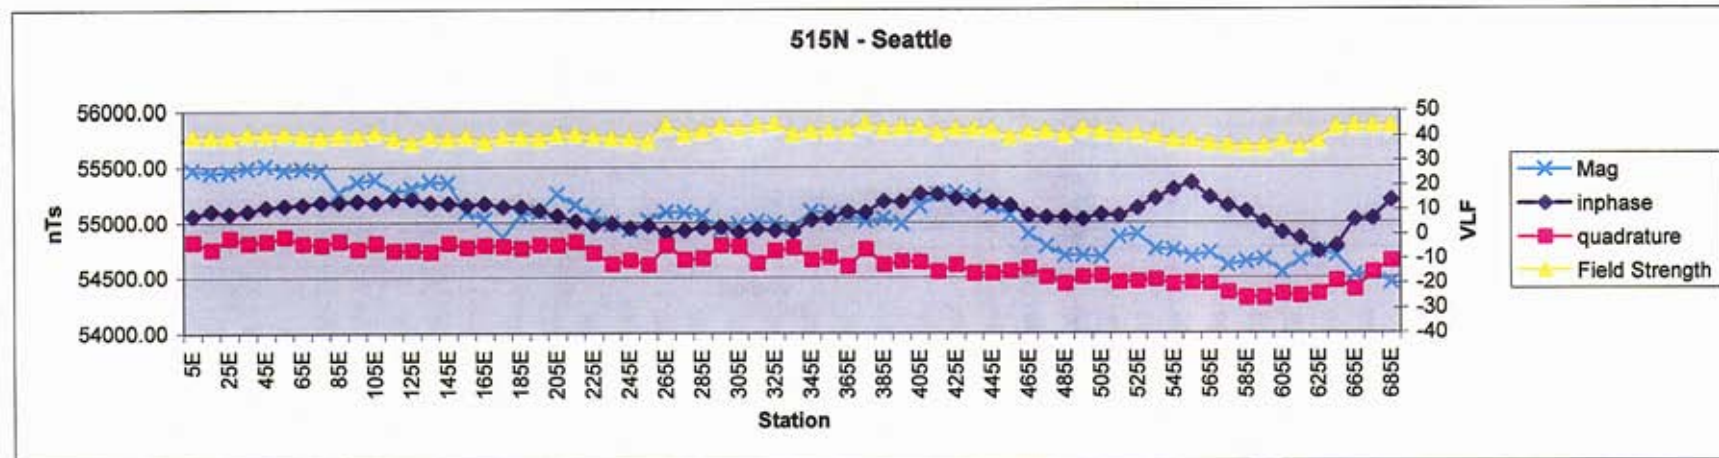
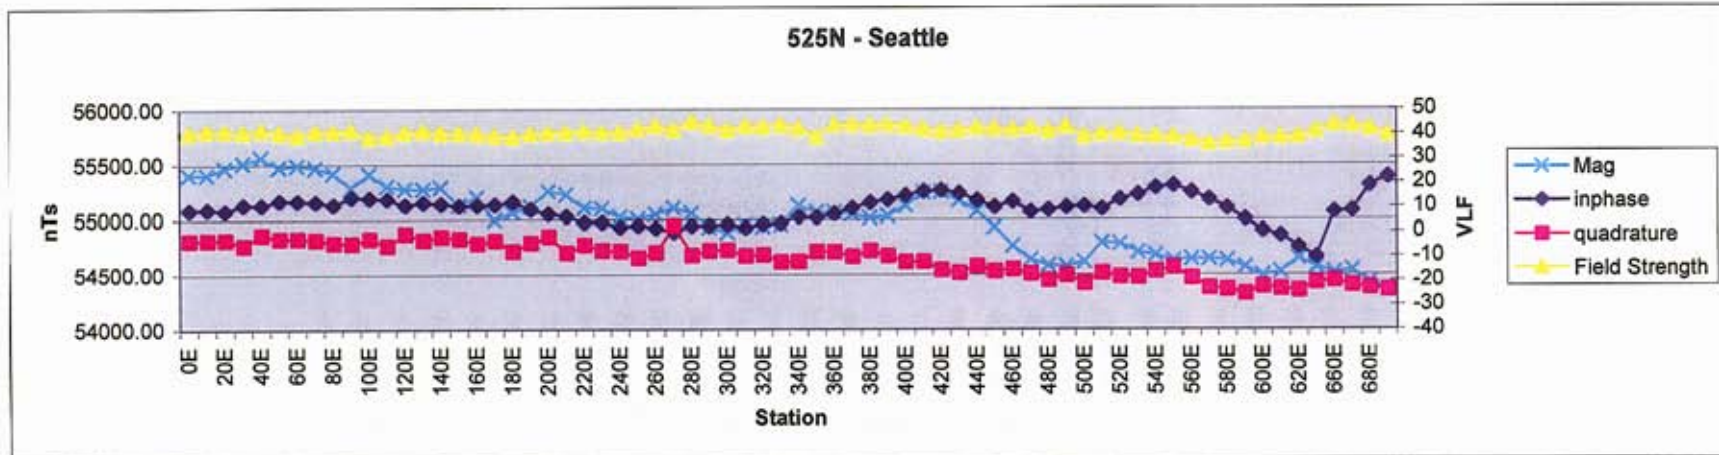




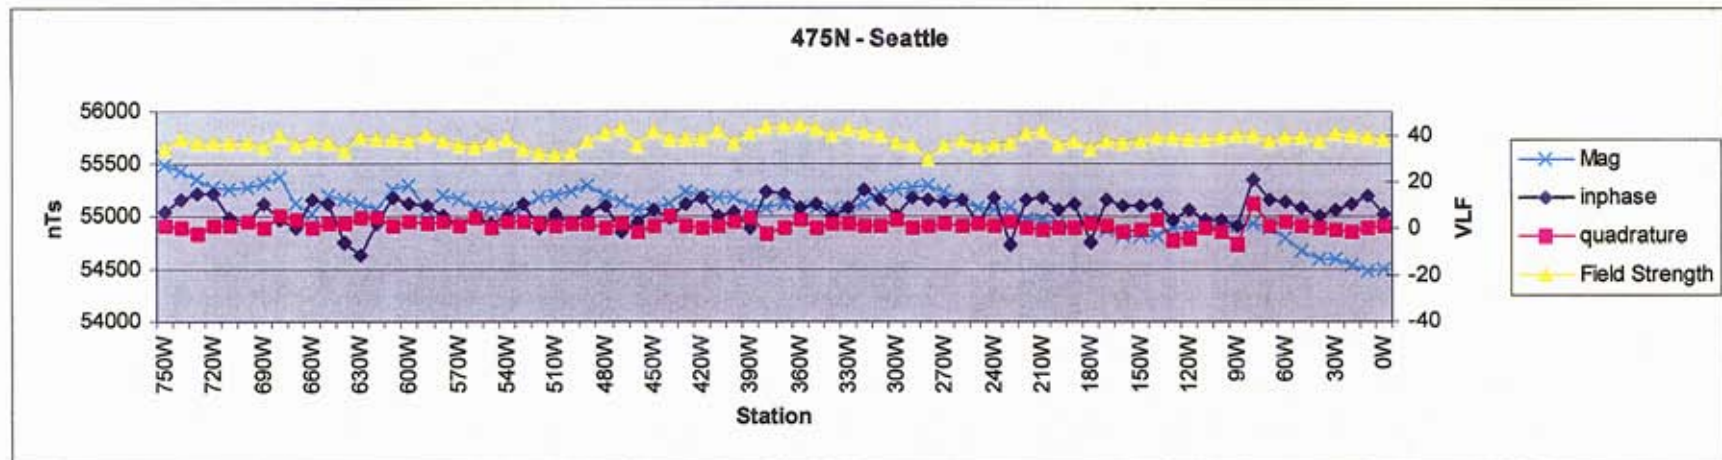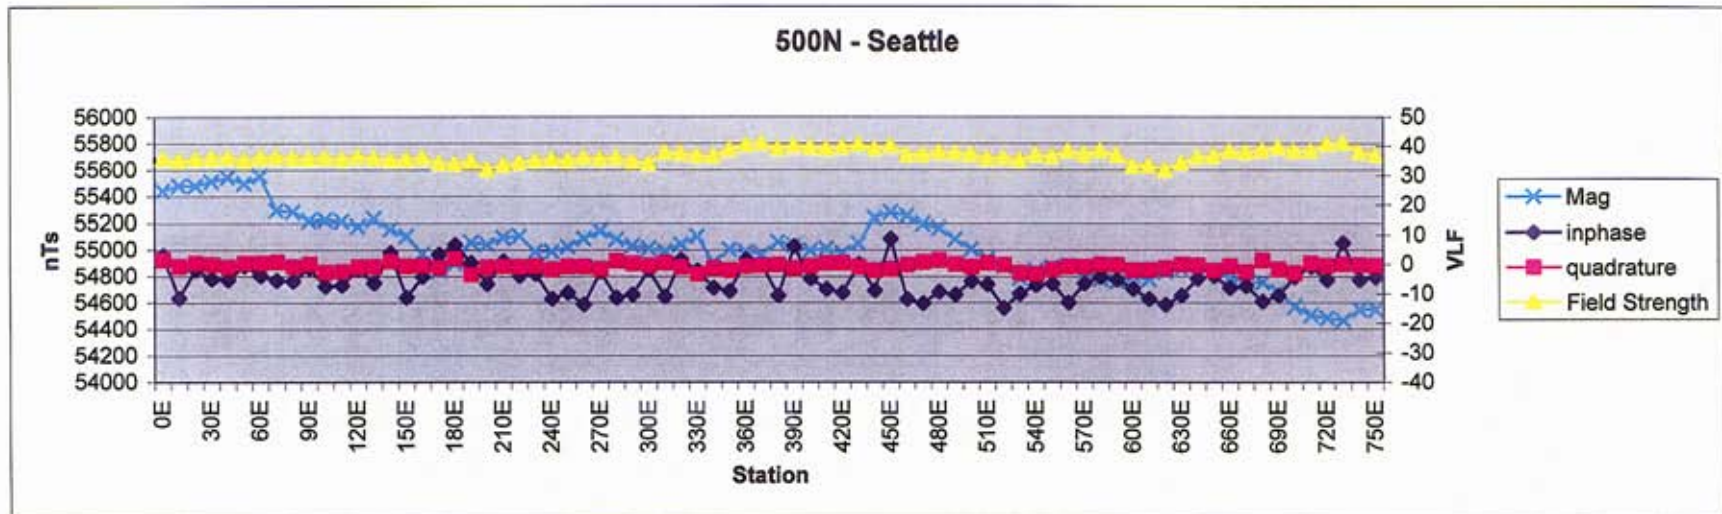


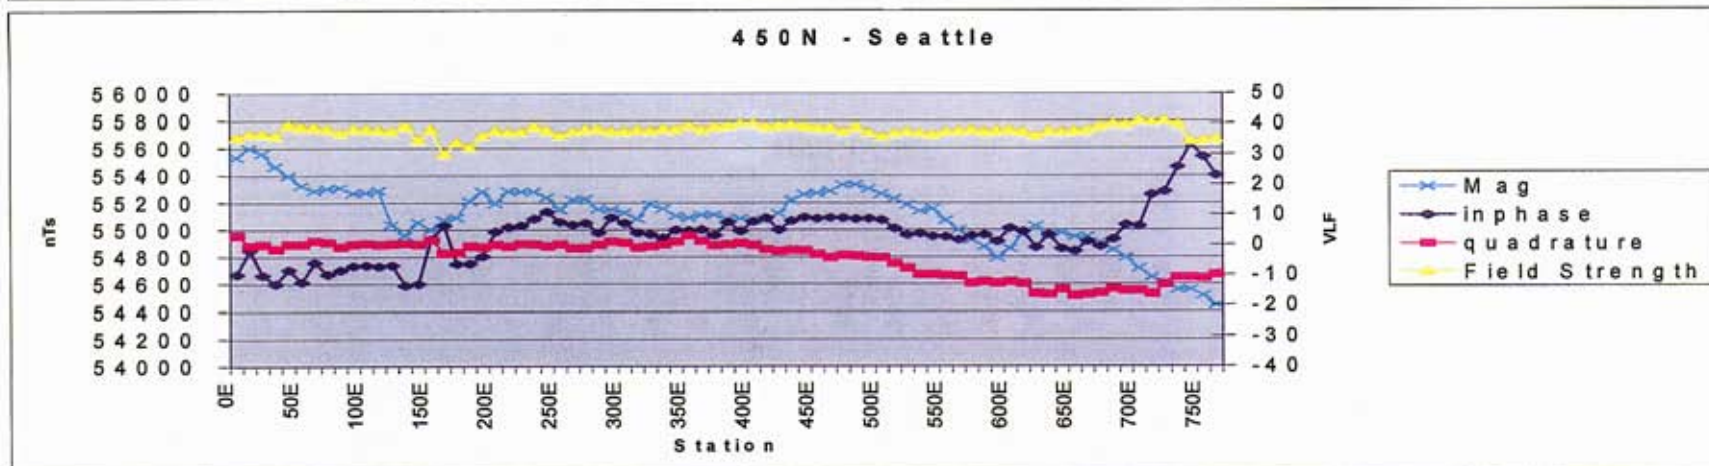
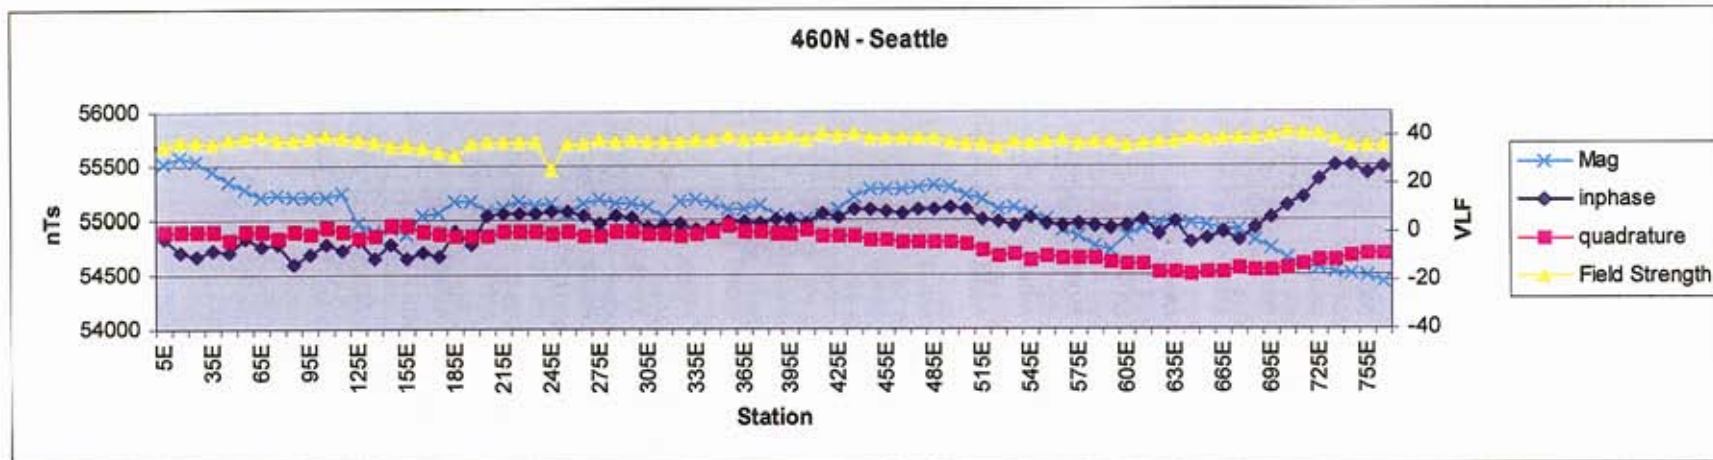






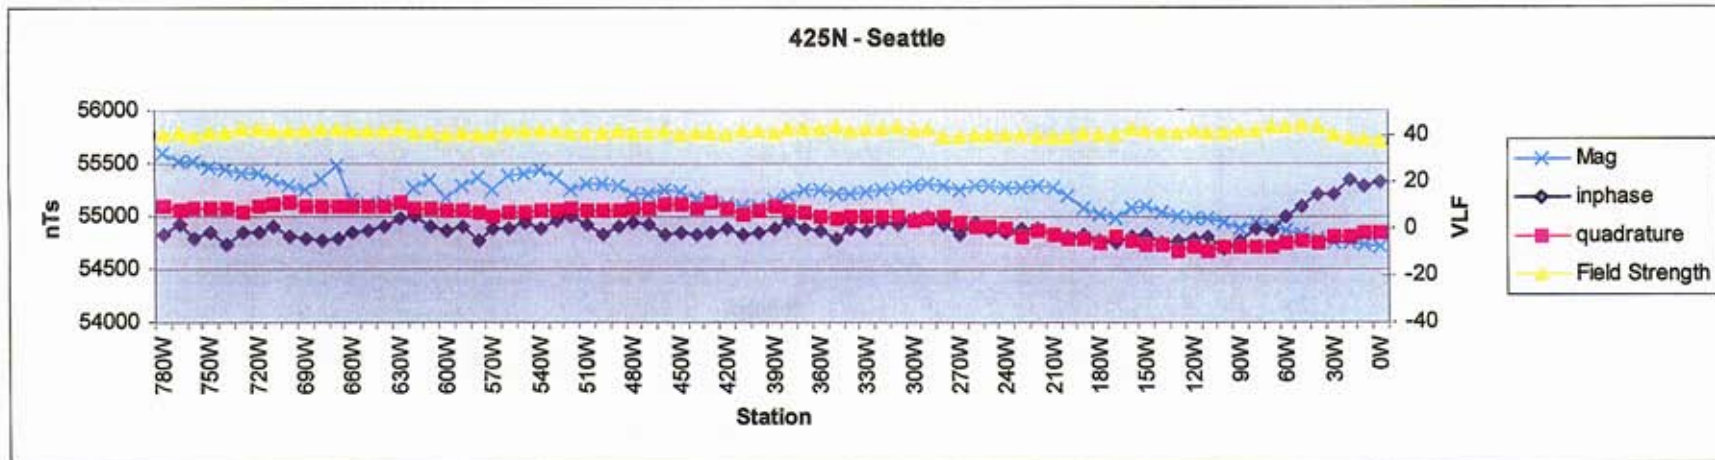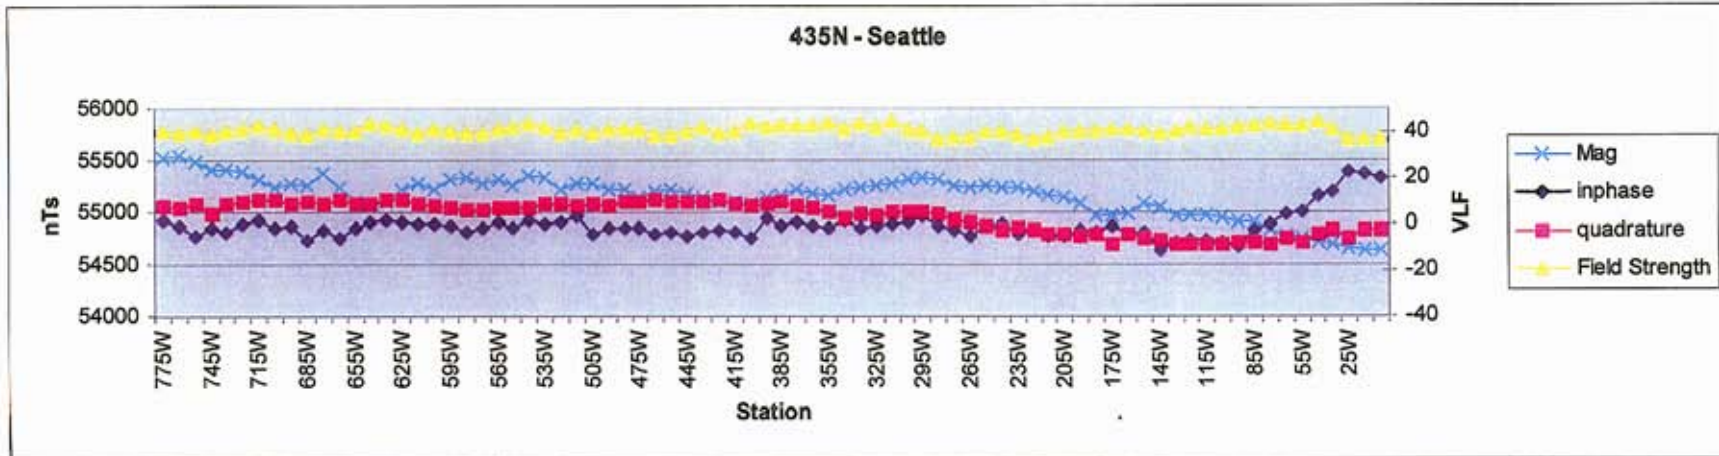




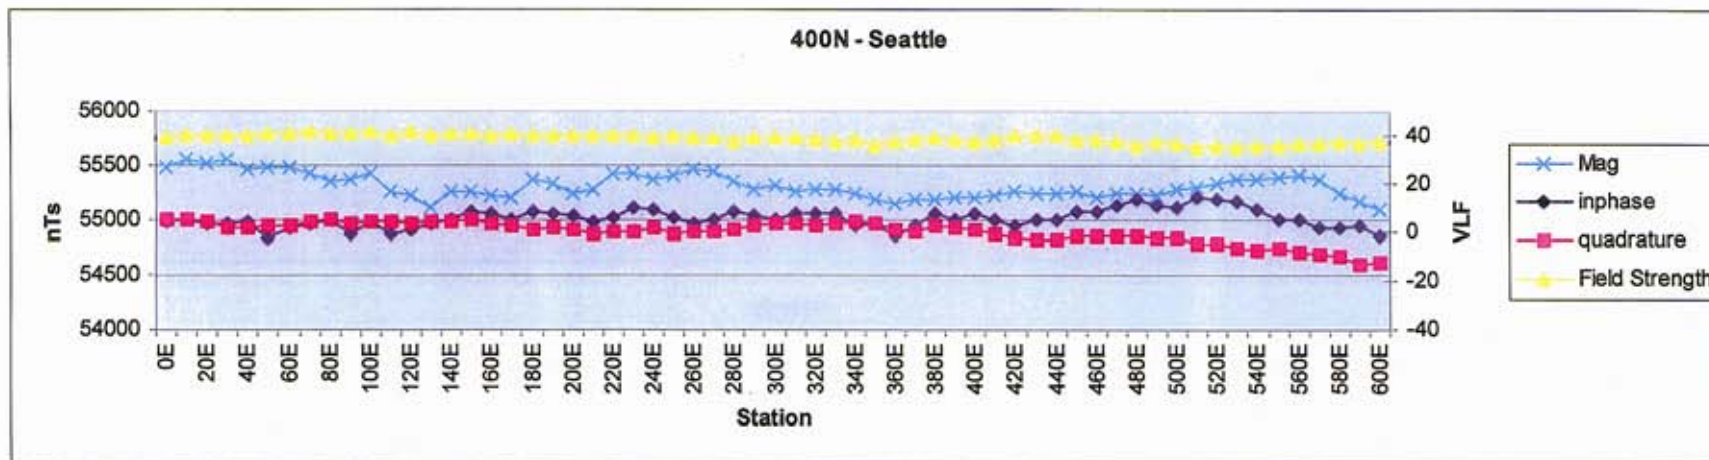

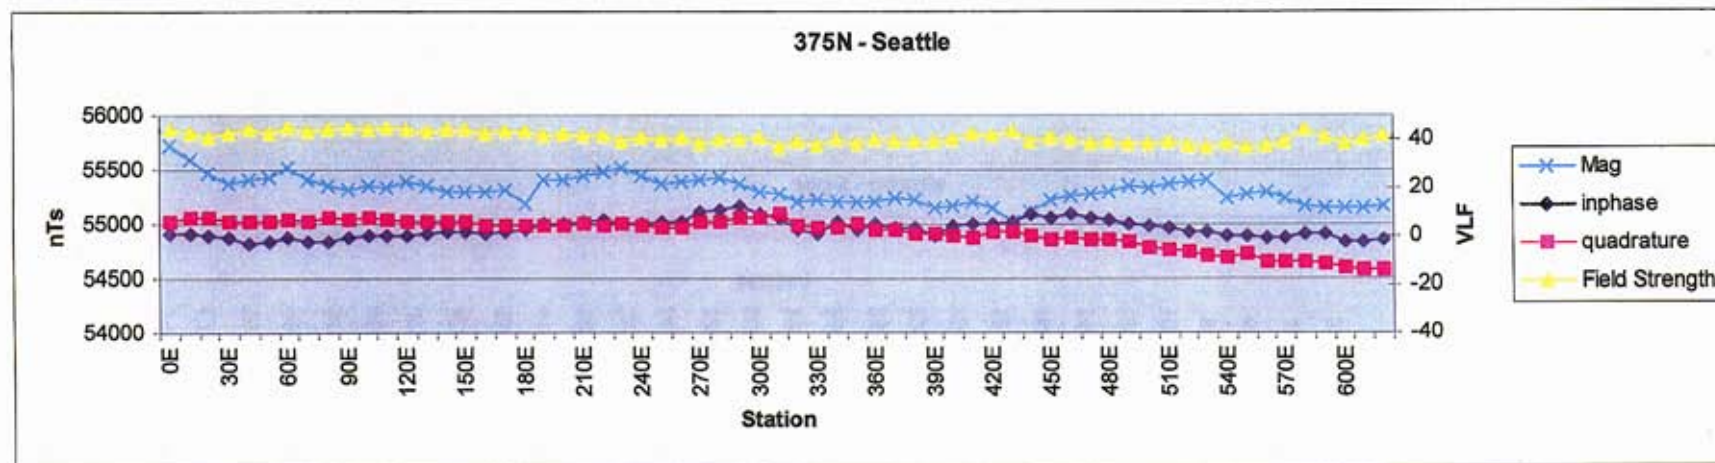
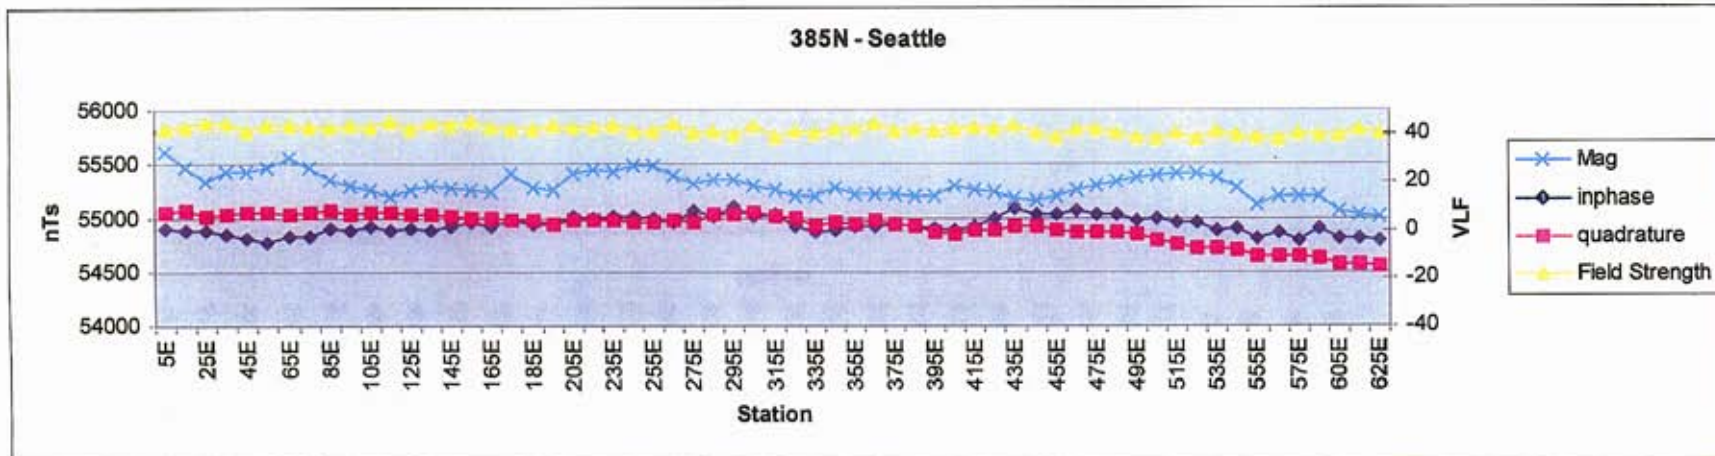


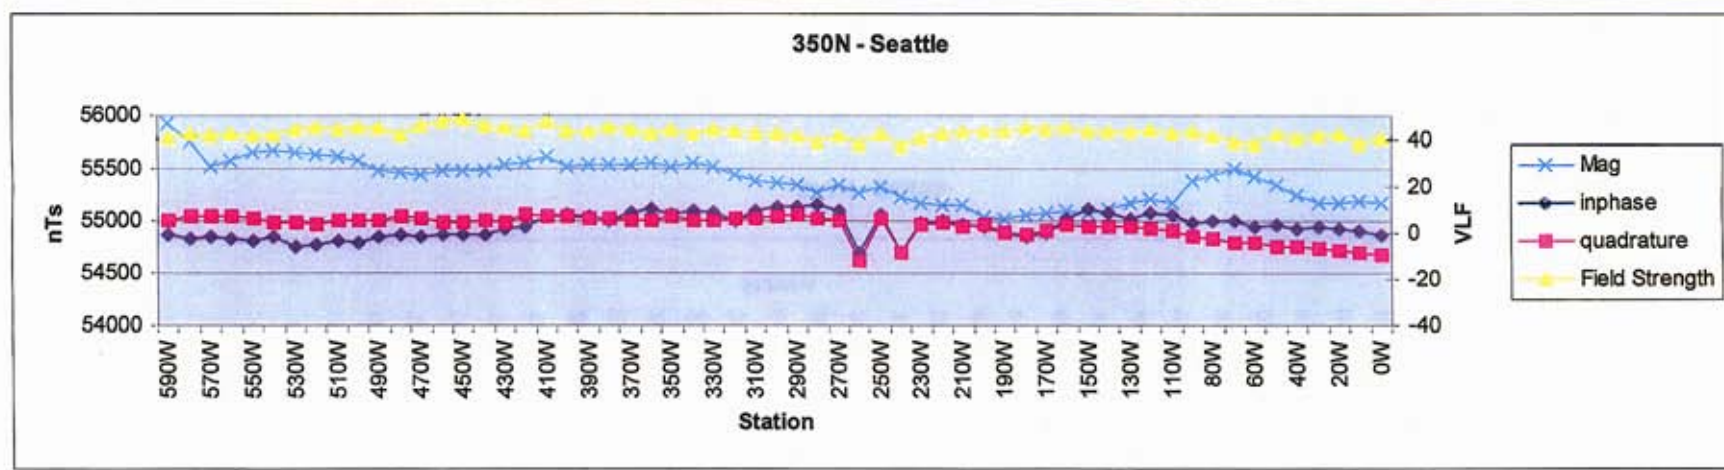
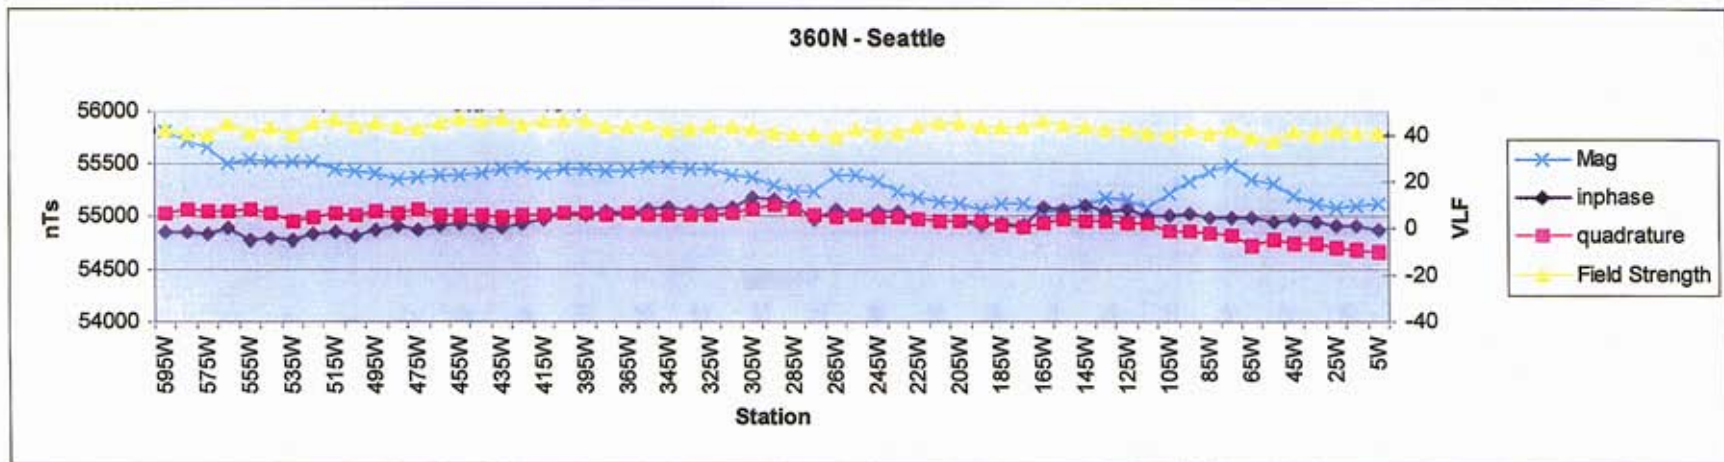





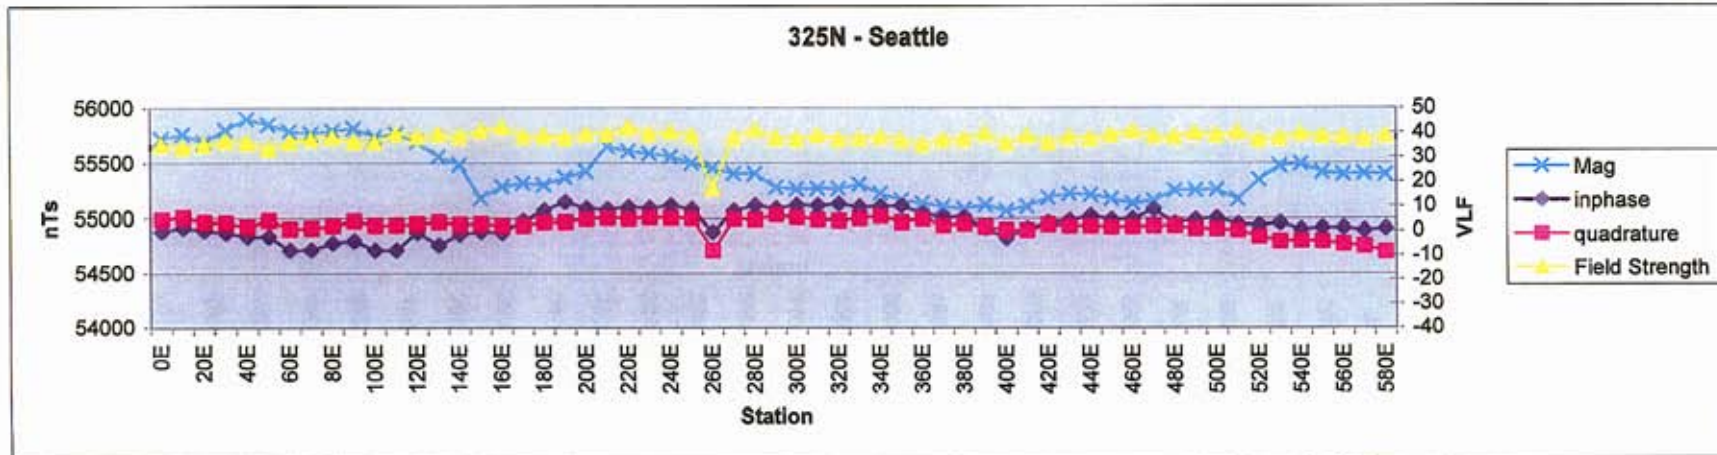






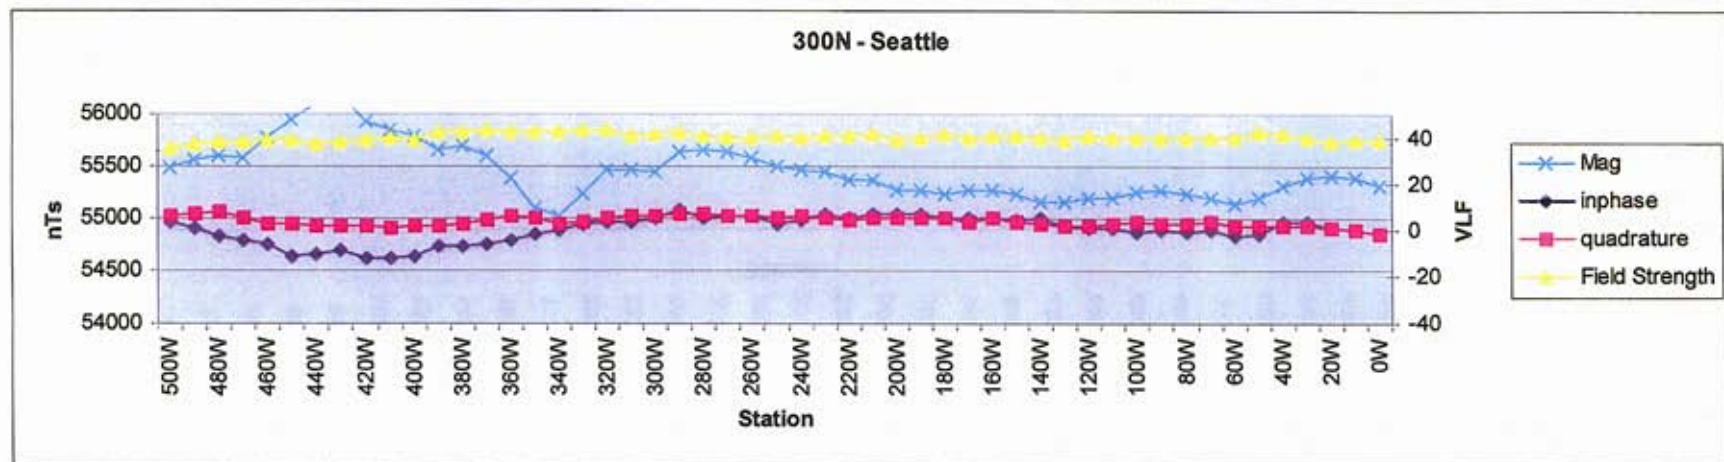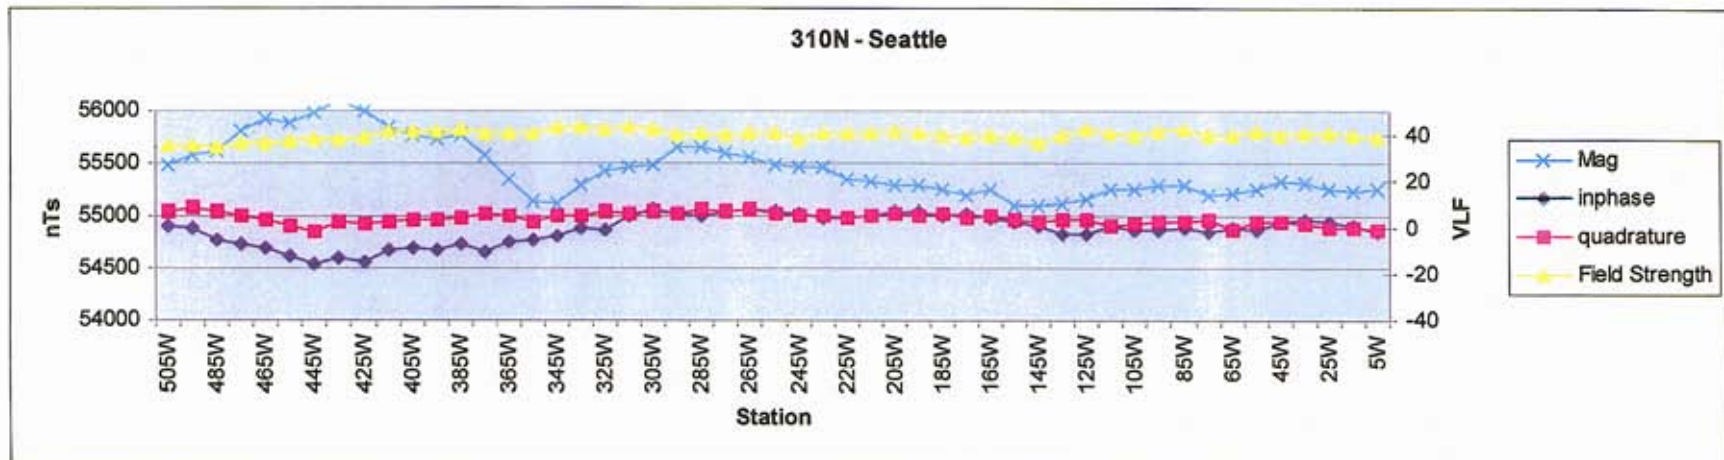

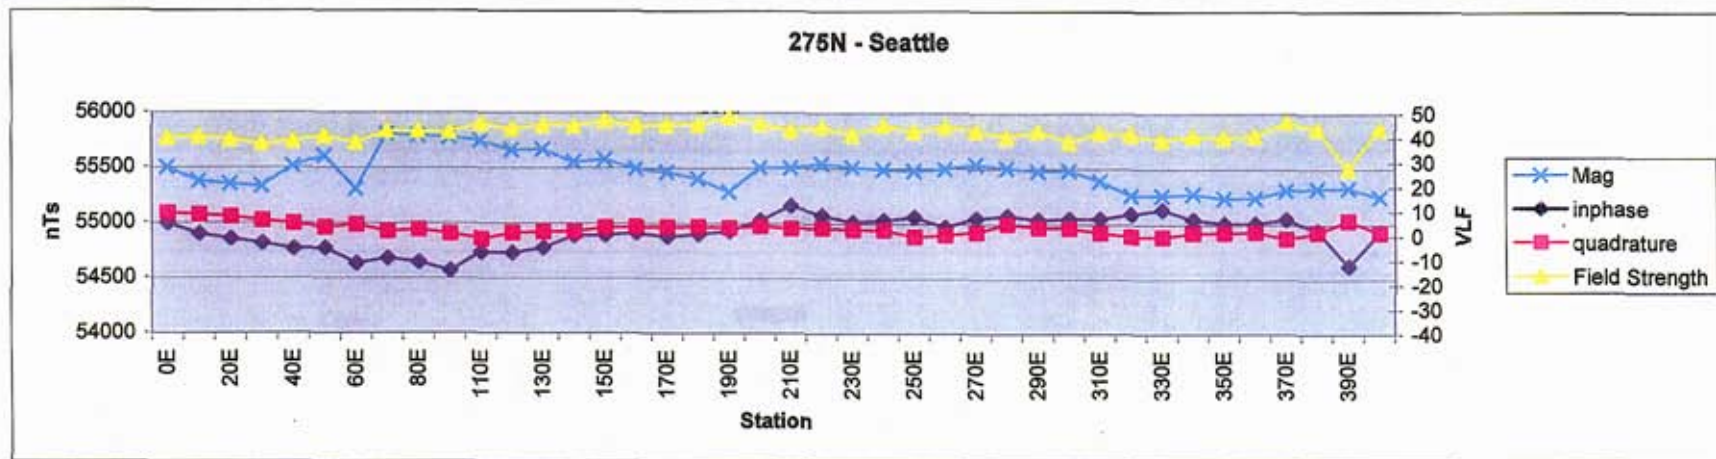
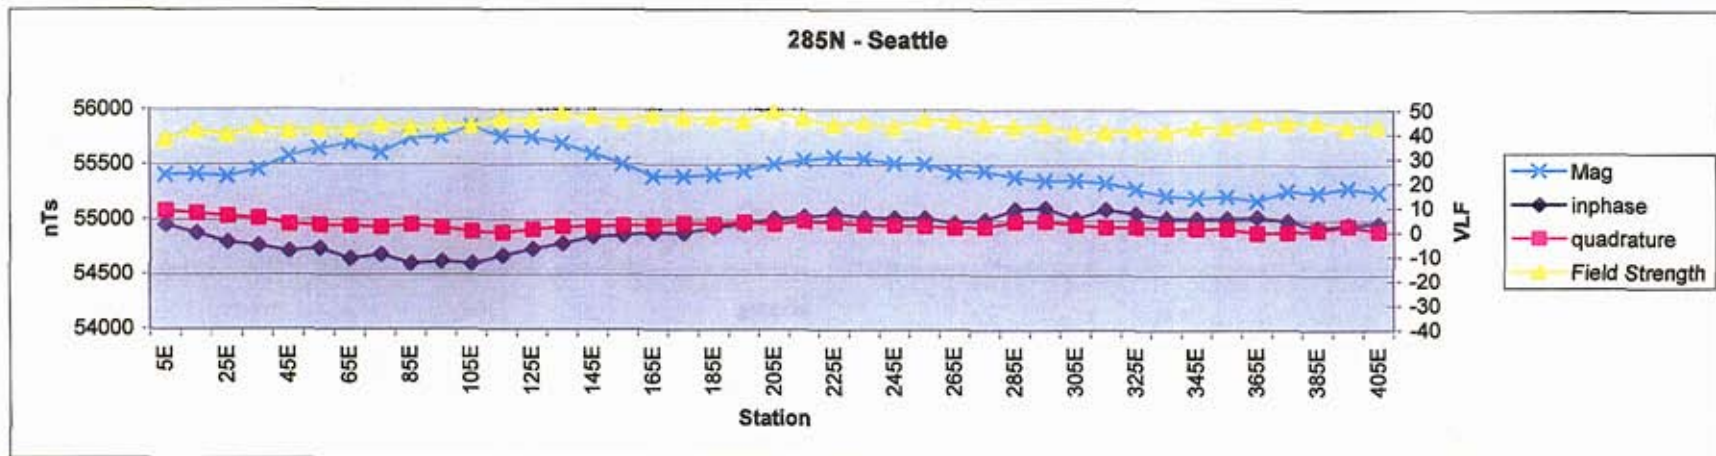





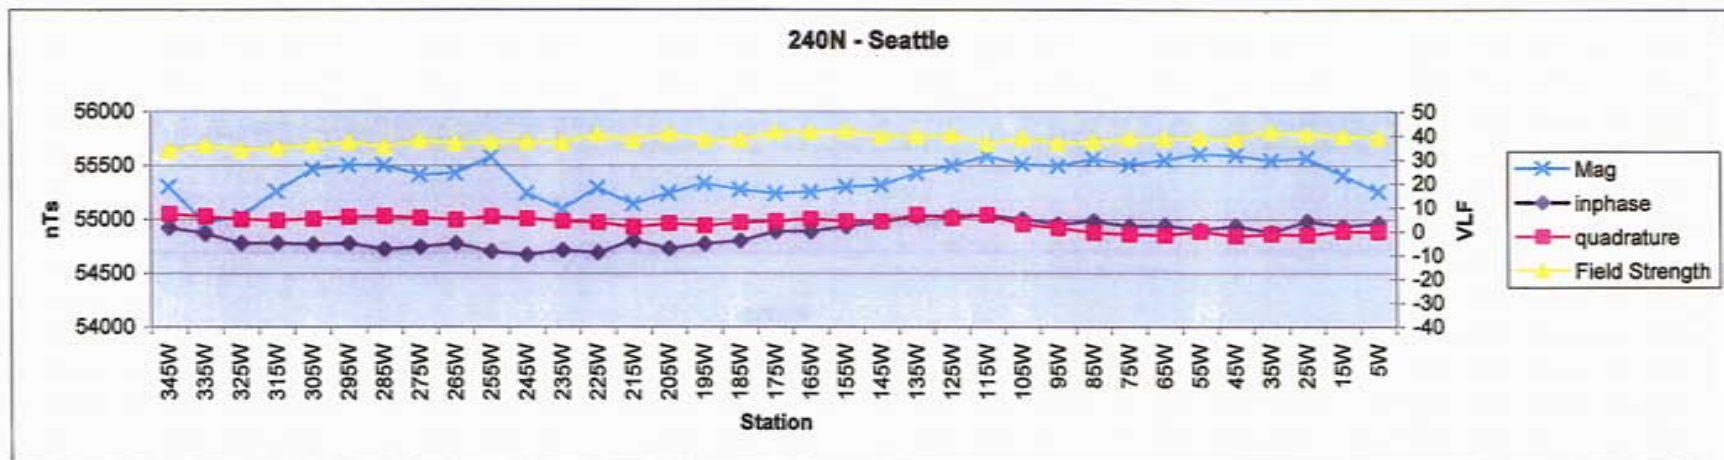
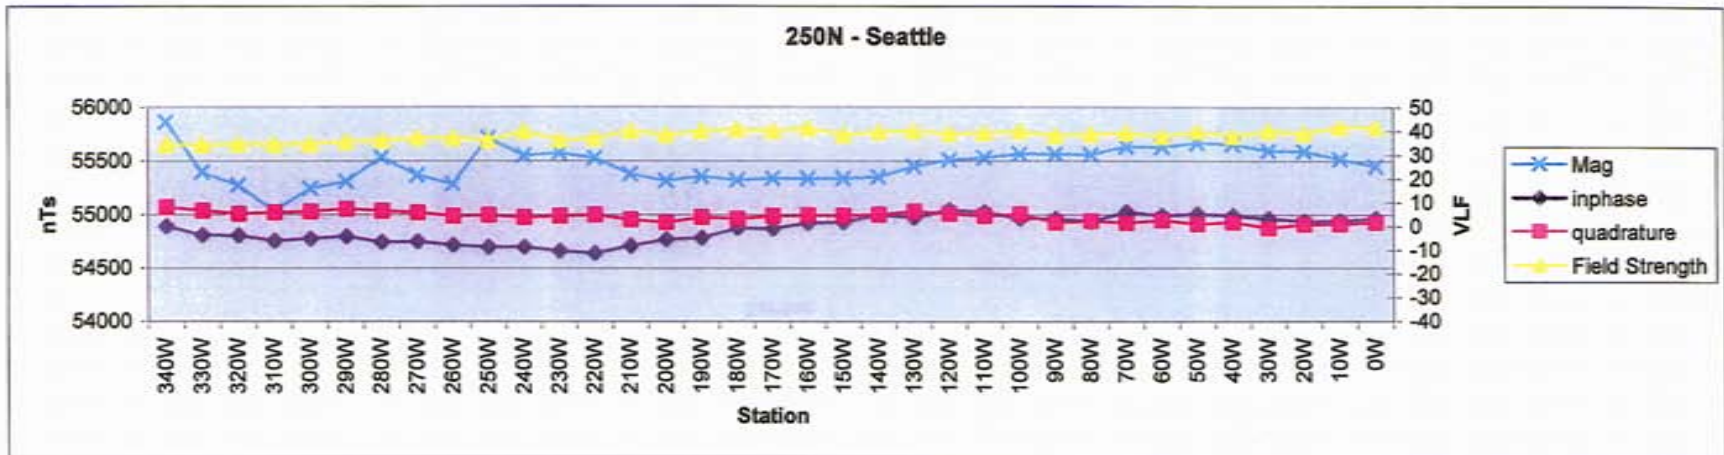


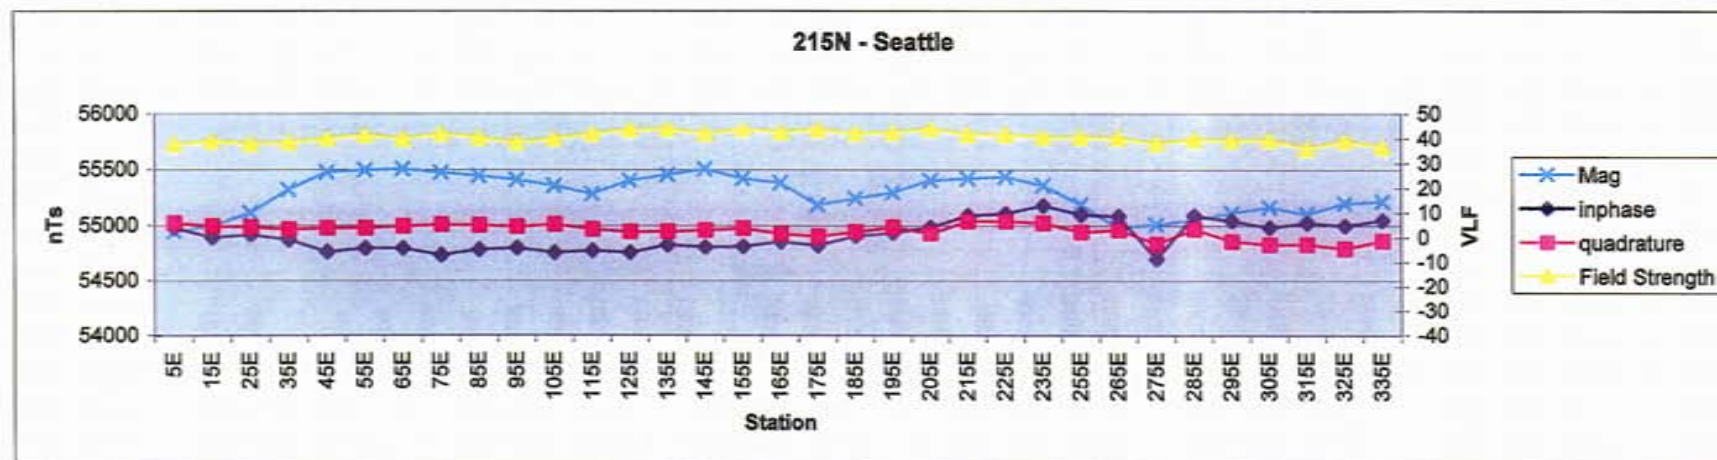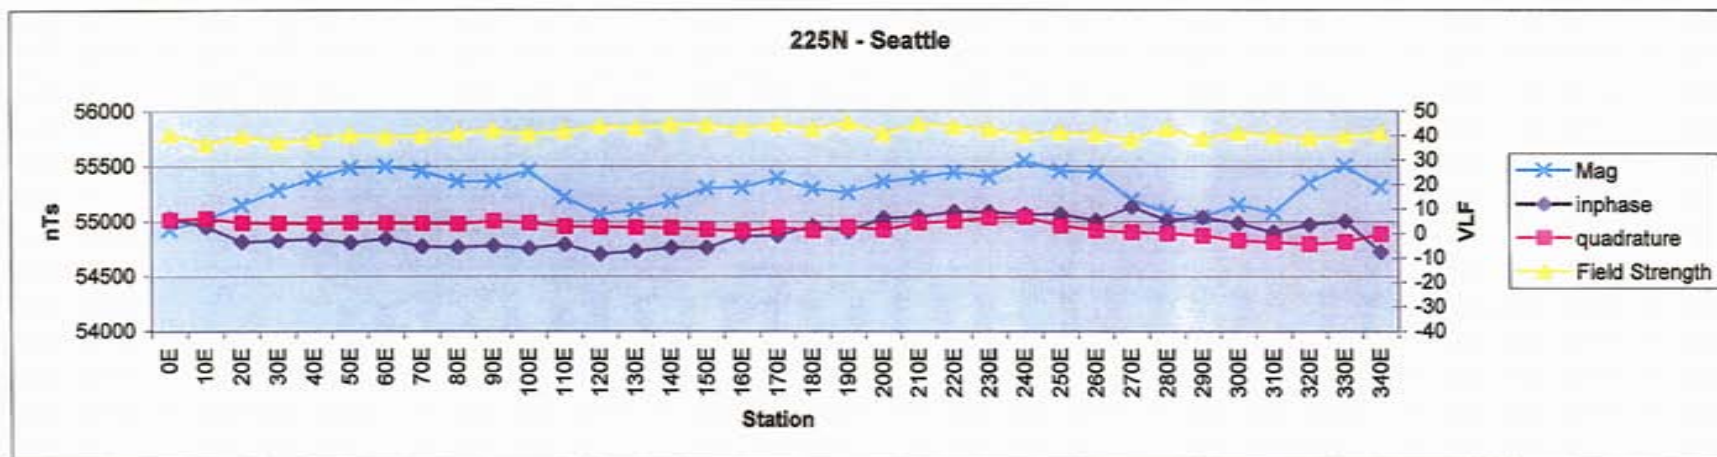





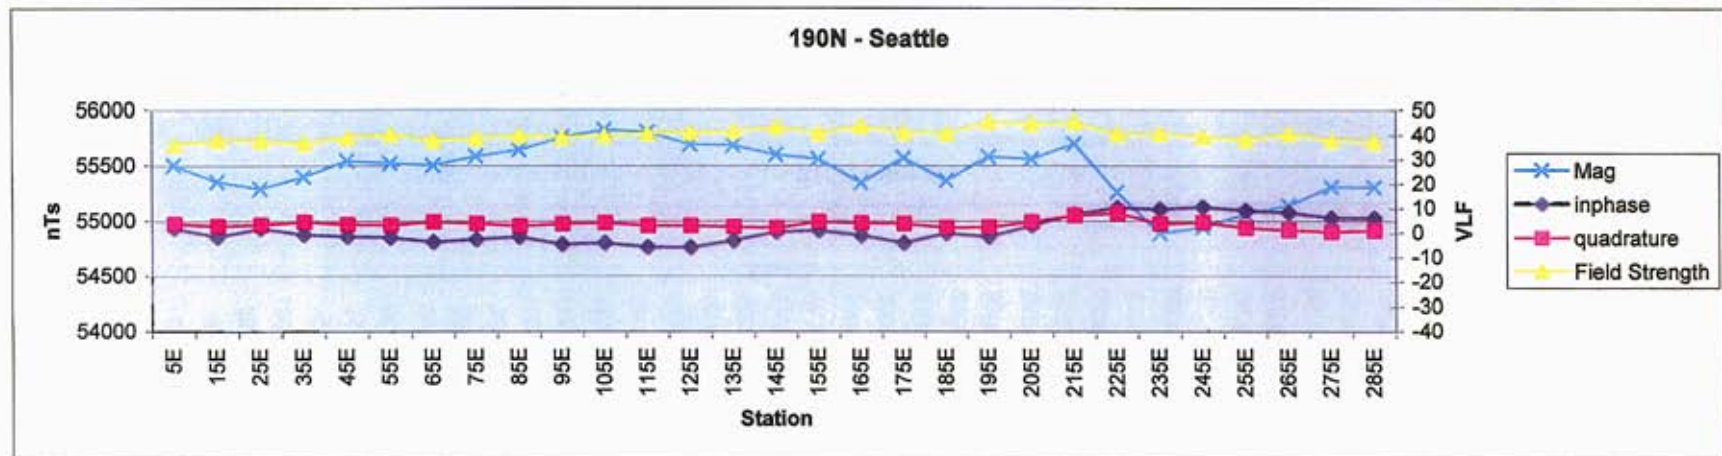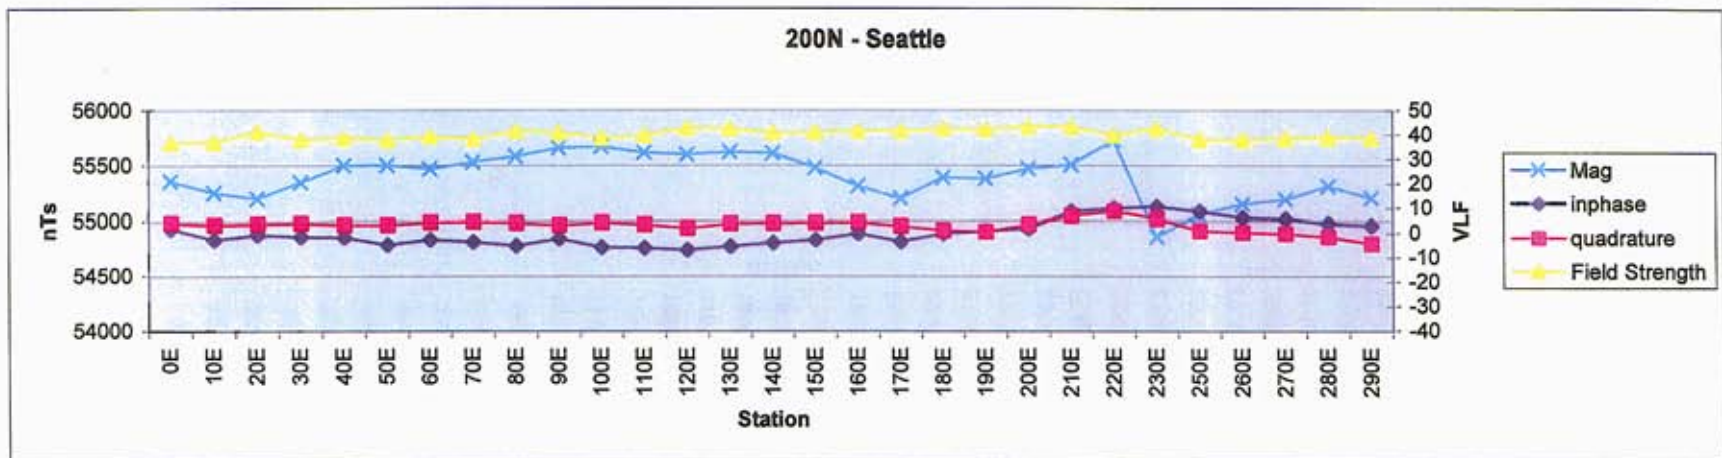


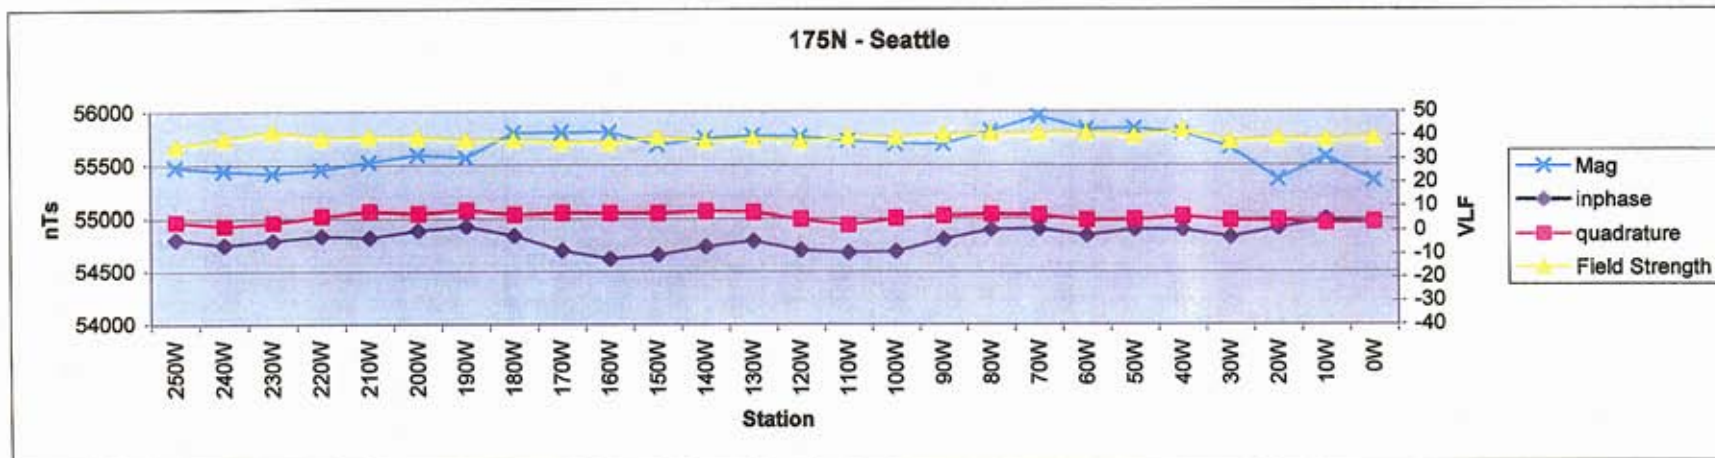


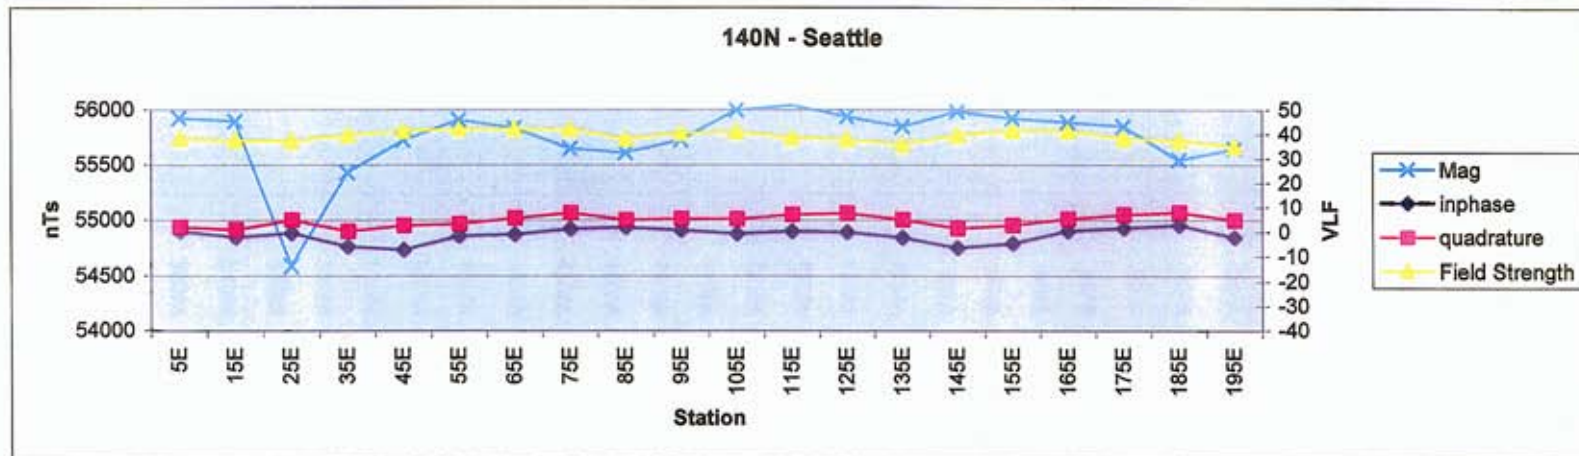
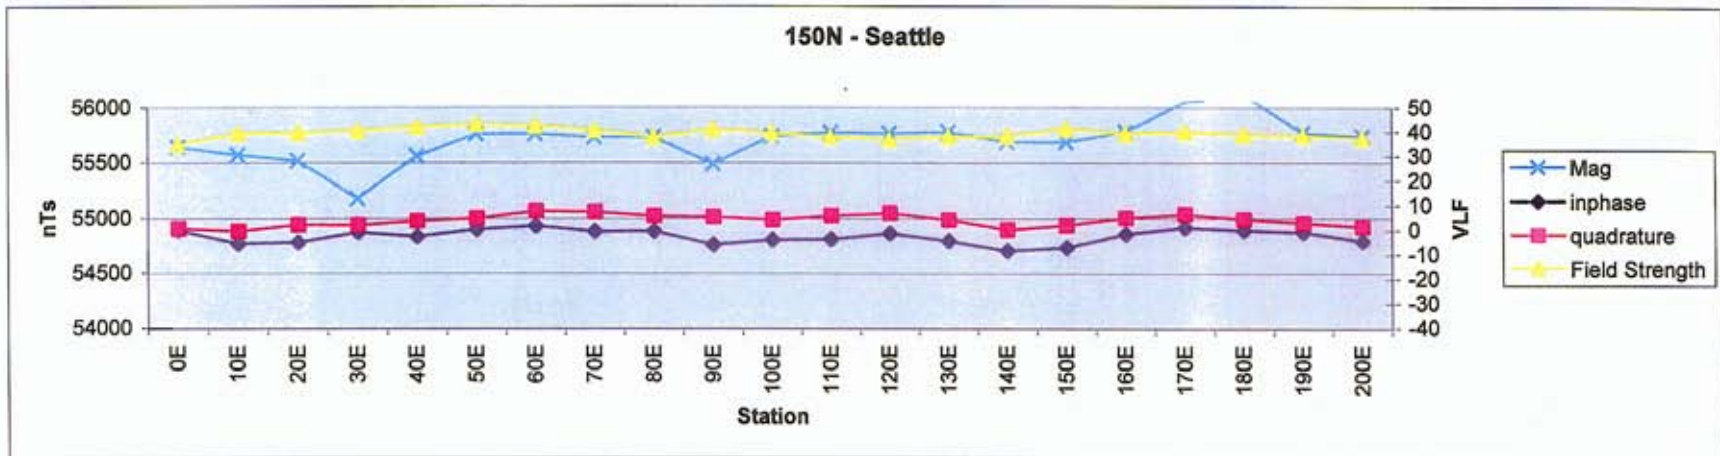






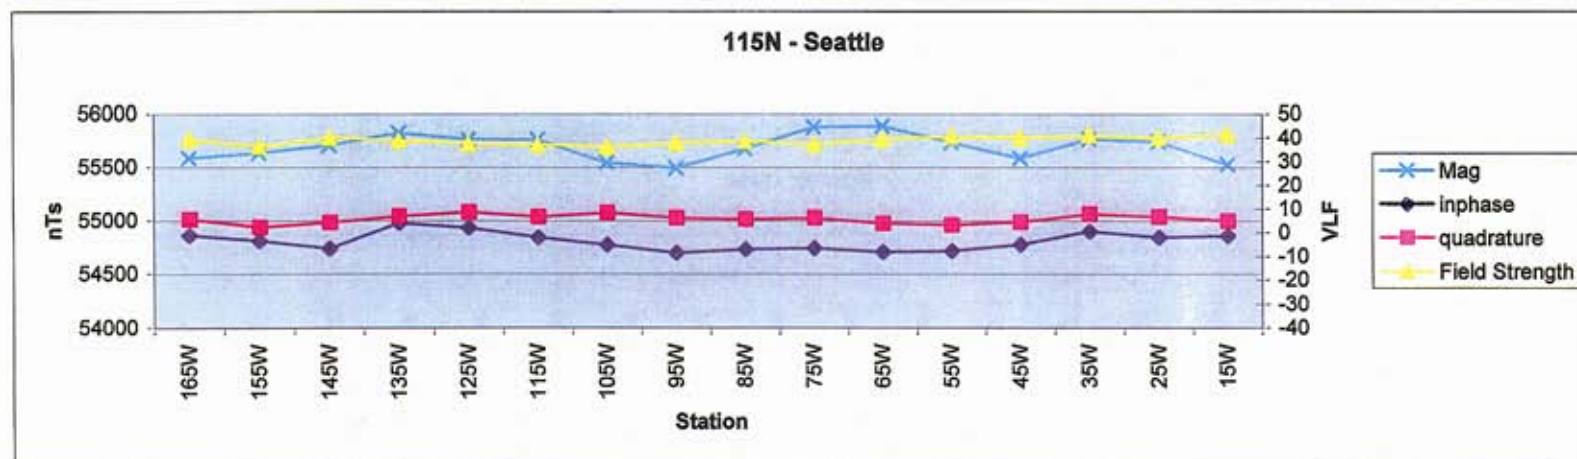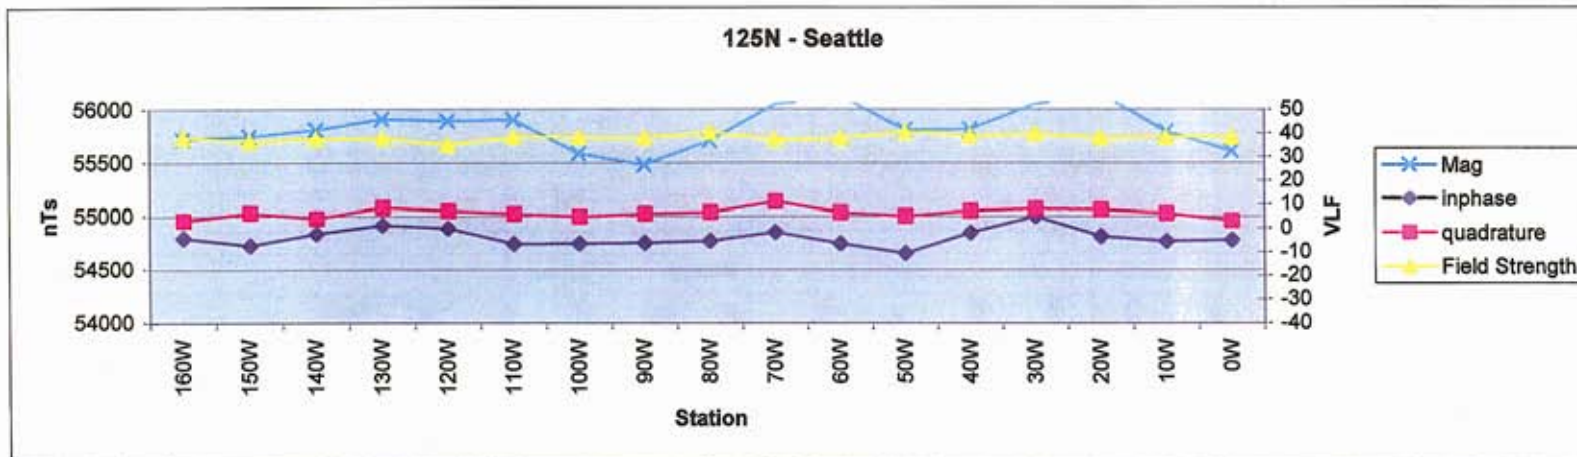



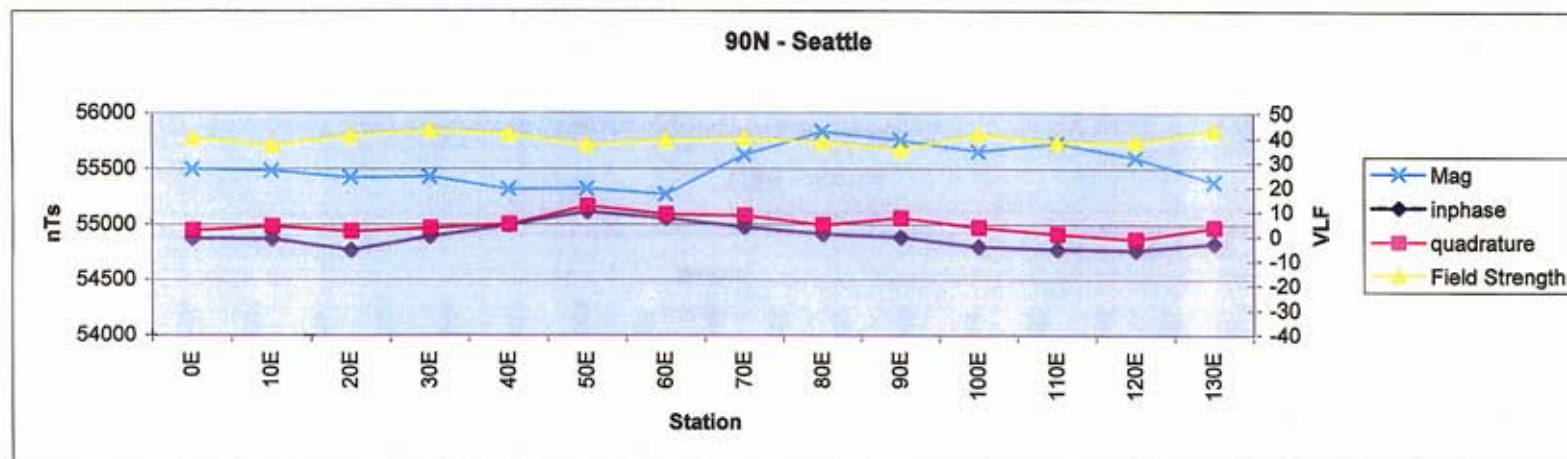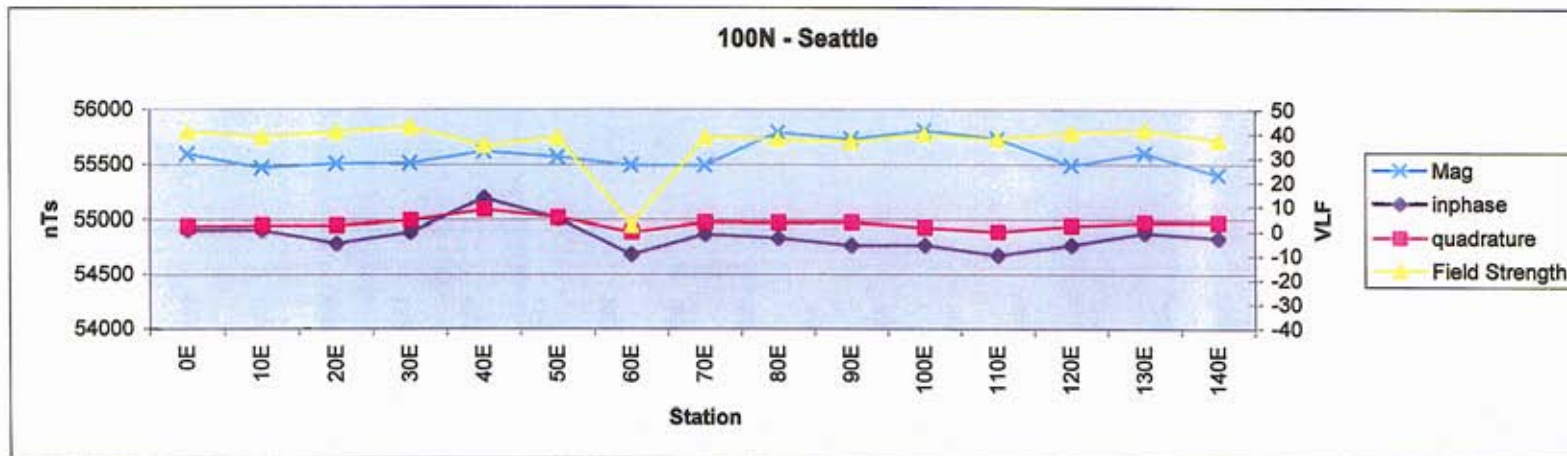

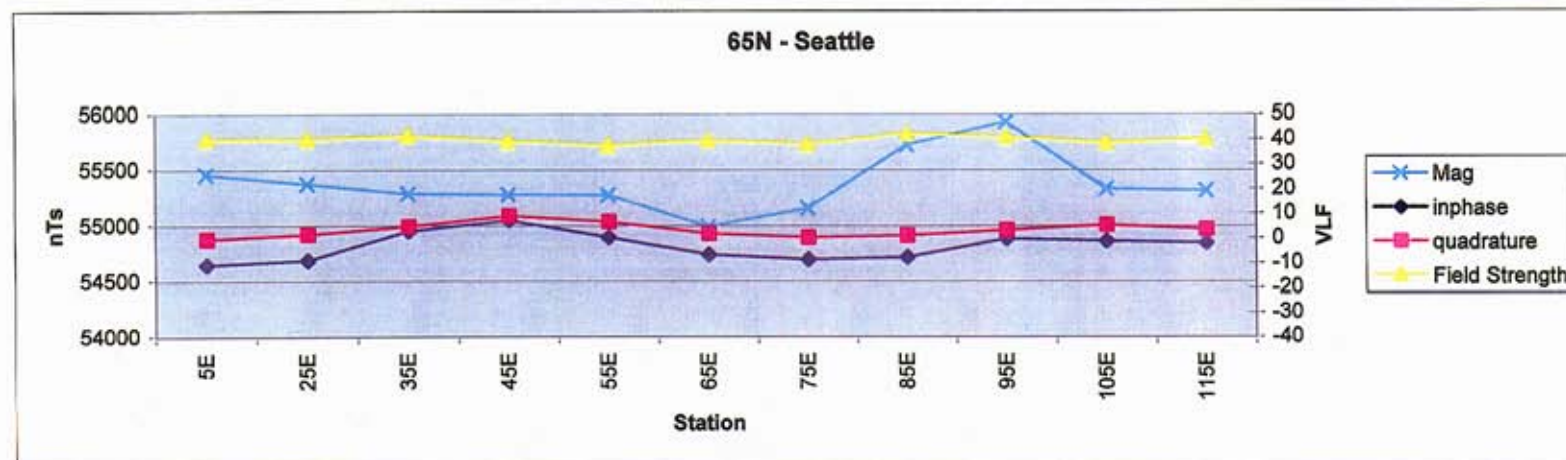
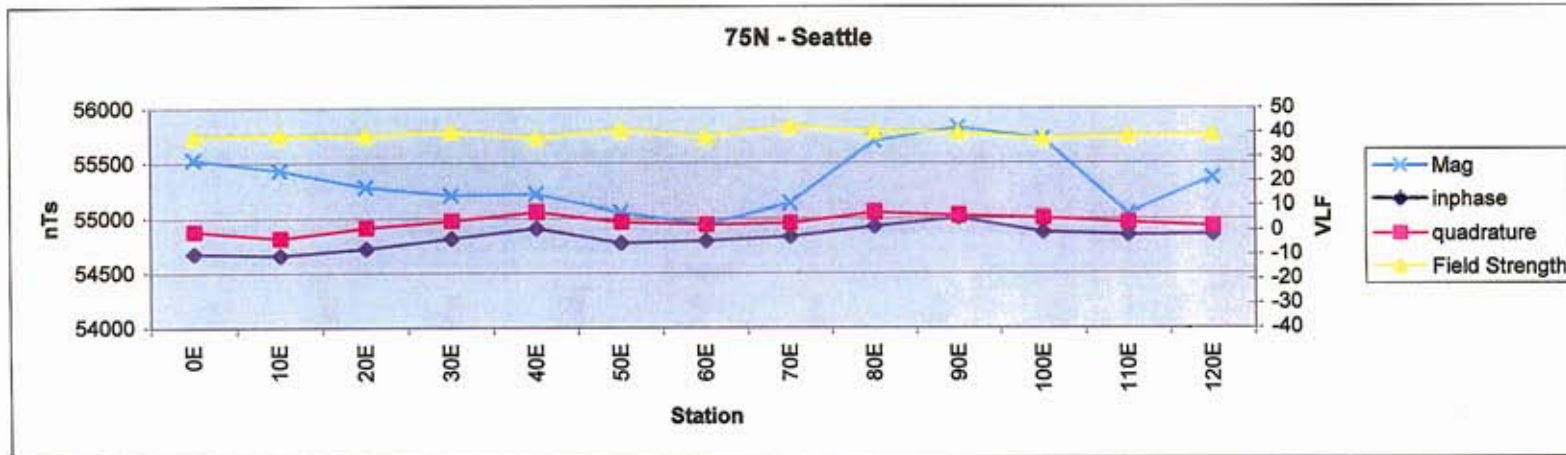


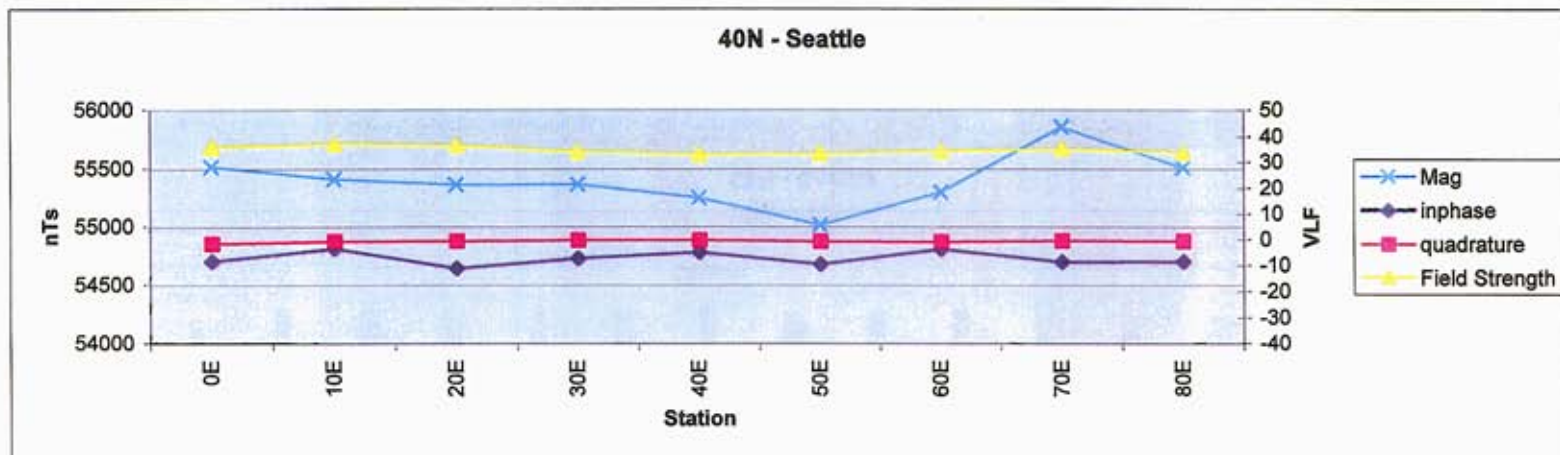
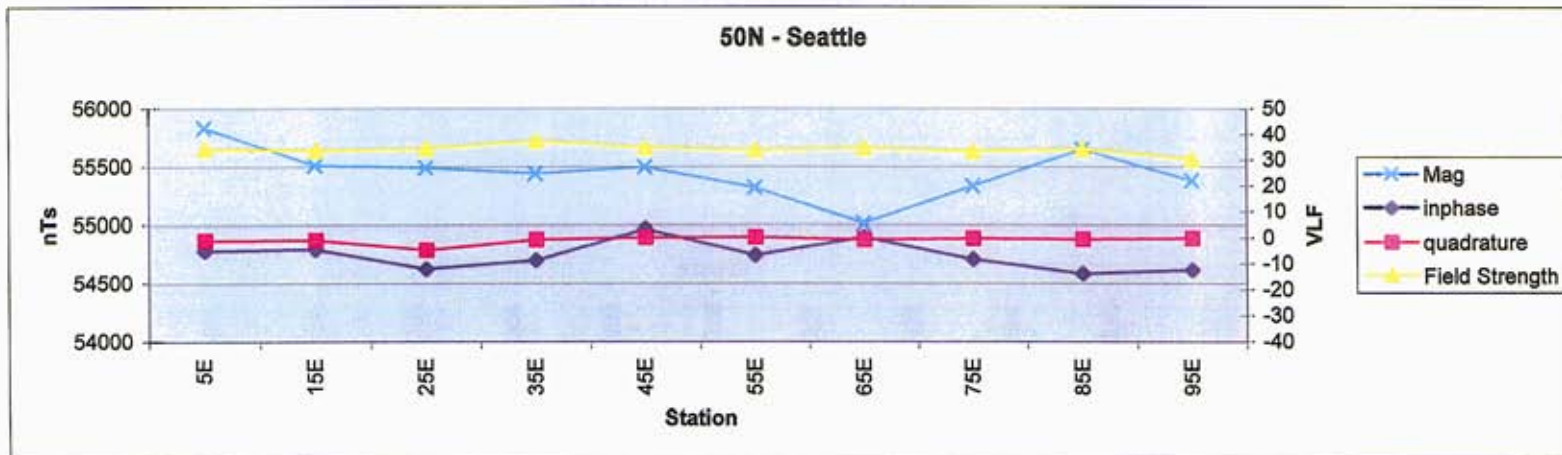






## 16.2 Charlie Prospect



Magnetic – VLF-EM Profiles

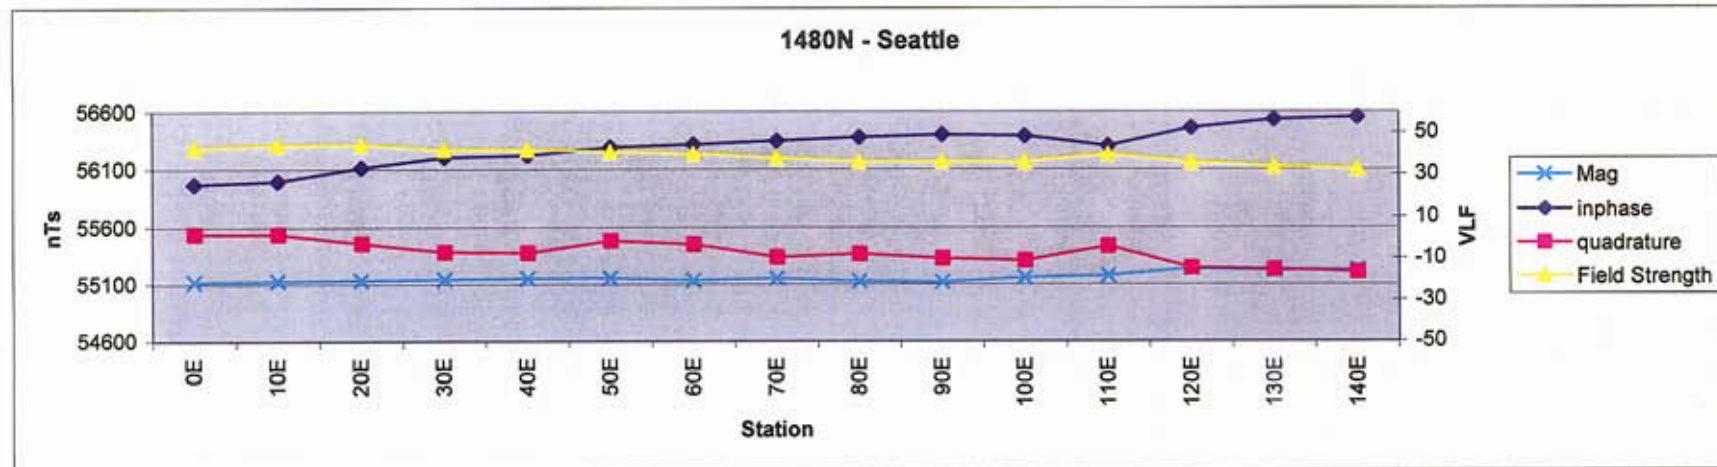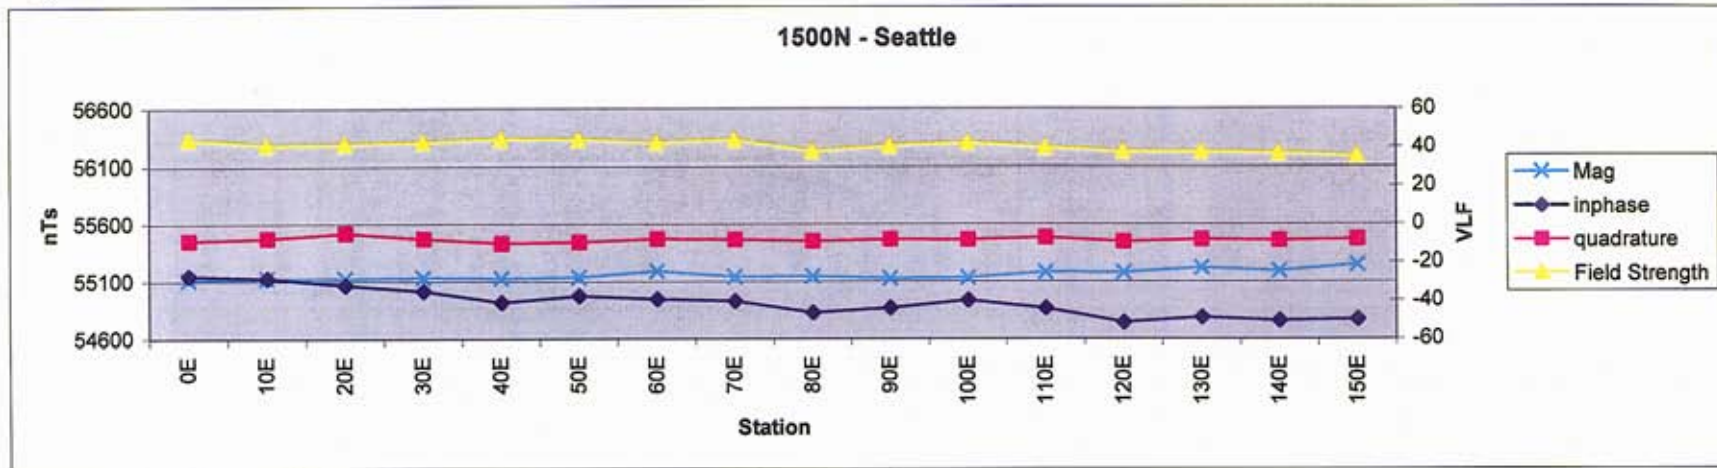

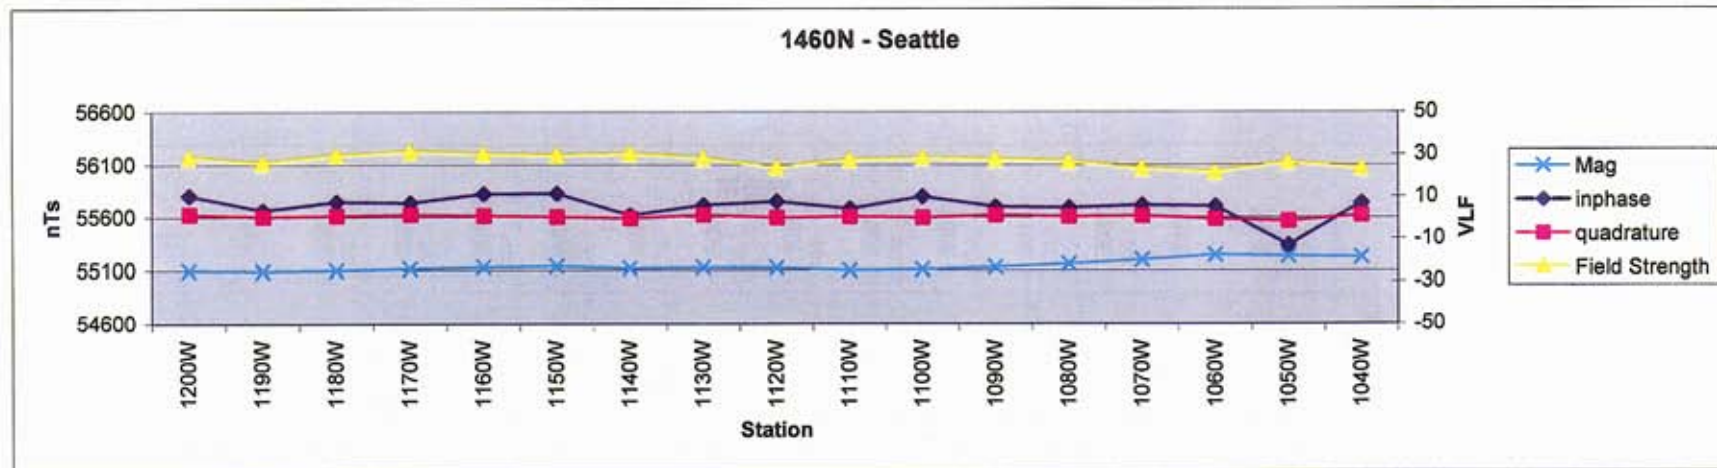
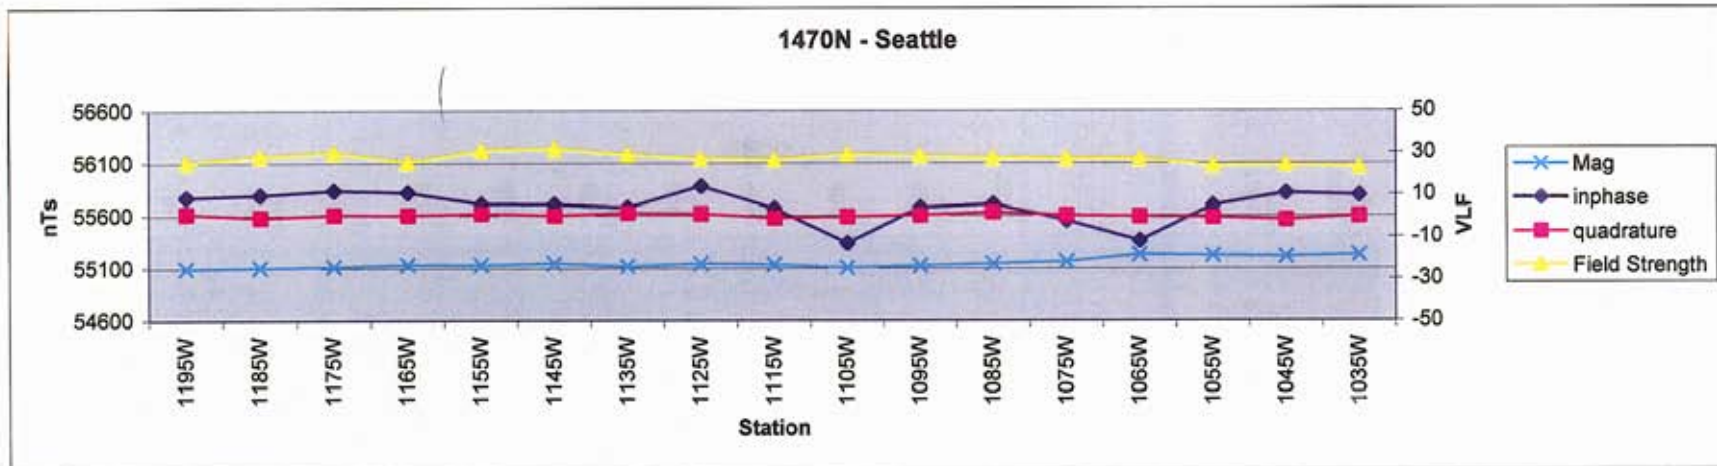




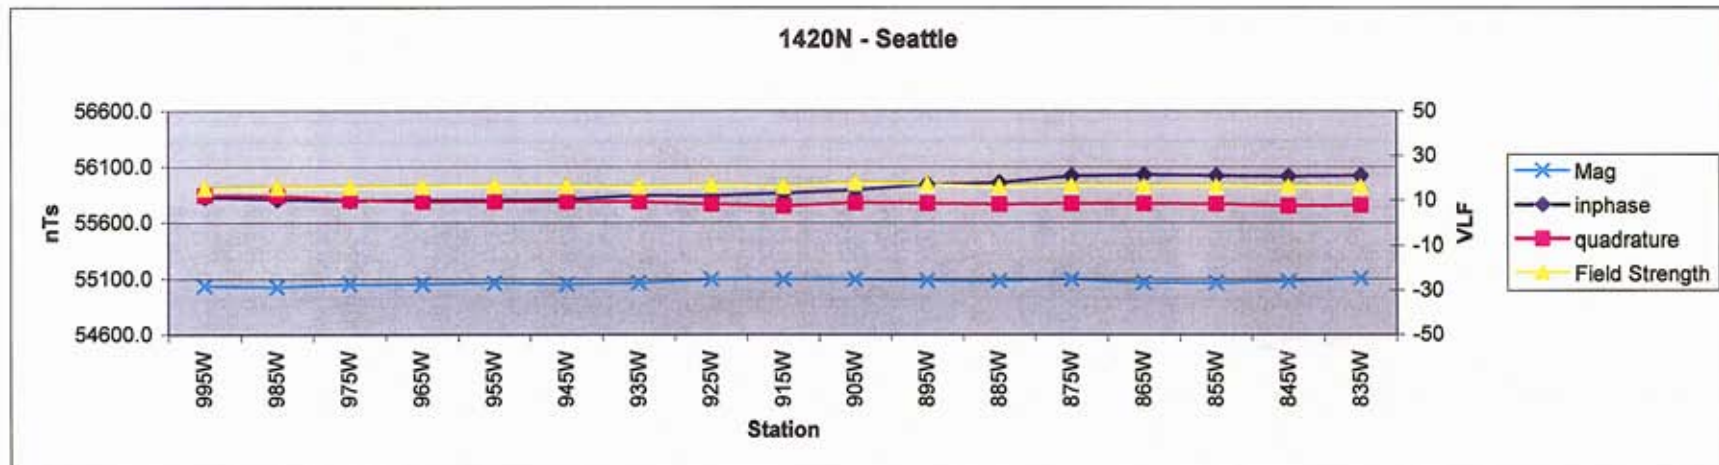
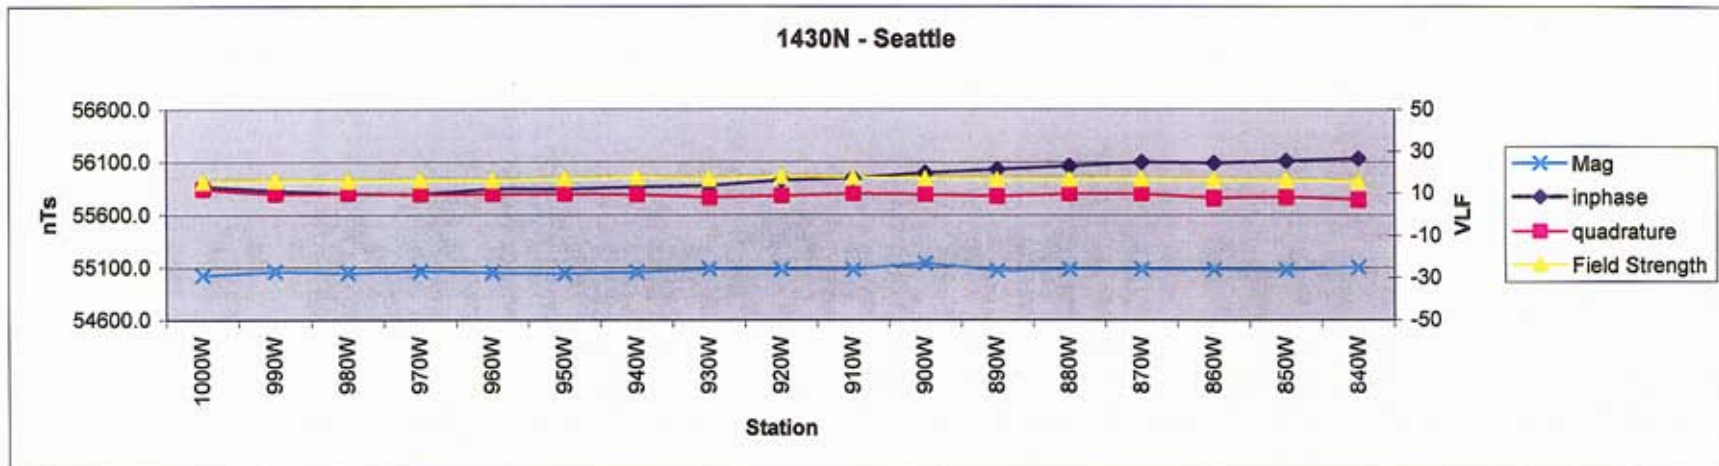


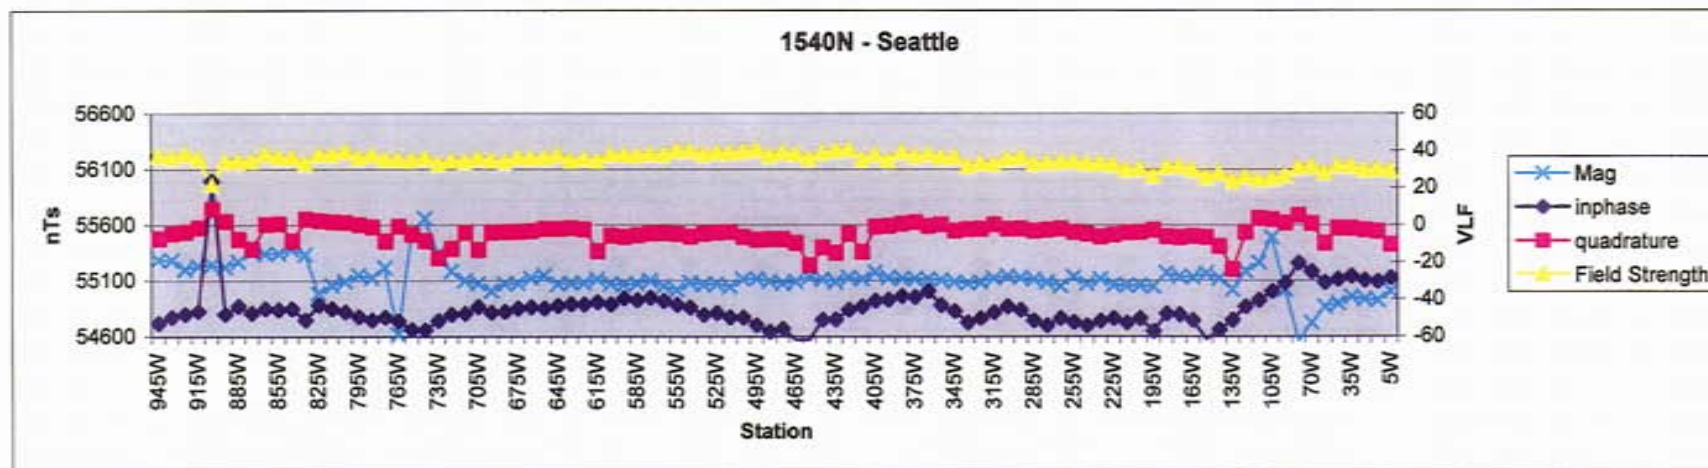
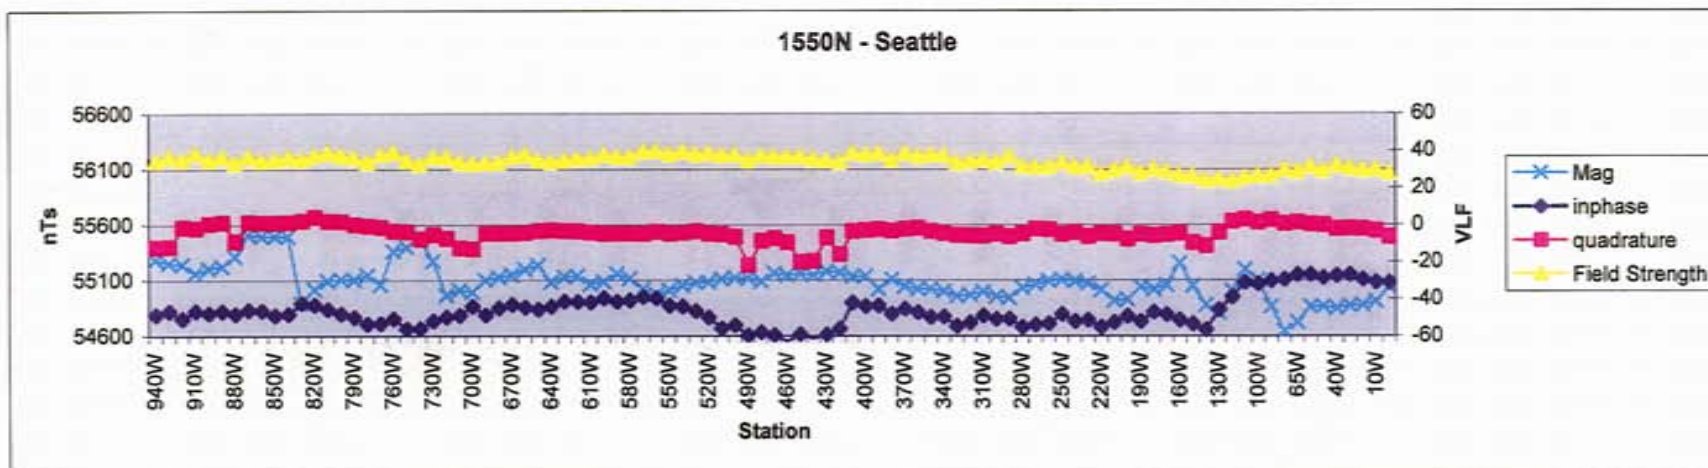




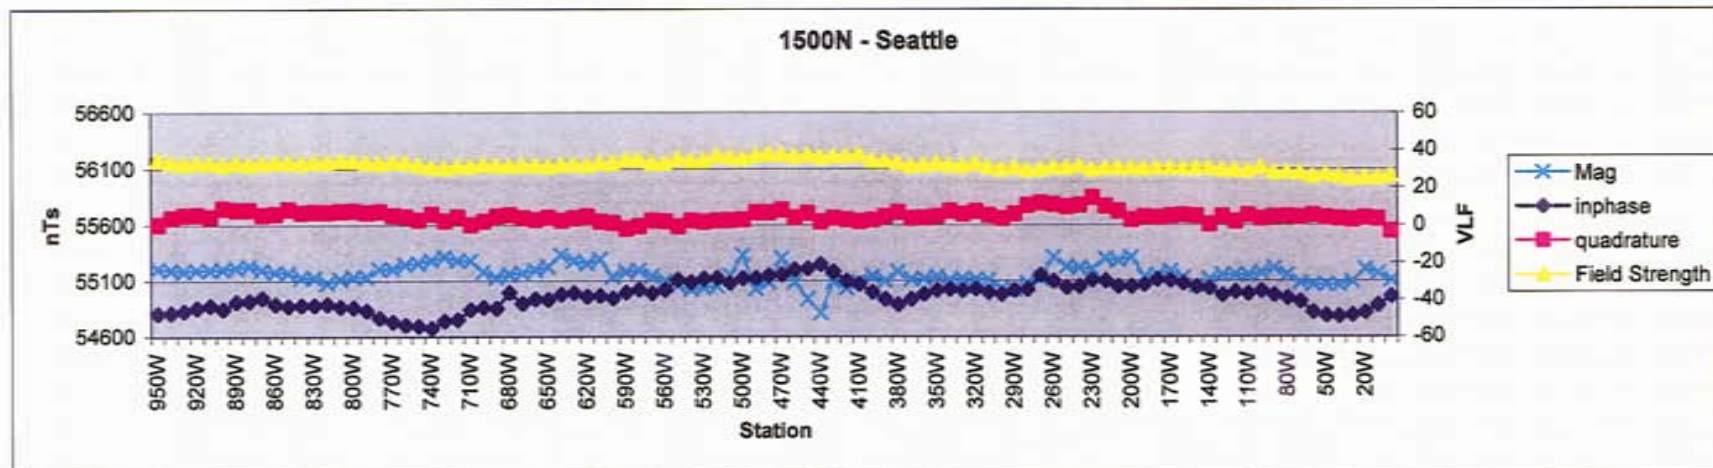
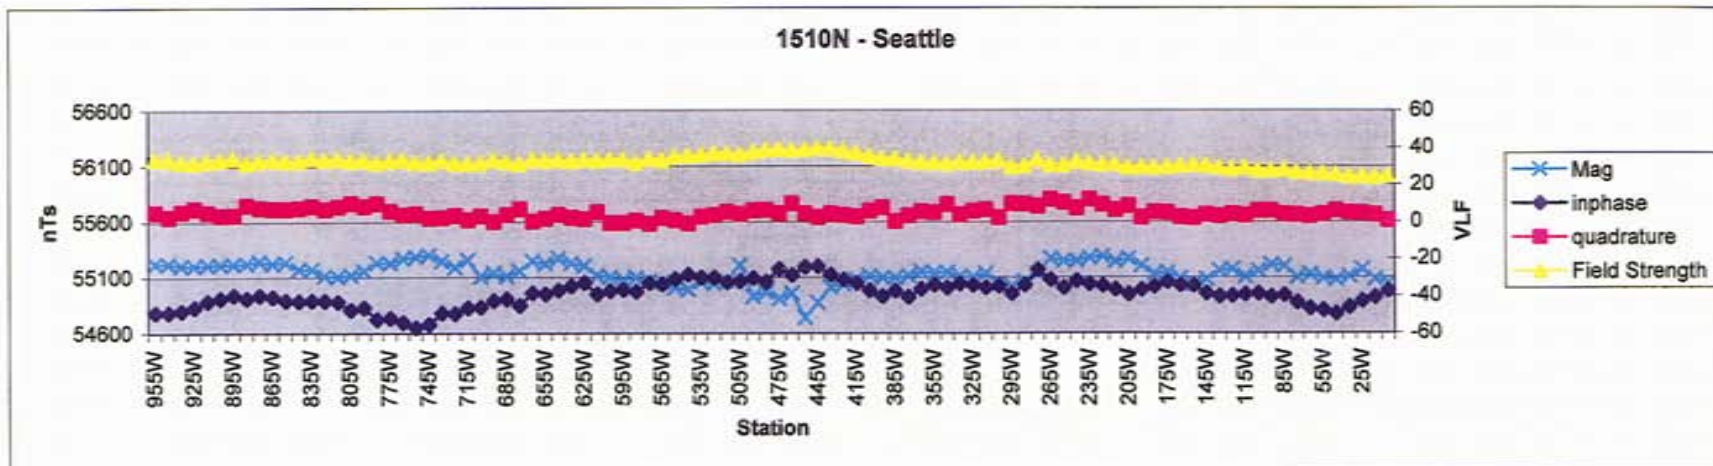




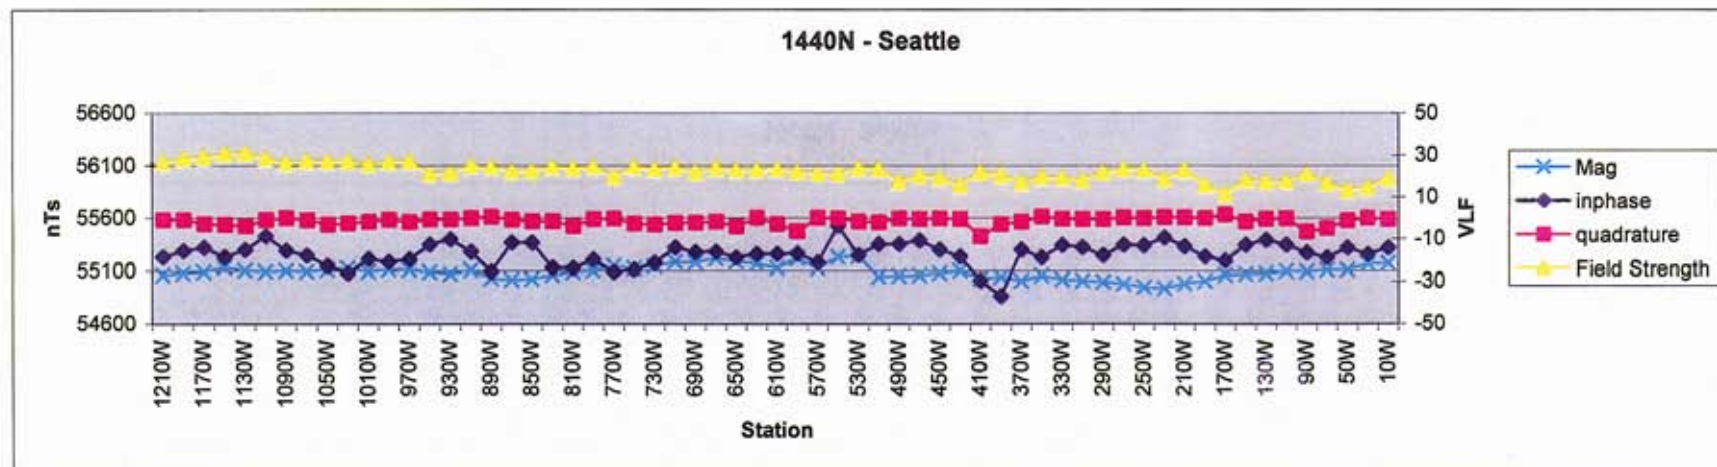
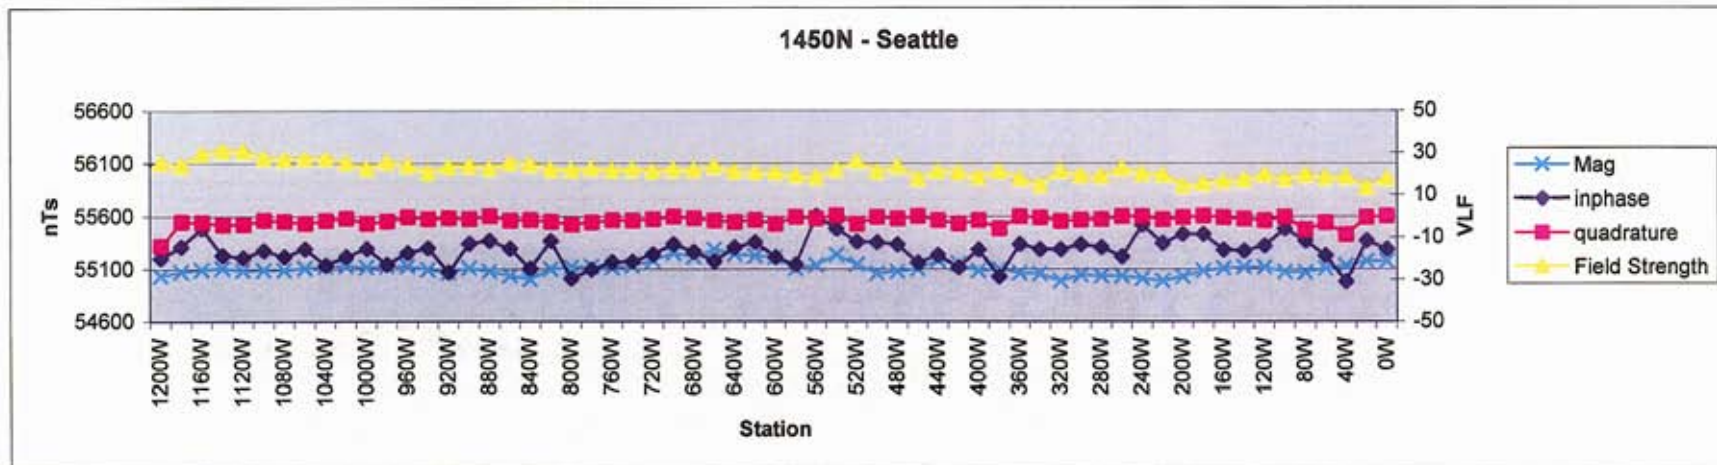


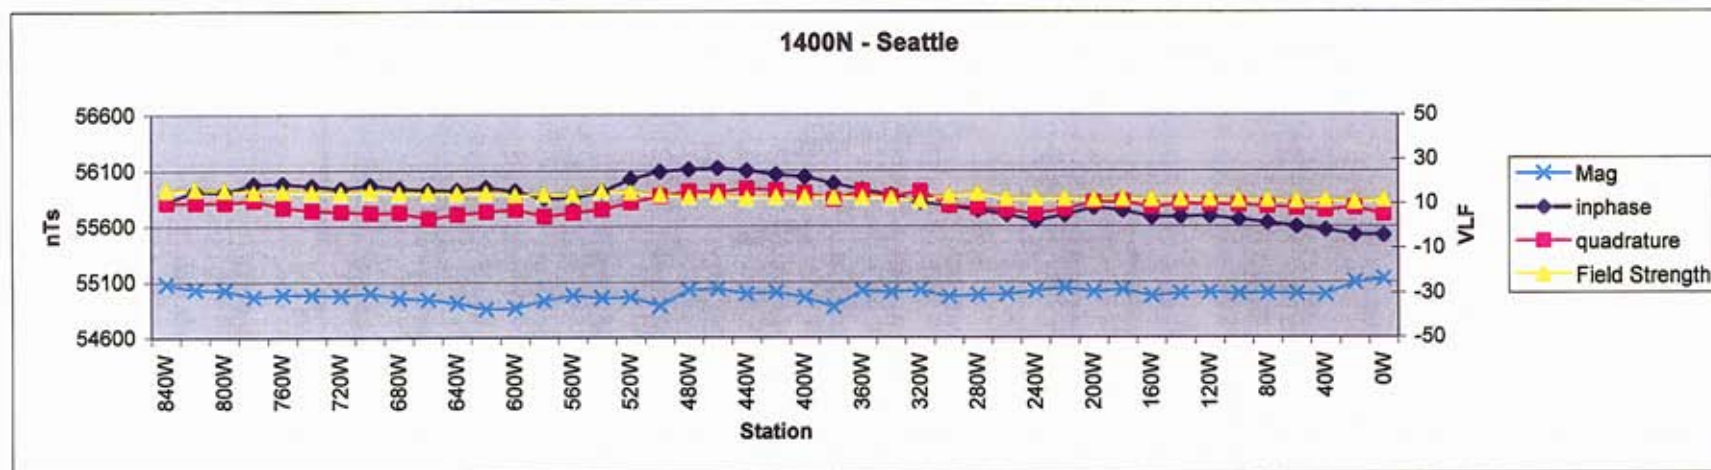
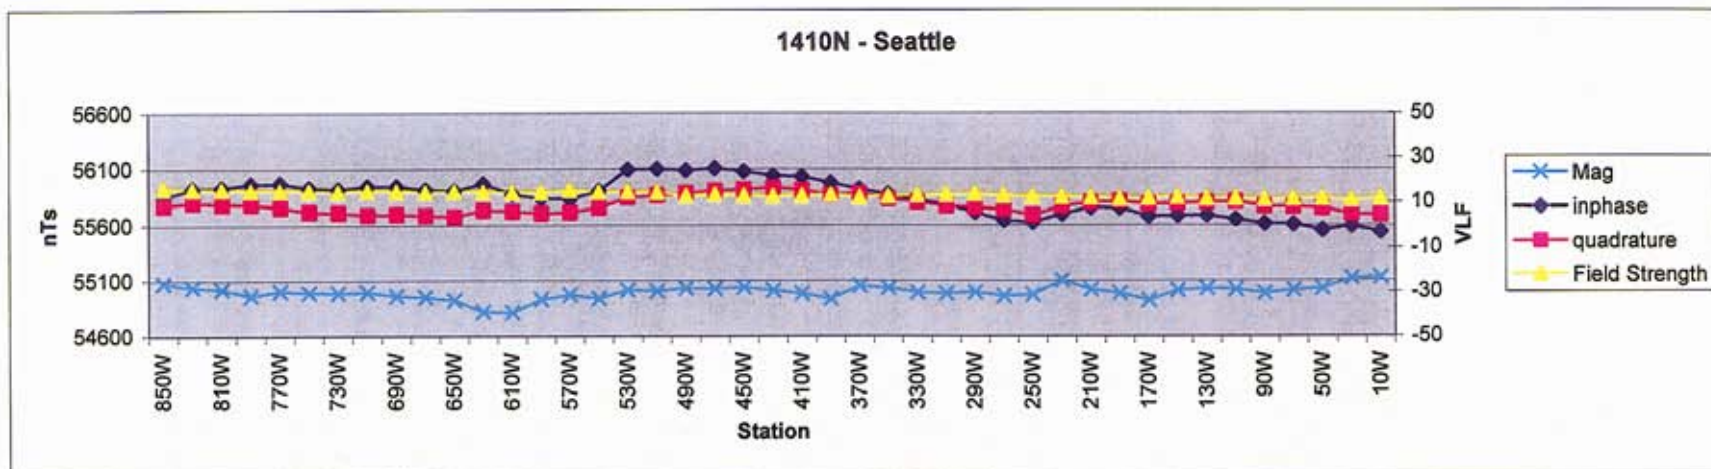






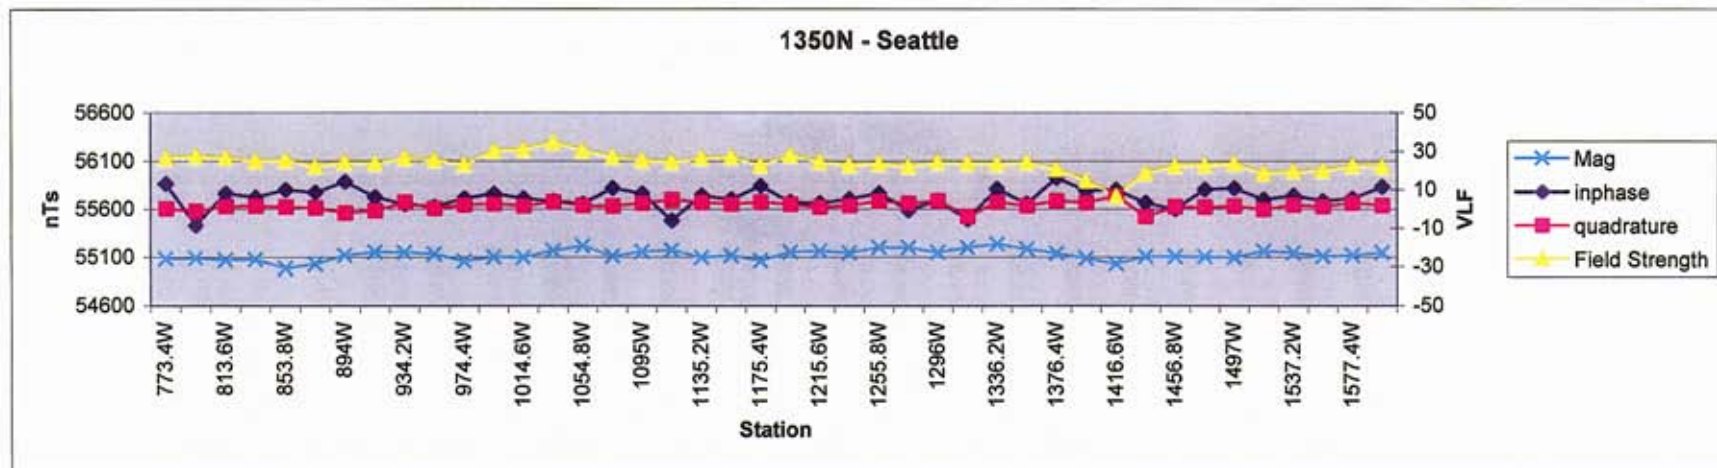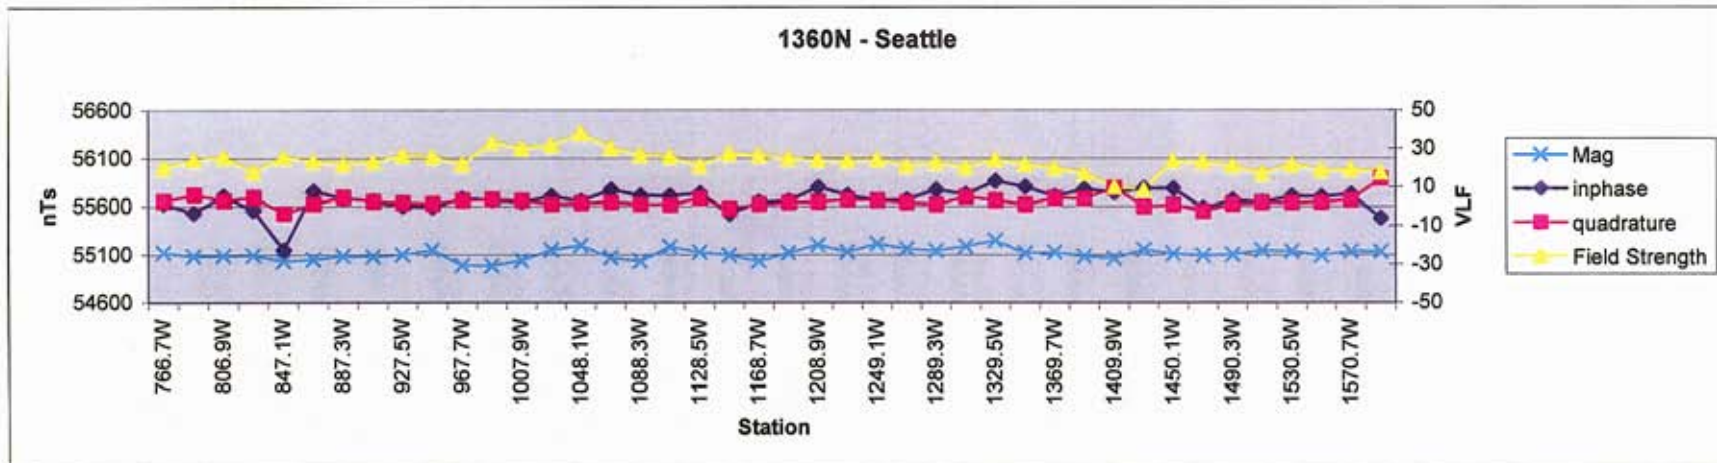





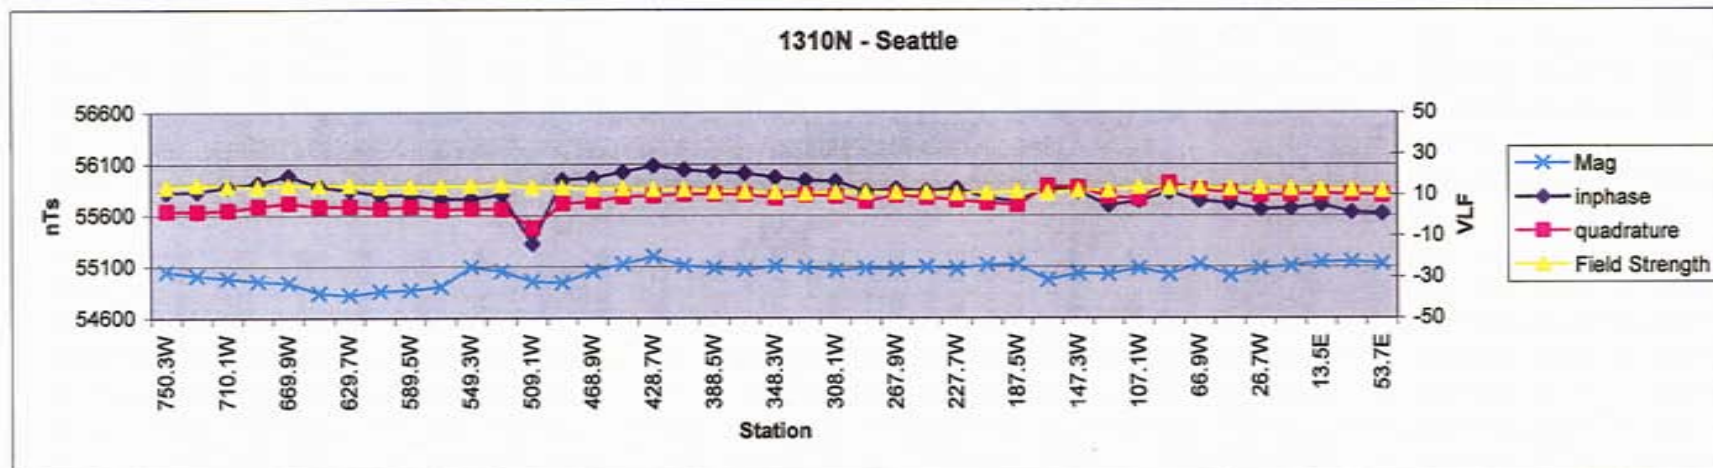
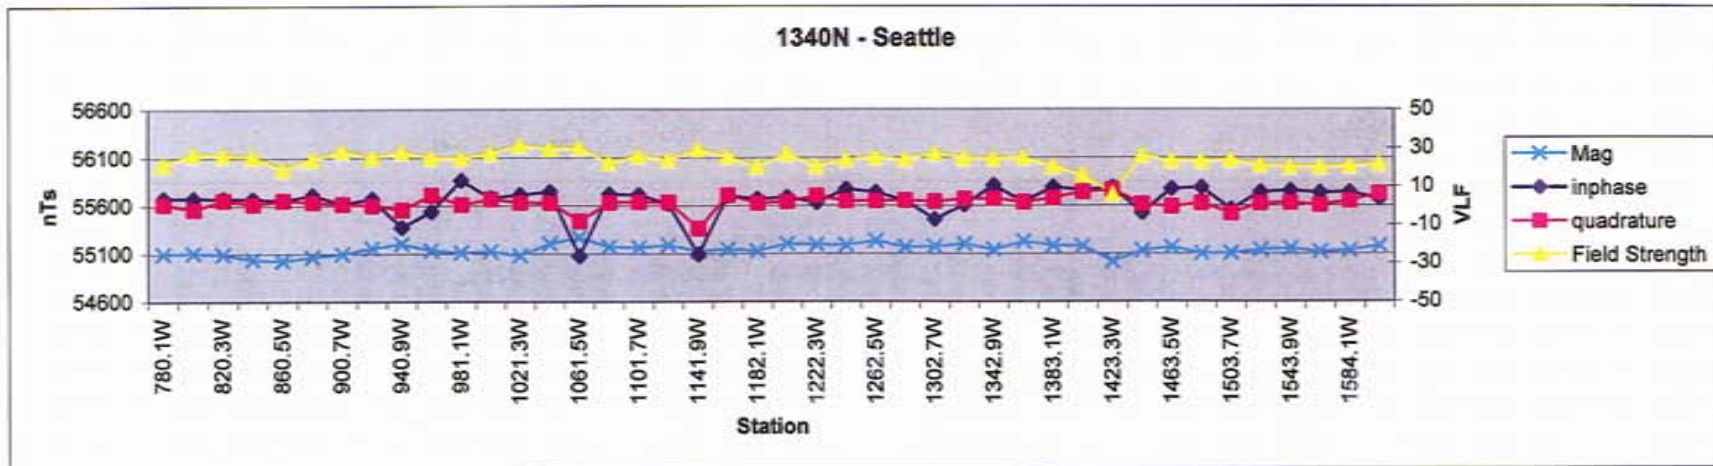


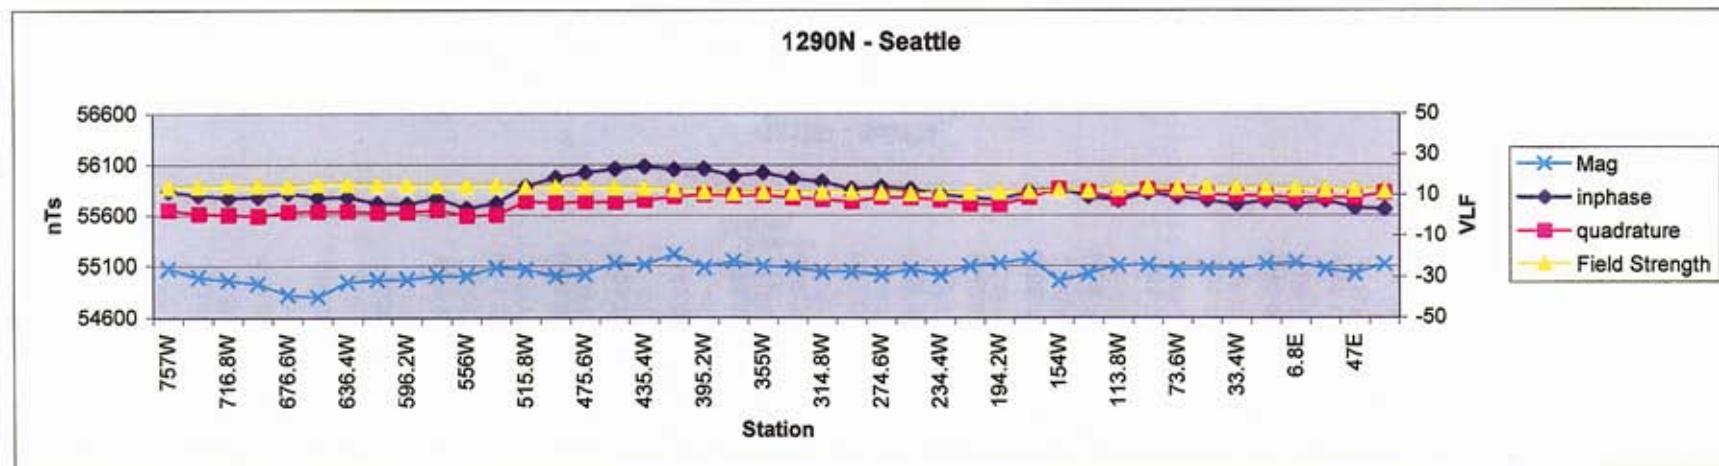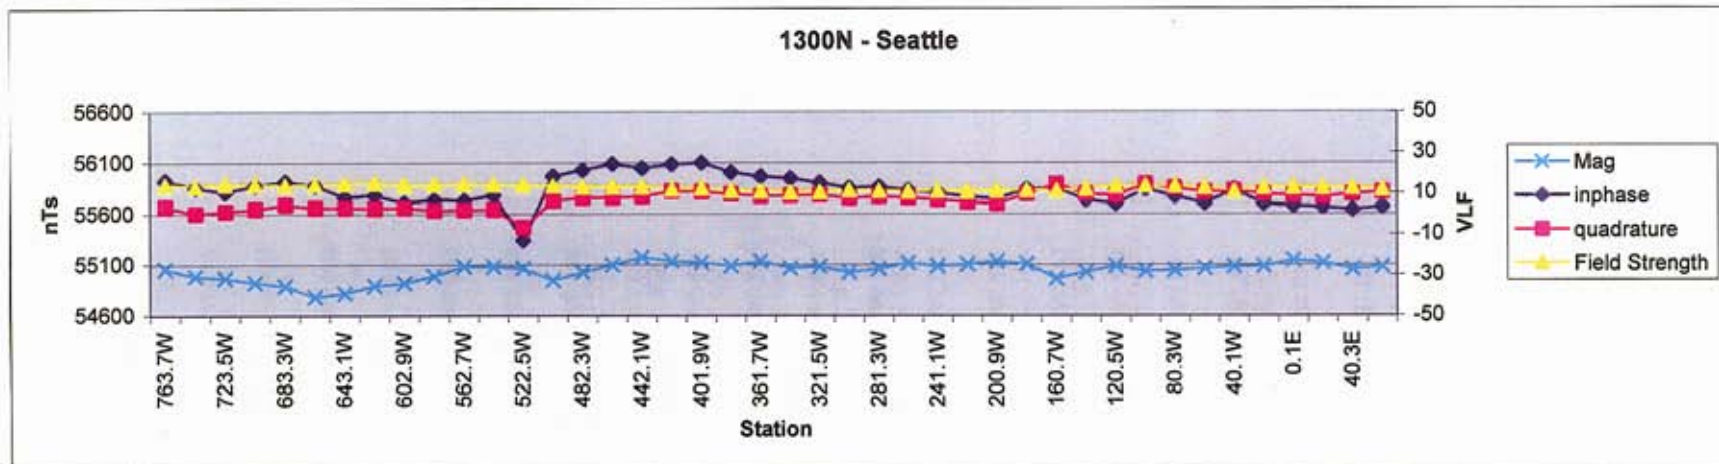

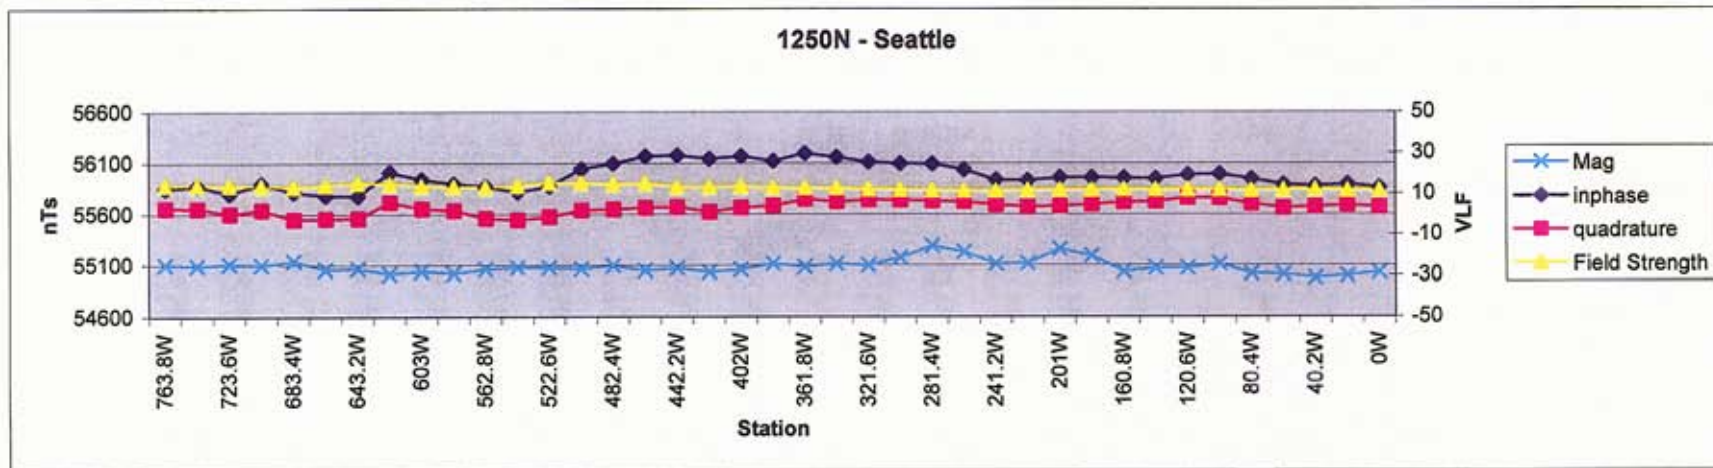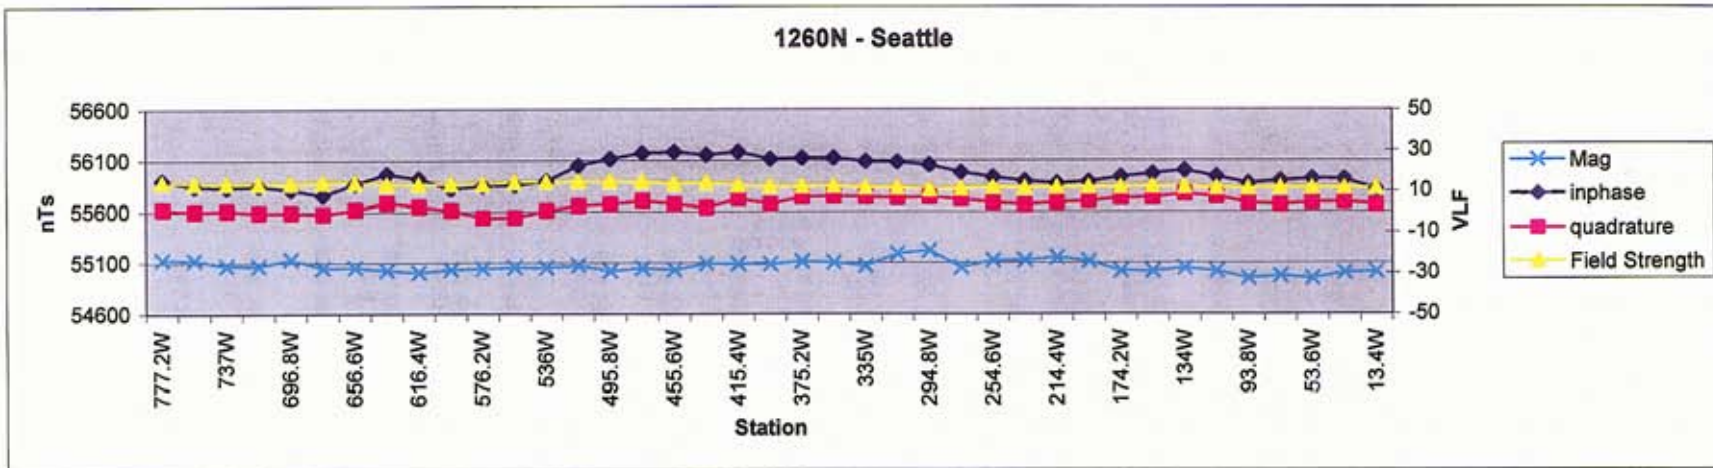



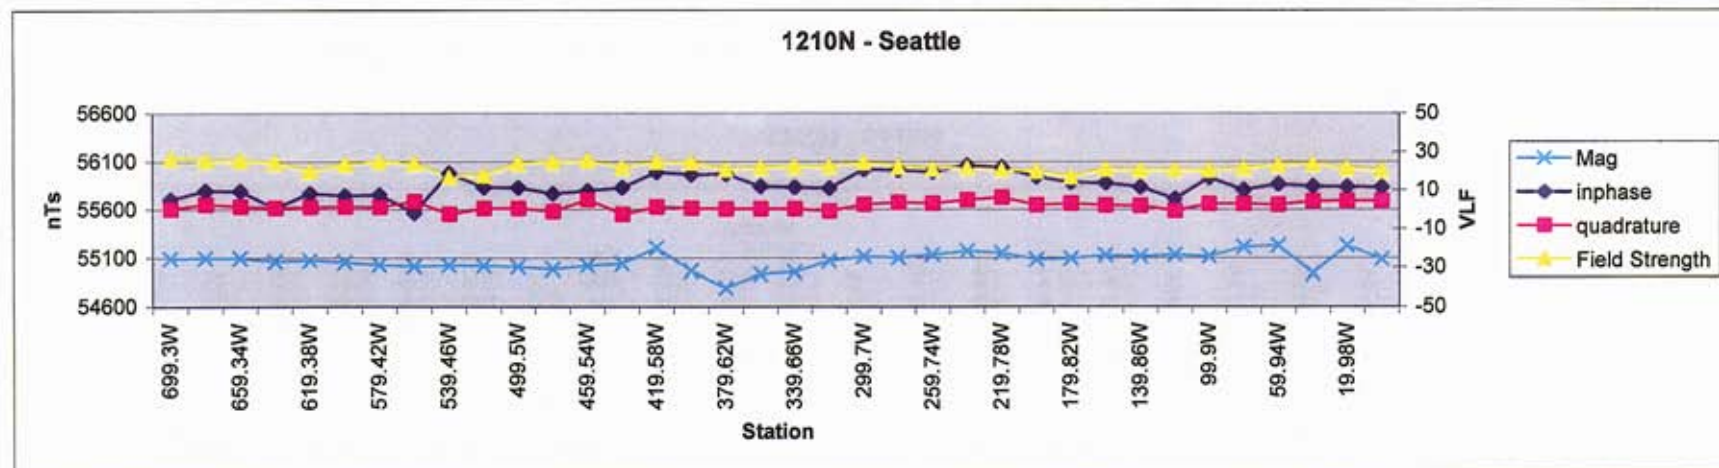
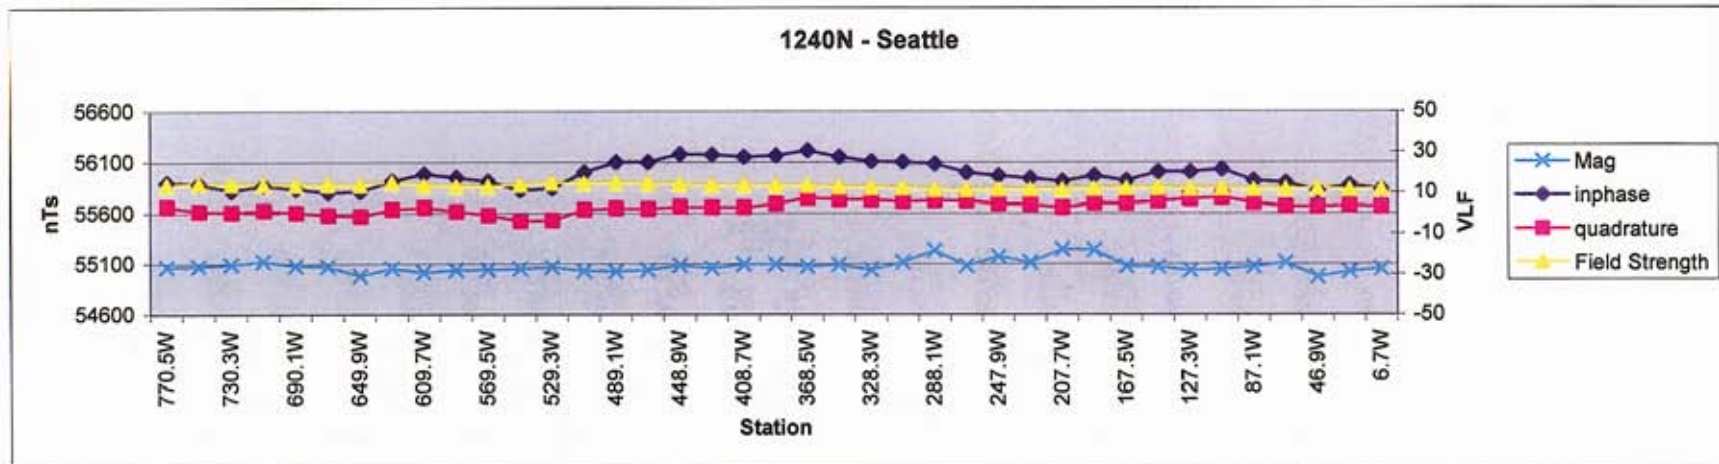


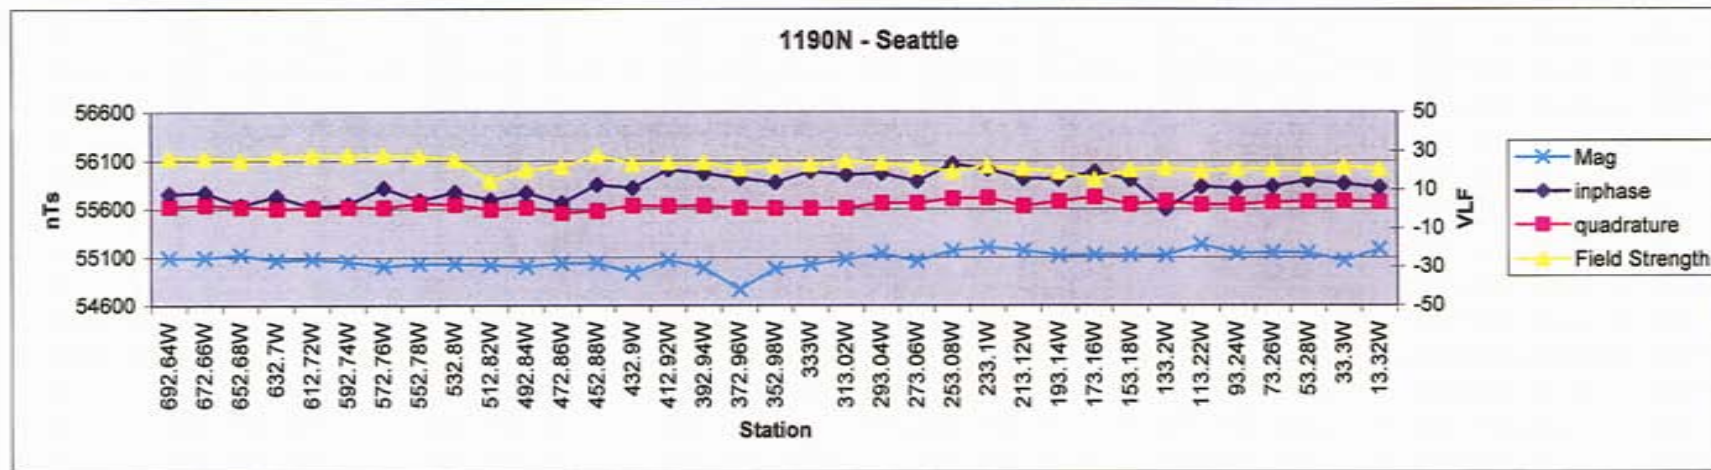
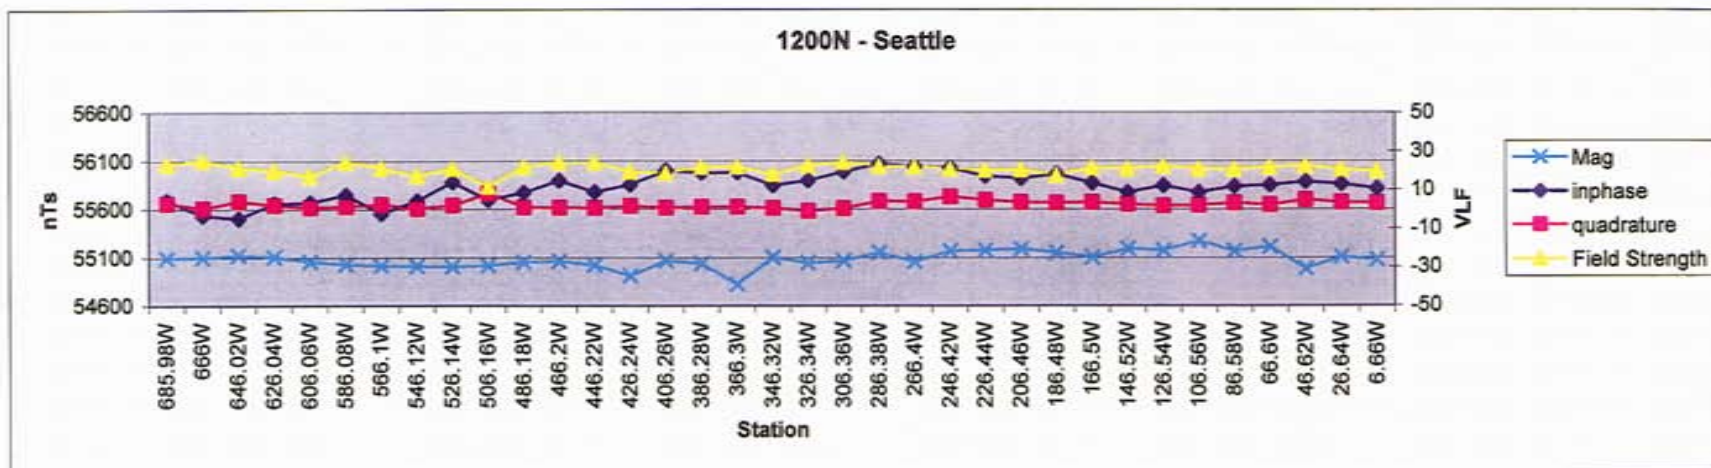


## 16.3 Northwest Copper Prospect





Magnetic – VLF-EM Profiles – NW Copper Test

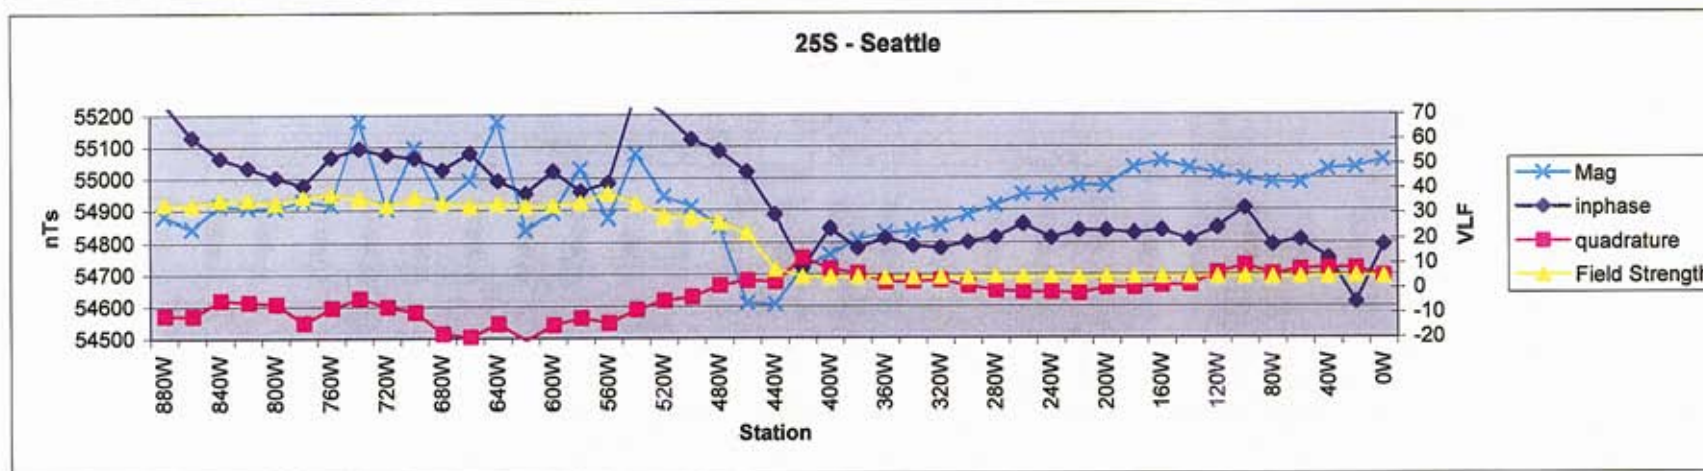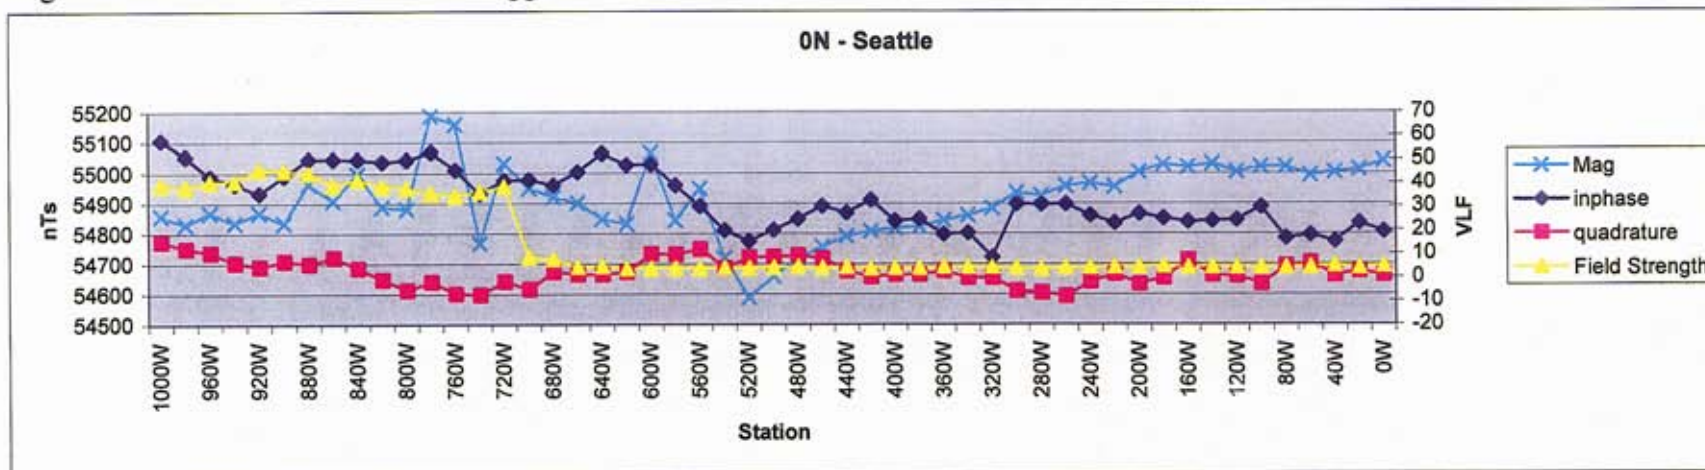


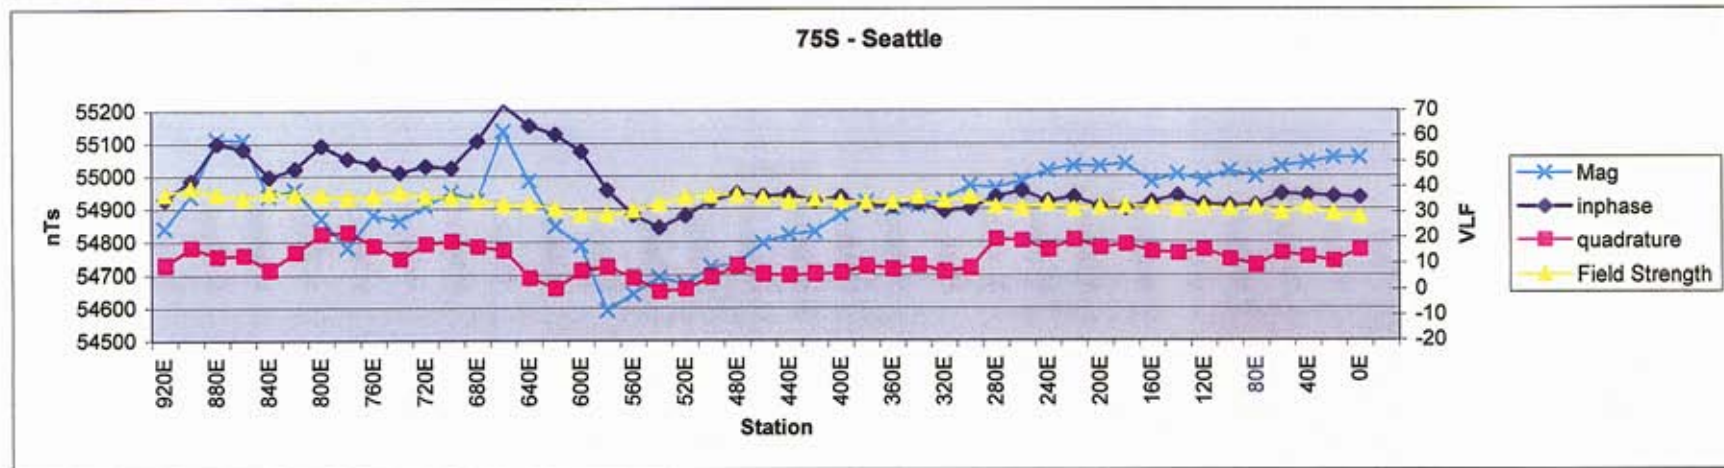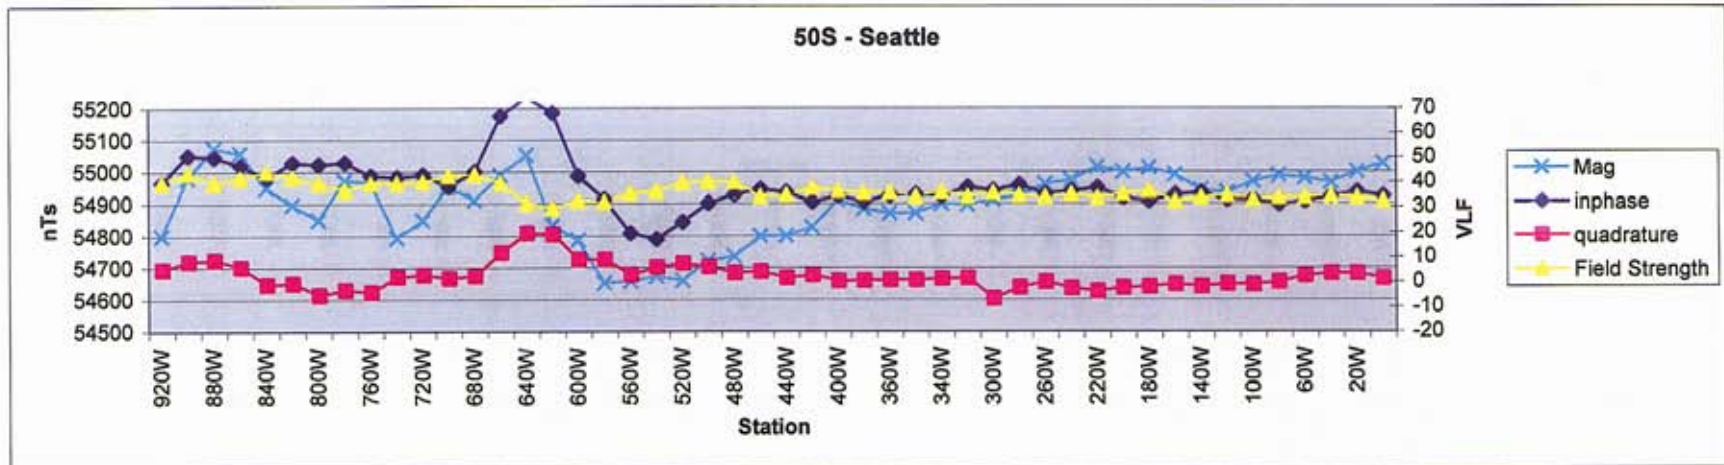



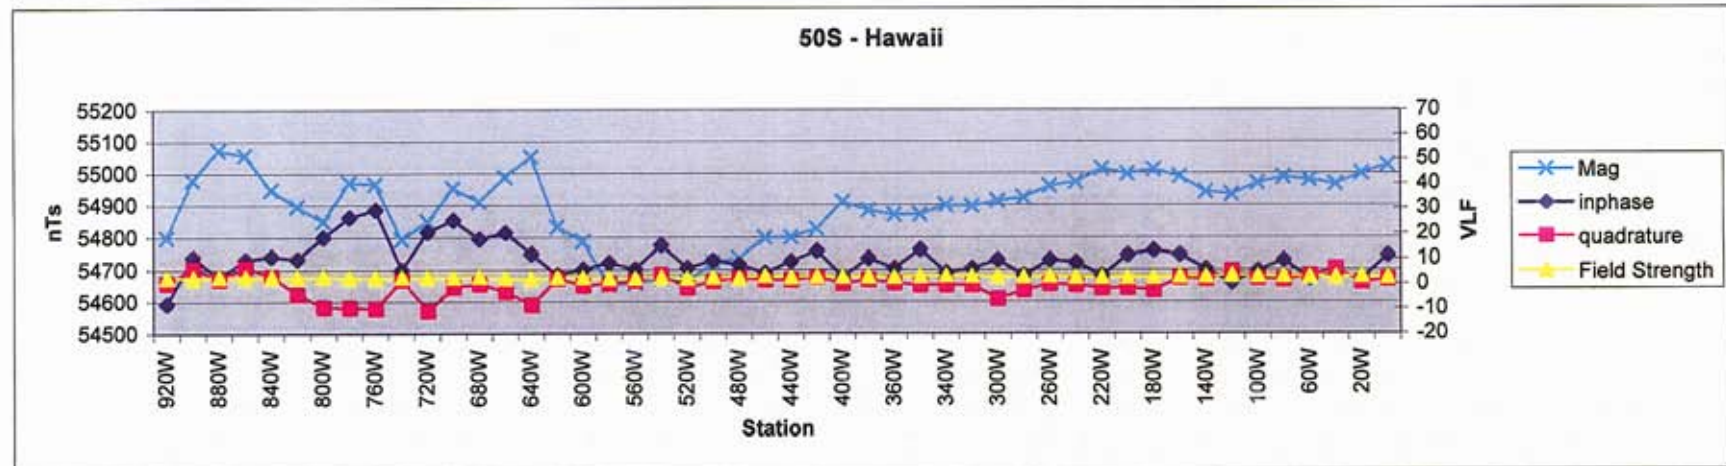
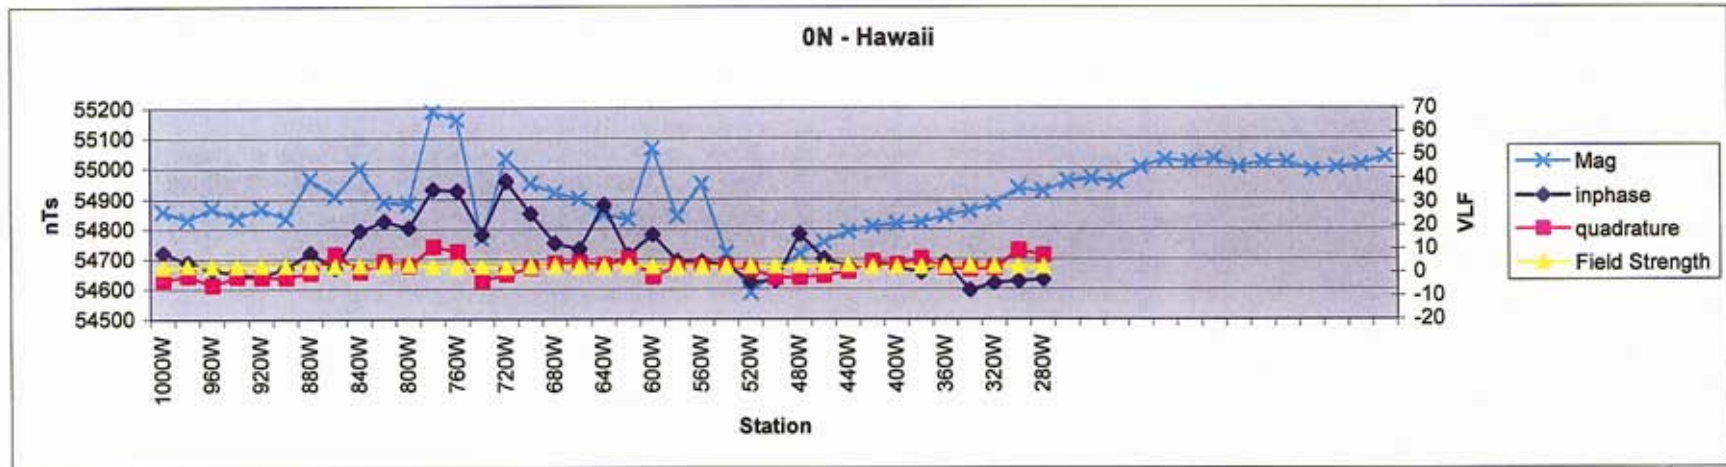





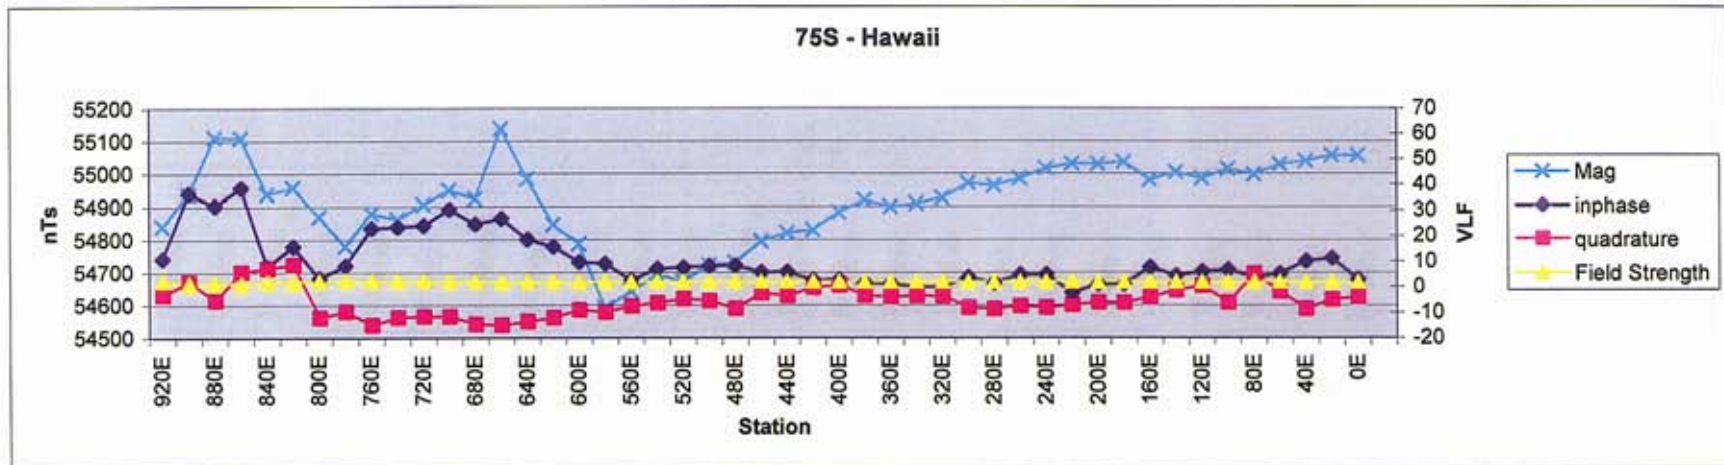


## 16.4 Ridge Prospect



Magnetic – VLF-EM Profiles- Ridge Peak Lines

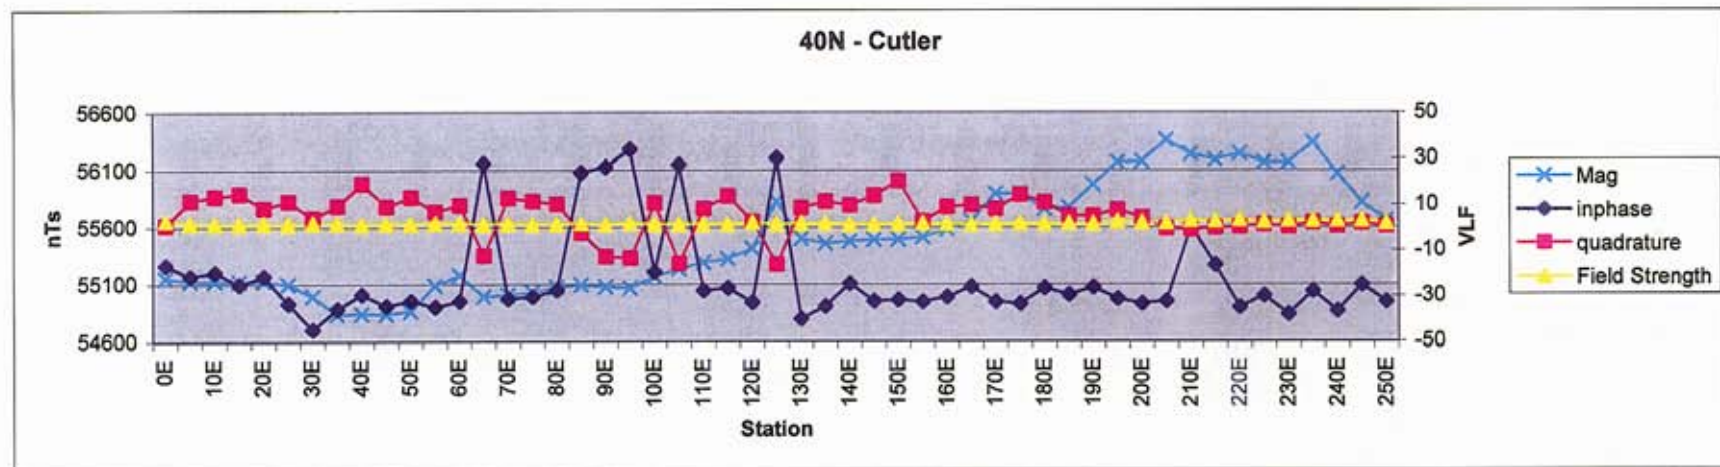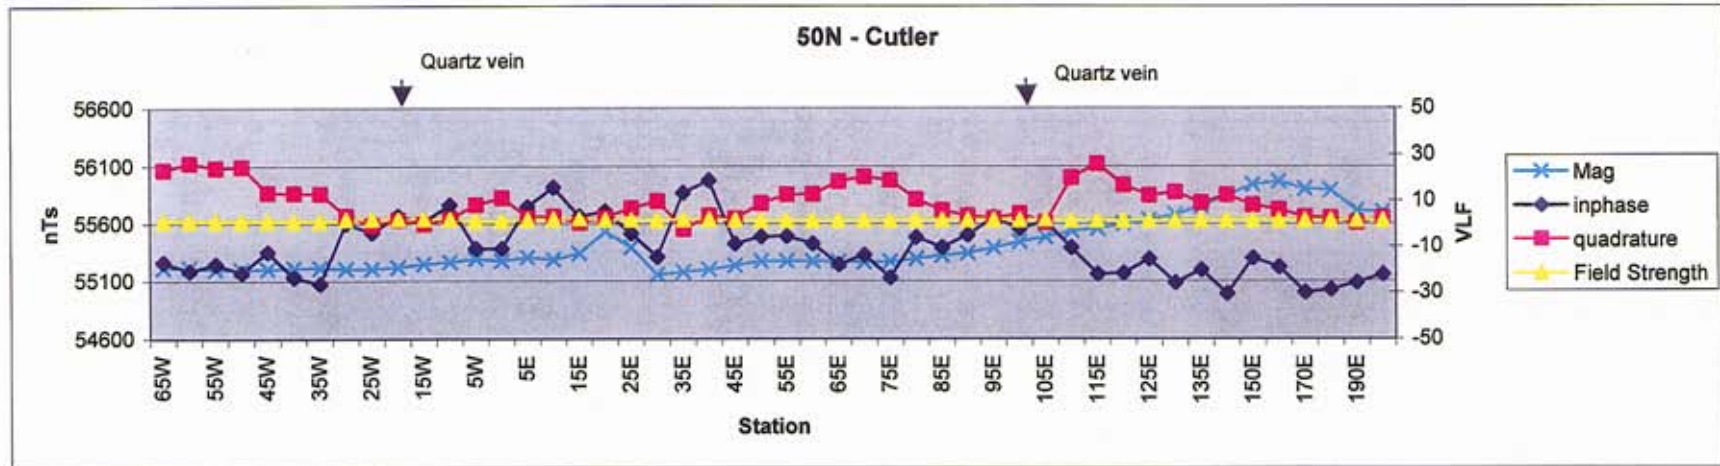



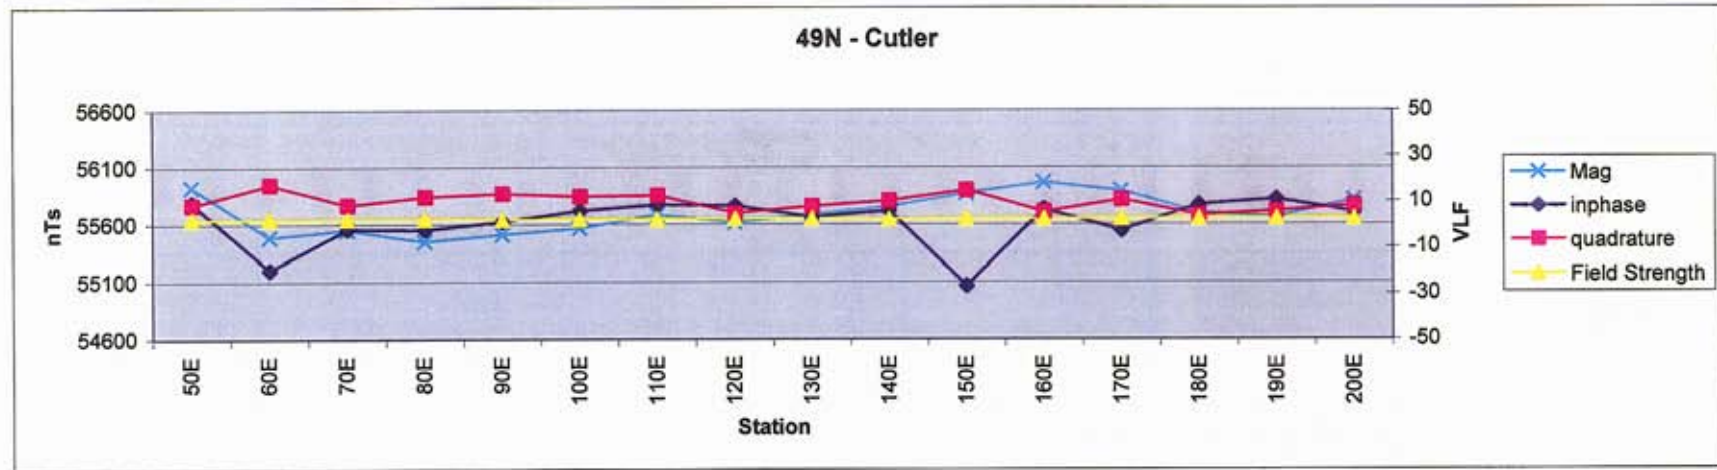
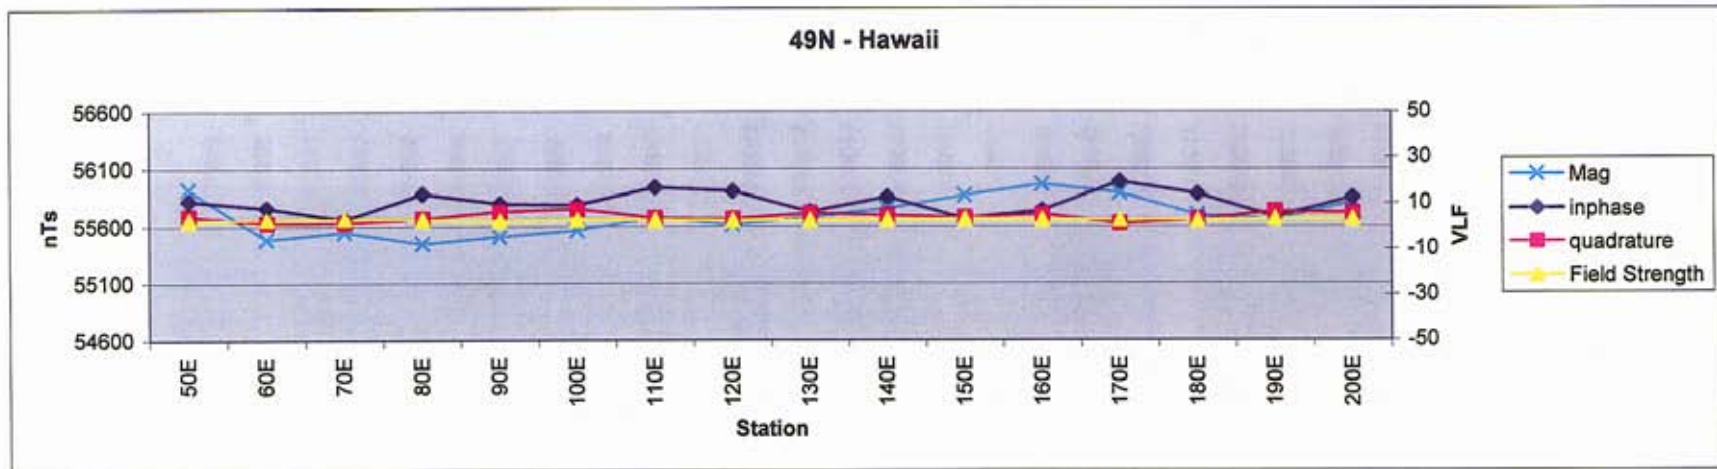


Magnetic – VLF-EM Profiles- Ridge Slide Line

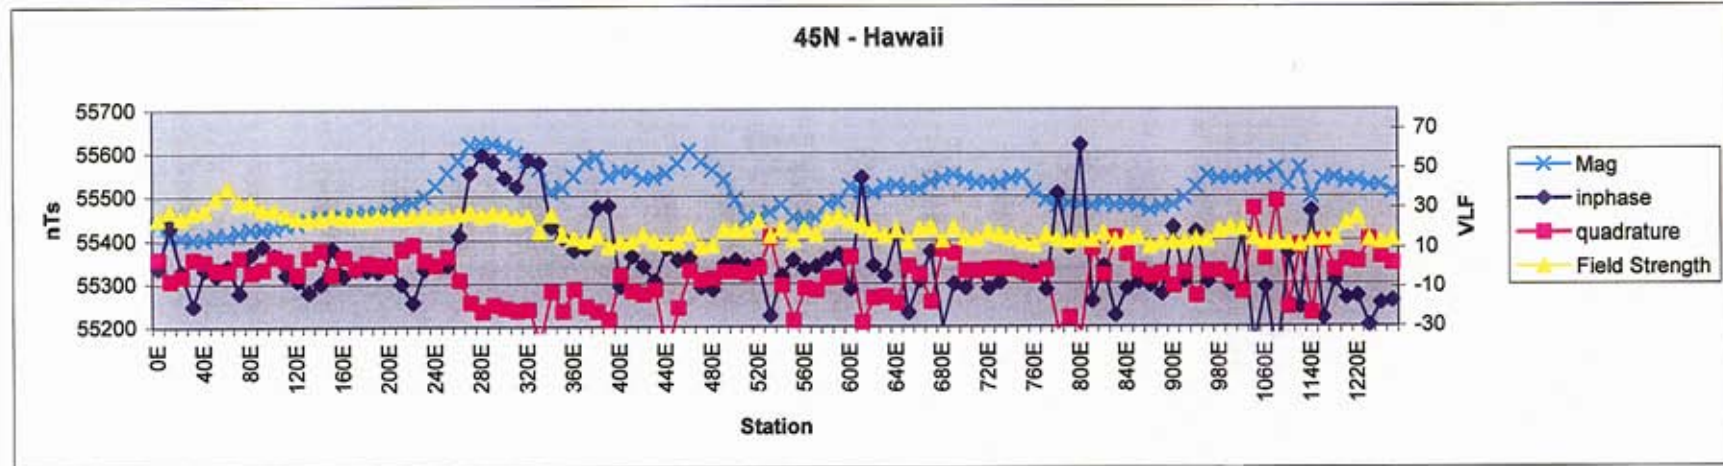
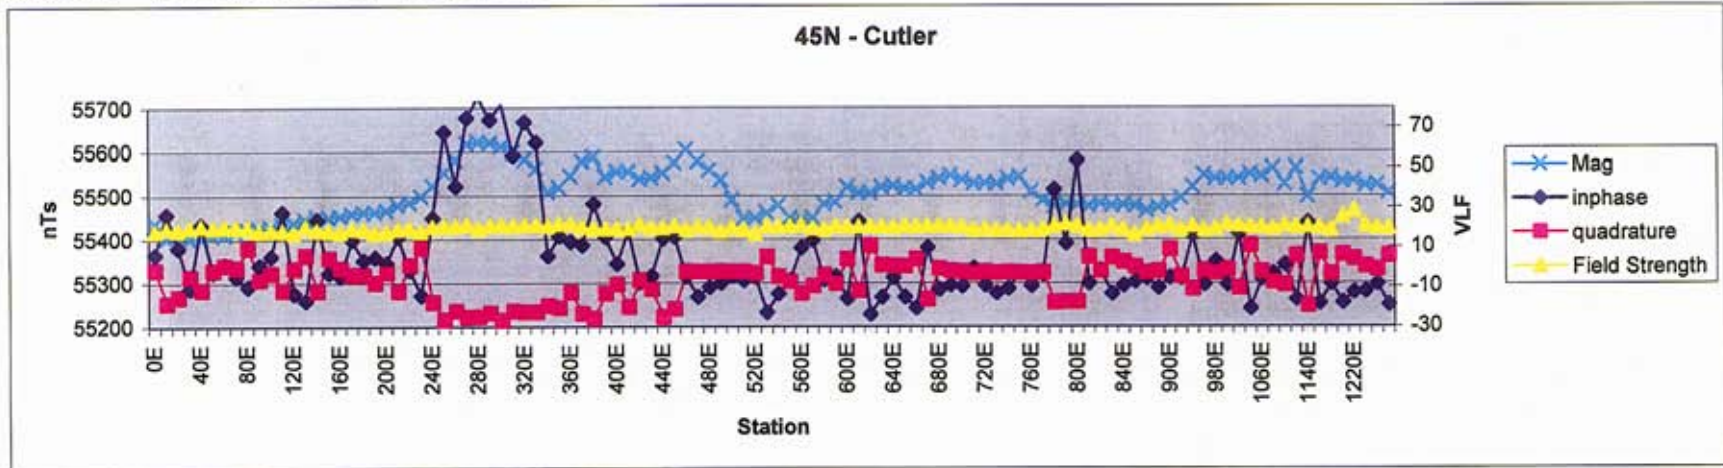






Magnetic – VLF-EM Profiles- Ridge River Lines

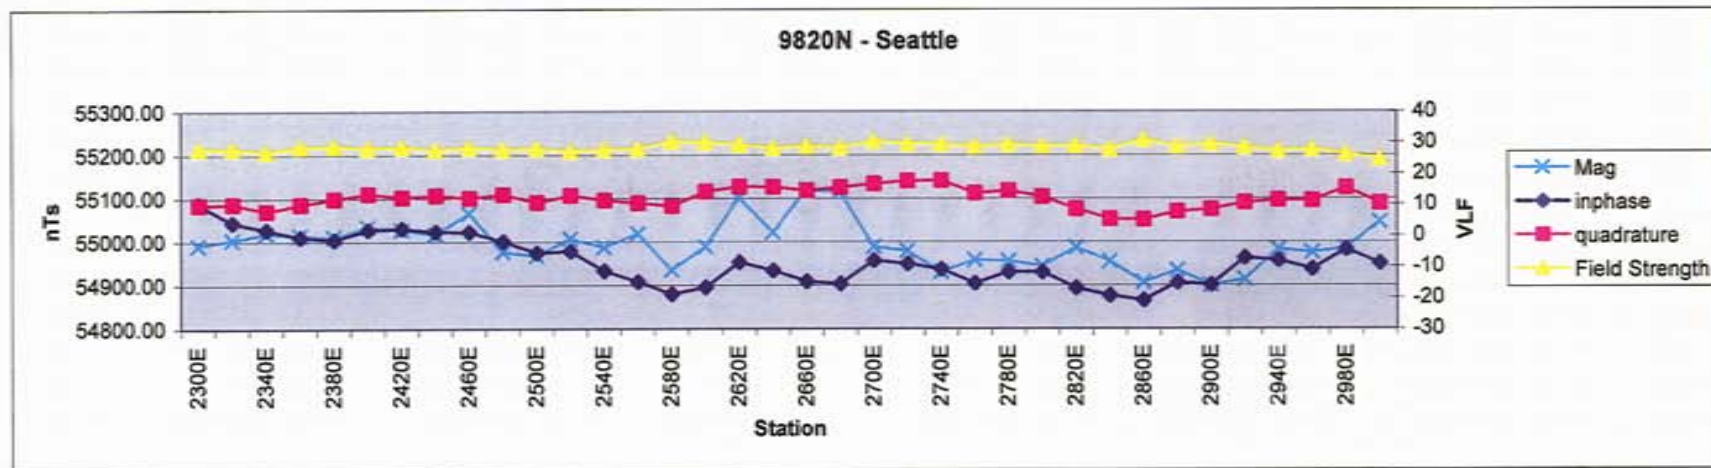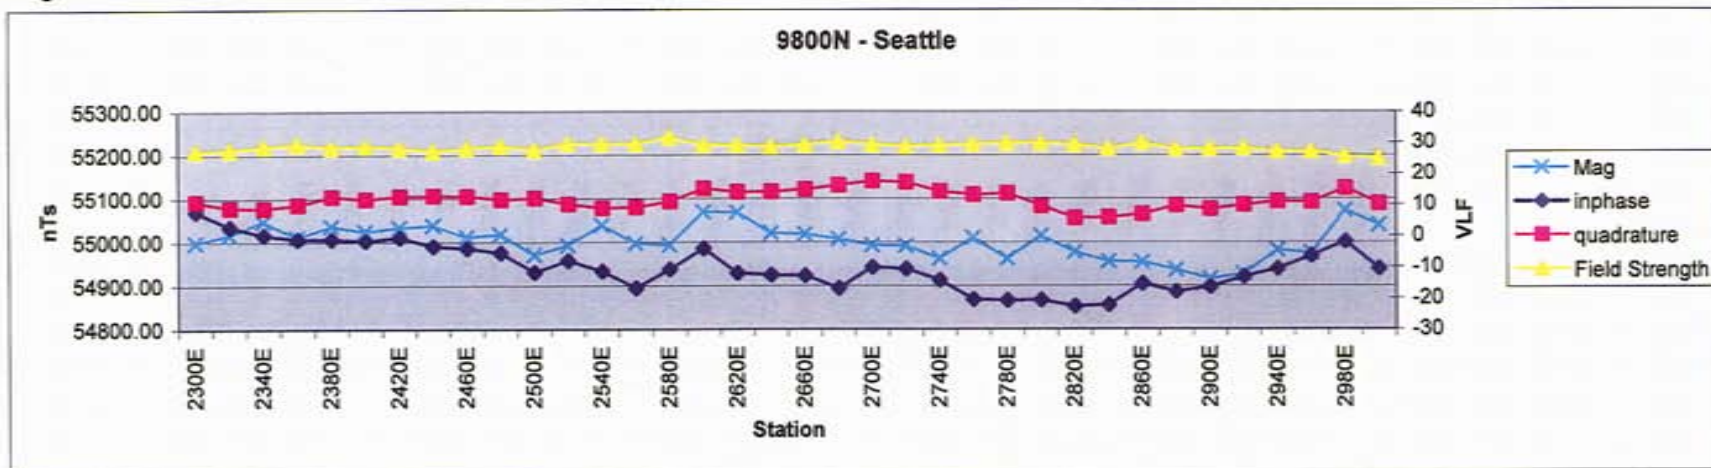



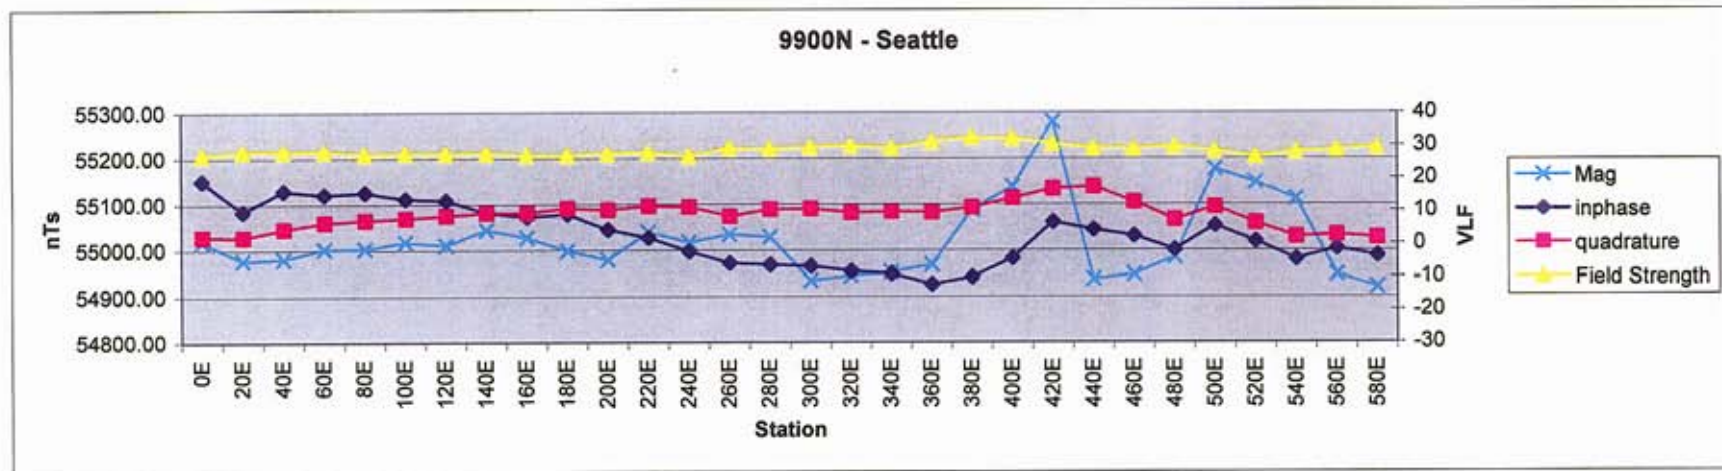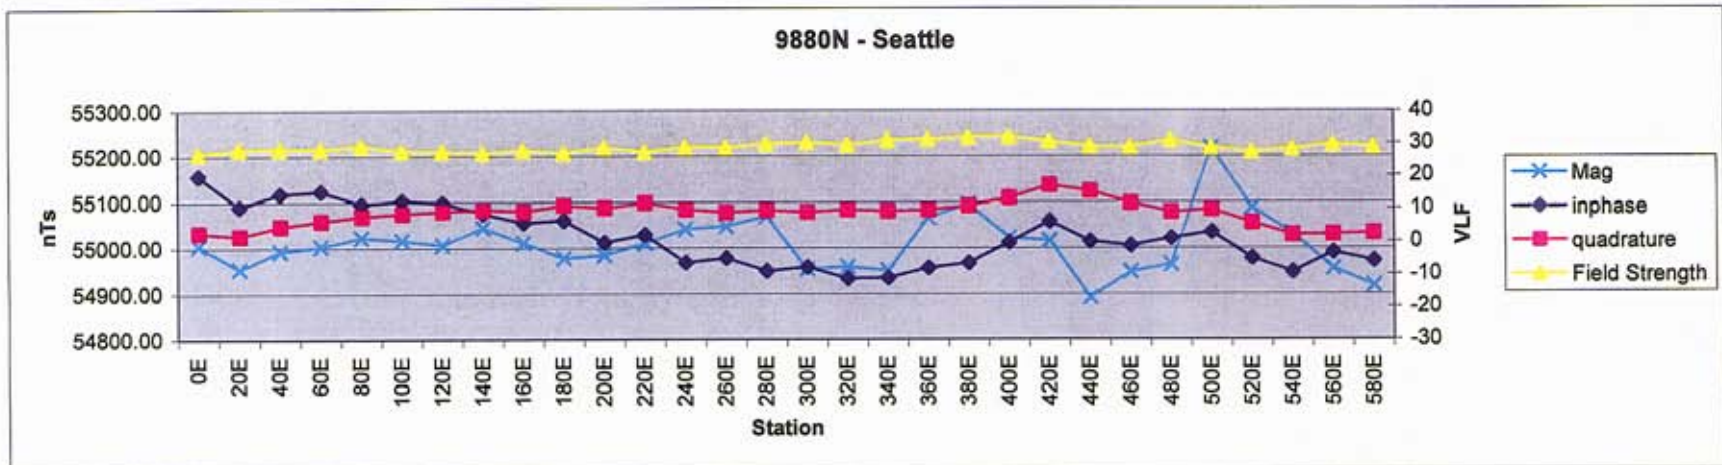

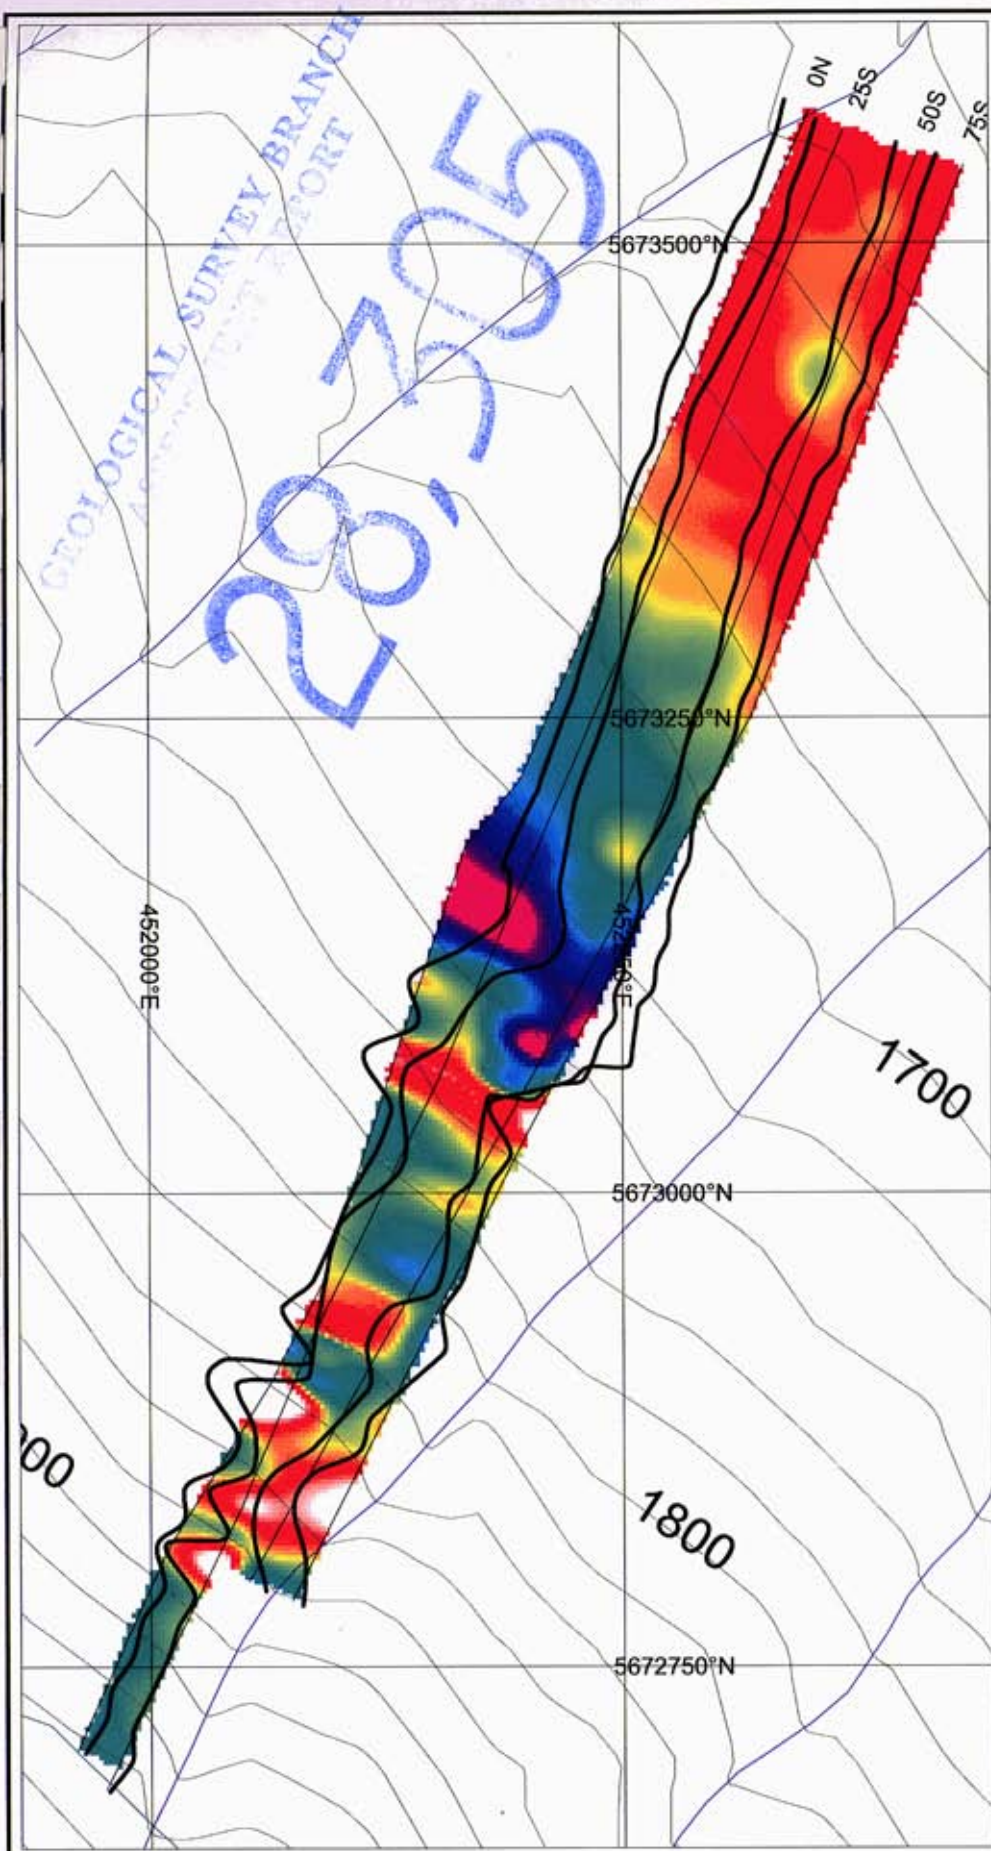

UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vif-em  
 Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

---

**Northwest Copper Project**


**Total Magnetic Field Intensity (nTs)  
 False Colour Contour Map  
 Stacked Profile Map**

---

Date: October, 2005 Plate: G-3b






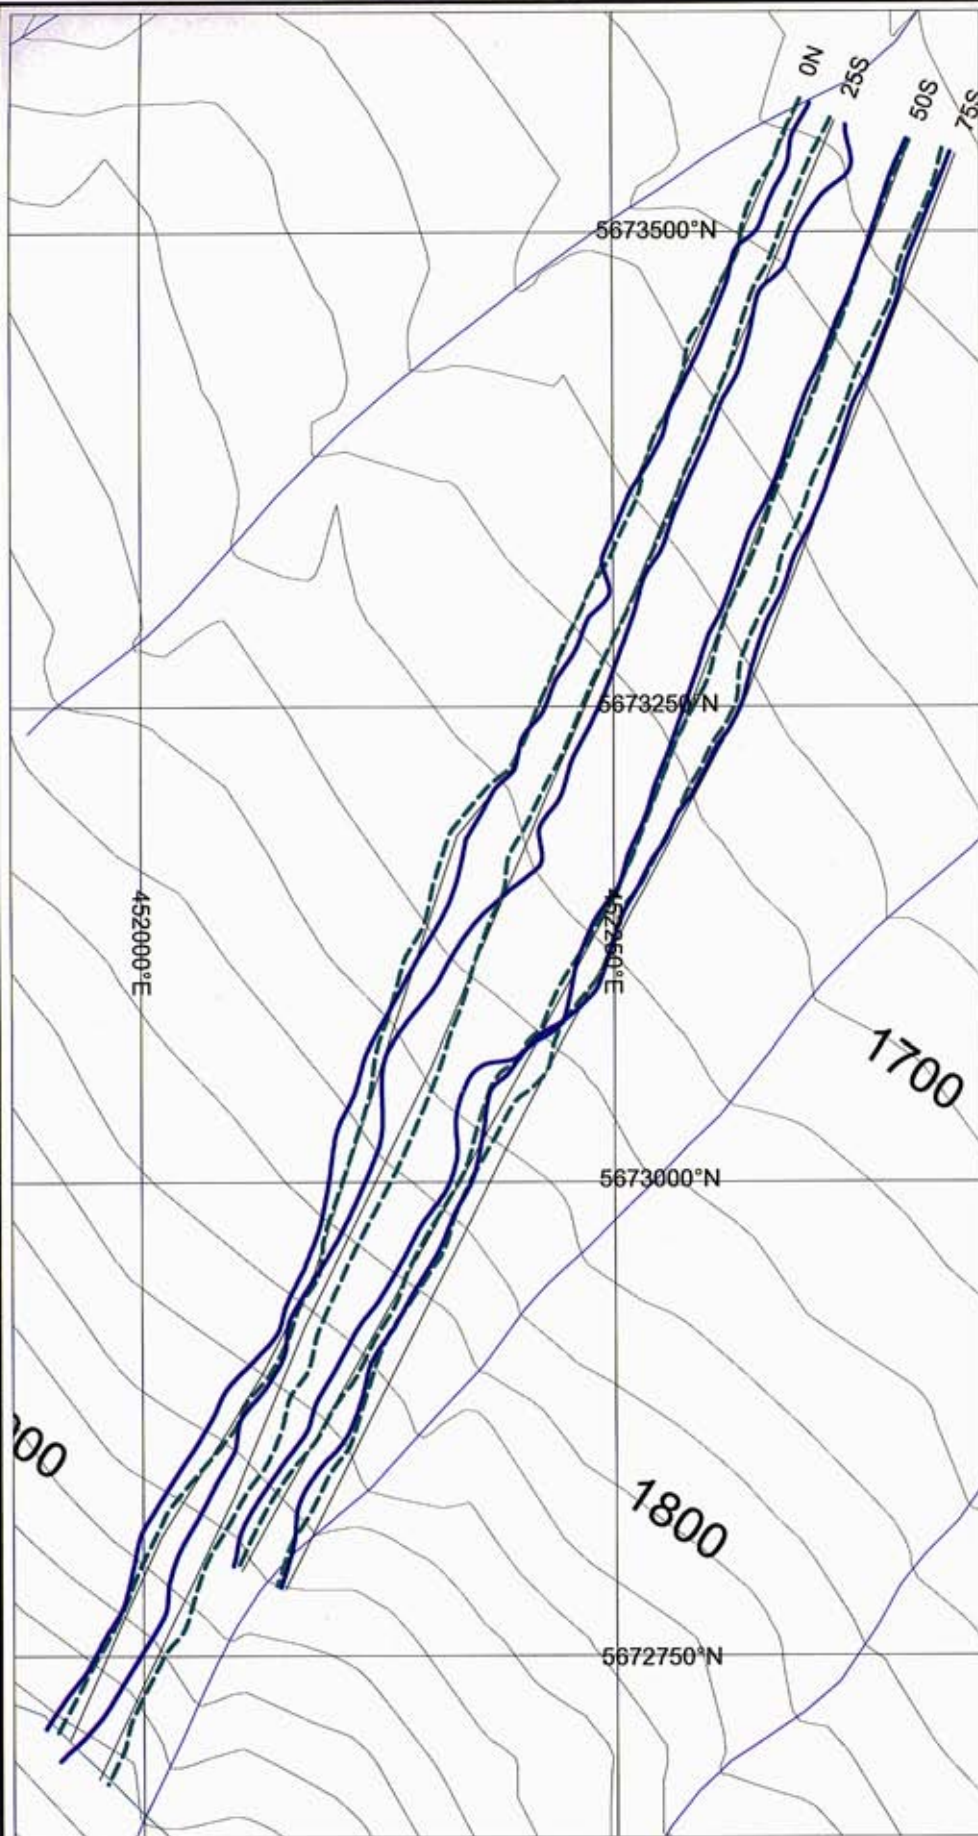

GEOLOGICAL SURVEY BRANCH  
/ SEGMENT REPORT

28,305

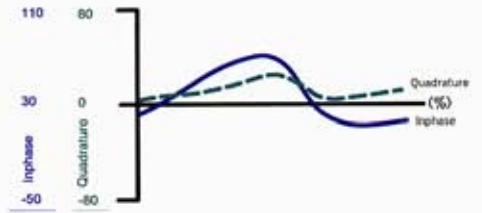

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vlf-em

Map Scale 1:4,000



**Galore Resources Inc.  
Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

**Northwest Copper Project**

**Seattle VLF-EM (24.8 kHz)  
Inphase and Quadrature Components  
Stacked Profile Map**



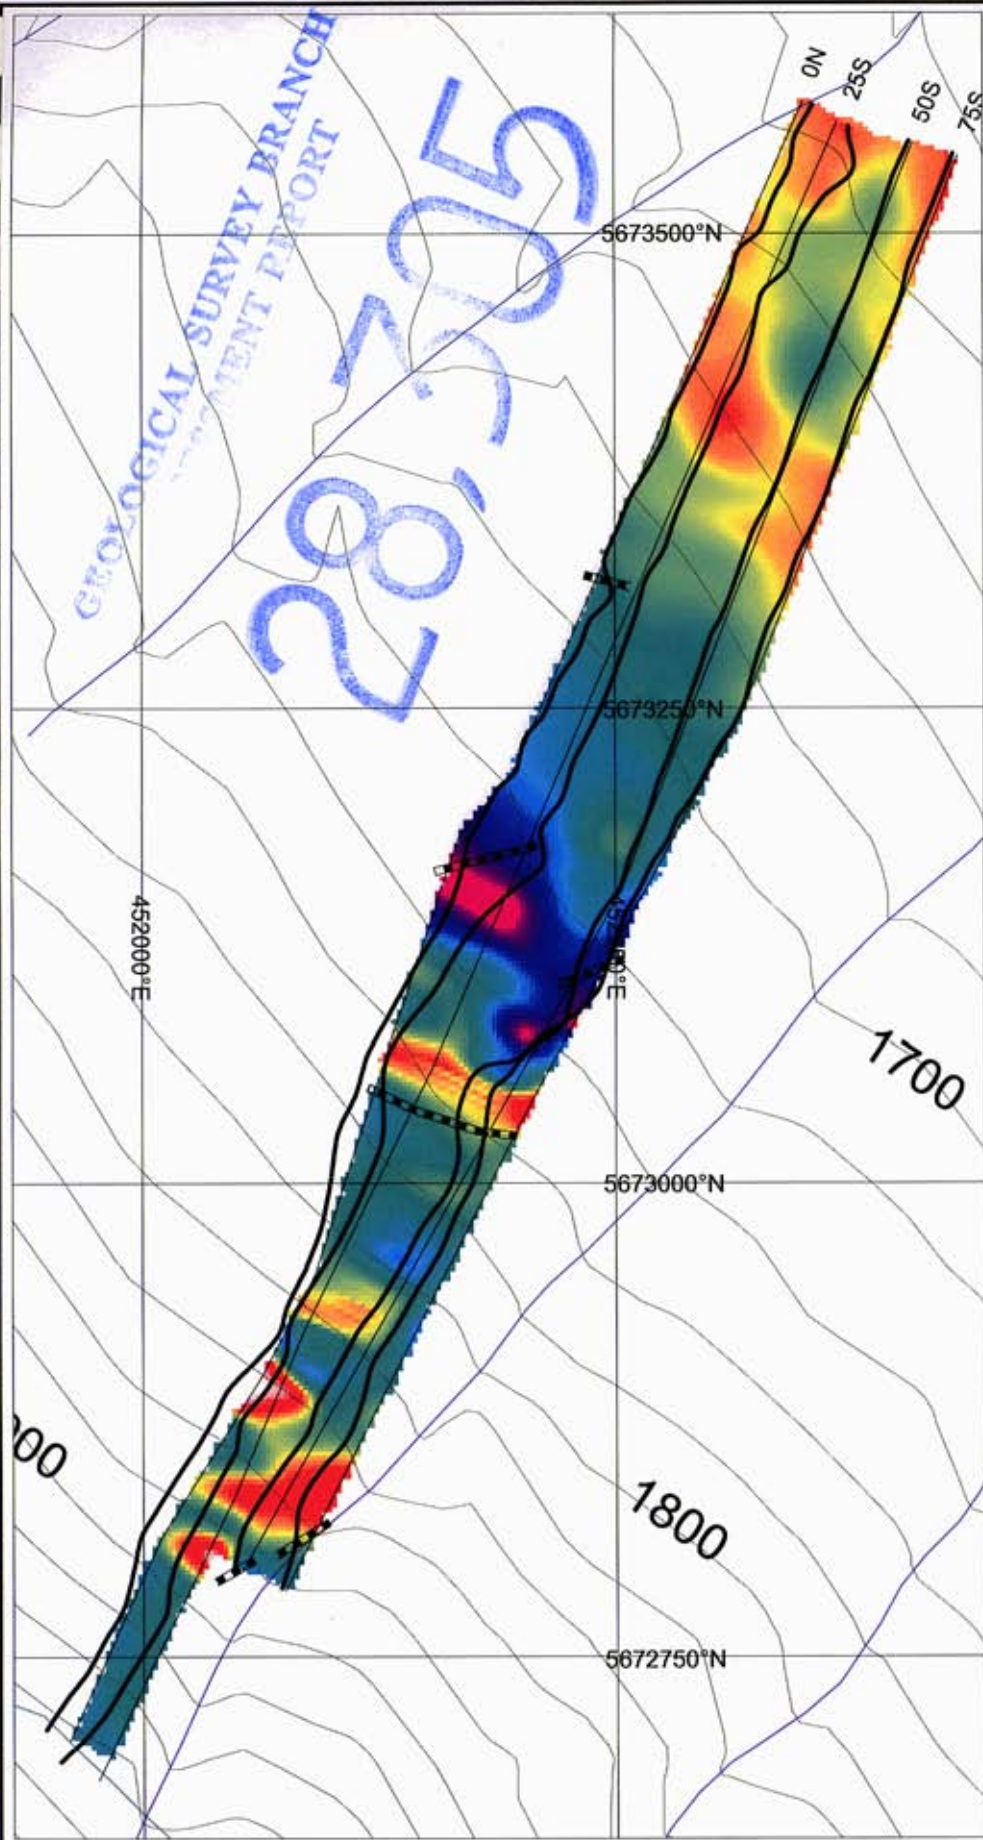

Interpretation Legend  
 - - - - - Vlf-em conductor





UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vlf-em  
 Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

**Northwest Copper Project**


**False Colour Contour Magnetic Map**  
**Stacked Profile Map (Seattle inphase)**

**Geophysical Interpretation**



Date: October, 2005

Plate: G-3d

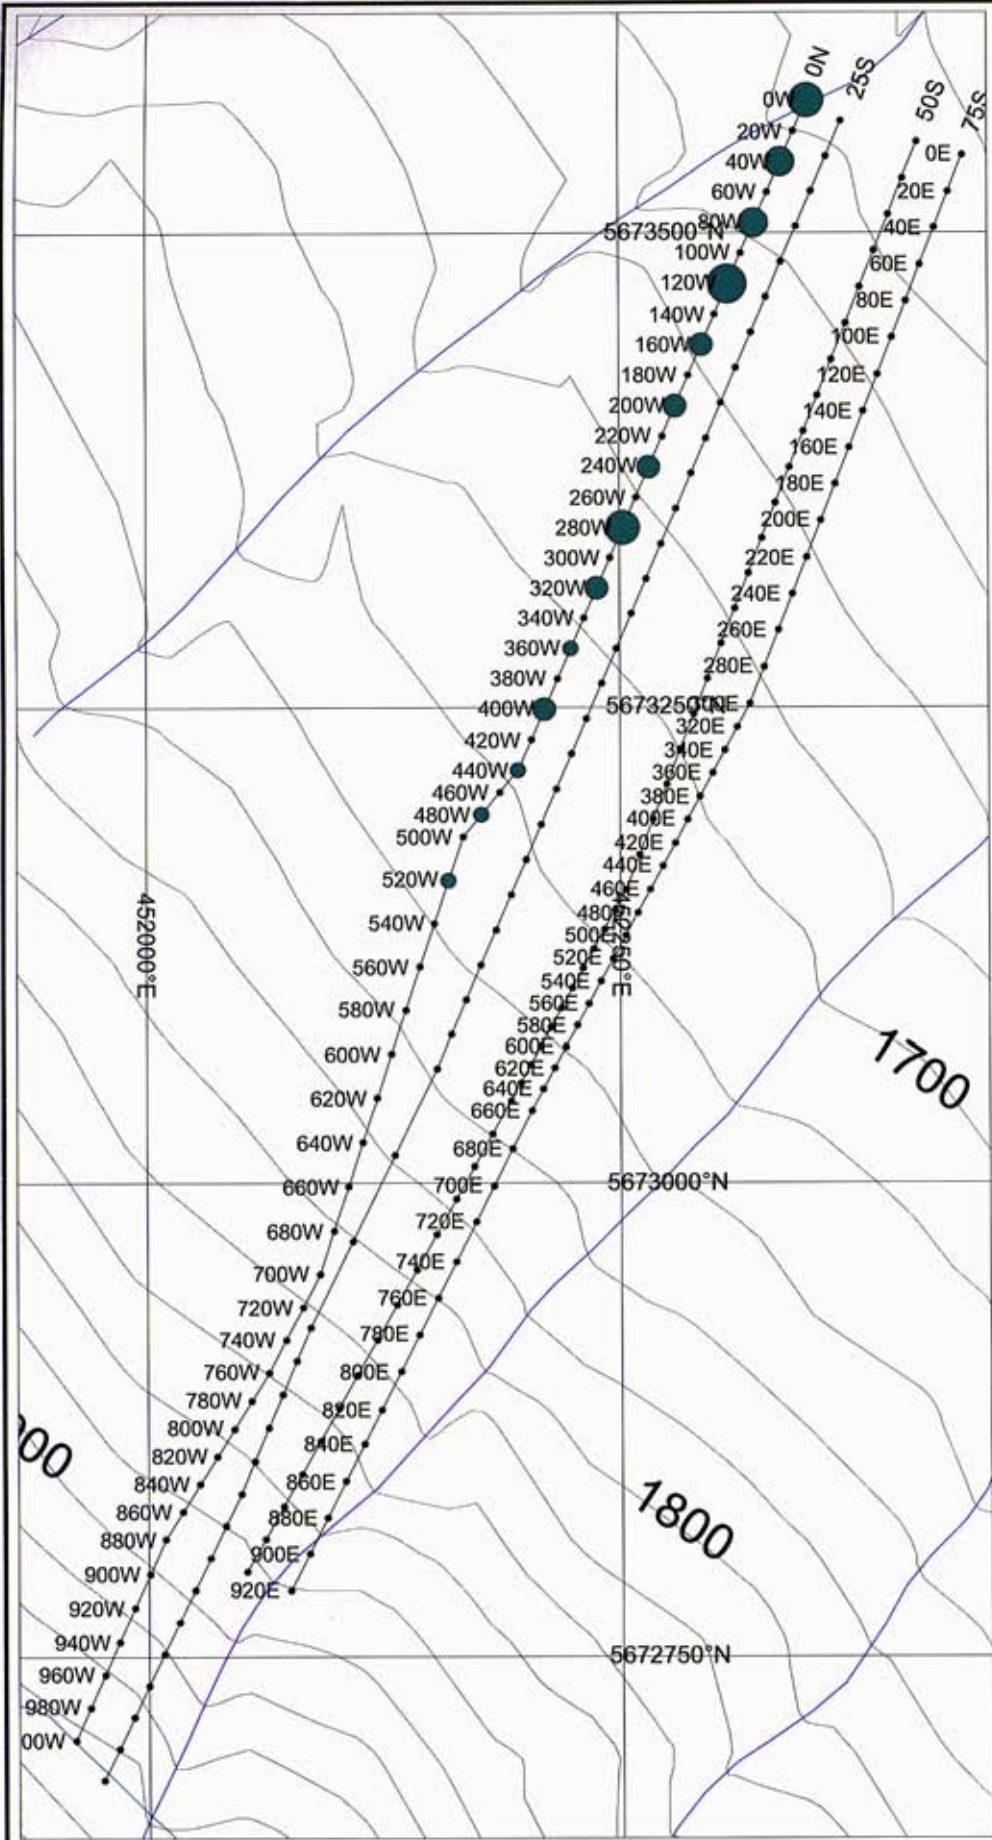

GEOLOGICAL SURVEY BRANCH  
PROJECT REPORT

# 28,305

Soil Geochemistry (Copper) ppm

- 60 to 67.7 (1)
- 50 to 60 (2)
- 45 to 50 (2)
- 40 to 45 (5)
- 27.8 to 40 (4)

UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vif-em  
 Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

---

**Northwest Copper Project**


**Soil Geochemistry  
 Copper (ppm)  
 Thematic Map**

---

Date: October, 2005 Plate: G-3e





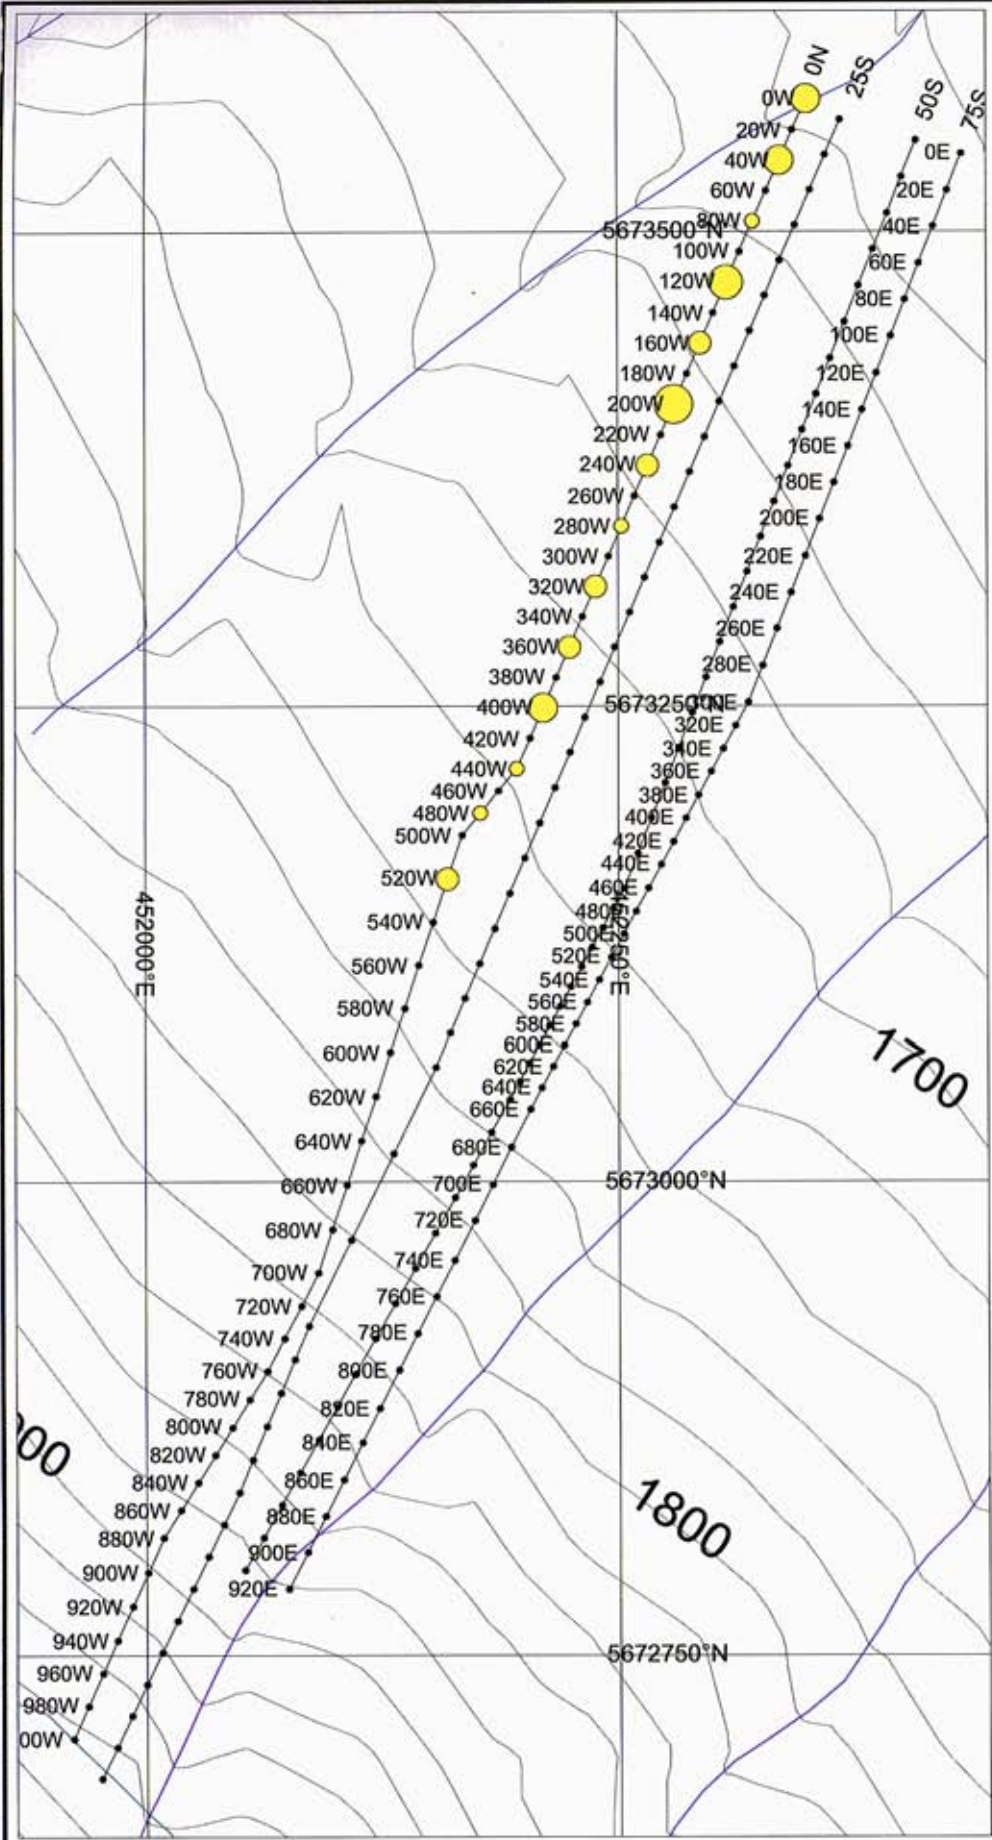

GEOLOGICAL SURVEY BRANCH  
 ASSESSMENT REPORT  
28,305

Soil Geochemistry (Gold) ppb

- 12.8 to 12.8 (1)
- 6.7 to 12.8 (1)
- 2.6 to 6.7 (3)
- 1.9 to 2.6 (5)
- 1 to 1.9 (4)

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vlf-em

Map Scale 1:4,000


**Galore Resources Inc.**  
**Taseko Lakes Project**  
Clinton Mining Division NTS: 92 O/4E, 92 O/3W

---


**Northwest Copper Project**  
**Soil Geochemistry**  
**Gold (ppb)**  
**Thematic Map**

---

Date: October, 2005
Plate: G-3f





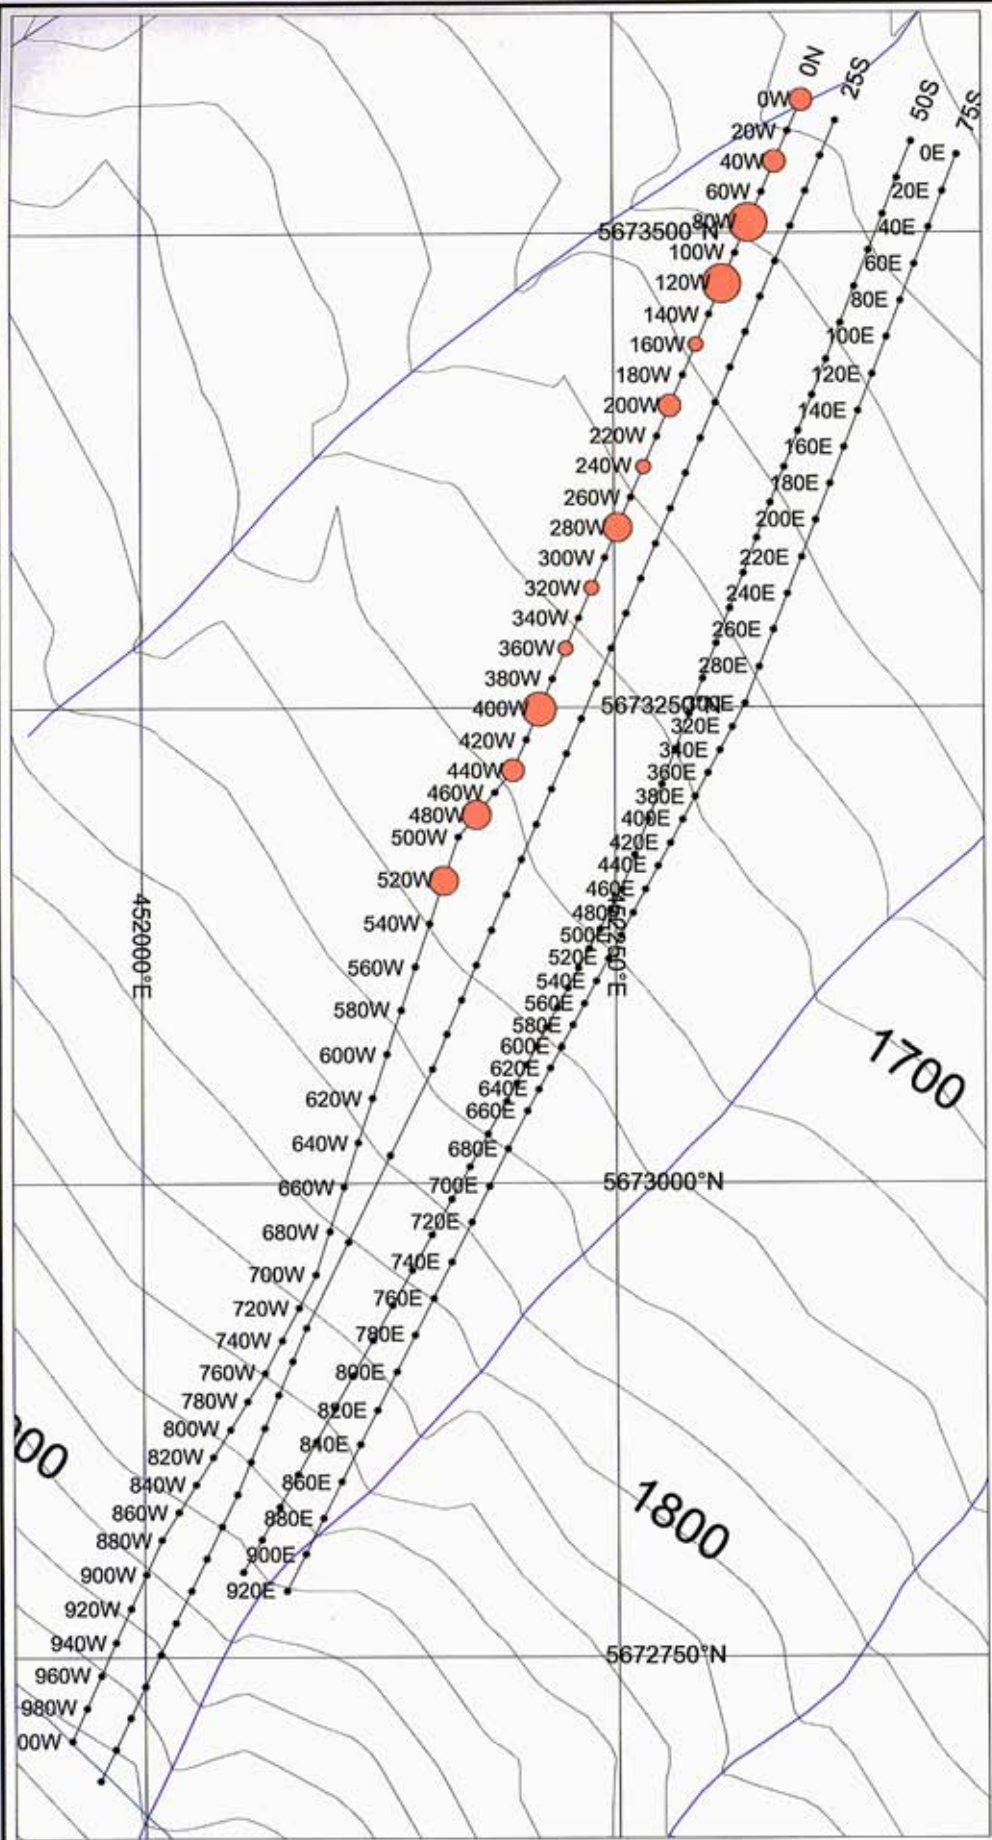

GEOLOGICAL SURVEY BRANCH  
TECHNICAL REPORT

28,305

Soil Geochemistry (Arsenic) ppm

- 16 to 18.2 (2)
- 14 to 16 (1)
- 12 to 14 (3)
- 10 to 12 (4)
- 7.9 to 10 (4)

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vif-em

Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
Clinton Mining Division NTS: 92 O/4E, 92 O/3W


---

**Northwest Copper Project**

**Soil Geochemistry**  
**Arsenic (ppm)**  
**Thematic Map**

---

Date: October, 2005 Plate: G-3g



## 17 Appendix 6 – Geochemical Assays

### SAMPLING METHOD & APPROCH

#### 1. Description of Hub-Charlie sampling:

The 2005 geochemical soil sampling along the Tchaikazan River has used the 1980-83 Suncor cut lines and grid system in order to duplicate the molybdenum-copper soil anomalies.

Galore Resources Inc. hired SJ Geophysics Ltd & S.J.V. Consultants Ltd. of Delta B.C. to conduct a magnetic & VLF-EM survey within the old Suncor grid system coincidental with Galore Resources soil sampling, having common stations and same 10 meters spacing interval.

The Hub west covers an area 700m x 500m and 750m x 250m for the Hub east.

Soil sampling was carried out by a 2-3 men team at 10 meters intervals using a pick and trowel for the A2-B2 (below roots level) and a 5 feet long auger for peat-swamp covered area.

For a 500 meters line we would collect 50 samples, with lines 25 meters apart.

After 5 lines we would collect 250 samples over an area 100 meters wide x 500 meters long, thus giving a density of 1 sample per 200 meter square.

Each location is flagged and marked with a station number, sample number and each sample hole has a coloured tape with the sample number.

#### 2. Sample quality

Comparing molybdenum values in soils obtained by Suncor in 1980-83 on the same grid: Galore Resources Inc. soil results are comparable or better.

The difference is due to 10m spacing instead of 25meters station. The increase density reflects better the geological changes.

#### 3. Sampling intervals

The sampling intervals were tightened to 10 meters to reflect better the geological host rock and its metal content. Grid line spacing was also tightened to 25 meters intervals.

**4. Sample values**

The sample value for copper & molybdenum are excellent correlating with the magnetic values obtained on the same locations.

A resampling of the very high anomalous values has been done and duplicate well past results, see attachment for copper-moly-cobalt values.

**SAMPLE PREPARATION, ANALYSIS & SECURITY**

**1. Sample drying & shipping**

J.HAJEK, Geochemist, project manager and director of Galore supervised the drying and shipping of all geochemical soils samples.

**2. ACME Analytical laboratories**

This Vancouver laboratory is well established certified and is known to the author for its high standards and quality control.

**3. Quality control**

For every batch of 40 samples or less 2 standards are analyzed along with a repeat sample. Each batch of 20 samples contains one or more internal duplicate sample known only to GALORE staff.

**4. Statement on sampling & analytical control**

The author view is that a geochemical sampling program must reflect the ground condition thus depending on the quality of the fieldwork and on the reliability of the analysis used.

We have used the 36 elements ICP-MS as the best tool for the expenditure. The multi-element correlation is also a reliable mean to provide an inside on the quality of the results.

**JOHN. H HAJEK, GEOCHEMIST**



## **GEOCHEMICAL SAMPLING**

### **I. Sample Geochemical Analysis**

#### **1. Hub Rock Analysis**

- Acme labs #A505235, Hub property  
22 samples analyzed on 1g as 7AX, August 31, 2005  
We have one repeat sample, 1 standard and 4 sample locations having more than one assay within the same location.  
R9H & R9 HUB, R10 & R10B, R11 & R11H, R25H, R25H1 & R25BH. 21 samples from the Hub Tchaikazan river outcrops and one background soil sample from the NWC.

#### **2. Geochemical Soils Results**

- Acme labs #A503634, Hub property  
32 samples analyzed on 15 g as 1DX, July 20, 2005  
We have one repeat, one control & one standard sample.  
This is a soil orientation survey to enhance the detection of copper-molybdenum in bedrock.
- Acme labs #A503635, Hub & NWC projects  
6 samples analyzed on 15 g as 1DX, July 20, 2005  
We have one standard sample. Hub-3= molybdenite vein,  
2 NWC samples with massive sulphides: Cu, Ag, As, Cd, Sb, Hg, Se with high silver.  
Acme labs #A503634, \$636.54 for 30 + 6= 36 samples
- Acme labs #A505136, \$4,186.80, mixed properties  
255 samples analyzed on 15g as 1DX, August 25, 2005  
One standard & one repeat sample for every 35 analysis.  
One control sample: G-1 for every batch analysis.  
Twin creek: L98N & L99N = 41 samples or 820 meters.  
Hub = 211 samples or 2,110 meters coverage.
- Acme labs #A505234, \$736.05, NWC property  
14 samples analyzed on 15 g as 1DX, August 31, 2005  
We have one repeat, one control & one standard sample.

Those samples represent a 280 meters E-W section across the Tchaikazan fault located within the geophysical VLF-Magnetic survey section.

- Acme labs #A507234,\$5,546.24, Hub & Michel road  
346 samples analyzed on 15g as 1DX, November 2, 2005  
One standard, one repeat sample for every 35 analysis including one control sample: G-1.  
L200N starts as sample #1200 on 00 base line, sample #1230 is 230m W, L200N & sample # 1600 is 400m W, L200N.  
L200N has 40 samples of which 22 are part of this lab report.  
L250N starts as sample #2001 on 00 base line, sample #2010 is 90W on the same 250N line.  
Sample #2051 is located 500m west on line 250N.  
L250N has 50 samples to the west covering 500 meters.  
Samples #1391-1631 are 12 control repeat samples.  
L275N starts with sample # 2060 on 00 base line going west, sample #2072 is located 120W on L275N & sample #2090 is located 300W on line 275N.  
L275N has 31 samples to the west covering 300 meters.  
L100N going west starts at sample #4203 duplicate of sample #355, finishes at sample location #4264 duplicate within 5meters of sample #370SE.  
Line 100N has 49 control-repeat samples.  
L175N going west starts at sample #4300 which is a repeat of sample #355 and finishes with sample #4321 which is a control of sample #310N sample.  
Line 175N has 22 repeat and control samples.  
R3004W to R3086W = 45 samples west of 250N on 00 baseline and going west on the road or 450 meters west.  
R 30087E to R3115E = 30 samples going east from 250N 00 base line. Sample # R3017 to sample #R3058 = 20 samples covering 200 meters of road to the west of 00 L250N.  
Total 95 road soil and swamp interface samples.  
Sample #T509 to sample #T1370 represent 29 road cut samples from Fortune property: claims # 358595 & 510763.
- Acme labs #A507340,\$1,718.31, Hub & Fortune properties  
109 samples analyzed on 15 g as 1DX, November 08, 2005  
One standard, one repeat sample for every 35 analysis including

one control sample: G-1 for every batch analysis.

L200N is represented by 20 samples going west starting at location 210W sample #1210 to sample #1570, station 570W. 42 control and repeat samples from sample #310B to sample #4349.

Hub road cut testing is represented by samples R3000 to R3029W or 13 samples.

Fortune road cut testing is represented by samples T501 to T547 or 28 samples.

## **II. Geochemical Interpretations**

### **1. Acme labs #A505235, Hub property**

22 rock samples analyzed on 1g as 7AX, August 31, 2005

R-3, R-4, R-5 rock samples have 0.2% Cu with moly enrichment and represent a zone of mineralization found and assayed by several past exploration teams.

R-10B is part of R-10 with lower copper content but contains silver-lead associated to Bi & Se and sulfur.

Manganese & iron rock content in this suite of analysis should be use as a guide to soils taken in the vicinity.

### **2. Acme labs #A503634, Hub property**

32 samples analyzed on 15g as 1DX, July 20, 2005

A25H located 100west on 00N line, is indicate of Mo=267ppm & Cu =0.3% enrichment in bedrock.

G10H & G12H are also indicative of similar copper-moly enrichment and represent a zone of interest 40 meters wide.

### **3. Acme labs #A503635, Hub & NWC Projects**

6 samples analyzed on 15g as 1DX, July 20, 2005

Rock sample HUB-3DH5 with Cu=0.3% and Mo=0.2% represent the high grade alteration found on the Tchaikazan river outcrops.

NWC-1DH5 & NWC-5D5 are high grade floats taken during a helicopter investigation of the NWC property. They are similar to sulphosalts enrichment in sediments for copper, silver, antimony and other elements of lesser importance.

### **4. Acme labs #A505136, mixed properties**

255 samples analyzed on 15g as 1DX, August 25, 2005



- 5. Acme Labs #A505234, NWC Property**  
14 samples analyzed on 15g as 1DX, August 31, 2005  
Background values, with small copper enrichment and to a lesser extend arsenic-gold.
- 6. Acme I Labs #A507234, Hub & Michel Claim Road**  
346 samples analyzed on 15g as 1DX, November 2, 2005
- 7. Acme labs #A507340, Hub & Fortune properties**  
109 samples analyzed on 15g as 1DX, November 08, 2005

### **III. Conclusions**

A total of 784 samples have been taken and analyzed by Galore Resources Inc. on the Taseko project.

Copper and molybdenum have been found in extremely high quantity in soils. It may be representative of commercial grade in the underlain bedrock or moved by ground water and concentrated in specific locations.

Numerous repeat samples, duplicates taken within 5 meters radius and the lack of any abnormal concentration of manganese or iron seem to favor the proximity of mineralized bedrock.

Trenching the anomalous locations is recommended before finishing a larger sampling program.

Geological mapping and sampling will also determine if the enhanced cobalt values are indicative of copper rich volcanic or other rock units.

From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT  
To Galore Resources Inc. PROJECT A Series  
Acme file # A503634 Received: JUL 20 2005 \* 32 samples in this disk file.

Analysis: GROUP 1DX - 15.00 GM SAMPLE LEACHED WITH 90 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 300 ML, ANALYSED BY ICP-MS.  
ELEMENT Mo Cu Pb Zn Ag Ni Co Mn Fe As U Au Th Sr Cd Sb Bi V Ca P La Cr Mg Ba Ti B Al Na K W Hg Sc Tl S Ga Se Sample  
SAMPLES ppm ppm ppm ppm ppm ppm ppm ppm % ppm ppb ppm ppm ppm ppm ppm ppm ppm ppm % % ppm ppm ppm ppm ppm ppm % ppm ppm gm

From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT  
To Galore Resources Inc. PROJECT A Series  
Acme file # A503635 Received: JUL 20 2005 \* 7 samples in this disk file.

Analysis: GROUP 1DX - 15.00 GM SAMPLE LEACHED WITH 90 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 300 ML, ANALYSED BY ICP-MS.  
ELEMENT Mo Cu Pb Zn Ag Ni Co Mn Fe As U Au Th Sr Cd Sb Bi V Ca P La Cr Mg Ba Ti B Al Na K W Hg Sc Tl S Ga Se Sample  
SAMPLES ppm ppm ppm ppm ppm ppm ppm ppm % ppm ppb ppm ppm ppm ppm ppm ppm ppm ppm % % ppm ppm ppm ppm ppm ppm % ppm ppm gm

From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT

To Galore Resources Inc. PROJECT N.W Copper

Acme file # A505235 Received: AUG 31 2005 \* 23 samples in this disk file.

Analysis: GROUP 7AX - 1.000 GM SAMPLE LEACHED WITH 30 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 100 ML, ANALYSED BY ICP-ES AND ICP-MS.

ELEMENT	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se
SAMPLES	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	
R-1H	32.3	1357.6	0.8	27	0.5	10.2	11.3	164	2.96	<5	<5	1	35	<5	<5	<5	84	0.61	0.044	6	13.4	0.91	69	0.144	1.56	0.095	0.29	1.3	<05	5.9	<5	<5	6	<2
R-3 HUB	182.7	2130.8	1	44	0.6	16.5	24.2	301	5.72	<5	<5	<5	131	<5	<5	<5	238	2.2	0.051	<5	32	2.05	95	0.301	4.88	0.476	0.95	4.1	<05	18.2	<5	<5	12	2
R-4 HUB	101.2	2076	3.7	65	0.7	16.3	20.2	522	5.24	<5	<5	<5	74	<5	<5	<5	209	1.54	0.049	<5	19.7	2.09	27	0.312	3.8	0.233	0.38	7.3	<05	18.1	<5	<5	10	2
R-5 HUB	275.8	2840.9	2	68	1.6	22	23.3	783	5.93	<5	<5	<5	114	<5	<5	<5	241	2.24	0.057	<5	27.3	2.25	31	0.325	4.61	0.332	0.38	7	<05	20.8	<5	0.5	12	2
R-6 HUB	116.3	1278.4	2.2	46	<5	15.4	21.3	502	5.71	<5	<5	0.5	122	<5	<5	<5	230	2.28	0.05	<5	21.5	1.92	49	0.272	4.46	0.393	0.47	13.2	<05	17.4	<5	<5	11	<2
R-7 HUB	72.3	1287	1.8	33	<5	18.3	22.9	220	5.63	<5	<5	0.5	164	<5	<5	<5	251	2.56	0.055	<5	24.3	1.84	110	0.299	5.36	0.61	1.03	9.2	<05	15.6	<5	<5	13	<2
R-8 HUB	67.3	641.8	0.9	32	<5	13.5	20.2	243	5.54	<5	<5	<5	166	<5	<5	<5	248	2.55	0.057	<5	22.6	1.79	104	0.305	5.23	0.574	0.98	0.7	<05	16.6	<5	<5	12	<2
R-9H	66.5	1142	0.8	27	<5	13.8	22	285	5.66	<5	<5	<5	176	<5	<5	<5	248	2.63	0.058	<5	17.8	1.94	127	0.294	5.64	0.667	1.14	2	<05	18.9	<5	<5	12	<2
R-9 HUB	50.3	721.7	1.2	25	<5	13.3	19.3	232	5.54	<5	<5	<5	186	<5	<5	<5	245	2.65	0.055	<5	18.9	1.72	83	0.294	5.04	0.515	0.77	0.8	<05	14.3	<5	<5	11	<2
R-10 HUB	75.8	1453.4	12.9	98	1.2	12	15.7	496	4.86	<5	<5	<5	54	<5	<5	<5	163	1.42	0.042	<5	14.5	2.11	33	0.255	3.39	0.153	0.41	7	<05	13.6	<5	2.1	10	3
R-10B HUB	153.8	579.3	233	112	4.9	8.3	8.9	403	4.97	<5	<5	<5	26	0.7	<5	<5	129	0.63	0.057	<5	13.9	1.42	33	0.167	1.92	0.051	0.35	47.2	0.31	5.1	<5	1.1	7	25
R-11H	7.1	540.6	3.9	35	<5	5.9	13.5	225	4.48	<5	<5	<5	101	<5	<5	<5	222	1.94	0.045	<5	9.3	1.13	68	0.215	3.69	0.408	0.48	0.7	<05	15.6	<5	<5	9	<2
R-11 HUB	59.5	1070.1	1.2	27	<5	11.2	21.3	220	5.42	<5	<5	<5	182	<5	<5	<5	247	2.61	0.054	<5	20.2	1.74	119	0.292	5.3	0.608	1.01	0.5	<05	14.4	<5	<5	13	<2
R-13H	27.5	520.5	1.8	19	<5	5	6	141	1.85	<5	<5	1.2	26	<5	<5	<5	48	0.33	0.037	5	5.6	0.64	48	0.087	1.11	0.074	0.18	<5	<05	3	<5	<5	<5	<2
R-14H	67	589	0.9	16	<5	4.4	4.9	113	1.36	<5	<5	1.2	23	<5	<5	<5	50	0.3	0.023	<5	7.6	0.55	37	0.083	0.96	0.064	0.14	<5	<05	3.5	<5	<5	<5	<2
R-21H	27.3	1341.3	0.8	20	<5	3.1	6	112	1.61	<5	<5	1.3	41	<5	<5	<5	37	0.25	0.032	<5	5.6	0.56	30	0.052	1.02	0.062	0.12	<5	<05	2.4	<5	<5	<5	<2
R-22H	48.7	888	2	15	<5	3.8	6.1	128	1.38	<5	<5	1.1	33	<5	<5	<5	23	0.62	0.033	<5	<5.0	0.45	144	0.014	0.82	0.048	0.17	<5	<05	1.8	<5	<5	<5	<2
R-25BH	36.2	751.4	0.8	27	<5	7.2	10.5	167	2.95	<5	<5	1.1	38	<5	<5	<5	91	0.62	0.044	7	11.5	0.92	94	0.147	1.69	0.111	0.36	0.8	<05	6.5	<5	<5	6	<2
R-25H	293	697.5	0.9	16	<5	2.6	5.6	122	1.44	<5	<5	1.1	34	<5	<5	<5	43	0.37	0.022	<5	7.4	0.56	44	0.024	0.95	0.057	0.15	<5	<05	2.7	<5	<5	<5	<2
R-25H-1	10.9	1067	3.5	17	<5	3.9	6.6	138	1.76	<5	<5	1.3	30	<5	<5	<5	42	0.57	0.04	<5	5.9	0.6	84	0.064	1.05	0.068	0.16	<5	<05	3	<5	<5	5	<2
R-26H	32.8	1017.7	1	17	<5	2.6	6.8	124	1.67	<5	<5	1.4	23	<5	<5	<5	49	0.38	0.041	5	5.9	0.59	37	0.096	1.07	0.065	0.12	0.8	<05	3.5	<5	<5	5	<2
NWC-T30	1.8	35.9	2.1	6	<5	2.7	4.8	120	1.72	23	<5	<5	<5	<5	<5	<5	18	0.11	0.012	<5	11.4	0.05	81	0.025	0.23	0.004	0.04	<5	0.12	2.8	<5	<5	<5	3
RE NWC-T30	1.6	37	1.9	6	<5	4.5	5.8	120	1.73	21	<5	<5	<5	<5	<5	<5	19	0.1	0.013	<5	12.4	0.06	79	0.025	0.24	0.004	0.04	<5	0.14	2.6	<5	<5	<5	2
STANDARD SF-2a	296.9	6929.8	8575.8	12186	66.7	3360.3	108.9	4120	7.45	21	1.6	2.4	44	51.1	49	4.9	39	1.72	0.044	9	248.8	4.05	123	0.111	1	0.438	0.82	0.8	0.71	4.4	1	3.7	<5	6



From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT

To Galore Resources Inc. PROJECT TASEKO

Acme file # A505136 Received: AUG 25 2006 \* 255 samples in this disk file.

Analysis: GROUP 1DX - 15.00 GM SAMPLE LEACHED WITH 90 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 300 ML, ANALYSED BY ICP-MS.

Table with columns: ELEMENT, Mo, Cu, Pb, Zn, Ag, Ni, Co, Mn, Fe, As, U, Au, Th, Sr, Cd, Sb, Bi, V, Ca, P, La, Cr, Mg, Ba, Ti, B, Al, Na, K, W, Hg, Sc, Tl, S, Ga, Se, Sample gm. Rows list various elements and their concentrations in different samples.







ELEMENT SAMPLES	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	U ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm
G-1	1.9	2.4	3	42	<1	8	4	498	1.83	<5	1.8	<5	3.8	86	<1	0.1	0.1	37	0.81	0.087	9	79.7	0.52	170	0.113	2	0.91	0.047	0.37	0.1	<0.1	1.9	0.3	0.07	5	<5
4266	15.5	5231.3	2.5	85	<1	18.8	83.1	313	4.04	4.3	0.3	2.1	0.6	97	<1	0.1	0.4	144	1.78	0.033	4	14.9	1.3	47	0.127	6	4.6	0.325	0.08	0.4	0.02	10.7	0.1	<0.05	11	1
4267	33.1	1407.1	2.6	51	0.1	15.8	29	354	4.46	6.9	0.2	1.2	0.6	81	0.1	0.2	0.9	153	0.77	0.017	3	21.8	1.43	78	0.15	6	3.95	0.128	0.26	0.4	<0.1	9.7	0.1	<0.05	11	0.6
4268	5.3	2340.1	1.9	64	<1	18	45.4	338	4.92	3.8	0.2	1.3	0.6	101	0.1	0.1	0.2	183	1.57	0.019	4	20.1	1.64	55	0.165	4	4.66	0.302	0.2	0.2	<0.1	14	0.1	<0.05	11	<5
RE 4268	5.3	2215.1	1.8	66	<1	16.6	43	339	4.81	3.8	0.2	1.8	0.6	97	0.1	0.1	0.2	181	1.47	0.017	4	19.3	1.64	54	0.166	5	4.71	0.327	0.19	0.2	<0.1	14.2	0.1	<0.05	11	<5
4273	11.3	3023.6	5	163	<1	21.8	134.6	450	3.36	5.6	0.4	1.2	1.4	63	0.1	0.2	0.3	94	1.34	0.037	6	21	0.86	55	0.126	9	3.6	0.177	0.11	0.3	0.02	6.6	0.1	<0.05	9	0.6
4278	14.7	958.3	4.3	88	0.1	15.3	47.3	355	3.41	4.7	0.2	1.2	0.6	88	0.2	0.2	0.4	117	1.51	0.03	4	16.3	1.09	82	0.124	8	3.93	0.2	0.11	0.3	0.02	7.6	0.1	<0.05	9	0.5
4279	14.1	1122.6	3.6	93	0.1	18.2	64.8	304	3.45	3.9	0.2	0.5	0.6	75	0.2	0.1	0.4	115	1.46	0.026	3	15.1	1.13	70	0.131	7	3.83	0.23	0.09	0.4	0.02	7.8	0.1	<0.05	10	<5
4280	29.1	971.8	3.3	79	0.1	20.3	50.1	274	3.97	7.7	0.2	6.6	0.6	49	0.1	0.2	0.4	132	0.83	0.022	3	17.6	1.22	114	0.137	7	4.11	0.122	0.11	0.4	0.01	8	0.1	<0.05	11	<5
4281	14.4	1776.9	3.7	87	0.1	17.2	50.6	291	4.28	6.4	0.3	1.2	0.9	75	0.1	0.2	0.4	140	1.35	0.024	4	17.8	1.22	78	0.145	7	4.39	0.248	0.12	0.2	0.01	9.6	0.1	<0.05	11	0.6
4282	12.9	1181.8	4	72	0.1	18.4	62.4	202	2.97	5.8	0.2	0.8	0.8	34	0.1	0.2	0.6	95	0.67	0.012	4	18.5	0.75	56	0.12	7	2.81	0.061	0.09	0.3	0.02	4.9	0.1	<0.05	10	<5
4285	17.2	192.5	5.2	59	0.1	11.5	15.9	229	2.5	8.6	0.2	2.1	0.7	25	0.1	0.3	0.3	79	0.41	0.03	5	16.4	0.43	71	0.093	5	1.92	0.024	0.09	0.2	0.03	3.3	0.1	<0.05	8	<5
4288	9	>10000	2.7	105	0.2	21.8	106.1	494	4.11	4.2	0.4	1.1	0.7	103	0.4	0.2	0.3	142	1.82	0.092	6	15.6	1.45	36	0.141	7	4.4	0.328	0.12	0.6	0.01	11.8	0.1	<0.05	11	1.1
4288	17.2	1028.4	3.9	55	0.2	15.7	21.2	549	4.34	7.4	0.3	3.7	1	52	0.1	0.3	0.5	126	0.73	0.086	5	21.6	1.03	67	0.102	6	4.1	0.077	0.13	0.5	0.01	7.5	0.1	<0.05	10	<5
4289	12.8	666.6	5.1	125	0.2	23.2	139	418	3.38	6.9	0.2	2.5	1	62	0.5	0.2	0.2	92	1.16	0.022	5	17.1	0.8	73	0.119	10	3.88	0.152	0.13	0.5	0.01	7.3	0.1	<0.05	10	<5
4290	5.6	4487.1	2.9	104	0.2	22.8	101.9	407	3.73	3.2	0.1	1	0.6	86	0.2	0.2	0.3	139	1.8	0.045	3	14.3	1.14	50	0.123	5	4.11	0.292	0.14	0.3	0.01	9.6	0.1	<0.05	10	0.6
4291	52.1	1293	3	49	0.1	15.3	19.8	372	4.49	5.1	0.2	3.7	0.7	73	0.1	0.2	0.3	146	0.96	0.037	4	19.8	1.36	64	0.139	5	4.11	0.119	0.12	0.6	0.01	11	0.1	<0.05	12	<5
4292	29.2	905.4	4.7	84	0.2	26.7	28.5	548	4.46	10.5	0.4	3	1	48	0.1	0.4	0.4	133	0.58	0.071	4	37.3	1.2	64	0.141	6	4.19	0.056	0.11	0.4	0.02	8.9	0.1	<0.05	13	<5
4300	32.1	6036.7	3	72	<1	25.6	91.2	618	4.03	7.9	0.7	1.2	0.8	98	0.1	0.4	0.2	129	1.79	0.059	9	24.7	1.03	52	0.114	7	4.51	0.257	0.08	1	0.02	8.5	0.1	<0.05	9	1.3
4301	15.8	2986.1	3.9	85	0.1	19.8	55	323	3.57	7.8	0.3	1.6	0.8	58	0.1	0.2	0.3	107	1.08	0.066	5	18.5	0.79	62	0.102	6	3.9	0.146	0.09	0.4	0.02	7.7	0.1	<0.05	9	0.7
4302	29.3	1610.5	3.9	96	0.1	20.3	70.1	1523	4.63	3.7	0.6	<5	2.4	35	0.3	0.2	0.2	110	1.03	0.03	9	20.6	0.91	40	0.216	8	3.16	0.066	0.13	0.5	0.02	6	0.2	<0.05	10	0.7
4303	12.1	1524.1	5.7	149	0.2	32.9	86.2	339	3.65	9.1	0.3	1.9	0.8	47	0.2	0.3	0.4	108	0.92	0.048	4	23.8	0.82	74	0.116	6	4.22	0.109	0.13	0.3	0.02	6.4	0.1	<0.05	10	<5
4304	10.8	5731.8	3.1	147	<1	38.6	130.7	474	4.14	7	0.3	2.1	0.8	81	0.1	0.2	0.3	141	1.53	0.038	6	22.3	1.24	46	0.134	6	4.88	0.259	0.09	0.3	0.01	9.2	0.1	<0.05	10	<5
4305	43.6	7280.1	2.3	87	0.1	25.8	62.9	446	4.87	5.5	0.4	4.2	0.8	98	0.2	0.2	0.7	158	1.91	0.075	5	17.7	1.9	82	0.2	5	3.98	0.231	0.26	0.5	0.03	16.6	0.1	<0.05	11	1.2
4306	39	3504.3	2.4	62	0.1	17.1	43.1	324	4.53	4.8	0.4	2.6	0.5	99	0.1	0.2	0.4	149	2.06	0.055	5	21.7	1.05	58	0.107	5	3.41	0.234	0.15	0.8	0.02	8.9	0.1	<0.05	9	1.7
4307	19.7	3700.4	2.5	56	0.1	18.7	79.1	388	3.86	4.8	0.3	2.1	0.5	102	0.1	0.2	0.3	128	2.33	0.06	5	19.6	1.12	60	0.108	10	3.74	0.24	0.11	0.6	0.02	9.7	0.1	<0.05	9	1.8
4308	24.5	7082.3	1.7	74	<1	20.8	61.4	404	4.75	4.4	0.3	3.6	0.5	108	0.2	0.1	0.8	157	2.09	0.072	5	15.9	1.75	65	0.163	5	4.19	0.34	0.2	0.5	0.03	14	0.1	<0.05	11	1.1
4309	11.8	4264.4	2.2	54	<1	15.2	70.9	357	4.45	3.9	0.2	3.8	0.7	98	0.1	0.1	0.6	156	1.84	0.033	5	15	1.36	43	0.145	5	4.23	0.334	0.07	0.3	0.02	12.5	0.1	<0.05	12	0.9
4310	13.3	3988.6	2.5	85	<1	22.2	134.8	325	3.98	4.7	0.2	1.5	0.6	92	0.1	0.1	0.4	125	1.89	0.037	5	16.4	1.15	56	0.123	7	4.11	0.278	0.09	0.6	0.02	10.1	0.1	<0.05	10	1.2
4311	11.5	3885.1	1.7	63	<1	19.4	112.8	324	4.44	4.6	0.2	2.7	0.8	111	0.1	0.1	0.3	153	1.91	0.025	4	15.8	1.26	56	0.139	4	4.16	0.364	0.09	0.7	0.02	11.3	0.1	<0.05	12	0.8
4312	17.4	2226.2	2.7	66	<1	20	99.7	312	4.15	4.4	0.2	1	0.9	98	0.1	0.1	0.2	141	1.62	0.019	4	18.1	1.25	59	0.135	5	4.35	0.275	0.1	0.4	0.02	10.6	0.1	<0.05	11	0.7
4313	19.4	5993.6	1.6	67	<1	19.5	59	379	4.8	3.7	0.3	2.4	0.8	114	0.1	0.1	0.5	180	1.9	0.061	5	20	1.5	61	0.145	4	4.19	0.314	0.18	0.6	0.01	12.3	0.1	<0.05	11	0.9
4314	34.9	5433.7	1.7	81	0.1	21	55.8	419	5.4	4.4	0.4	3.6	0.6	109	0.1	0.1	0.5	207	1.88	0.064	5	21.5	1.82	60	0.173	2	4.11	0.315	0.23	0.7	0.01	14.3	0.1	<0.05	12	0.7
4315	36.7	2529.7	2.2	54	0.1	15.6	36.7	384	5.26	6	0.3	7.6	0.7	105	0.1	0.1	0.7	182	1.87	0.066	5	22.3	1.59	69	0.155	4	4.04	0.282	0.22	1.4	0.02	13.4	0.1	<0.05	12	0.9
431																																				

From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT  
 To Galore Resources Inc. PROJECT N.W. Copper  
 Acme file # A505234 Received: AUG 31 2005 \* 16 samples in this disk file.  
 Analysis: GROUP 1DX - 15.00 GM SAMPLE LEACHED WITH 90 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 300 ML, ANALYSED BY ICP-MS.

ELEMENT	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Au	Th	Sr	Cd	Sb	Bi	V	Ca	F	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se
SAMPLES	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm	ppm	%	ppm	%	ppm	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	
G-1	0.7	2	2.6	47	<1	6.3	4.3	575	1.82	<5	2	1.1	3.6	48	<1	<1	<1	33	0.38	0.076	6	71.2	0.62	236	0.117	<1	0.99	0.081	0.5	0.1	<0.1	3.7	0.4	<0.05	4	<5
NW-1 LON	0.7	56.3	3.6	44	0.1	18.7	10.7	462	3.32	10.5	1.1	2.7	0.9	46	0.1	0.5	0.1	82	0.73	0.034	9	31.6	0.85	85	0.101	3	2.59	0.033	0.04	0.1	0.09	9.5	<1	<0.05	6	<5
NW-2 LON 40W	1	46.3	4.7	53	0.1	16.9	12.4	499	3.61	10.9	0.7	3.2	1	41	0.1	0.5	0.1	100	0.57	0.021	5	29	0.87	75	0.071	1	2.9	0.023	0.02	0.1	0.04	7.9	<1	<0.05	7	<5
NW-3 LON 80W	1.3	46.6	4.2	55	0.1	19.8	13.5	394	4.33	16	0.4	1.5	0.7	30	0.1	0.7	0.1	118	0.46	0.026	3	29.8	0.89	78	0.095	3	3.47	0.018	0.03	0.2	0.14	6.6	<1	<0.05	9	<5
NW-4 LON 120W	1.4	67.7	5.7	54	0.2	22	15.1	594	4.08	18.2	1	6.7	1.1	69	0.1	0.7	0.1	105	0.72	0.057	10	30.5	0.74	198	0.061	3	4.77	0.021	0.04	0.2	0.07	9.5	0.1	<0.05	10	<5
NW-5 LON 160W	0.9	41.7	4.7	66	0.1	17.3	12.5	393	3.71	9.7	0.4	2	0.8	38	0.1	0.6	0.1	106	0.55	0.031	5	27.4	0.79	83	0.078	2	3.11	0.017	0.03	0.2	0.04	6.2	<1	<0.05	8	<5
NW-6 LON 200W	0.5	40	5.2	61	0.1	19.5	12.6	397	3.75	10.3	0.4	12.8	0.8	38	0.1	0.5	0.1	102	0.59	0.036	6	31.3	0.81	68	0.069	2	3.36	0.017	0.04	0.2	0.02	6.6	<1	<0.05	9	<5
NW-7 LON 240W	0.5	40.4	4.1	51	0.1	19.7	12.4	493	3.65	9.8	0.4	1.6	0.6	42	0.1	0.5	0.1	99	0.69	0.031	6	32.3	0.98	83	0.101	2	2.95	0.026	0.03	0.1	0.06	8	<1	<0.05	8	<5
RE NW-7 LON 240W	0.4	40.3	3.8	49	0.1	18.6	12.1	476	3.53	8.7	0.3	2.8	0.6	39	0.1	0.5	0.1	99	0.69	0.03	6	30	0.95	75	0.097	2	2.8	0.022	0.03	0.1	0.07	7.9	<1	<0.05	7	<5
NW-8 LON 280W	0.7	57.2	5.3	64	0.1	21.1	13.4	584	4	12.8	0.6	1	0.8	40	0.1	0.6	0.1	100	0.83	0.035	9	36	0.98	91	0.056	2	3.34	0.017	0.04	0.2	0.05	11.2	0.1	<0.05	9	<5
NW-9 LON 320W	0.7	44.8	4.5	60	0.1	18.9	14.5	753	3.8	9.5	0.6	1.9	0.6	39	0.1	0.5	0.1	105	0.87	0.031	8	34.5	1.05	73	0.093	3	3.01	0.021	0.03	0.2	0.05	9.7	<1	<0.05	8	<5
NW-10 LON 360W	0.8	27.9	3.9	53	0.1	15.2	12.7	542	3.42	7.9	0.4	1.9	0.6	36	0.1	0.5	0.1	98	0.62	0.021	6	28.1	0.97	56	0.107	3	2.45	0.019	0.02	0.1	0.05	8.4	<1	<0.05	7	<5
NW-11 LON 400W	0.7	42.3	5	52	0.1	18.3	14.4	441	3.85	14	0.3	2.6	0.8	27	0.1	0.6	0.1	108	0.49	0.036	4	29.3	0.96	75	0.102	2	3.39	0.016	0.03	0.2	0.06	7.4	<1	<0.05	8	<5
NW-12 LON 440W	0.8	29.8	5.5	56	0.1	17.6	14.6	575	3.85	10.1	0.2	1.2	0.6	26	0.1	0.5	0.1	109	0.49	0.035	4	28.7	0.9	75	0.099	3	3.13	0.015	0.03	0.1	0.03	6.8	<1	<0.05	9	<5
NW-13 LON 480W	0.9	33.6	5.2	64	0.1	12.5	15.9	511	4.08	12	0.2	1.1	0.6	23	0.1	0.5	0.1	111	0.39	0.035	5	20.5	0.73	60	0.049	3	2.92	0.012	0.03	0.1	0.03	7.7	<1	<0.05	9	<5
NW-14 LON 520W	1.2	31.7	6.2	66	0.1	13	14.6	388	4.56	12.8	0.2	1.9	0.6	17	0.1	0.6	0.1	115	0.27	0.045	3	21.4	0.71	62	0.051	2	2.96	0.01	0.04	0.1	0.03	6.8	<1	<0.05	10	<5
STANDARD DS6	11.4	121.2	29.5	137	0.3	24.3	10.7	682	2.77	20.3	6.5	46.8	3	39	5.8	3.4	4.9	55	0.81	0.076	13	183.4	0.57	159	0.078	17	1.86	0.07	0.13	3.5	0.22	3.2	1.7	<0.05	6	4.2

From ACME ANALYTICAL LABORATORIES LTD. 852 E. HASTINGS ST. VANCOUVER BC V6A 1R6 PHONE(604)253-3158 FAX(604)253-1716 @ CSV TEXT FORMAT  
 To Galore Resources Inc.

Acme file # A507234 Page 1 Received: NOV 2 2005 \* 346 samples in this dcl file.

Analysis: GROUP 1DX - 15.0 GM SAMPLE LEACHED WITH 90 ML 2-2-2 HCL-HNO3-H2O AT 95 DEG. C FOR ONE HOUR, DILUTED TO 300 ML, ANALYSED BY ICP-MS.

ELEMENT	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se
SAMPLES	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm	ppm	%	ppm	%	ppm	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	
G-1	2	3.5	2.9	46	<.1	8.6	4.4	559	2.01	<.5	1.7	0.5	4	66	<.1	0.1	0.1	40	0.62	0.094	8	91.2	0.59	172	0.119	1	0.96	0.057	0.45	0.1	<.01	2.1	0.3	<.05	5	<.5
1230	10	74.9	7.1	84	<.1	20	24.9	416	3.62	18.7	0.1	4.4	0.4	58	0.6	0.9	0.2	71	1.43	0.039	4	33.6	0.99	61	0.034	9	2.57	0.02	0.08	0.3	0.03	5.3	0.1	<.05	7	2.6
1240	26.5	956.3	5.4	63	0.2	13	19.6	508	4.34	8.6	0.3	5.7	0.8	67	0.1	0.4	1.1	123	0.94	0.067	5	21.4	1.24	89	0.141	4	3.38	0.1	0.19	2.3	0.04	9.1	0.1	<.05	9	0.8
1270	72	1946.8	12.3	65	0.3	12.2	23.8	525	5.55	7	0.4	7.2	0.9	52	0.1	1.1	3.1	146	0.79	0.055	6	18.9	1.56	98	0.179	4	3.45	0.063	0.25	4.8	0.05	11.7	0.1	<.05	11	1.4
1280	40.6	1379.5	3	58	0.2	11.5	22.7	496	5.01	4.9	0.3	4.3	0.9	81	0.1	0.3	1.2	158	1.11	0.054	5	18.6	1.72	138	0.205	2	3.65	0.159	0.38	0.9	0.02	13.8	0.2	<.05	10	0.7
1290	24.4	1084.6	3	55	0.1	13.2	18.4	430	4.53	7	0.3	4.9	0.9	79	<.1	0.2	0.7	132	1.13	0.054	5	18.9	1.56	114	0.176	5	3.71	0.125	0.16	0.8	0.03	11.4	0.1	<.05	10	0.6
1360	14.3	2078.9	2.6	62	0.1	22.2	70.7	326	4.15	6.7	0.3	7	0.5	85	0.1	0.2	0.3	128	1.42	0.046	5	28.5	1.1	53	0.14	4	3.92	0.24	0.08	0.4	0.03	8.9	0.1	<.05	9	1
1380	26.4	3133.3	2.5	68	0.2	22.6	42.6	350	4.95	7.7	0.2	6	0.6	98	0.1	0.2	0.4	161	1.69	0.056	5	31	1.37	56	0.151	5	4.75	0.248	0.15	0.4	0.03	12.3	0.1	<.05	12	1
1400	35.1	713.4	3.5	63	<.1	23.4	41.2	404	4.41	5.8	0.2	2.4	0.7	81	0.2	0.2	0.3	135	1.51	0.024	4	27.4	1.03	64	0.124	9	5.01	0.205	0.17	0.3	0.02	9.8	0.1	<.05	11	0.8
1420	14.9	207.3	6.3	89	0.2	25.6	25.4	764	4.11	10.6	0.2	1.4	0.9	30	0.2	0.4	0.3	114	0.48	0.046	5	31.9	0.81	106	0.152	5	3.77	0.033	0.13	0.5	0.02	5.9	0.1	<.05	11	<.5
RE 1420	15.9	213.7	6.3	89	0.2	25.2	26.5	796	4.24	10.6	0.2	2.1	0.9	30	0.2	0.3	0.3	116	0.48	0.044	4	31.7	0.79	102	0.14	5	3.63	0.03	0.13	0.6	0.02	5.8	0.1	<.05	11	<.5
1430	14.9	570.6	4.8	80	0.2	22.6	24.9	437	4.55	10.6	0.2	1.7	0.8	32	0.2	0.3	0.3	131	0.52	0.05	4	34.8	1.04	67	0.147	5	4.27	0.053	0.1	0.7	0.02	8	0.1	<.05	11	<.5
1450	9.4	184.9	5.2	77	0.1	26.2	20.7	383	3.99	11.3	0.2	1.9	0.7	27	0.1	0.3	0.2	116	0.43	0.058	4	36.3	0.95	63	0.154	4	3.78	0.028	0.13	0.5	0.01	5.9	<.1	<.05	10	<.5
1460	21.8	747.6	3.9	60	0.2	20.3	27.1	351	4.77	9.3	0.2	2.8	0.8	45	0.1	0.3	0.4	144	0.71	0.039	4	30.3	0.98	70	0.141	4	4.31	0.085	0.11	0.5	0.02	8.3	0.1	<.05	11	<.5
1470	25.8	610.7	4.7	55	<.1	22.2	29.8	314	4.47	9.7	0.2	2.6	0.6	49	<.1	0.3	0.3	143	0.89	0.018	4	32.3	0.98	81	0.153	7	4.26	0.075	0.17	1.1	0.02	7.2	0.1	<.05	11	<.5
1490	350.6	>10000	3.2	52	1.7	17.7	956.6	6113	3.17	8.6	4.8	1.1	0.3	54	0.3	0.3	0.3	82	1.1	0.112	95	22.3	0.7	38	0.073	10	5.3	0.072	0.09	7.3	0.07	7	0.1	0.13	7	2.9
1530	29.9	760.9	4.1	67	0.2	20.9	28.2	495	5.25	9.9	0.2	5.5	0.8	48	0.1	0.4	0.4	142	0.64	0.054	4	37.5	0.99	64	0.116	4	3.69	0.055	0.13	0.8	0.02	7.9	0.1	<.05	11	<.5
1540	29.4	1694	3.9	66	0.2	20.7	40.7	502	5.56	10	0.2	4.2	0.6	59	0.2	0.3	0.5	146	0.73	0.076	5	41.3	1.07	62	0.118	4	4.08	0.078	0.14	1	0.02	8.9	0.1	<.05	11	0.6
1560	15.9	546.6	6.2	74	0.3	24.1	30.4	322	4.52	13.3	0.3	1.5	1	25	0.1	0.4	0.3	116	0.44	0.055	4	31.5	0.77	73	0.12	3	3.67	0.036	0.12	0.8	0.02	6.2	0.1	<.05	10	<.5
1580	10.2	1735.9	5.2	126	0.2	27.5	122.1	993	4.28	11.1	0.4	3.6	0.9	30	0.2	0.4	0.3	111	0.52	0.123	5	35.3	0.95	75	0.106	3	3.7	0.033	0.09	0.6	0.03	7.5	0.1	<.05	10	0.5
1590	5.9	155.7	5.3	91	<.1	27.5	24.5	601	3.87	10.8	0.2	2.3	0.8	26	0.1	0.4	0.2	104	0.51	0.053	4	34.1	0.94	96	0.148	4	3.62	0.025	0.11	0.5	0.02	6.4	0.1	<.05	10	<.5
1600	5.1	72.6	4.8	70	<.1	25.4	17.9	557	4.07	13.1	0.2	1.3	0.6	39	<.1	0.4	0.2	123	0.58	0.023	4	39.2	1.16	81	0.167	3	3.88	0.021	0.1	0.5	0.02	6.7	<.1	<.05	10	<.5
2001	12.4	885.3	4.5	62	0.2	16.1	21	518	4.29	8.2	0.2	3.1	0.7	42	0.1	0.2	0.7	133	0.69	0.038	4	24.7	1.22	85	0.144	4	3.59	0.073	0.18	1.6	0.02	9.3	0.1	<.05	10	<.5
2002	14.4	974.1	3.8	67	0.1	16.4	22.4	412	4.31	8.3	0.2	2.7	0.7	42	0.1	0.3	0.5	138	0.74	0.033	4	25.5	1.19	99	0.155	5	3.72	0.09	0.15	0.8	0.01	8.9	0.1	<.05	10	<.5
2003	9.2	1230.9	3.6	54	0.3	14.1	16.7	301	3.92	7.4	0.6	3.4	0.5	68	0.1	0.3	0.4	123	1.29	0.045	12	22.1	1.13	79	0.121	5	3.43	0.12	0.13	0.7	0.06	10.6	0.1	<.05	9	1.1
2004	13.1	287.5	3.2	58	0.1	15.8	24.4	289	3.51	8	0.2	2.2	0.7	87	0.2	0.2	0.3	115	1.32	0.017	3	24.4	1.01	105	0.133	7	3.39	0.166	0.09	0.6	0.03	8.3	0.1	<.05	9	0.9
2005	28	732.1	6.3	91	0.3	30.5	91.1	605	4.02	17.8	0.3	5.7	0.5	59	0.2	0.6	0.2	96	1.14	0.073	6	38.8	1.39	72	0.079	4	3.07	0.083	0.1	0.6	0.05	8.5	0.1	<.05	8	1.7
2006	46.4	299.6	8.8	97	0.4	33.7	127.2	2167	4.22	30.4	0.3	12.5	0.5	54	1	1	0.1	90	1.08	0.058	6	49.3	1.35	85	0.056	5	2.87	0.031	0.09	0.5	0.04	8.3	0.1	<.05	8	2
2007	40.6	1709.8	4	53	0.2	20.1	59	435	3.69	18.4	0.3	3.1	0.7	67	0.2	0.7	0.5	118	1.35	0.06	5	32.6	1.18	92	0.139	6	3.13	0.103	0.16	1.5	0.05	9	0.1	0.47	8	3
2008	14.7	97	9.3	73	0.2	26.3	31.8	692	4.53	35.5	0.2	5.8	0.6	47	0.3	1.4	0.1	93	0.94	0.035	6	49.6	1.41	63	0.051	5	2.91	0.022	0.08	0.3	0.03	7.8	0.1	<.05	9	1.6
2009	13.8	111.1	8.6	60	0.1	22	17.1	427	4.05	29.4	0.2	14.5	0.5	37	0.2	1.2	0.1	84	0.74	0.022	7	41.2	1.23	54	0.045	4	2.55	0.019	0.09	0.2	0.02	6	<.1	<.05	7	1
2010	19	486.9	4.8	71	0.2	20.3	20.3	419	4.18	13.1	0.5	3.4	0.5	55	0.2	0.6	0.1	120	1.15	0.022	5	36.9	1.09	73	0.152	5	3.69	0.034	0.08	0.6	0.04	7.8	0.1	<.05	9	1.4
2011	9.8	63.5	6.4	55	<.1	23.4	18.3	358	3.75	15.3	0.2	2.5	0.8	47	0.3	0.5	0.2	102	1.1	0.018	4	39.3	0.95	86	0.129	9	2.98	0.048	0.08	0.8	0.03	6.4	<.1	<.05	8	0.5
2012	12.1	256	5.6	76	0.3	26.9	25.4	484	4.07	18	0.3	1.8	0.7	63	0.3	0.5	0.3	109	1.04	0.035	5	40.2	1.26	84	0.131	5	3.64	0.083	0.09	1.2	0.03	8.1	0.1	<.05	9	1
2013	6.1	131.4	6	66	<.1	26.7	22.2	459	4.27	18.7	0.3	2.2	0.8	42	0.1	0.5	0.3	120	0.67	0.016	5	43.6	1.27	85	0.161	4	3.61	0.039	0.14	0.9	0.03	7.9	<.1	<.05	9	<.5
STANDARD DS6	11.7	124	29.4	144	0.3	25.2	11	702	2.85	21.4	6.8	45.7	3.1	41	6.1	3.5	5.1	58	0.86	0.079	15	186.1	0.59	165	0.084	18	1.92	0.076	0.16	3.4	0.22	3.3	1.8	<.05	6	4.4
G-1	1.9	2.9	2.6	39	<.1	7.7	4.1	504	1.83	<.5	1.7	<.5	3.7	59	<.1	0.1	0.1	39	0.57	0.082	7	82.6	0.55	159	0.11	1	0.86	0.046	0.42	0.1	<.01	2.1	0.3	0.07		






ELEMENT SAMPLES	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	U ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm
1631	16.8	1031.4	3.4	79	0.3	20.7	90.4	313	3.98	8.3	0.3	2.6	0.7	73	0.3	0.2	0.4	126	1.34	0.023	3	17	1.07	54	0.129	8	4.38	0.168	0.12	1.2	0.03	10	0.1	<0.05	11	1
RE 1631	16.7	1031.2	3.5	78	0.3	20.2	86.7	300	3.83	8	0.3	2.1	0.6	72	0.4	0.1	0.4	123	1.36	0.022	3	17.1	1.05	53	0.127	9	4.24	0.17	0.12	1.2	0.02	9.7	0.1	<0.05	11	0.9
2060	3	52.7	10.8	94	0.2	23.7	19.2	717	4.36	37.4	0.2	4.8	0.5	34	0.2	1.1	0.1	91	0.57	0.055	4	46	1.37	62	0.055	4	2.75	0.013	0.11	0.3	0.04	5.8	<1	<0.05	9	<5
2061	5.6	58.2	11	88	<1	24.3	20.5	570	4.46	33.7	0.2	8.8	0.7	35	0.2	1.1	0.1	103	0.63	0.033	5	46.9	1.26	59	0.064	3	2.79	0.016	0.13	0.3	0.03	7.2	<1	<0.05	9	<5
2062	17.2	39.2	9.1	114	0.2	22	17.4	784	4.12	19.7	0.3	4	0.6	58	0.5	0.9	0.1	86	1.3	0.066	5	42.3	1.3	69	0.083	9	2.68	0.023	0.09	0.3	0.03	6.6	0.1	<0.05	8	1.5
2063	18.5	503.5	2.7	48	0.1	17.9	23.9	367	3.83	10.2	0.2	3.5	0.7	76	0.1	0.3	0.3	128	1.16	0.045	5	27.3	1.24	100	0.163	3	3.08	0.128	0.15	0.7	0.02	10.5	0.1	<0.05	8	0.7
2064	23.7	31.8	10.5	90	0.3	31.8	68.8	940	4.55	36.6	0.3	6.8	0.6	55	0.5	1.2	0.1	93	1.05	0.042	7	56.8	1.48	76	0.085	6	3.1	0.023	0.09	0.3	0.05	9.5	0.1	<0.05	9	1.4
2065	48.9	505.8	14.5	100	0.3	29.3	46.3	621	5.19	49.2	0.3	13.6	0.8	51	0.2	1.1	0.1	106	0.87	0.063	8	58.8	1.67	65	0.065	4	3.18	0.02	0.08	0.3	0.07	11	<1	0.06	10	2.4
2066	28.2	1543.7	2.6	55	0.1	18.7	85.7	684	4.28	8.1	0.3	2.9	0.6	79	0.1	0.3	0.4	139	1.35	0.051	4	28.2	1.25	79	0.175	3	3.36	0.143	0.15	0.8	0.03	10.5	0.1	<0.05	10	1
2067	32.8	1244.1	3	59	0.1	16	45.8	686	4.78	13.6	0.4	3.2	0.7	70	0.2	0.5	0.5	147	1.15	0.067	6	30.5	1.53	135	0.195	4	3.51	0.103	0.44	2.4	0.05	13.3	0.1	<0.05	10	0.9
2068	18	971.5	7.3	79	0.6	26.1	57.5	644	3.95	25.6	0.7	3.9	0.5	59	0.3	1.1	0.2	96	1.36	0.042	9	45.9	1.09	77	0.095	6	3	0.033	0.09	0.7	0.05	7.7	0.1	<0.05	8	1.6
2069	21.1	587.7	7.5	94	0.3	30.4	68.6	790	4.29	23.5	0.5	3.2	0.8	62	0.4	0.7	0.3	110	1.08	0.041	7	49.8	1.22	93	0.15	5	3.61	0.046	0.08	1	0.05	8.6	0.1	<0.05	9	1
2070	4.9	89.1	6.9	84	<1	30.2	21.6	544	4.36	24.6	0.3	2.3	0.9	44	0.2	0.5	0.3	121	0.74	0.024	5	49.8	1.23	78	0.172	4	3.44	0.036	0.13	1	0.03	8.2	<1	<0.05	10	<5
2071	10.2	142.3	6.5	69	0.2	20	23.5	587	4.35	14.1	0.2	2.3	0.6	48	0.3	0.6	0.1	122	0.93	0.02	4	34.3	1.15	80	0.153	8	3.58	0.026	0.09	0.3	0.03	7.8	0.1	<0.05	9	0.5
2072	14.1	134.3	5.8	72	<1	22.3	22.8	438	4.27	11.3	0.2	1.1	0.6	42	0.2	0.5	0.2	126	0.94	0.015	4	32.4	0.98	90	0.179	7	3.69	0.032	0.11	0.4	0.05	6.6	0.1	<0.05	10	<5
2073	7.2	148.1	7.5	73	0.1	31	22.1	476	4.43	24.1	0.3	2.2	0.9	50	0.2	0.6	0.3	122	0.66	0.024	5	46.9	1.24	86	0.177	4	3.6	0.044	0.16	1.2	0.02	8.8	0.1	<0.05	10	<5
2074	8.6	186.6	5.3	60	<1	21.5	21.5	418	4.11	14.8	0.2	2.6	0.6	40	0.2	0.5	0.2	122	0.71	0.015	4	35.1	1.13	61	0.168	5	3.37	0.033	0.12	0.5	0.03	7.2	<1	<0.05	9	<5
2075	13.2	3454.3	4.3	69	0.1	25.2	91.2	638	4.15	8.9	0.4	0.7	0.8	70	0.1	0.4	0.3	111	1.46	0.033	8	35.4	1.21	75	0.168	7	3.57	0.096	0.09	0.8	0.02	9.7	0.1	<0.05	9	1.6
2076	10.4	756	6.6	69	<1	18.7	57.2	234	3.19	5.8	0.2	1	0.7	34	0.2	0.3	0.3	81	0.9	0.012	5	24.9	0.55	42	0.114	6	2.94	0.036	0.07	0.3	0.01	4.9	0.1	<0.05	8	0.6
STANDARD DS6	11.5	124.3	29.9	144	0.3	25.2	11	715	2.87	21.2	6.7	45.5	3.1	40	6	3.6	5	57	0.86	0.081	13	188.5	0.6	162	0.083	17	1.95	0.074	0.15	3.4	0.23	3.3	1.8	<0.05	7	4.4
G-1	2.1	3.5	2.8	44	<1	8.6	4.2	548	1.95	<5	1.8	<5	3.9	67	<1	<1	0.1	40	0.65	0.091	8	84.3	0.55	175	0.126	2	0.96	0.05	0.4	0.1	<0.01	2.1	0.3	<0.05	5	<5
2077	26	1301.4	3.1	48	<1	20.2	29.1	382	4.06	11.7	0.3	3.4	0.6	84	0.1	0.4	0.3	129	0.97	0.045	6	31.8	1.01	67	0.148	4	3.35	0.108	0.1	0.7	0.03	9.1	0.1	<0.05	8	1.1
2078	24.2	6070.7	3.4	65	0.2	25.4	91	521	3.98	10.1	0.5	3.2	0.6	92	0.1	0.4	0.3	118	1.04	0.06	15	32.4	1.09	75	0.135	5	3.87	0.126	0.11	1	0.03	8.5	0.1	<0.05	8	1.5
2079	28.5	>10000	4	70	0.5	26.5	138.1	662	4.16	15.3	0.9	3.4	0.7	59	0.3	0.5	0.3	116	0.91	0.088	24	35.4	1.05	58	0.145	5	4.07	0.081	0.12	0.9	0.04	9.9	0.1	<0.05	9	1.7
2080	18.5	6230.7	3	68	0.2	27	74.5	576	3.86	13.1	0.7	2.4	0.8	63	0.1	0.5	0.2	111	0.95	0.069	13	36.1	1.09	58	0.156	5	3.62	0.083	0.13	0.7	0.03	10	0.1	<0.05	8	1.2
2081	19	518.3	4.5	66	<1	22.7	82.1	247	3.66	10.4	0.2	1.9	0.8	35	0.1	0.3	0.2	111	0.72	0.011	4	30.5	0.67	65	0.159	5	3.4	0.051	0.15	0.3	0.02	6	0.1	<0.05	9	0.5
2082	10.3	413.9	4.4	68	<1	21.2	23.1	383	3.89	12.3	0.3	5.6	0.8	32	0.2	0.4	0.2	114	0.48	0.026	4	32.6	0.83	69	0.165	5	3.29	0.043	0.13	0.5	0.01	6.4	0.1	<0.05	9	<5
2083	10.1	379.5	3.3	63	<1	22.4	22.6	322	3.78	12.7	0.2	7.2	0.6	28	0.2	0.3	0.2	109	0.51	0.019	3	33.9	0.8	58	0.167	4	3.1	0.035	0.13	0.4	0.01	6.2	0.1	<0.05	8	<5
RE 2083	9.6	375.6	3.6	59	<1	21.6	22	309	3.68	13.1	0.2	1.4	0.7	31	0.2	0.4	0.2	111	0.55	0.018	4	33.2	0.81	61	0.179	4	3.19	0.039	0.14	0.5	0.02	6.3	0.1	<0.05	9	<5
2084	151.9	1249.2	2.9	61	0.2	16.6	106.4	1229	5	10.1	0.3	13.2	0.7	55	0.2	0.5	0.3	120	0.88	0.036	5	31.4	1.13	71	0.186	4	3.16	0.091	0.16	0.9	0.03	9.9	0.1	<0.05	8	1.2
2085	6.1	192.5	3.6	45	<1	21	15.3	541	3.48	16.4	0.3	2.4	0.9	41	0.1	0.7	0.1	98	0.71	0.026	7	38.4	0.91	60	0.196	4	2.52	0.042	0.16	0.2	0.06	8.4	0.1	<0.05	7	<5
2086	10.8	130.4	5.1	65	<1	25.9	22	450	3.92	13.2	0.2	3.1	0.7	31	0.1	0.4	0.3	119	0.53	0.026	4	35.9	0.93	113	0.171	3	3.46	0.03	0.12	0.6	0.02	5.9	<1	<0.05	9	<5
2087	12.7	208.7	4.4	49	0.1	19	18.7	498	3.87	12.2	0.2	1	0.6	32	<1	0.3	0.3	113	0.49	0.027	3	30.1	0.92	78	0.149	3	3.19	0.038	0.11	0.7	0.01	6.5	0.1	<0.05	9	<5
2088	14.2	222.6	4.9	61	0.1	20.2	20.8	636	4.11	13.3	0.2	1.6	0.8	40	0.1	0.4	0.3	115	0.57	0.037	4	32.1	0.93	111	0.15	3	3.31	0.042	0.12	0.8	0.01	6.9	0.1	<0.05	9	<5
2089	9.6	220.6	4.4	62	<1	18.9	19.7	507	4.16	12.8	0.2	1.8	0.7	36	0.1	0.3	0.3	120	0.53	0.034	4	33.8	0.96	105	0.161	3	3.39	0.047	0.14	0.8	0.01	7.3	0.1	<0.05	10	<5
2090	21	381.9	3.6	53	0.1	17.4	19.1	460	4.63	13.2	0.4	5.5	0.9	68	<1	0.4	0.4	130	0.62	0.028	6	32.6	1.29	90	0.181	2	3.54	0.046	0.24	1	0.02	10.9	0.2	<0.05	10	0.8
4203	28.6	934.8	3.8	77	0.1	29.4	28.3	660	5.07	9.4	0.2	3.9	0.7	74	0.1	0.3	0.4	158	0.75	0.052	4	64.4	1.25	97	0.154	4	4.7	0.106	0.13	0.7	0.02	9.4	0.1	<0.05	12	<5
4204	24.1	1104.2	3.3	67	0.1	27.8	29.9	462	4.96	8.7	0.2	4.3	0.6	68	0.1	0.3	0.5	159	0.68	0.033	3	69.5	1.25	84	0.163	4	4.62	0.099	0.17	0.7	0.01	9.7	0.1	<0.05	11	<5
4205	28.9	702.6	5	89	0.2	31.2	28	865	4.57	11.6	0.3																									

ELEMENT SAMPLES	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	U ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm
R3089E	1.5	61.7	14.7	88	0.3	25.3	24.1	1373	4.64	57.5	0.2	15	0.7	36	0.4	1.8	0.1	86	0.87	0.066	9	44.4	1.8	85	0.033	2.7	0.02	0.14	0.2	0.06	9.4	<.1	<.05	8	<.5	
R3090E	1.3	86.4	16.8	102	0.3	28.4	26.7	1597	5.18	55.8	0.2	17.5	0.8	41	0.5	1.6	0.1	97	0.74	0.069	9	53.5	1.7	103	0.048	4	3.05	0.022	0.1	0.3	0.06	9.9	<.1	<.05	9	<.5
R3091E	1.9	62.7	10.7	84	0.2	26.9	19.8	870	4.47	44.1	0.2	9.6	0.8	40	0.2	1.5	0.1	92	0.66	0.043	7	52.5	1.39	74	0.069	3	2.85	0.018	0.08	0.2	0.04	8.2	<.1	<.05	9	<.5
R3092E	3	77.7	11	169	0.2	25.1	21.4	1044	4.22	24.2	0.3	6.8	0.8	30	0.3	0.5	0.2	103	0.57	0.061	5	42.9	1.13	83	0.106	3	3.4	0.025	0.15	0.5	0.02	7.5	0.1	<.05	9	<.5
R3093E	20.4	467.8	10.5	65	0.2	21.3	19.5	596	4.4	21.4	0.3	7.2	0.8	49	0.2	1	0.4	119	0.7	0.031	6	41.3	1.37	73	0.152	2	3.18	0.054	0.15	0.8	0.03	8.9	0.1	<.05	9	<.5
R3094E	12.3	729.9	4.6	46	<.1	14.1	20.3	375	4.16	10.9	0.2	3.6	0.6	52	0.1	0.8	0.5	133	0.86	0.017	3	28.5	1.22	97	0.139	5	3.26	0.127	0.21	1	0.02	9.7	0.1	<.05	9	<.5
R3095E	19.1	1072.5	4.3	59	0.3	14.2	23.1	528	4.55	10.7	0.3	5	0.7	52	0.2	1.1	0.6	139	0.71	0.031	4	28.7	1.35	84	0.14	3	3.61	0.103	0.16	1.2	0.02	10.4	0.1	<.05	10	<.5
RE R3095E	19.8	1048.2	4.4	58	0.3	14.9	22.9	527	4.46	10.6	0.3	17.8	0.8	54	0.2	1.1	0.6	138	0.76	0.029	4	29.4	1.34	87	0.146	2	3.62	0.106	0.17	1.3	0.02	11	0.1	<.05	10	<.5
R3096E	12.5	594.8	6.2	99	0.2	16	20.6	495	3.93	11.5	0.2	4.1	0.8	37	0.2	0.4	0.5	120	0.6	0.037	4	23.9	1.06	116	0.134	2	3.24	0.062	0.13	1.1	0.01	8.2	0.1	<.05	10	<.5
R3097E	29.9	1164.5	4.7	46	0.2	10.2	20.5	399	4.63	8.5	0.3	6.1	0.7	57	0.1	2.3	0.6	125	0.57	0.041	5	17.6	1.41	87	0.141	1	2.79	0.043	0.18	3.1	0.03	10.7	0.1	<.05	9	0.7
R3098E	10.6	720	4.3	49	0.2	11.7	17.5	408	4.04	10.9	0.3	3.9	0.7	44	0.1	0.6	0.5	116	0.53	0.026	3	22.6	1.25	81	0.138	3	2.7	0.037	0.16	2.1	0.01	7.5	0.1	<.05	8	<.5
R3099E	1.4	63.5	9.5	76	0.2	32.2	19	732	4.78	39.8	0.3	12.8	0.9	32	0.1	1.2	0.1	99	0.51	0.028	7	60.8	1.61	49	0.113	1	2.92	0.014	0.11	0.2	0.05	9.4	<.1	<.05	9	<.5
R3100E	3	42.1	9.5	140	0.1	21.8	17.9	1116	3.86	19.5	0.2	3.1	0.8	28	0.3	0.5	0.1	90	0.57	0.066	4	44.3	1.05	125	0.073	2	2.98	0.016	0.15	0.2	0.03	5.8	0.1	<.05	9	<.5
R3101E	1.2	59.9	11.5	109	0.1	22.7	20.8	912	4.2	23.5	0.3	4.7	0.9	43	0.4	0.8	0.2	105	0.68	0.047	6	44.7	1.37	69	0.141	2	3.01	0.022	0.15	0.3	0.05	8.7	<.1	<.05	9	<.5
R3102E	1.5	56.1	9.1	82	0.2	25.3	19.3	685	4.49	21.1	0.3	6.2	0.9	42	0.2	0.6	0.2	115	0.61	0.032	5	44.9	1.4	60	0.173	2	3.28	0.02	0.12	0.4	0.03	8.4	<.1	<.05	9	<.5
STANDARD DS6	11.6	122.6	29.9	143	0.3	25.4	10.8	692	2.8	20.5	6.7	47	3.1	40	5.9	3.5	4.9	57	0.83	0.077	14	188.3	0.57	162	0.082	17	1.89	0.069	0.15	3.5	0.23	3.3	1.7	<.05	6	4.2
G-1	2.4	3.2	3.1	43	<.1	8.6	4.3	573	1.93	0.5	1.7	0.6	3.6	64	<.1	0.1	0.1	40	0.63	0.088	8	101.2	0.58	179	0.122	<.1	0.89	0.053	0.38	0.1	0.01	2.1	0.3	0.05	5	<.5
R3103E	1.5	50.7	12.2	226	0.2	23.1	21.5	1480	3.85	21.5	0.3	3.1	0.6	36	1.1	0.6	0.2	87	0.72	0.12	5	39.5	1.05	103	0.088	5	2.77	0.017	0.12	0.3	0.03	6.6	<.1	<.05	8	<.5
R3104E	1.5	47.3	15	130	0.2	26.5	21	1330	4.33	37.7	0.2	11.6	0.7	34	0.7	1	0.1	94	0.72	0.068	6	49	1.32	79	0.076	2	2.85	0.016	0.18	0.4	0.03	7.6	<.1	0.07	9	<.5
R3105E	1.1	51.2	11.7	96	0.1	26.9	20.5	1050	4.35	35.8	0.3	10.5	0.9	37	0.5	1.1	0.1	98	0.62	0.049	7	54	1.49	58	0.09	4	2.86	0.018	0.12	0.3	0.04	8.5	<.1	<.05	8	<.5
R3106E	1.2	49.2	11.9	89	0.3	28.9	20.2	830	4.54	45.9	0.2	9.9	0.7	36	0.3	1.4	0.1	97	0.49	0.037	5	54.9	1.56	66	0.073	2	3.02	0.013	0.1	0.3	0.03	7.7	<.1	<.05	8	<.5
R3107E	1.7	42.9	10.2	85	0.1	29.7	19.3	652	4.6	38.3	0.2	5	0.7	29	0.2	1.3	0.1	100	0.4	0.033	4	58.4	1.56	52	0.089	3	2.92	0.013	0.08	0.3	0.02	6.8	<.1	<.05	8	<.5
R3108E	5.8	121.7	10.7	128	0.2	24.2	21.3	704	4.29	22.4	0.3	12.4	0.7	41	0.3	0.6	0.4	113	0.64	0.06	5	38.9	1.16	88	0.123	3	3.36	0.036	0.1	1.1	0.02	8	0.7	<.05	9	<.5
R3109E	12.8	244.4	11.6	81	0.1	18.7	22.4	1065	4.16	19.6	0.3	1.4	0.8	54	0.4	0.5	0.4	106	0.82	0.058	5	32	1.03	107	0.113	4	2.96	0.042	0.11	0.8	0.02	7.3	<.1	<.05	8	<.5
R3110E	14.3	378.3	6.4	72	<.1	20.4	21.2	580	4.56	17.4	0.4	0.7	0.7	52	0.1	0.5	0.4	131	0.62	0.052	4	32.6	1.23	89	0.131	3	4.08	0.064	0.12	1.4	0.03	8.3	0.1	<.05	10	<.5
R3111E	9	145	10.4	88	0.1	21.6	24.1	688	4.16	20.9	0.3	2.4	0.9	34	0.4	0.5	0.3	110	0.5	0.033	5	36.8	1.1	90	0.118	3	3.34	0.026	0.1	0.7	0.03	7.4	0.1	<.05	9	<.5
R3112E	18.1	398.4	6.8	65	<.1	16.4	20.1	459	4.15	14.4	0.3	3	0.8	41	0.2	0.4	0.4	115	0.58	0.033	5	27	1.16	82	0.132	3	3.33	0.057	0.1	1.2	0.03	8.4	0.1	<.05	9	<.5
R3113E	14.6	429.6	4	44	<.1	14.5	17.4	336	3.71	10.3	0.3	4.5	0.8	39	0.1	0.3	0.4	114	0.52	0.032	4	26.2	0.99	76	0.14	3	3.11	0.049	0.08	1	0.02	7.2	0.1	<.05	9	<.5
RE R3113E	16.3	442.4	3.8	45	<.1	14.9	18.3	349	3.93	10.7	0.3	2.1	0.7	40	<.1	0.4	0.4	111	0.53	0.035	4	27.1	1.04	85	0.145	3	3.27	0.051	0.09	1.1	0.02	7.5	0.1	<.05	9	<.5
R3114E	12.1	420.9	3.4	44	0.1	13.7	17	319	3.26	9	0.2	4.7	0.6	33	0.1	0.3	0.3	100	0.39	0.029	4	25.2	0.94	90	0.127	2	2.88	0.037	0.08	0.9	0.02	6.4	0.1	<.05	8	<.5
R3115E	47.6	770.2	3.4	46	0.2	13.7	19.8	348	3.98	11.1	0.3	16.4	0.8	31	0.1	0.4	0.5	112	0.44	0.07	4	23	1.06	72	0.126	2	3.37	0.045	0.08	1.4	0.03	8.5	0.1	<.05	10	<.5
R3016	18.4	630.2	2.7	45	0.1	14	42.5	280	3.8	5.7	0.2	1.6	0.5	73	0.7	0.1	0.3	123	1.28	0.016	3	21.2	1.12	70	0.128	2	3.86	0.237	0.05	0.3	0.02	10	0.1	<.05	9	<.5
R3017	72.7	2007.8	2.6	54	<.1	17	42.2	434	4.39	7.4	0.4	4.7	0.6	71	<.1	0.2	0.5	149	1.28	0.051	5	21.1	1.41	63	0.143	4	3.99	0.227	0.12	0.5	0.03	11.2	0.1	<.05	9	0.6
R3022	14.3	1298.8	2.6	72	<.1	17.6	59.6	325	4.32	4.6	0.2	1.5	0.5	77	<.1	0.1	0.7	149	1.46	0.02	2	17.7	1.48	63	0.154	2	3.74	0.254	0.08	0.4	0.01	12.1	0.1	<.05	10	0.5
R3024	6.8	7740.8	2.3	129	<.1	28	138.9	433	4.78	4.4	0.3	1.9	0.6	71	0.4	0.1	0.4	179	1.19	0.029	4	18.2	1.62	47	0.168	3	4.71	0.251	0.09	0.3	0.01	13.2	0.1	<.05	12	<.5
R3025	44.5	2862.4	2.9	63	0.2	15.4	35.4	383	4.88	3.6	0.2	3.3	0.6	87	0.1	0.1	0.5	179	1.23	0.045	4	16.6	1.88	91	0.18	2	3.56	0.197	0.34	0.4	0.01	15	0.1	<.05	10	0.7
R3033	5.9	317.9	3.3	55	0.2	20.7	16.8	355	3.86	11.8	0.3	3.1	0.9	34	0.1	0.3	0.2	123	0.53	0.025	4	33.9	1.22	66	0.148	3	3.27	0.059	0.09	0.3	0.03	7.7	0.1	<.05	8	<.5
R3035	19	1487	3.4	65	0.3	16.3	23.9	426	4.44	7.5	0.2	10.4	0.6	40	0.1	0.3	0.6	147	0.63	0.055	4	20.6	1.21	59	0.115	3	3.69	0.075	0.09	0.5	0.02	9.9	0.1	<.05	10	<.5
R3038	98.6	1387.1	2.4	50	0.2	13.5	21.4																													





ELEMENT	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Sample
SAMPLES	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm	ppm	%	ppm	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	gm	
T-507	1.2	26.7	5.9	54	<1	21.4	12.6	256	2.98	8.4	0.8	3	2.3	20	0.2	0.2	0.1	80	0.3	0.069	5	24.9	0.54	50	0.102	1	2.1	0.013	0.03	0.4	0.02	2.3	<1	<.05	7	<.5	15
T-508	0.9	29.1	4.9	57	0.1	19.5	10.5	338	2.73	6	0.5	4.2	2.2	18	0.1	0.2	0.1	62	0.21	0.101	4	25	0.68	46	0.102	1	2.24	0.008	0.03	0.3	0.03	2.6	<1	<.05	7	<.5	15
T-511	0.8	31.7	4.7	50	<1	16.7	9.7	280	2.92	8.9	0.6	4.6	3	16	0.1	0.2	0.1	73	0.18	0.092	5	25.8	0.54	46	0.099	1	2.15	0.01	0.04	0.2	0.03	3.1	<1	<.05	6	<.5	15
T-512	0.8	19.9	6.3	79	0.1	10.5	7.3	265	2.76	6.8	0.6	1.7	2.8	16	<1	0.2	0.1	74	0.16	0.094	4	19.5	0.38	46	0.109	1	2.07	0.01	0.04	0.4	0.02	2.3	0.1	<.05	7	<.5	15
T-516	0.8	24	4.1	42	<1	8.5	6.9	180	3.33	6.3	1.3	1.7	5.8	13	<1	0.2	0.1	101	0.12	0.096	5	21.9	0.32	24	0.092	1	2.21	0.009	0.03	0.5	0.02	2.5	0.1	<.05	6	<.5	15
T-517	0.7	17.5	3.5	36	<1	7.9	6.4	179	2.33	6.2	0.8	3.4	3.5	12	0.1	0.1	0.1	65	0.11	0.077	4	15.5	0.3	29	0.095	<1	2.29	0.009	0.03	0.4	0.02	2.4	0.1	<.05	5	<.5	15
T-519	0.5	25	5.8	62	<1	10.1	7.8	854	2.34	5.5	0.5	0.8	2.2	22	0.2	0.1	0.1	58	0.24	0.101	3	15.8	0.36	57	0.077	<1	1.54	0.011	0.04	0.2	0.03	1.8	0.1	<.05	5	<.5	15
T-520	1.1	20.6	5.5	48	<1	10.9	7.6	221	2.74	6.5	0.6	1.4	2.8	15	0.1	0.2	0.1	66	0.15	0.101	5	19	0.39	45	0.106	1	2.34	0.009	0.03	0.4	0.03	2.6	0.1	<.05	7	<.5	15
T-521	0.5	22.9	5.1	60	<1	11.1	7.5	450	2.42	6.1	0.5	5.8	2.5	16	0.1	0.2	0.1	63	0.19	0.089	4	17.1	0.38	44	0.097	1	1.85	0.011	0.04	0.3	0.02	2.3	0.1	<.05	6	<.5	15
T-524	0.5	16.1	5.1	62	0.1	8.7	6.6	372	2.44	6.2	0.5	1.2	2.3	17	0.1	0.1	0.1	65	0.22	0.085	4	15.8	0.29	48	0.077	1	1.46	0.011	0.03	0.4	0.02	1.8	0.1	<.05	5	<.5	15
T-525	1.4	44.2	5.7	58	<1	23	13.8	256	3.54	20.1	0.4	2.7	2	19	0.1	0.3	0.1	90	0.21	0.034	4	29.5	0.6	61	0.101	1	2.4	0.011	0.02	0.3	0.01	2.9	0.1	<.05	7	<.5	15
T-527	1.3	34.3	7.2	76	0.1	27.6	13.6	399	3.57	19.4	0.7	3.6	2.1	13	0.1	0.3	0.1	80	0.16	0.128	5	35.7	0.65	66	0.079	1	3.06	0.009	0.03	0.3	0.02	3.8	0.1	<.05	8	<.5	15
T-528	1.2	22.5	4.1	28	<1	10.9	8.9	171	3.15	7.1	0.8	1.5	3.9	13	<1	0.2	0.1	81	0.13	0.044	6	22.6	0.35	44	0.095	<1	2.57	0.013	0.02	0.3	0.04	3.7	<1	<.05	6	<.5	15
T-530	0.8	13.9	3.4	35	<1	7.7	5.9	143	2.47	6.4	0.6	1.2	2.7	12	<1	0.1	0.1	62	0.12	0.116	5	18.4	0.29	26	0.071	1	2.28	0.009	0.02	0.3	0.04	2.3	<1	<.05	5	<.5	15
T-531	1.2	25.2	5.5	71	0.2	13.1	8.5	205	2.84	6.4	0.5	5.5	2.2	15	0.1	0.2	0.1	69	0.14	0.171	4	21.4	0.47	41	0.104	1	2.77	0.011	0.03	0.4	0.04	3	<1	<.05	8	<.5	15
RE T-531	1.2	24.2	5.3	65	0.2	11.6	8.3	202	2.71	6.5	0.4	2.1	2.1	14	<1	0.2	0.1	64	0.13	0.165	4	19.9	0.42	41	0.099	<1	2.6	0.011	0.03	0.3	0.03	2.9	0.1	<.05	7	<.5	15
T-534	11.6	17	6.8	79	<1	13.2	9.7	209	3.69	16.5	0.5	2.4	2.1	19	0.1	0.4	0.2	87	0.21	0.085	4	19.2	0.48	61	0.144	1	2.42	0.011	0.03	0.4	0.02	2.2	<1	<.05	11	<.5	15
T-535	21.5	12.3	5.6	58	0.1	9.7	7.8	206	3.24	10.4	0.6	33.2	1.8	21	0.1	1.3	0.1	84	0.35	0.039	4	17	0.43	35	0.13	3	2.14	0.013	0.02	0.3	0.02	2.5	<1	<.05	8	<.5	16
T-540	2.7	22.3	5.6	81	0.5	13.8	11.3	177	3.07	11.9	1.3	1.9	2.8	22	0.2	2	0.1	93	0.4	0.053	5	20.9	0.39	50	0.109	2	2.48	0.019	0.03	0.3	0.03	2.1	0.1	<.05	8	0.7	15
T-541	1.2	15.7	5.3	104	<1	11.5	12.8	461	2.96	6.5	0.6	<.5	2.5	20	0.2	0.5	0.1	77	0.51	0.032	6	15.1	0.81	37	0.221	3	1.82	0.018	0.03	0.1	<.01	3.1	0.1	<.05	9	<.5	15
T-543	1.4	14.4	4.9	67	<1	11	7.9	227	2.42	3.2	0.3	0.6	1.3	14	0.1	0.2	0.2	58	0.14	0.081	3	14.1	0.38	40	0.095	<1	1.73	0.009	0.03	0.3	0.02	1.7	<1	<.05	7	<.5	15
STANDARD DS6	11.2	120.7	29.4	139	0.3	24.1	10.6	685	2.73	20.7	6.5	44.3	3	40	6.1	3.5	5	54	0.83	0.077	12	157	0.57	164	0.079	17	1.85	0.071	0.14	3.4	0.18	3.2	1.7	<.05	6	4.1	15
G-1	2.1	3.1	2.7	43	<1	7.8	4.1	532	1.87	<.5	1.8	1.1	3.8	67	<1	<1	0.1	39	0.64	0.091	8	73.3	0.58	191	0.122	1	0.95	0.053	0.41	0.1	<.01	2.1	0.3	<.05	5	<.5	15
T-544	0.9	5	3.8	20	<1	3.1	2.3	89	1.04	1.1	0.2	12.5	0.9	14	0.1	0.1	0.1	36	0.17	0.011	3	7.8	0.14	27	0.092	1	0.56	0.01	0.02	0.1	0.01	1	<1	<.05	4	0.5	15
T-547	2.4	39.7	5.5	113	0.1	14	15.2	399	3.34	7.9	0.7	2.1	1.9	35	0.3	0.7	0.1	80	0.78	0.036	6	18.9	0.71	33	0.173	3	1.95	0.021	0.03	0.2	0.02	3.1	0.1	<.05	8	1.1	15
STANDARD DS6	11.2	124.5	29.5	144	0.3	24.3	10.5	696	2.78	20.8	6.4	44.6	3	40	6.2	3.6	5	55	0.85	0.077	12	177.2	0.57	165	0.078	16	1.89	0.072	0.15	3.4	0.22	3.2	1.7	<.05	6	4.5	15

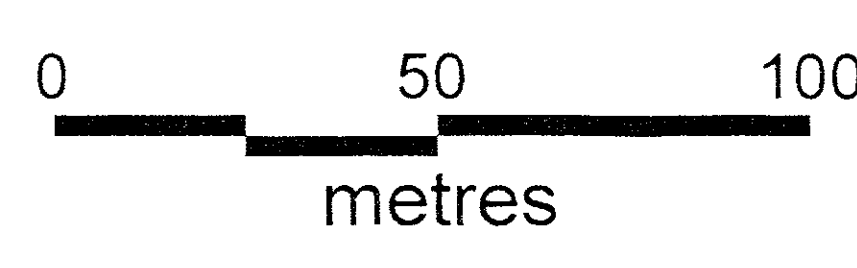

UTM Coordinate System: NAD83 Zone 10N  
 Field Surveys - Magnetics, VLF-em, Soil Geochemistry  
 Map Scale: 1:1,000  
 Station  
 Survey Lines


28,305

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS 92 O-4E 02 O-3W

**Hub Project**  
**Geochemical Sampling Location Map**

UTM Coordinate System: NAD 83 Zone 10N  
 Date: October, 2005  
 Page: G-1a



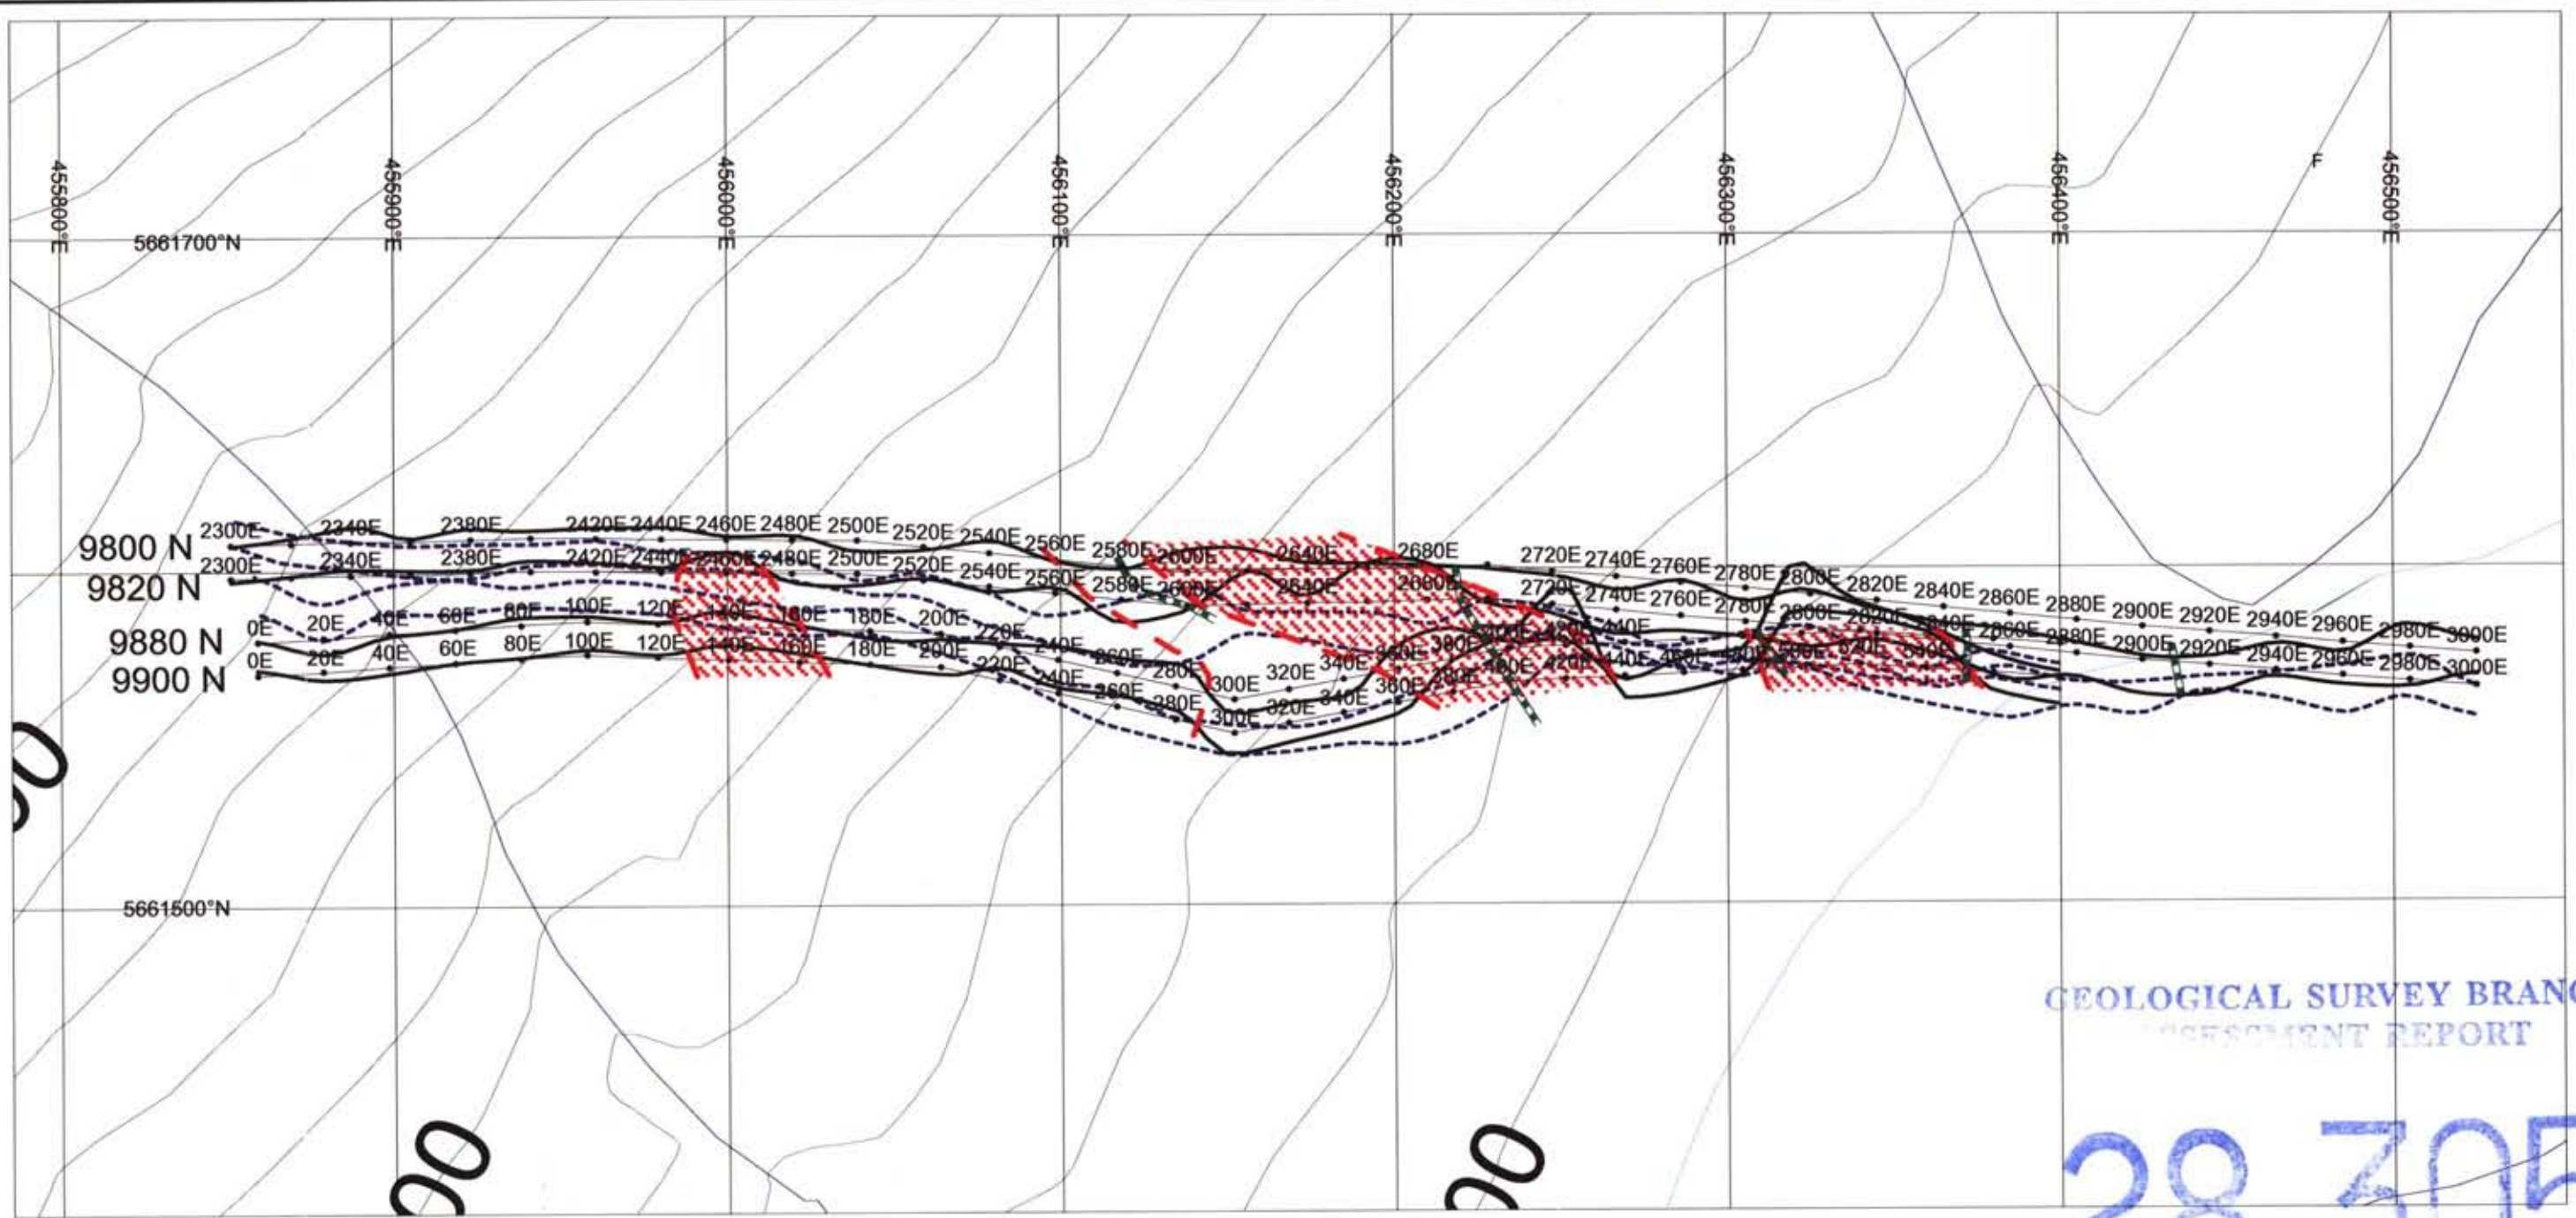





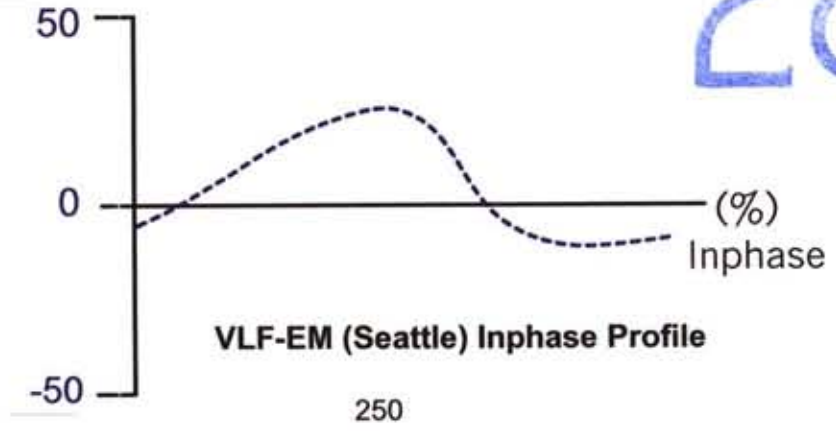
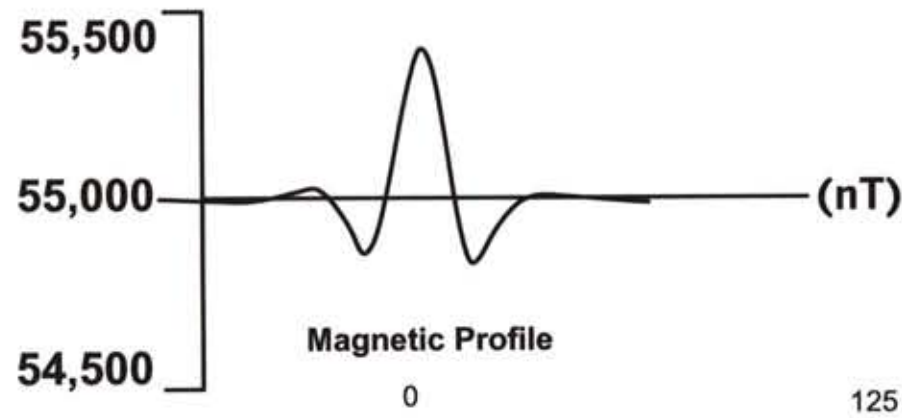
GEOLOGICAL SURVEY BRANCH  
ASSESSMENT REPORT

28,305

UTM Coordinate System: NAD83, Zone 10N  
Field Surveys - Magnetics, Vlf-em  
Map Scale 1:2,000

**Interpretation Legend**

-  Magnetic defined contact
-  Magnetic High
-  VLF-EM conductor



**Galore Resources Inc.  
Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Twin Creeks Area

Ridge-River Grid

Stacked Profiles (mag, vlf-em)

Interpretation


Date: October, 2005

Plate: G-4d








28,305

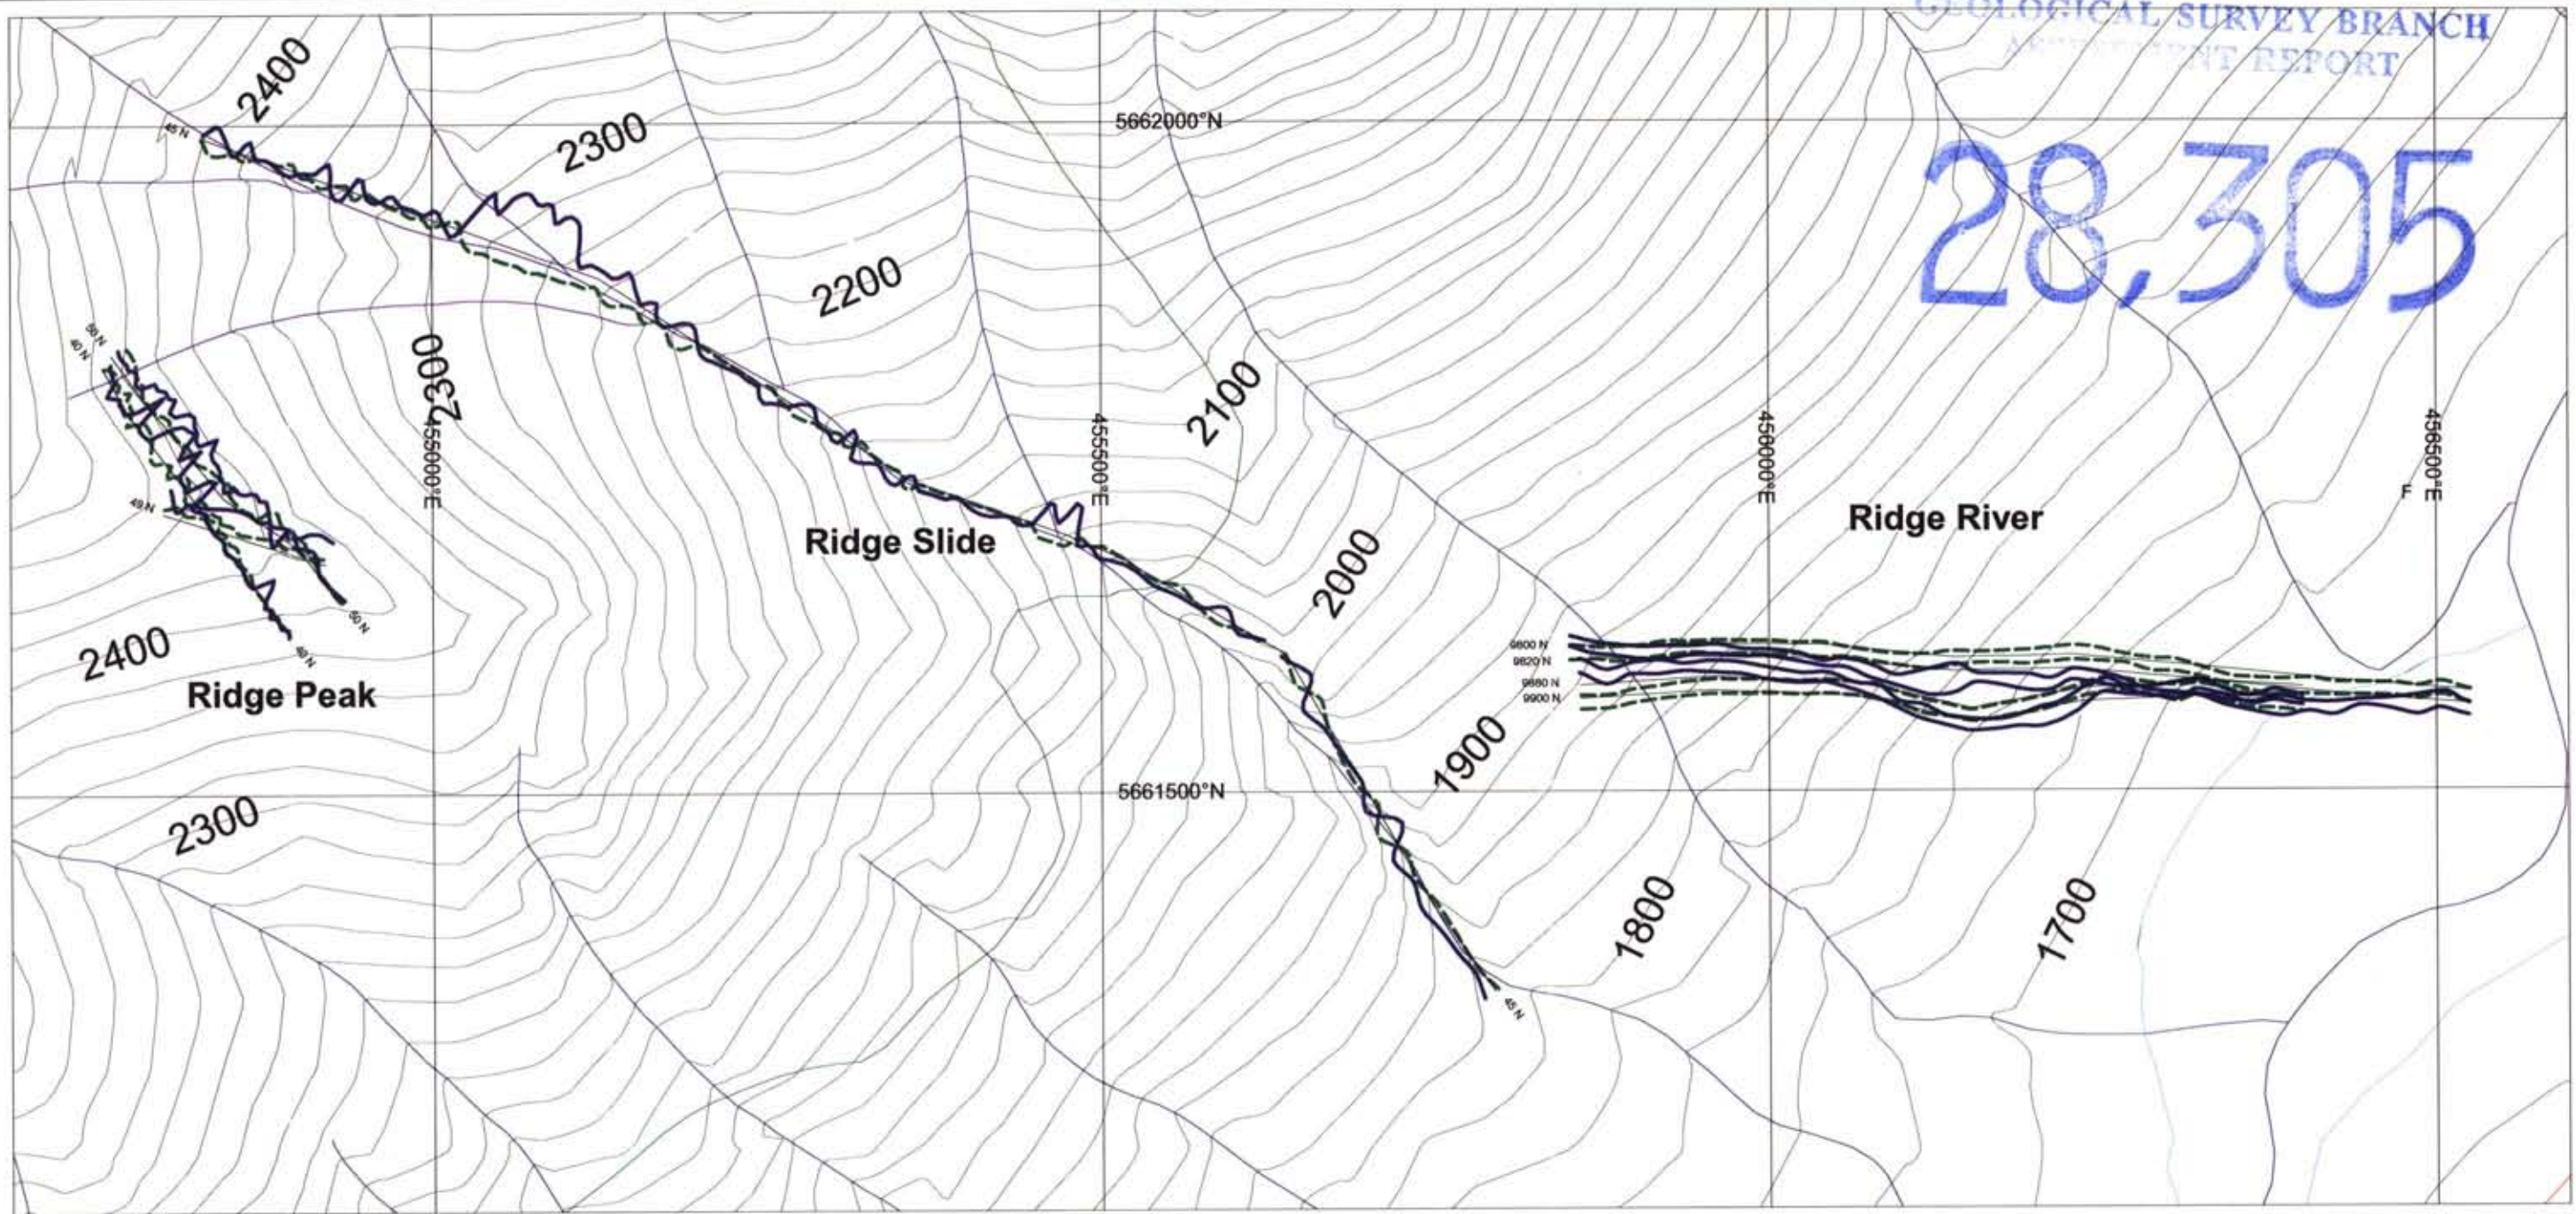

Ridge Peak

Ridge Slide

Ridge River

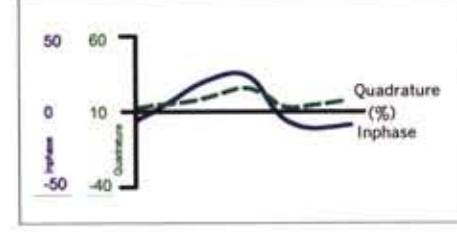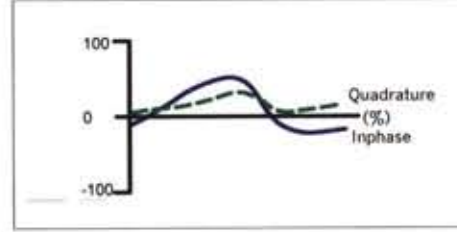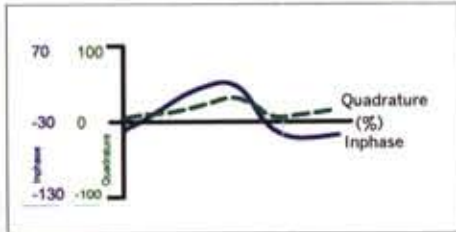

Cutler

Cutler

Seattle

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vlf-em

Map Scale 1:5,000



**Galore Resources Inc.  
Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Twin Creeks Area


Ridge-Peak, Ridge-Slide, Ridge-River

VLF-EM Inphase, Quadrature  
Stacked Profile Map







28,305

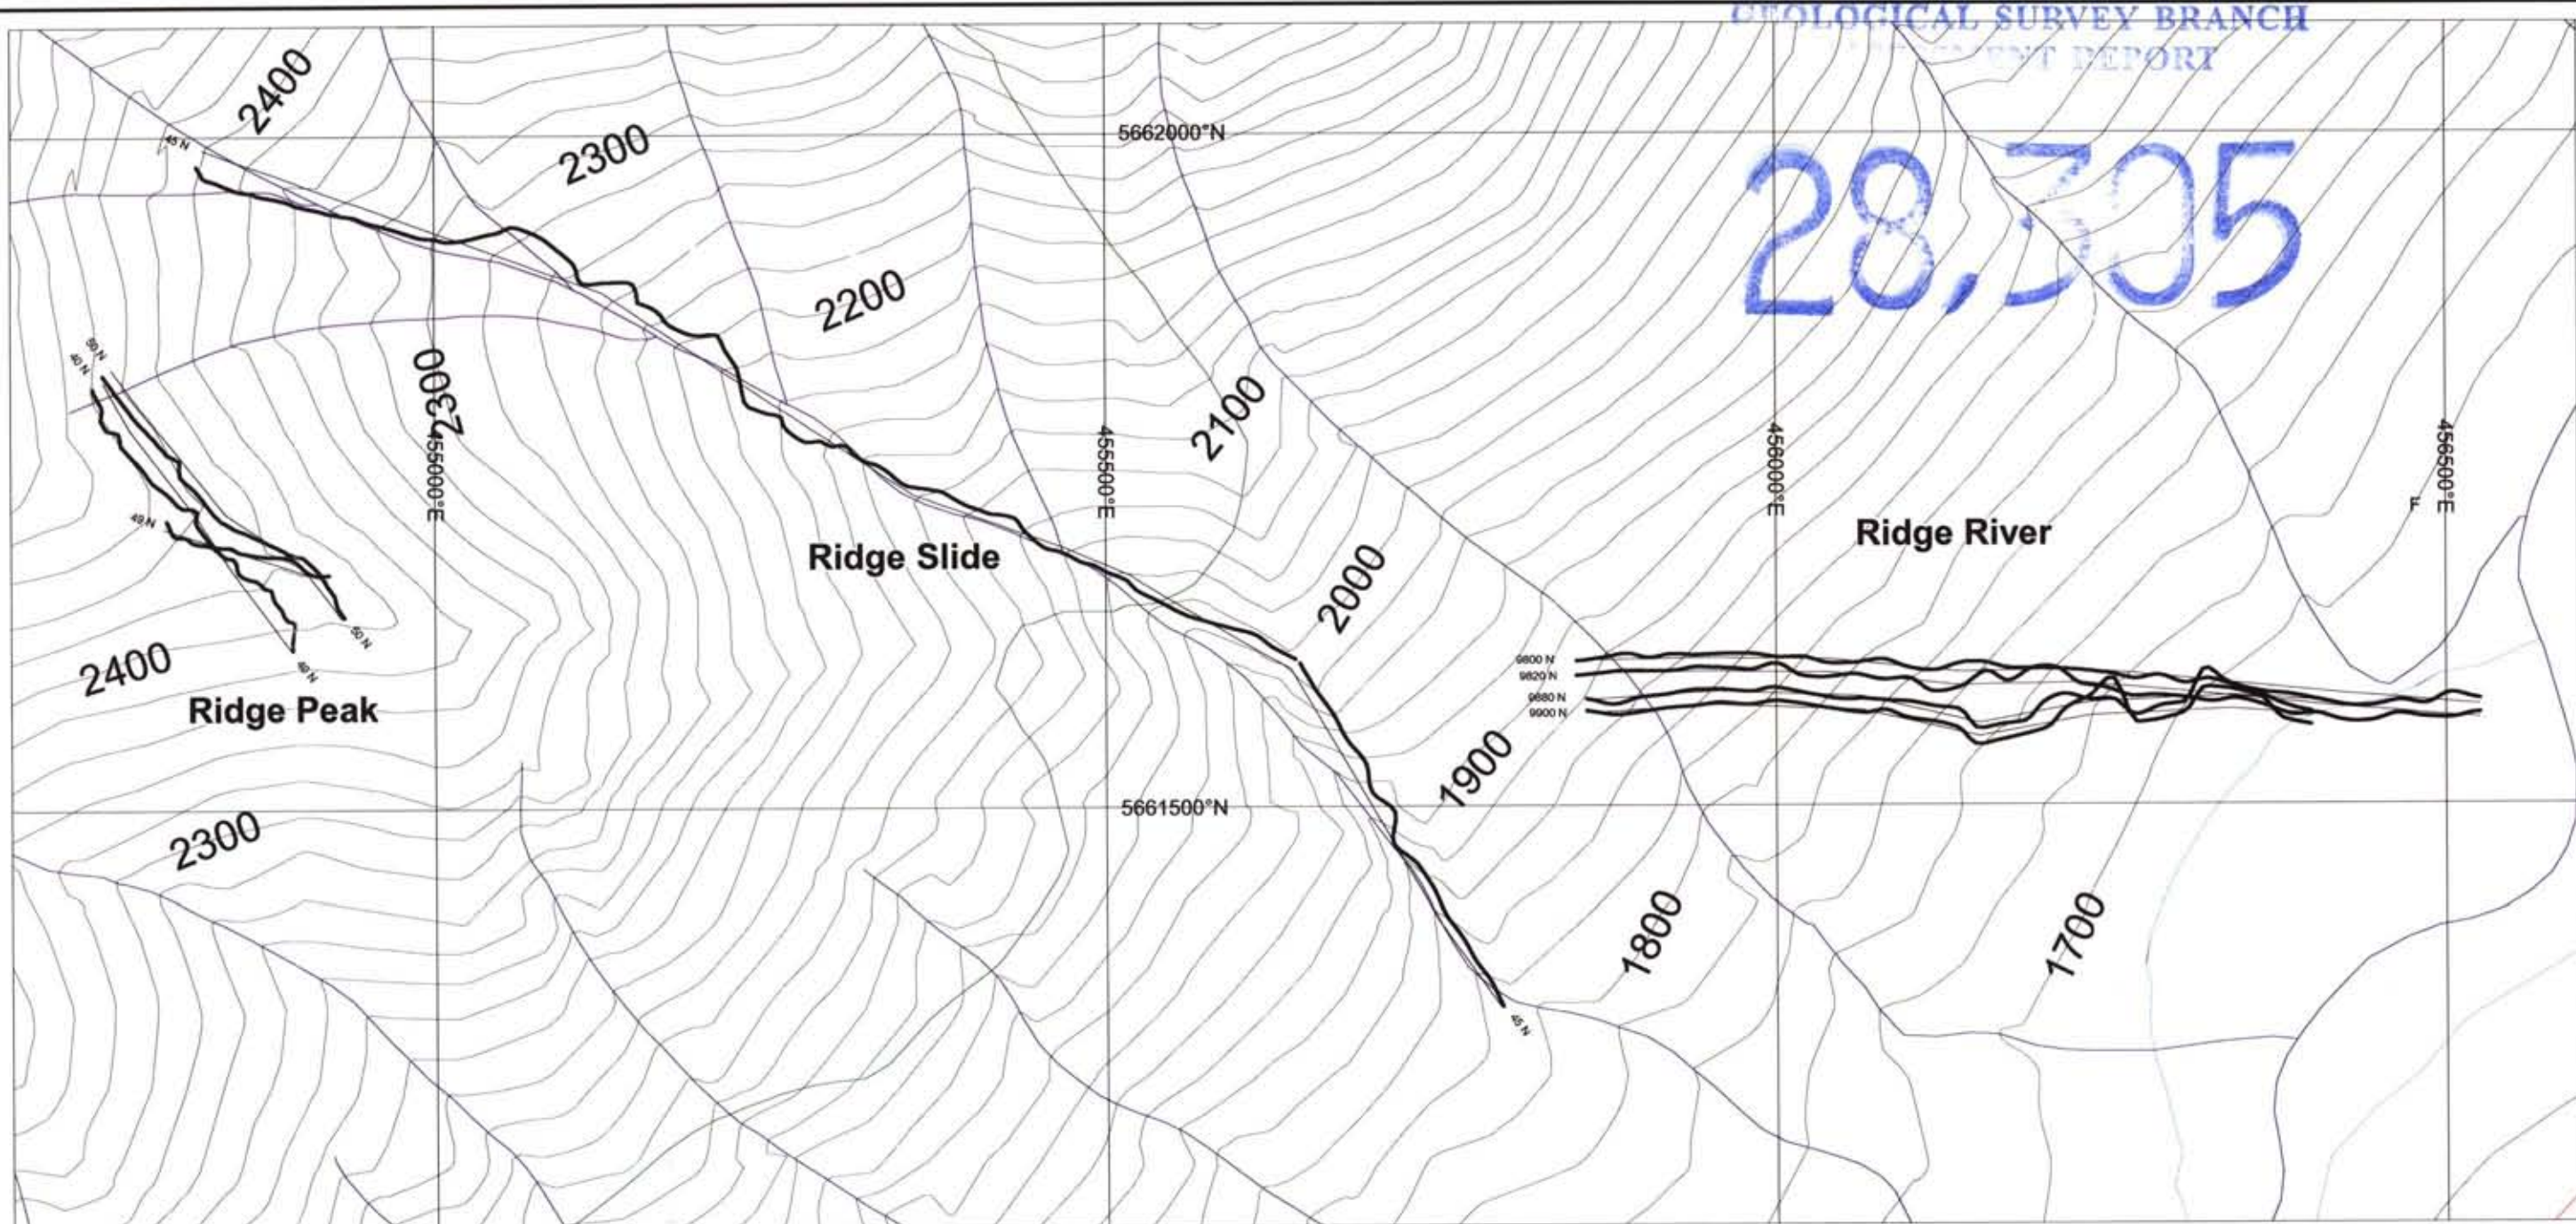


Ridge Peak

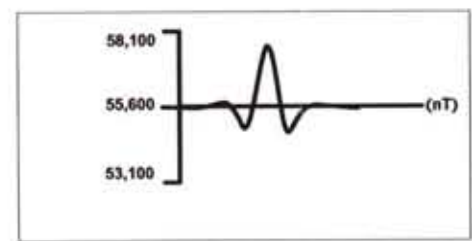

Ridge Slide

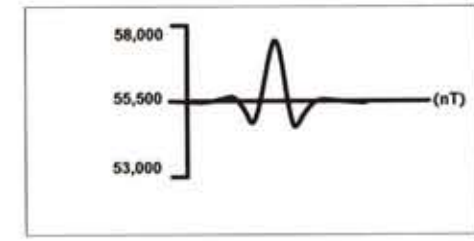

Ridge River

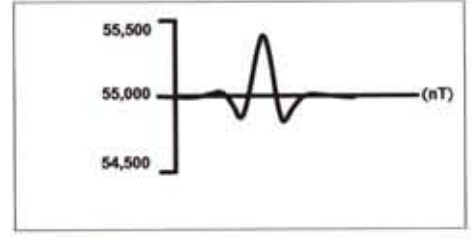

UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vif-em  
 Map Scale 1:5,000




**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

**Twin Creeks Area**  
 Ridge-Peak, Ridge-Slide, Ridge-River

**Total Magnetic Field Intensity  
 Stacked Profile Map**

Date: October, 2005 Plate: G-4b



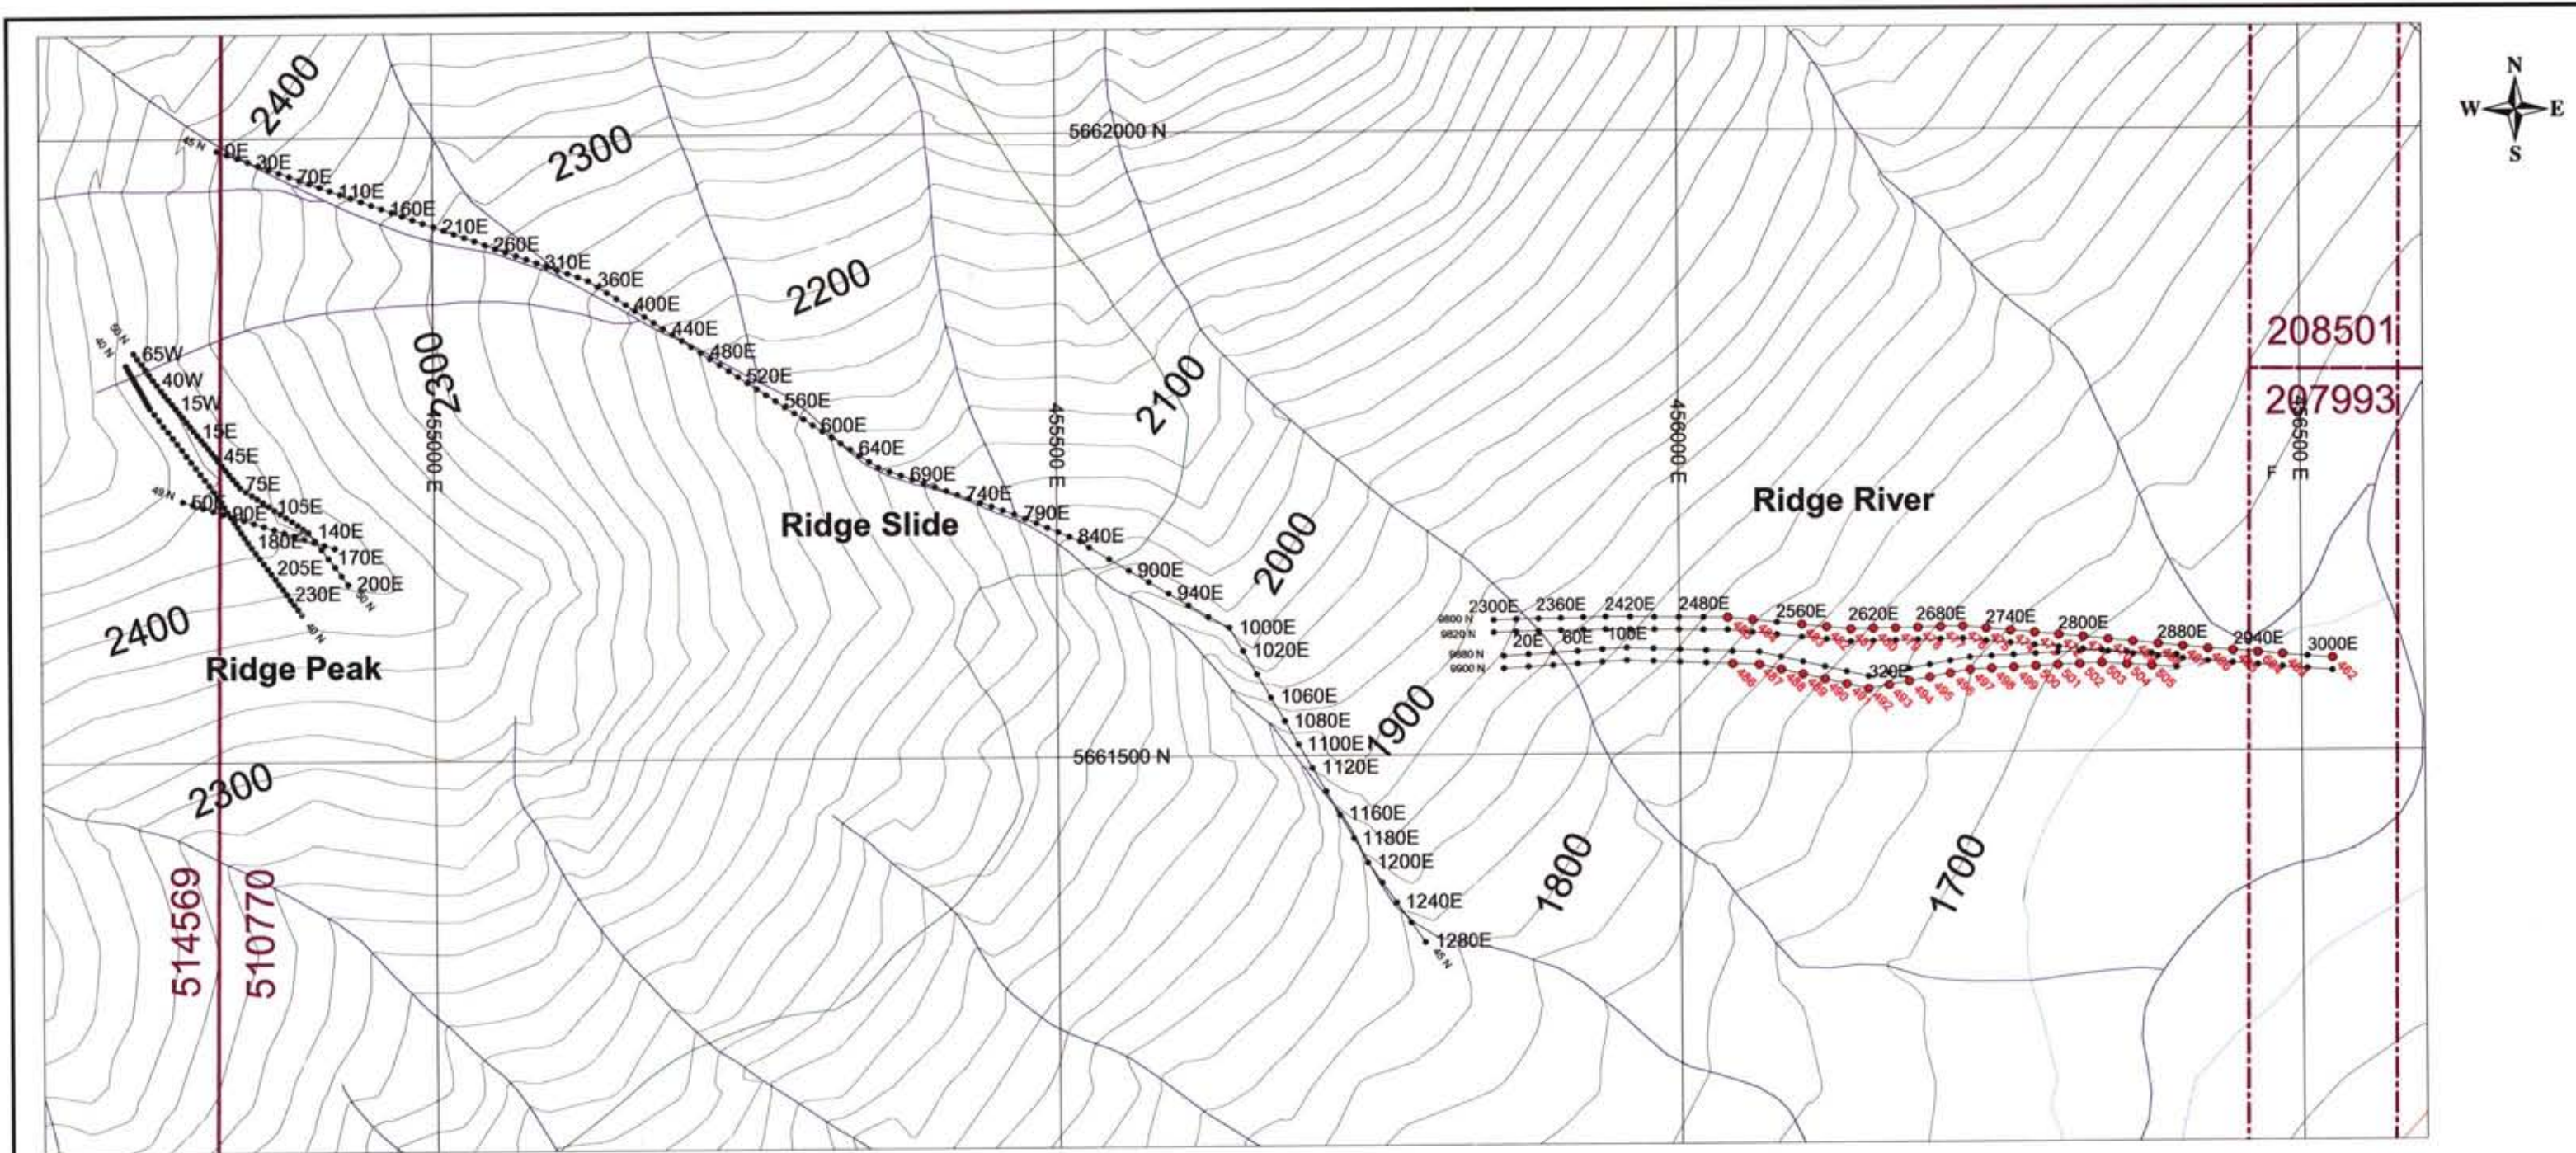

GEOLOGICAL SURVEY BRANCH  
INTERPRETATION REPORT

28,305




UTM Coordinate System: NAD83, Zone 10N  
Field Surveys - Magnetics, VLF-em  
Map Scale 1:5,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Twin Creeks Area  
Ridge-Peak, Ridge-Slide, Ridge-River  
Survey Grid Map  
Geochemical Sample Location Map


Date: October, 2005 Plate: G-4a



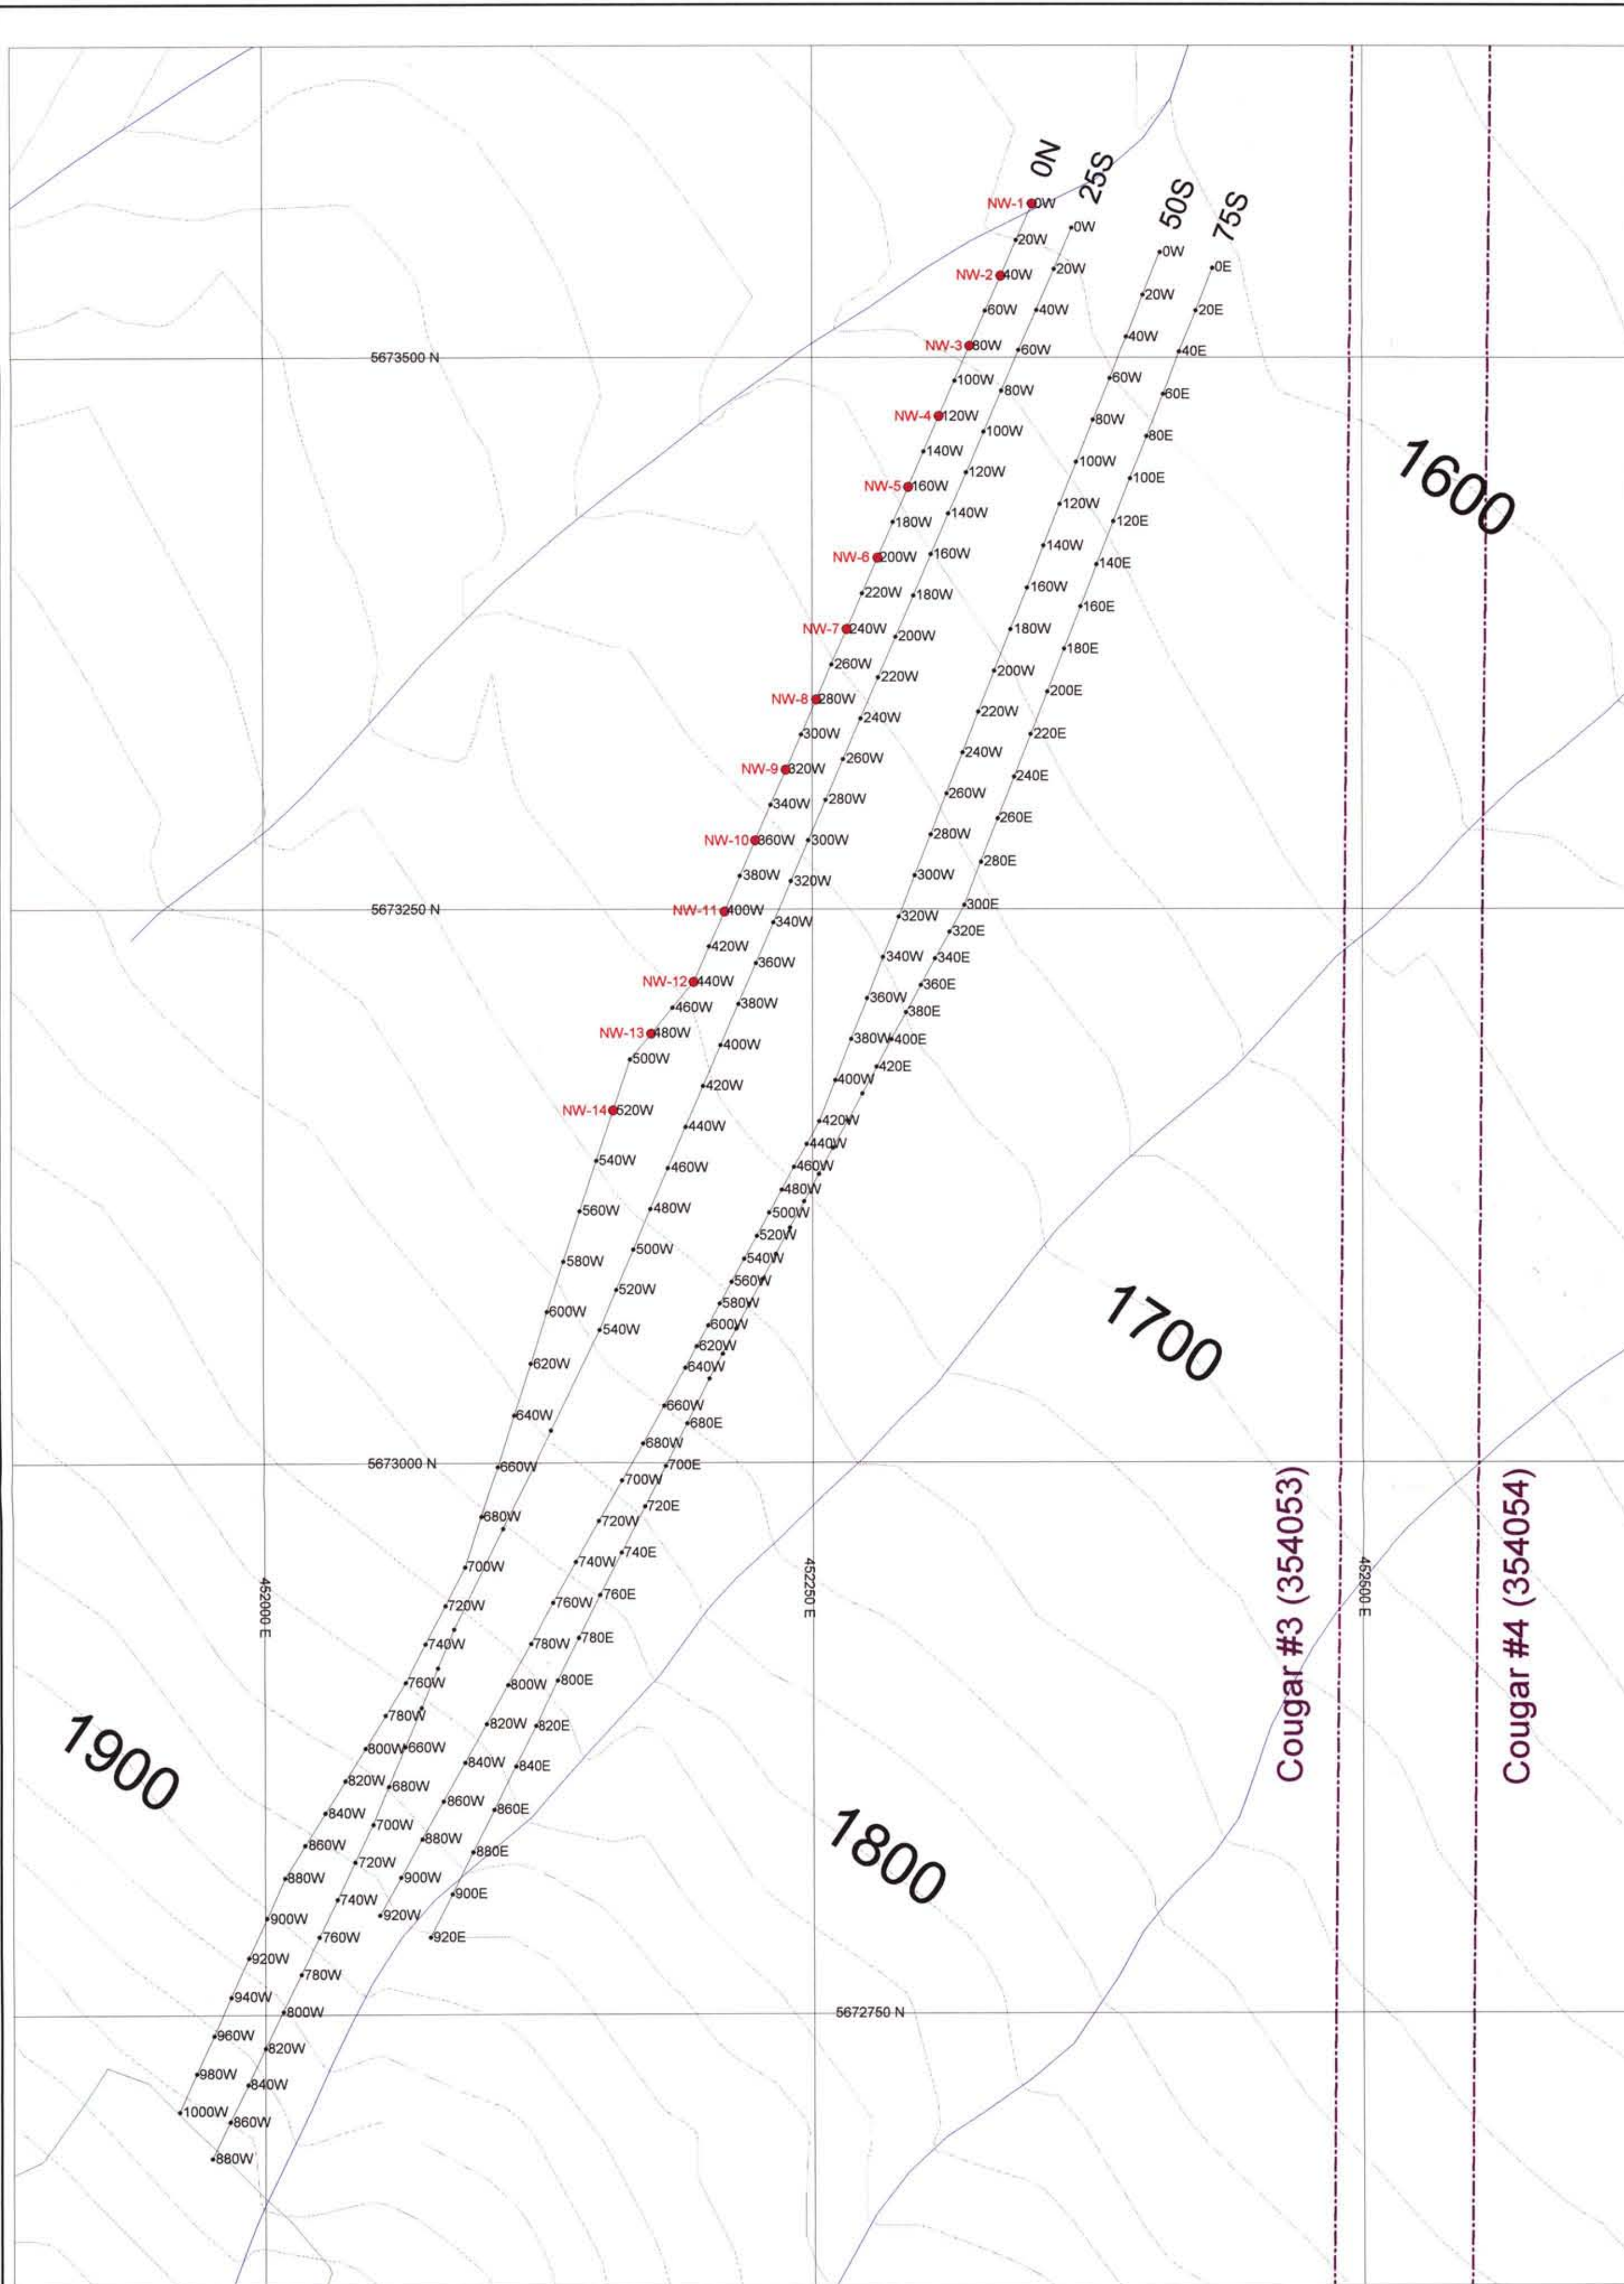

GEOLOGICAL SURVEY BRANCH  
 REPORT

28,305

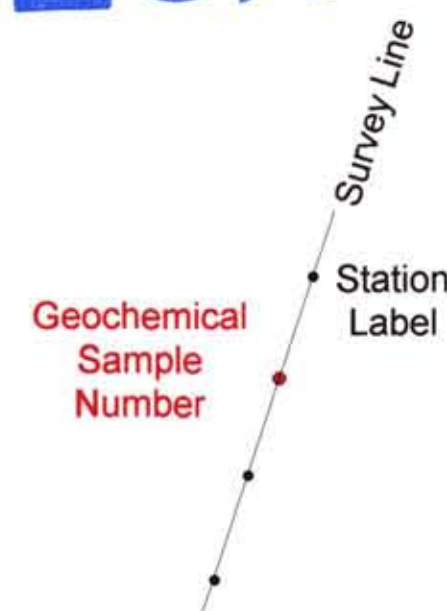


UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vlf-em  
 Map Scale 1:2,000


**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Northwest Copper Project  
 Survey Grid Map

Geochemical Sample Location Map

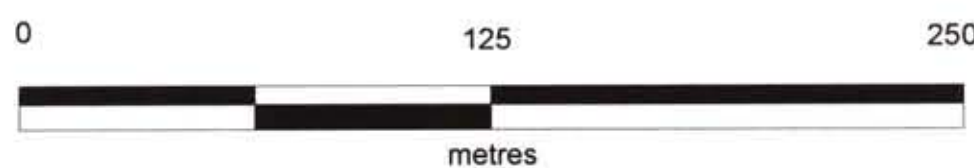



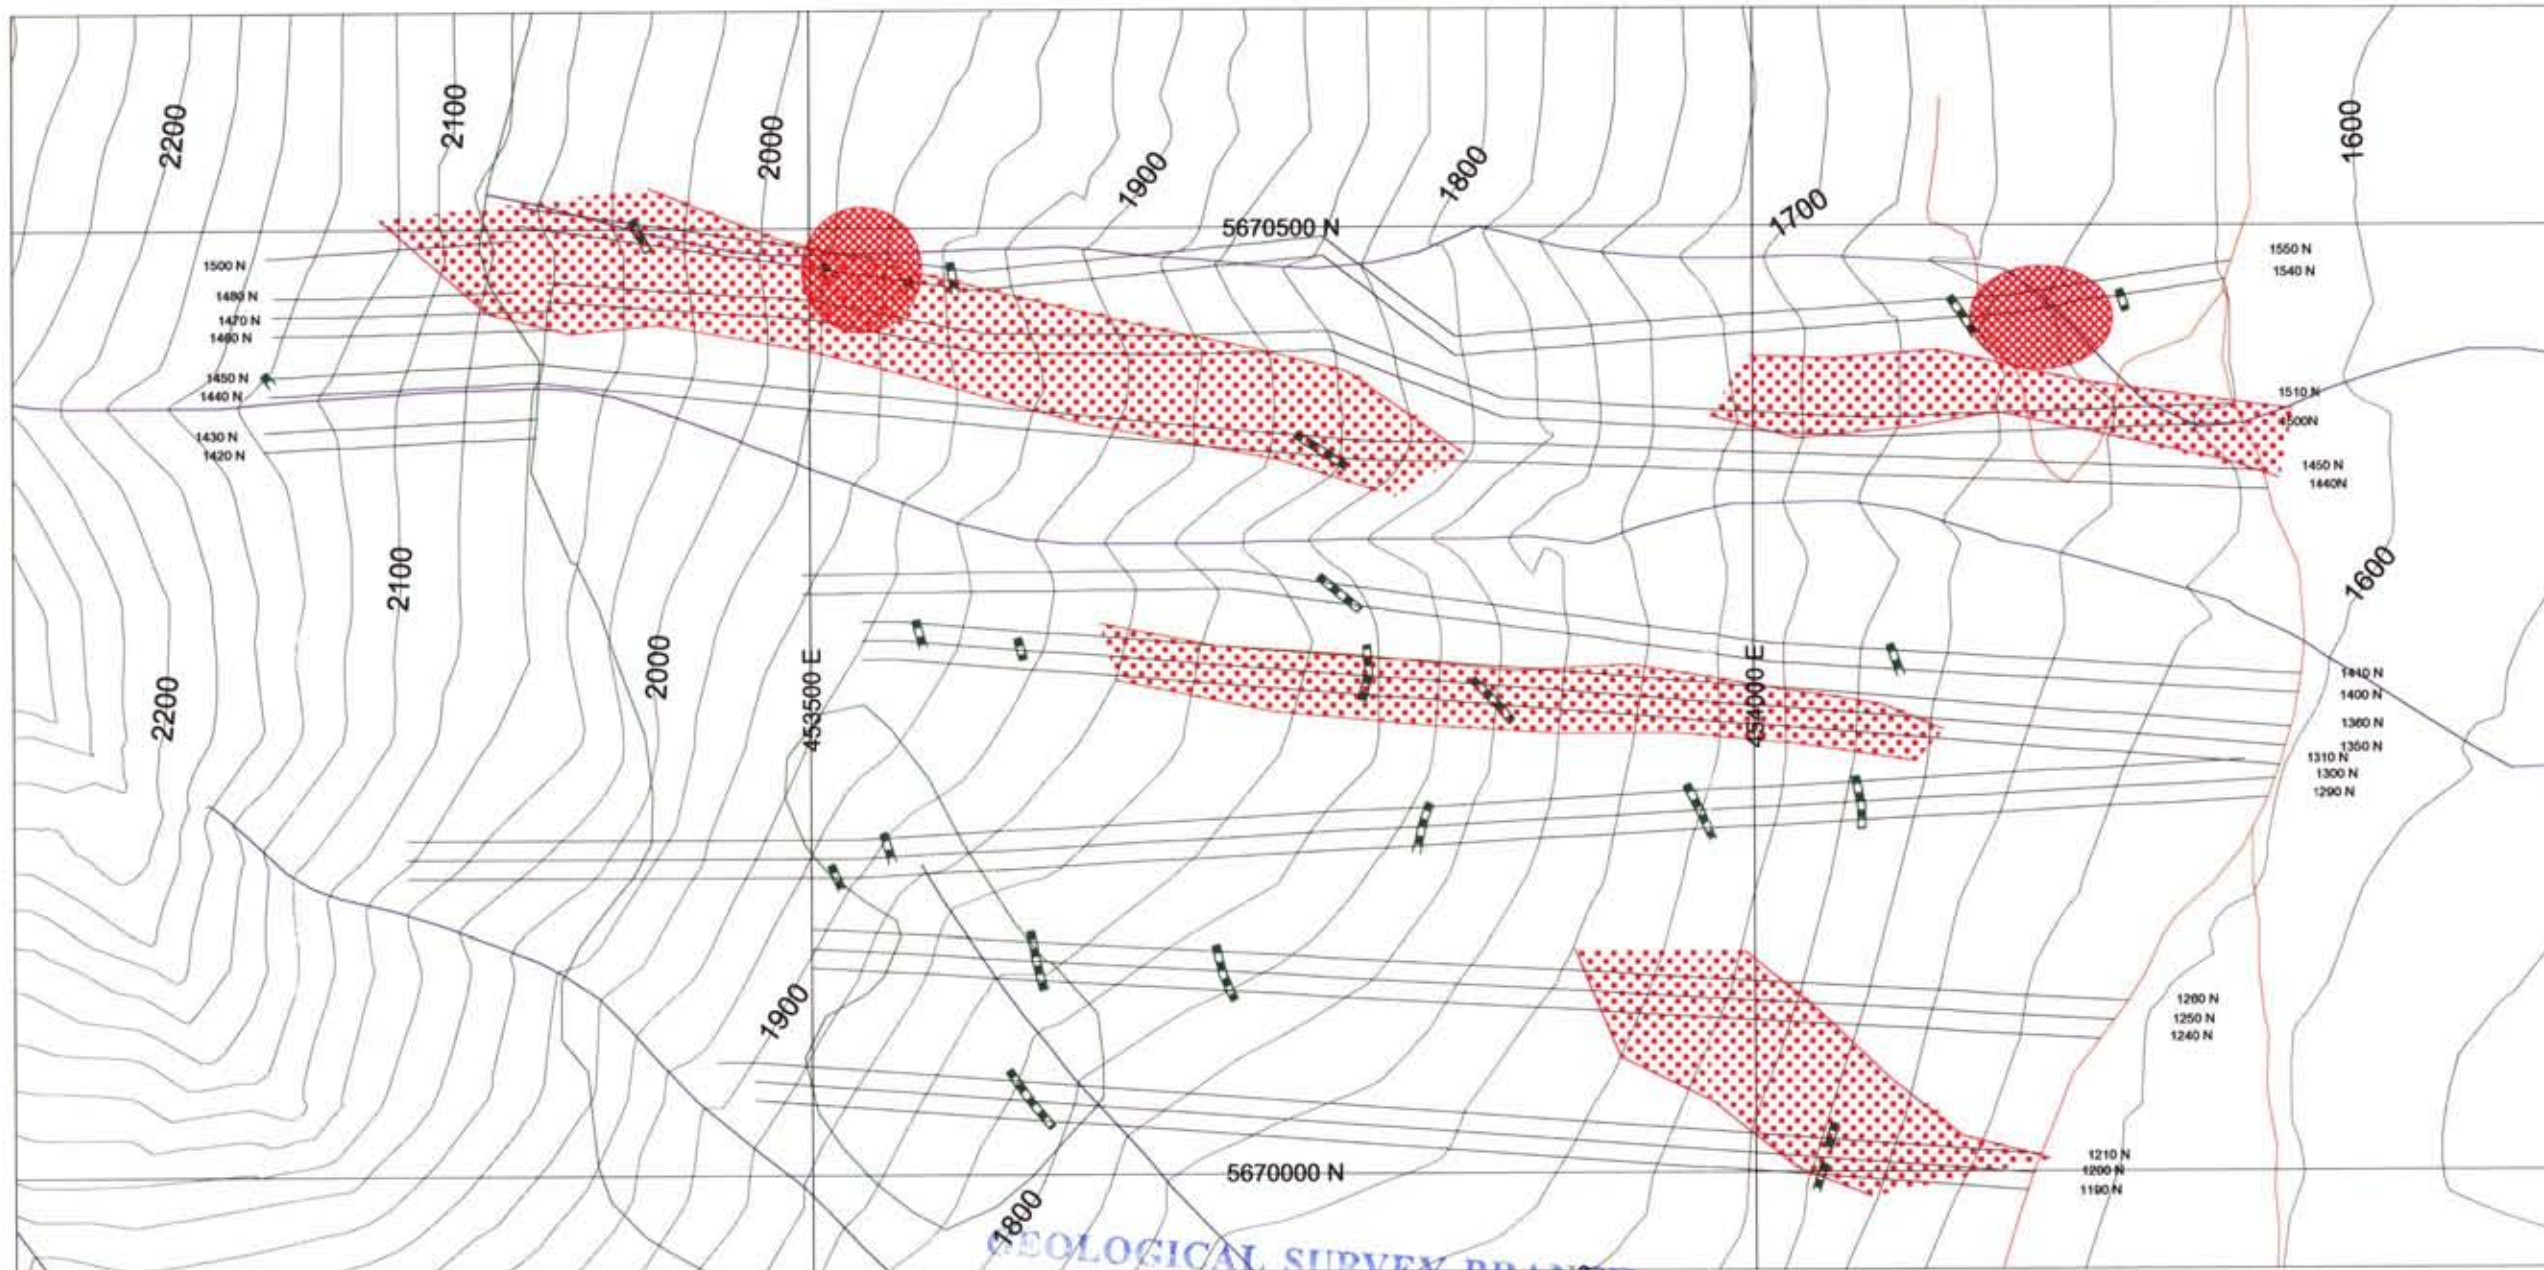


**Interpretation Legend**

-  Magnetic High Trend
-  Magnetic Dipole
-  Vif-em conductor

GEOLOGICAL SURVEY BRANCH  
 INTERPRETATION REPORT

28,305

UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vif-em  
 Map Scale 1:4,000



**Galore Resources Inc.**  
**Taseko Lakes Project**



Clinton Mining Division NTS: 92 O/4E, 92 O/3W

**Charlie Project**  
**Geophysical Interpretation**

Date: October, 2005

Plate: G-2d




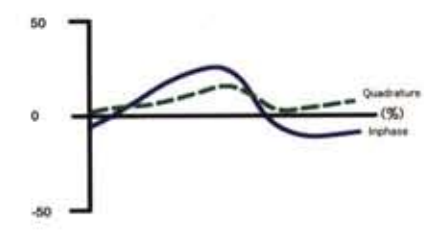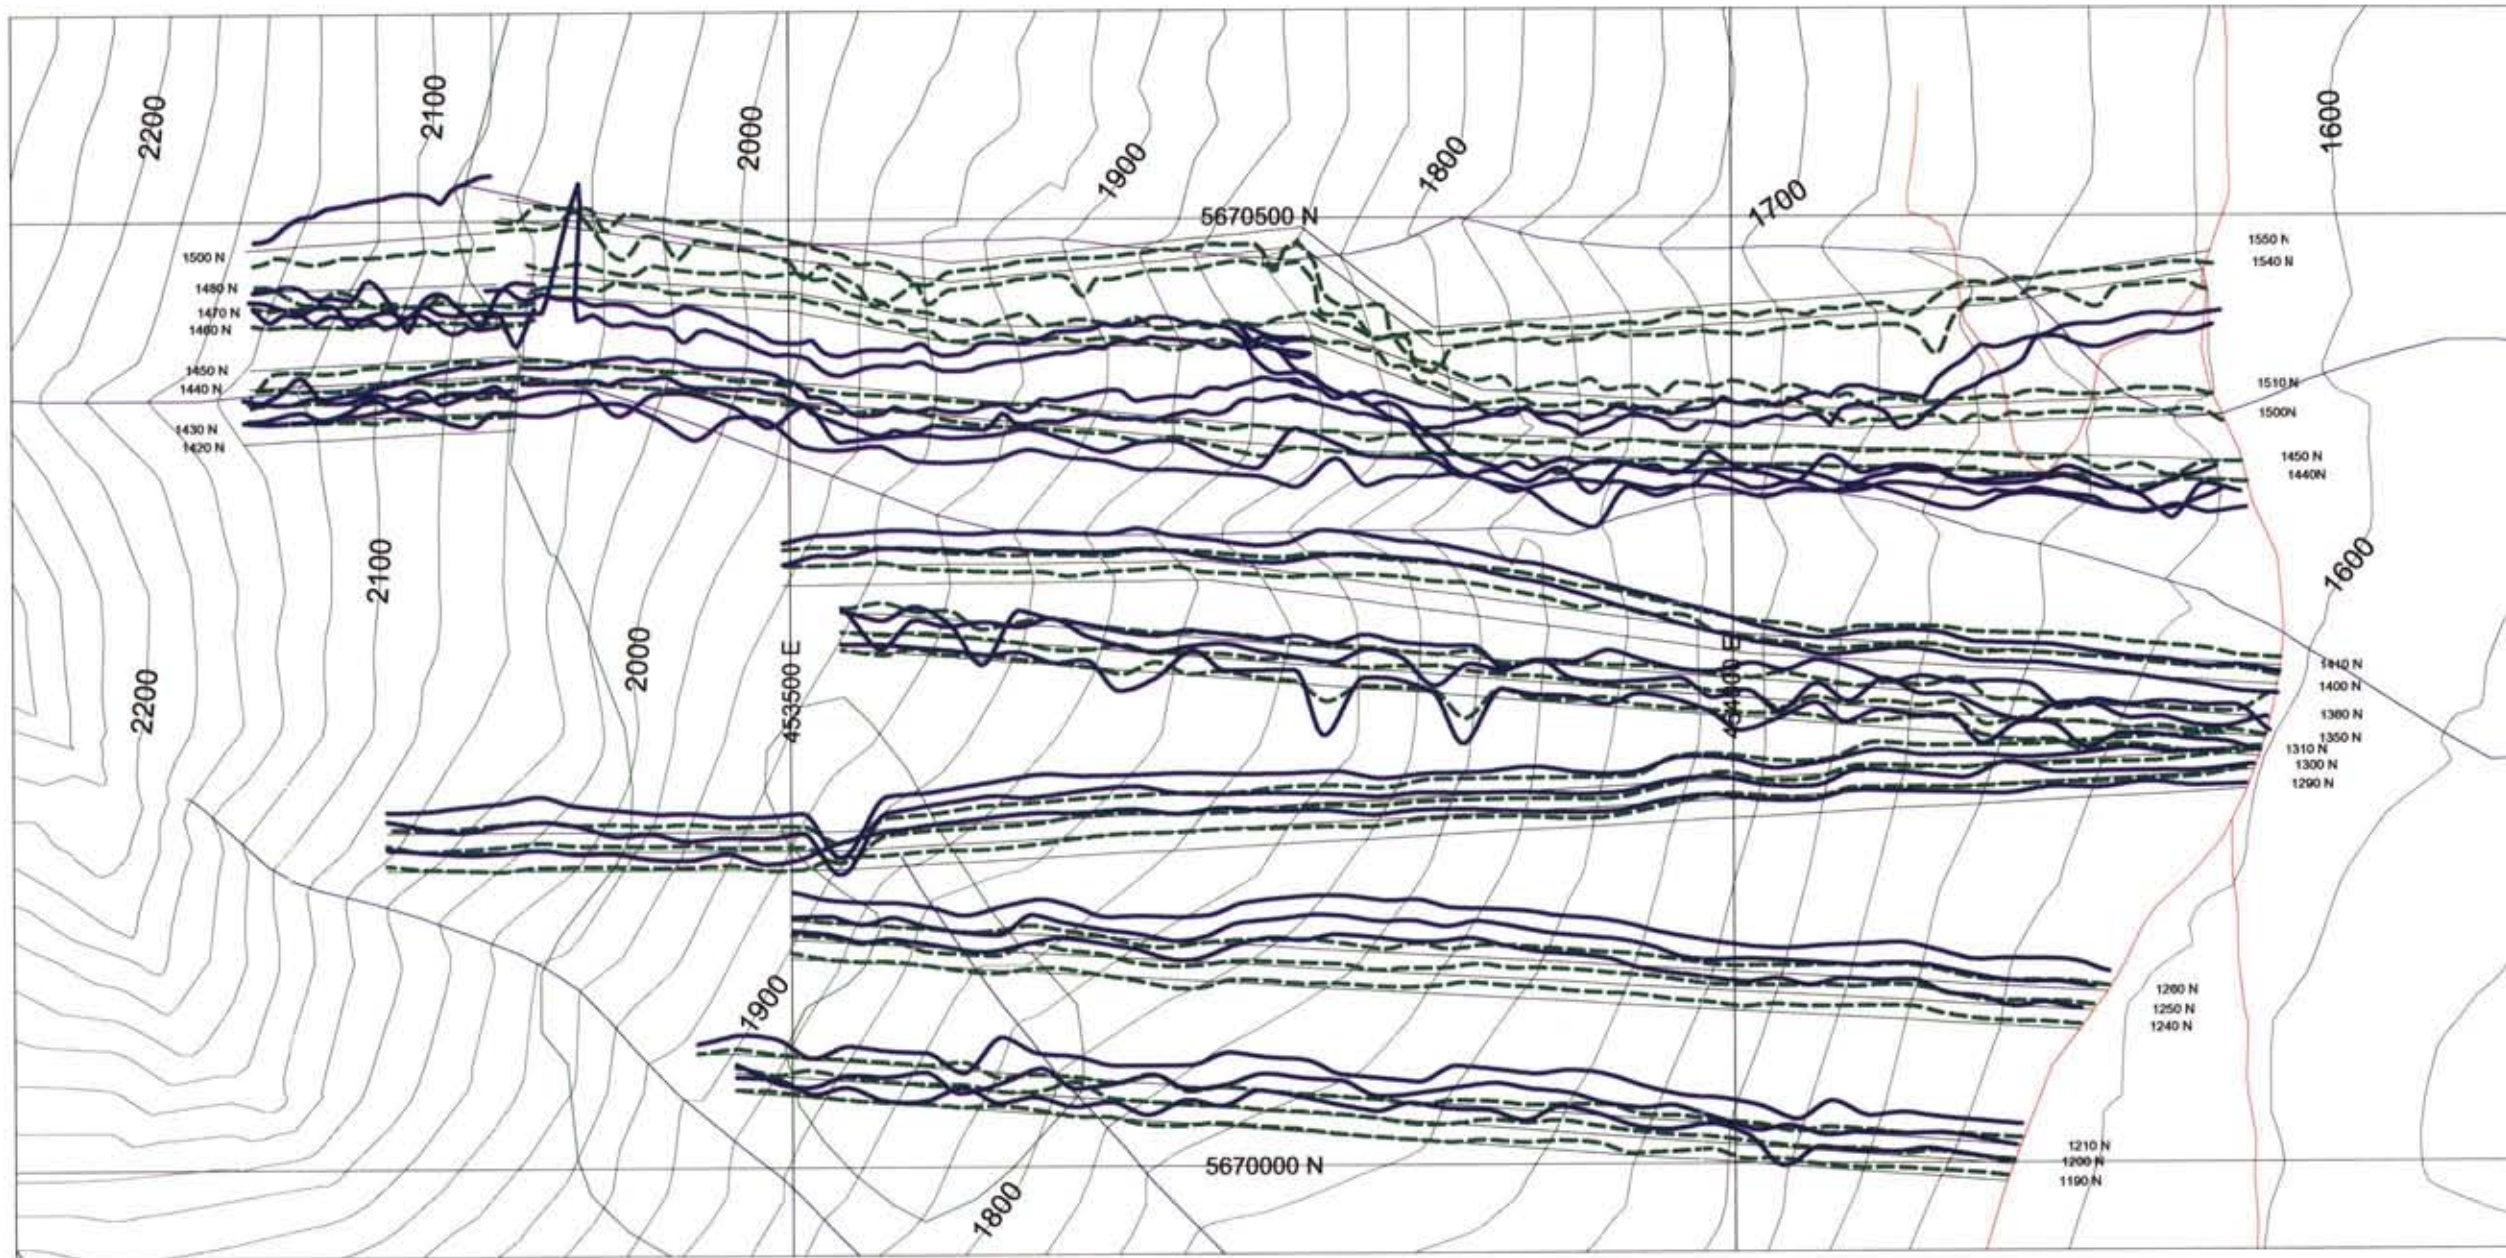


GEOLOGICAL SURVEY BRANCH  
REPORT

28,305



UTM Coordinate System: NAD83, Zone 10N  
Field Surveys - Magnetics, Vlf-em  
Map Scale 1:4,000



<p><b>Galore Resources Inc.</b>  <b>Taseko Lakes Project</b>          Clinton Mining Division NTS: 92 O/4E, 92 O/3W</p>
<p><b>Charlie Project</b>          Seattle VLF-EM (24.8 kHz)          Inphase and Quadrature Components          Stacked Profile Map</p>
<p>Date: October, 2005 <span style="float: right;">Plate: G-2c</span></p>





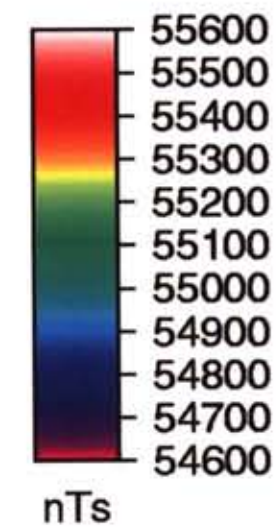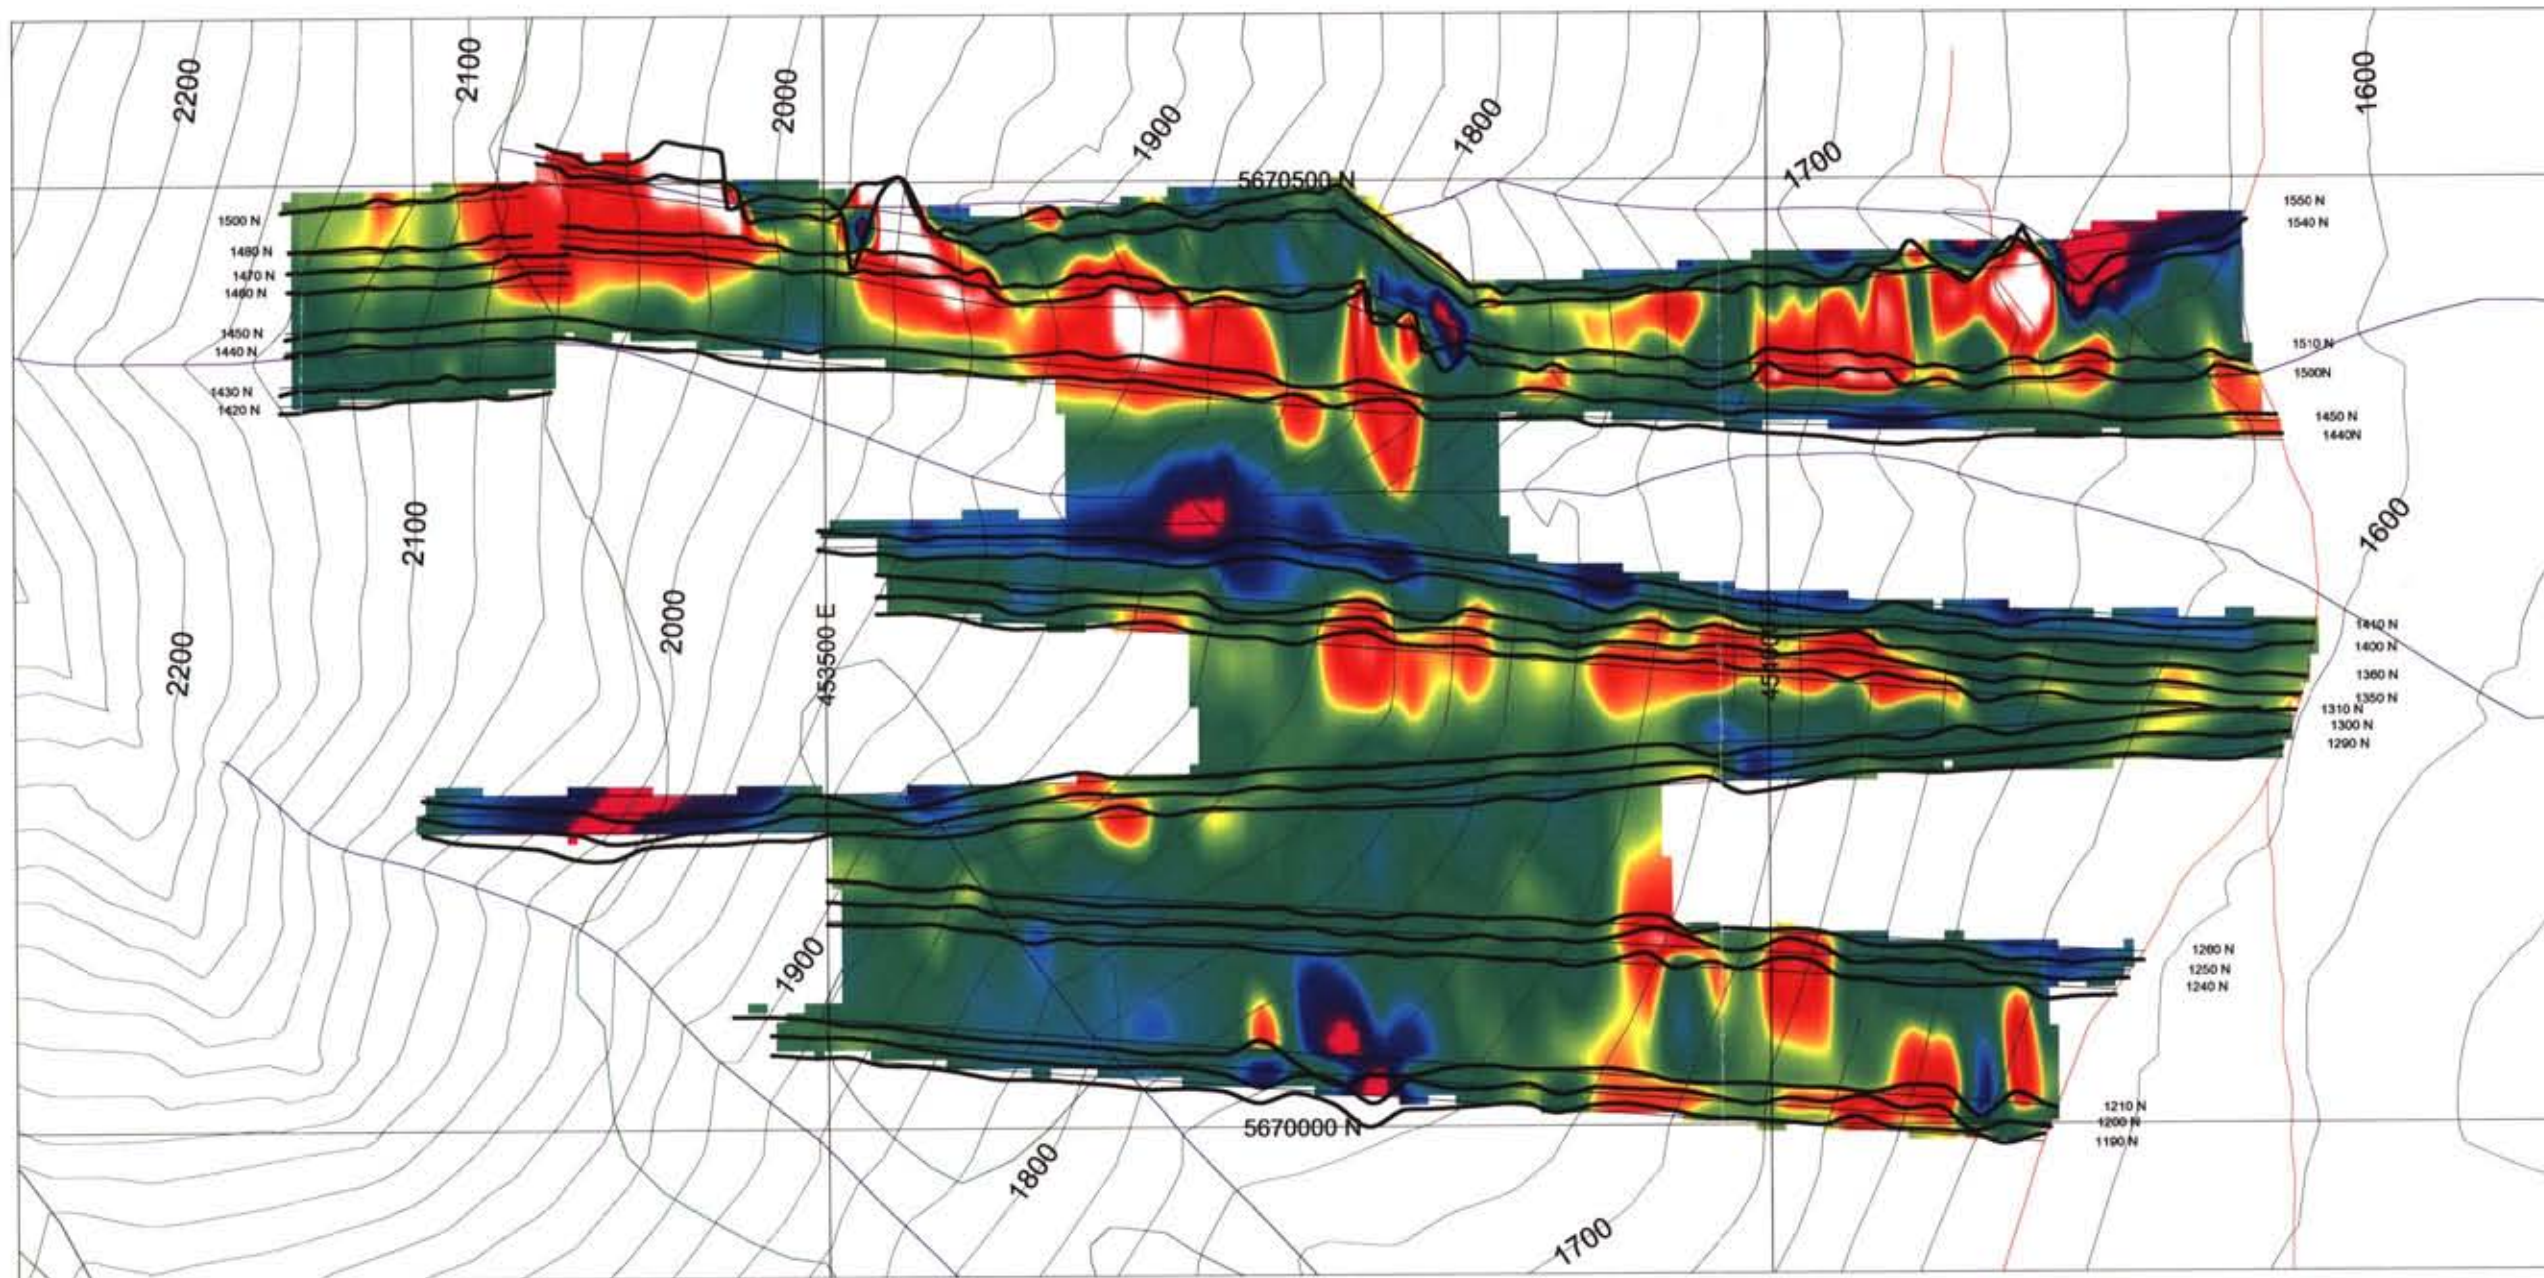

GEOPHYSICAL SURVEY BRANCH  
REPORT

28,305

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vif-em

Map Scale 1:4,000



**Galore Resources Inc.**  
**Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Charlie Project


**Total Magnetic Field Intensity (nTs)**  
**False Colour Contour Map**  
**Stacked Profile Map**

Date: October, 2005

Plate: G-2b






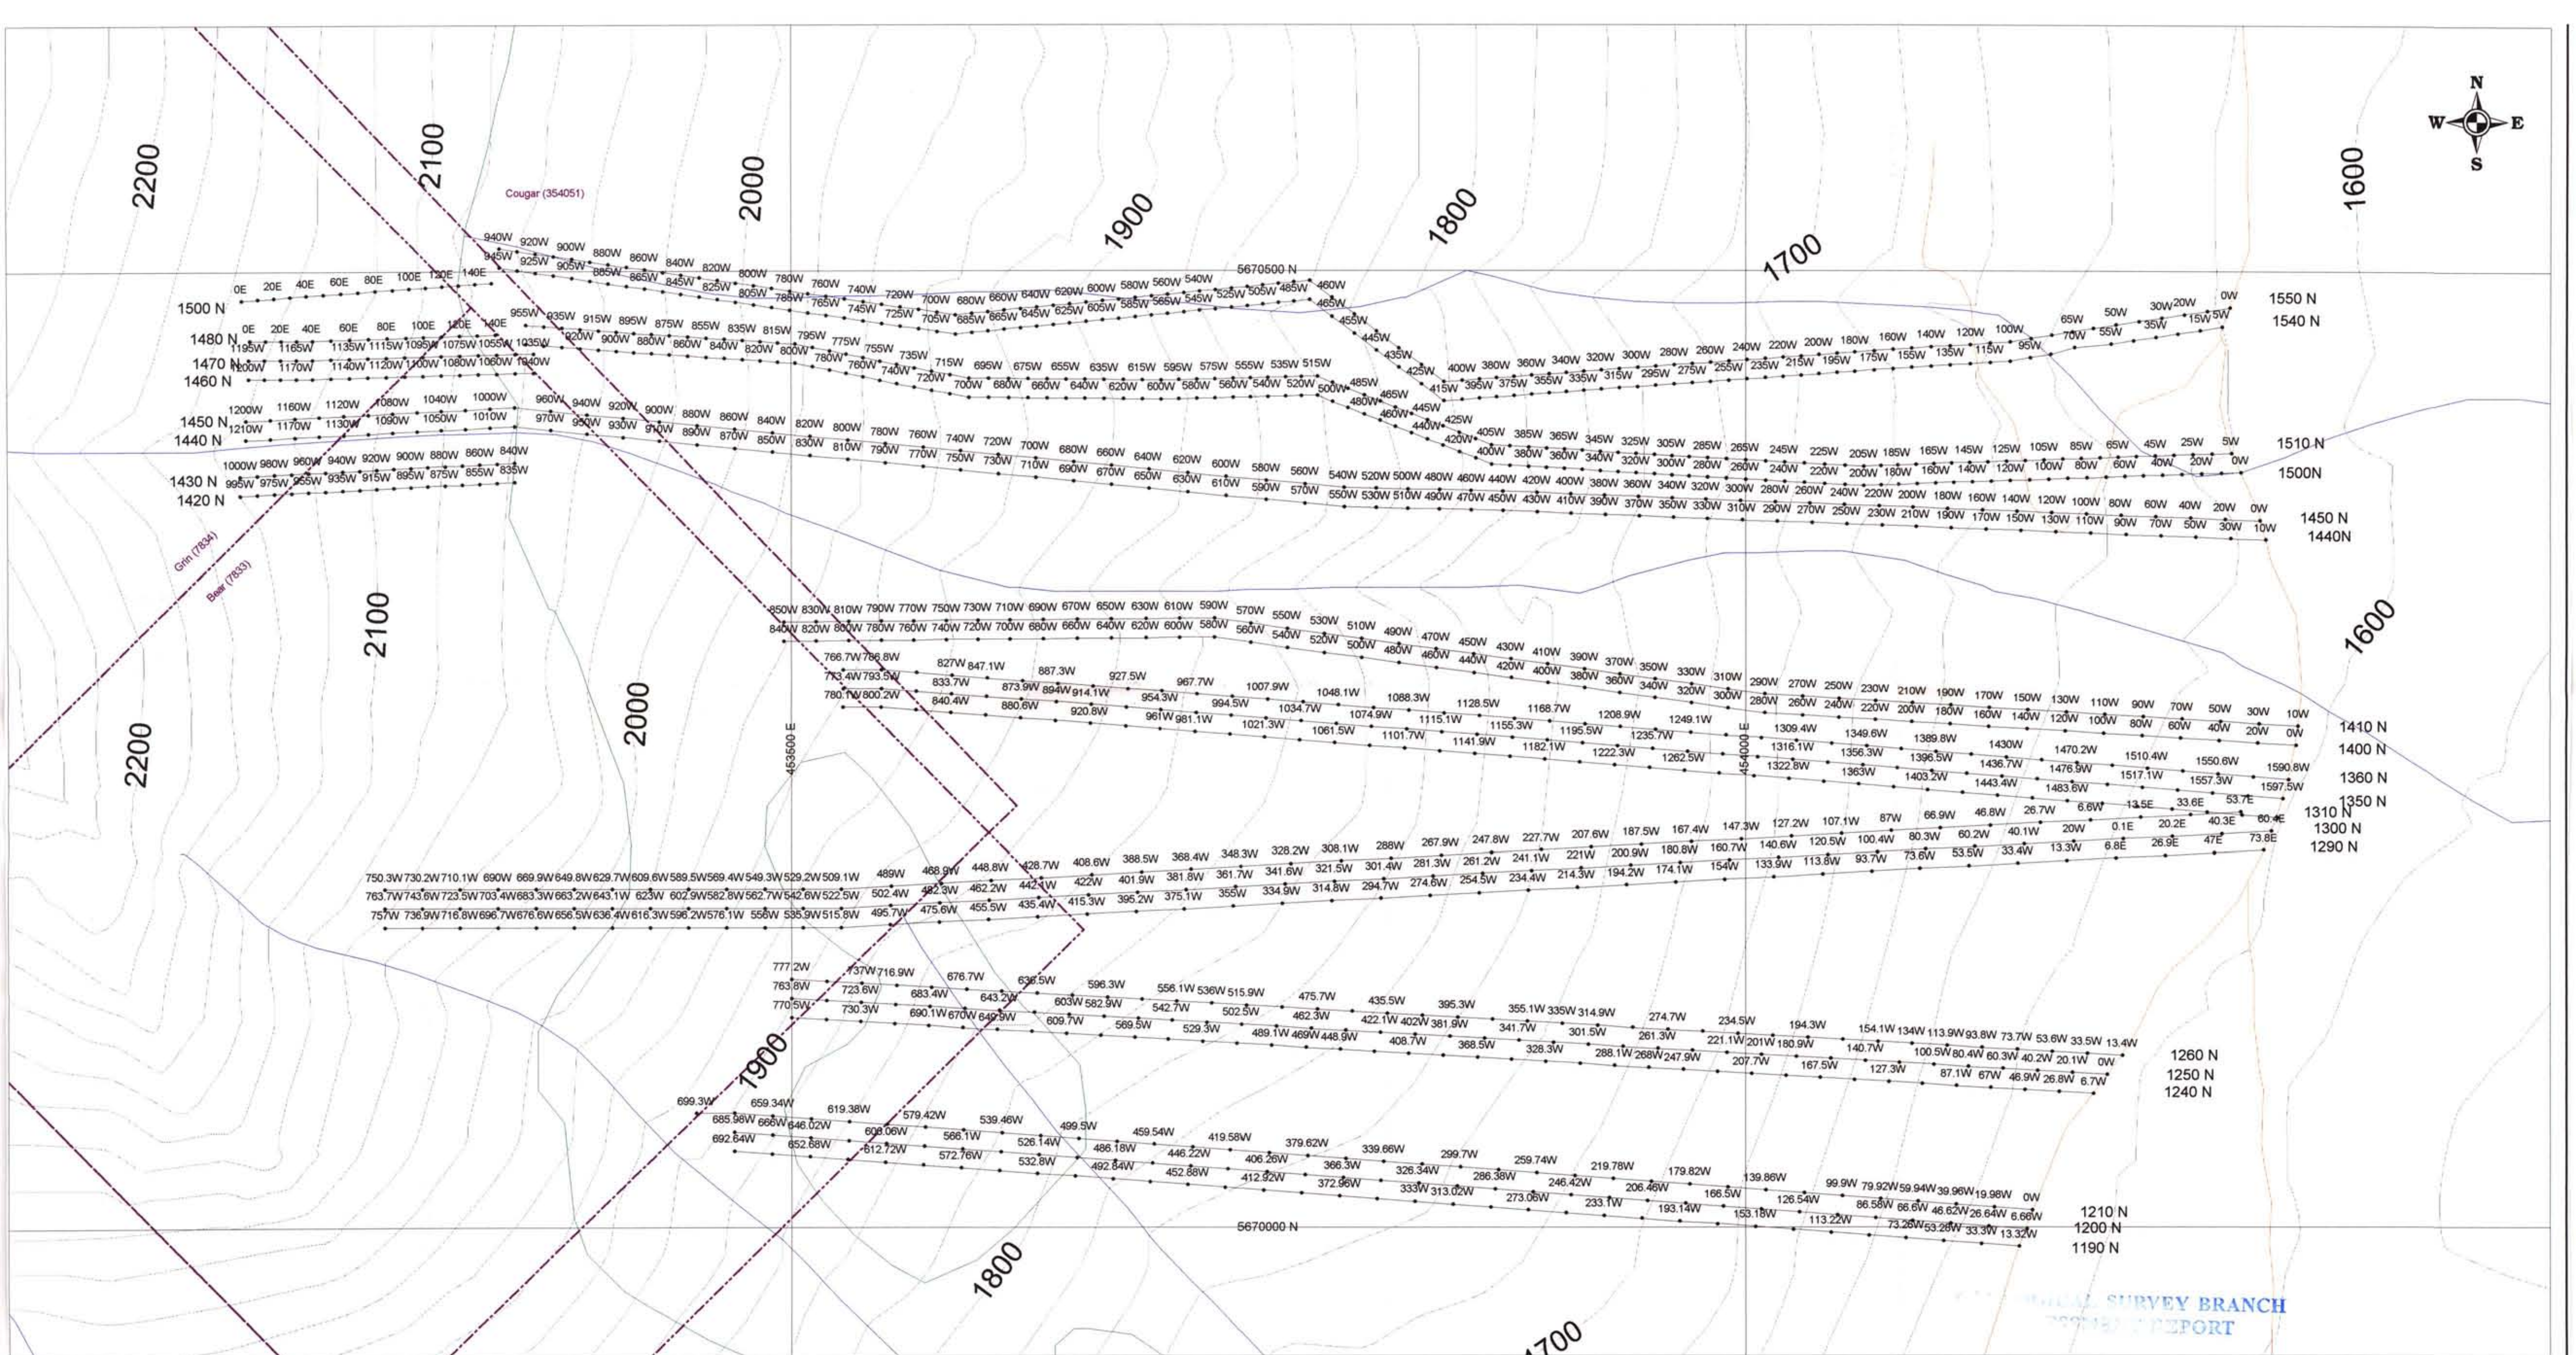


28,305



UTM Coordinate System: NAD83, Zone 10N  
Field Surveys - Magnetics, VLF-em  
Map Scale 1:2,000

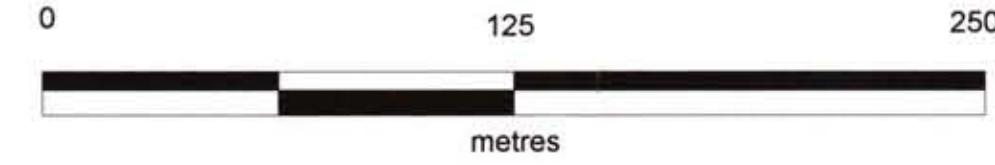



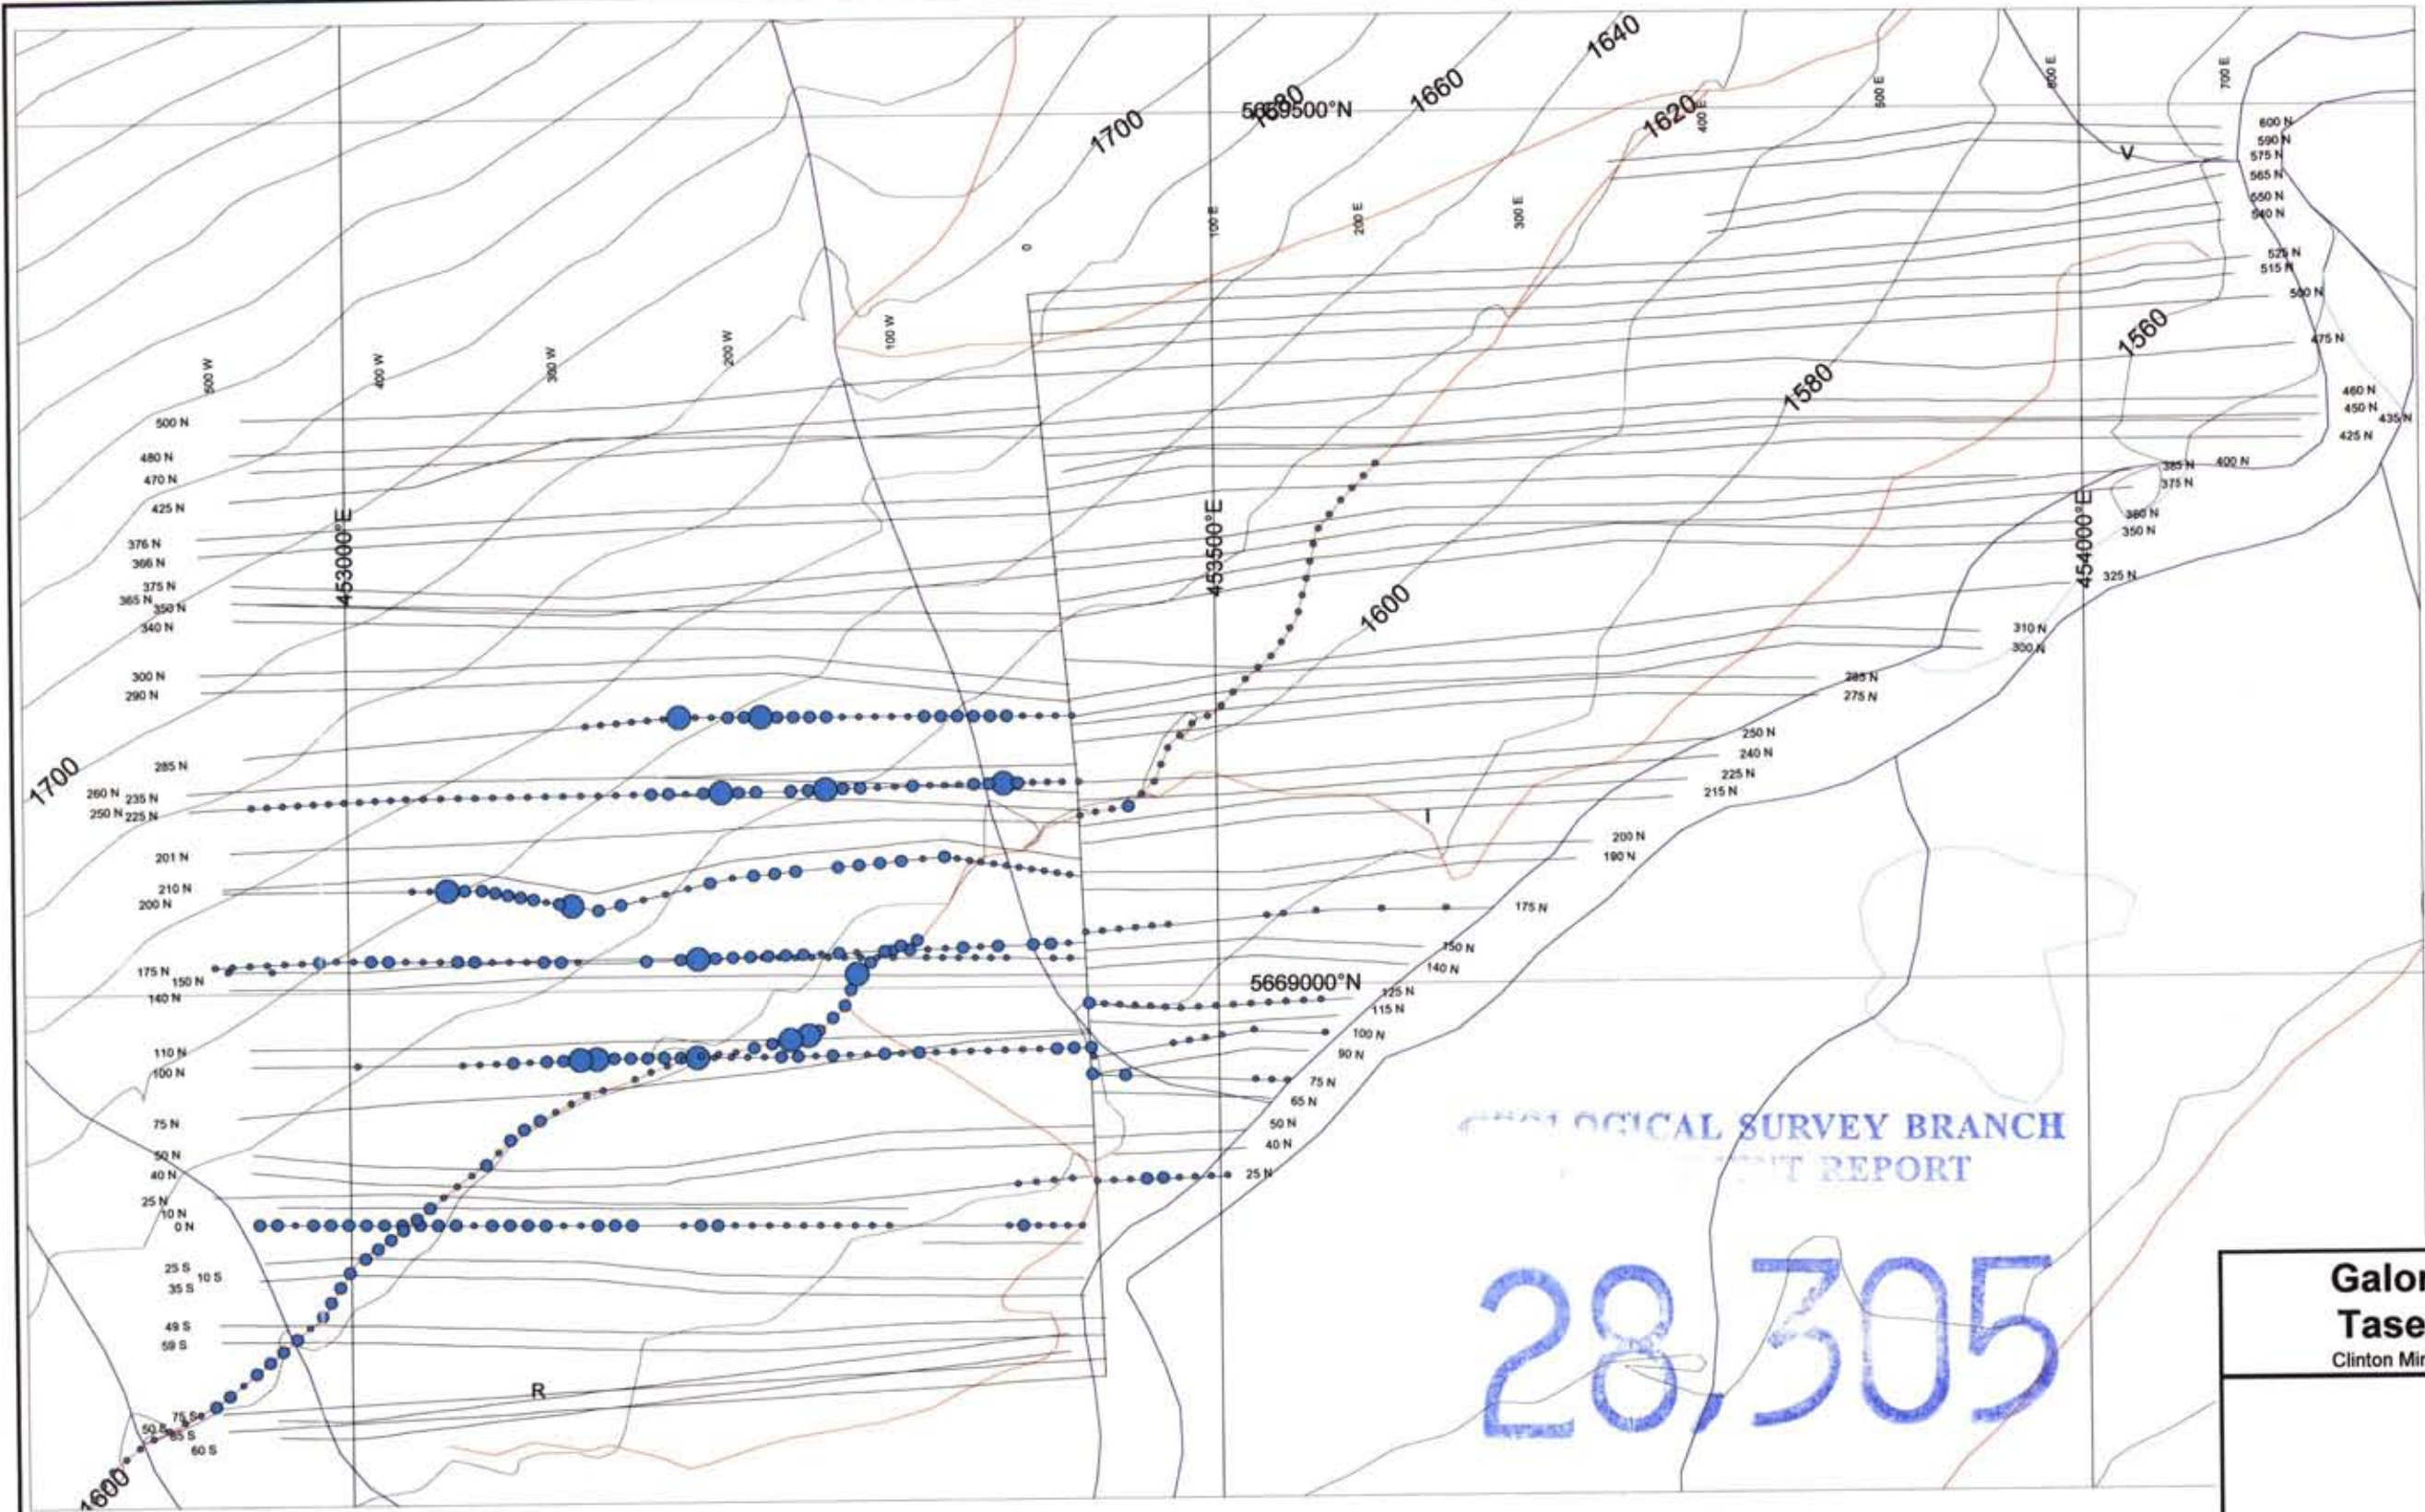

Geochem - Cobalt

- 100 to 957 (14)
- 25 to 100 (140)
- 2 to 25 (263)

GEOLOGICAL SURVEY BRANCH  
 REPORT

28,305

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

---

**Hub Project**


**Soil Geochemistry**  
**Cobalt (ppm)**  
**Thematic Map**

---

UTM Coordinate System: NAD 83, Zone 10N  
 Date: October, 2005


Plate: G-1g

**SJ Geophysics Ltd.**  
 S.J.V. Consultants Ltd.



UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Geochemical Soil Sampling  
 Map Scale 1:4,000



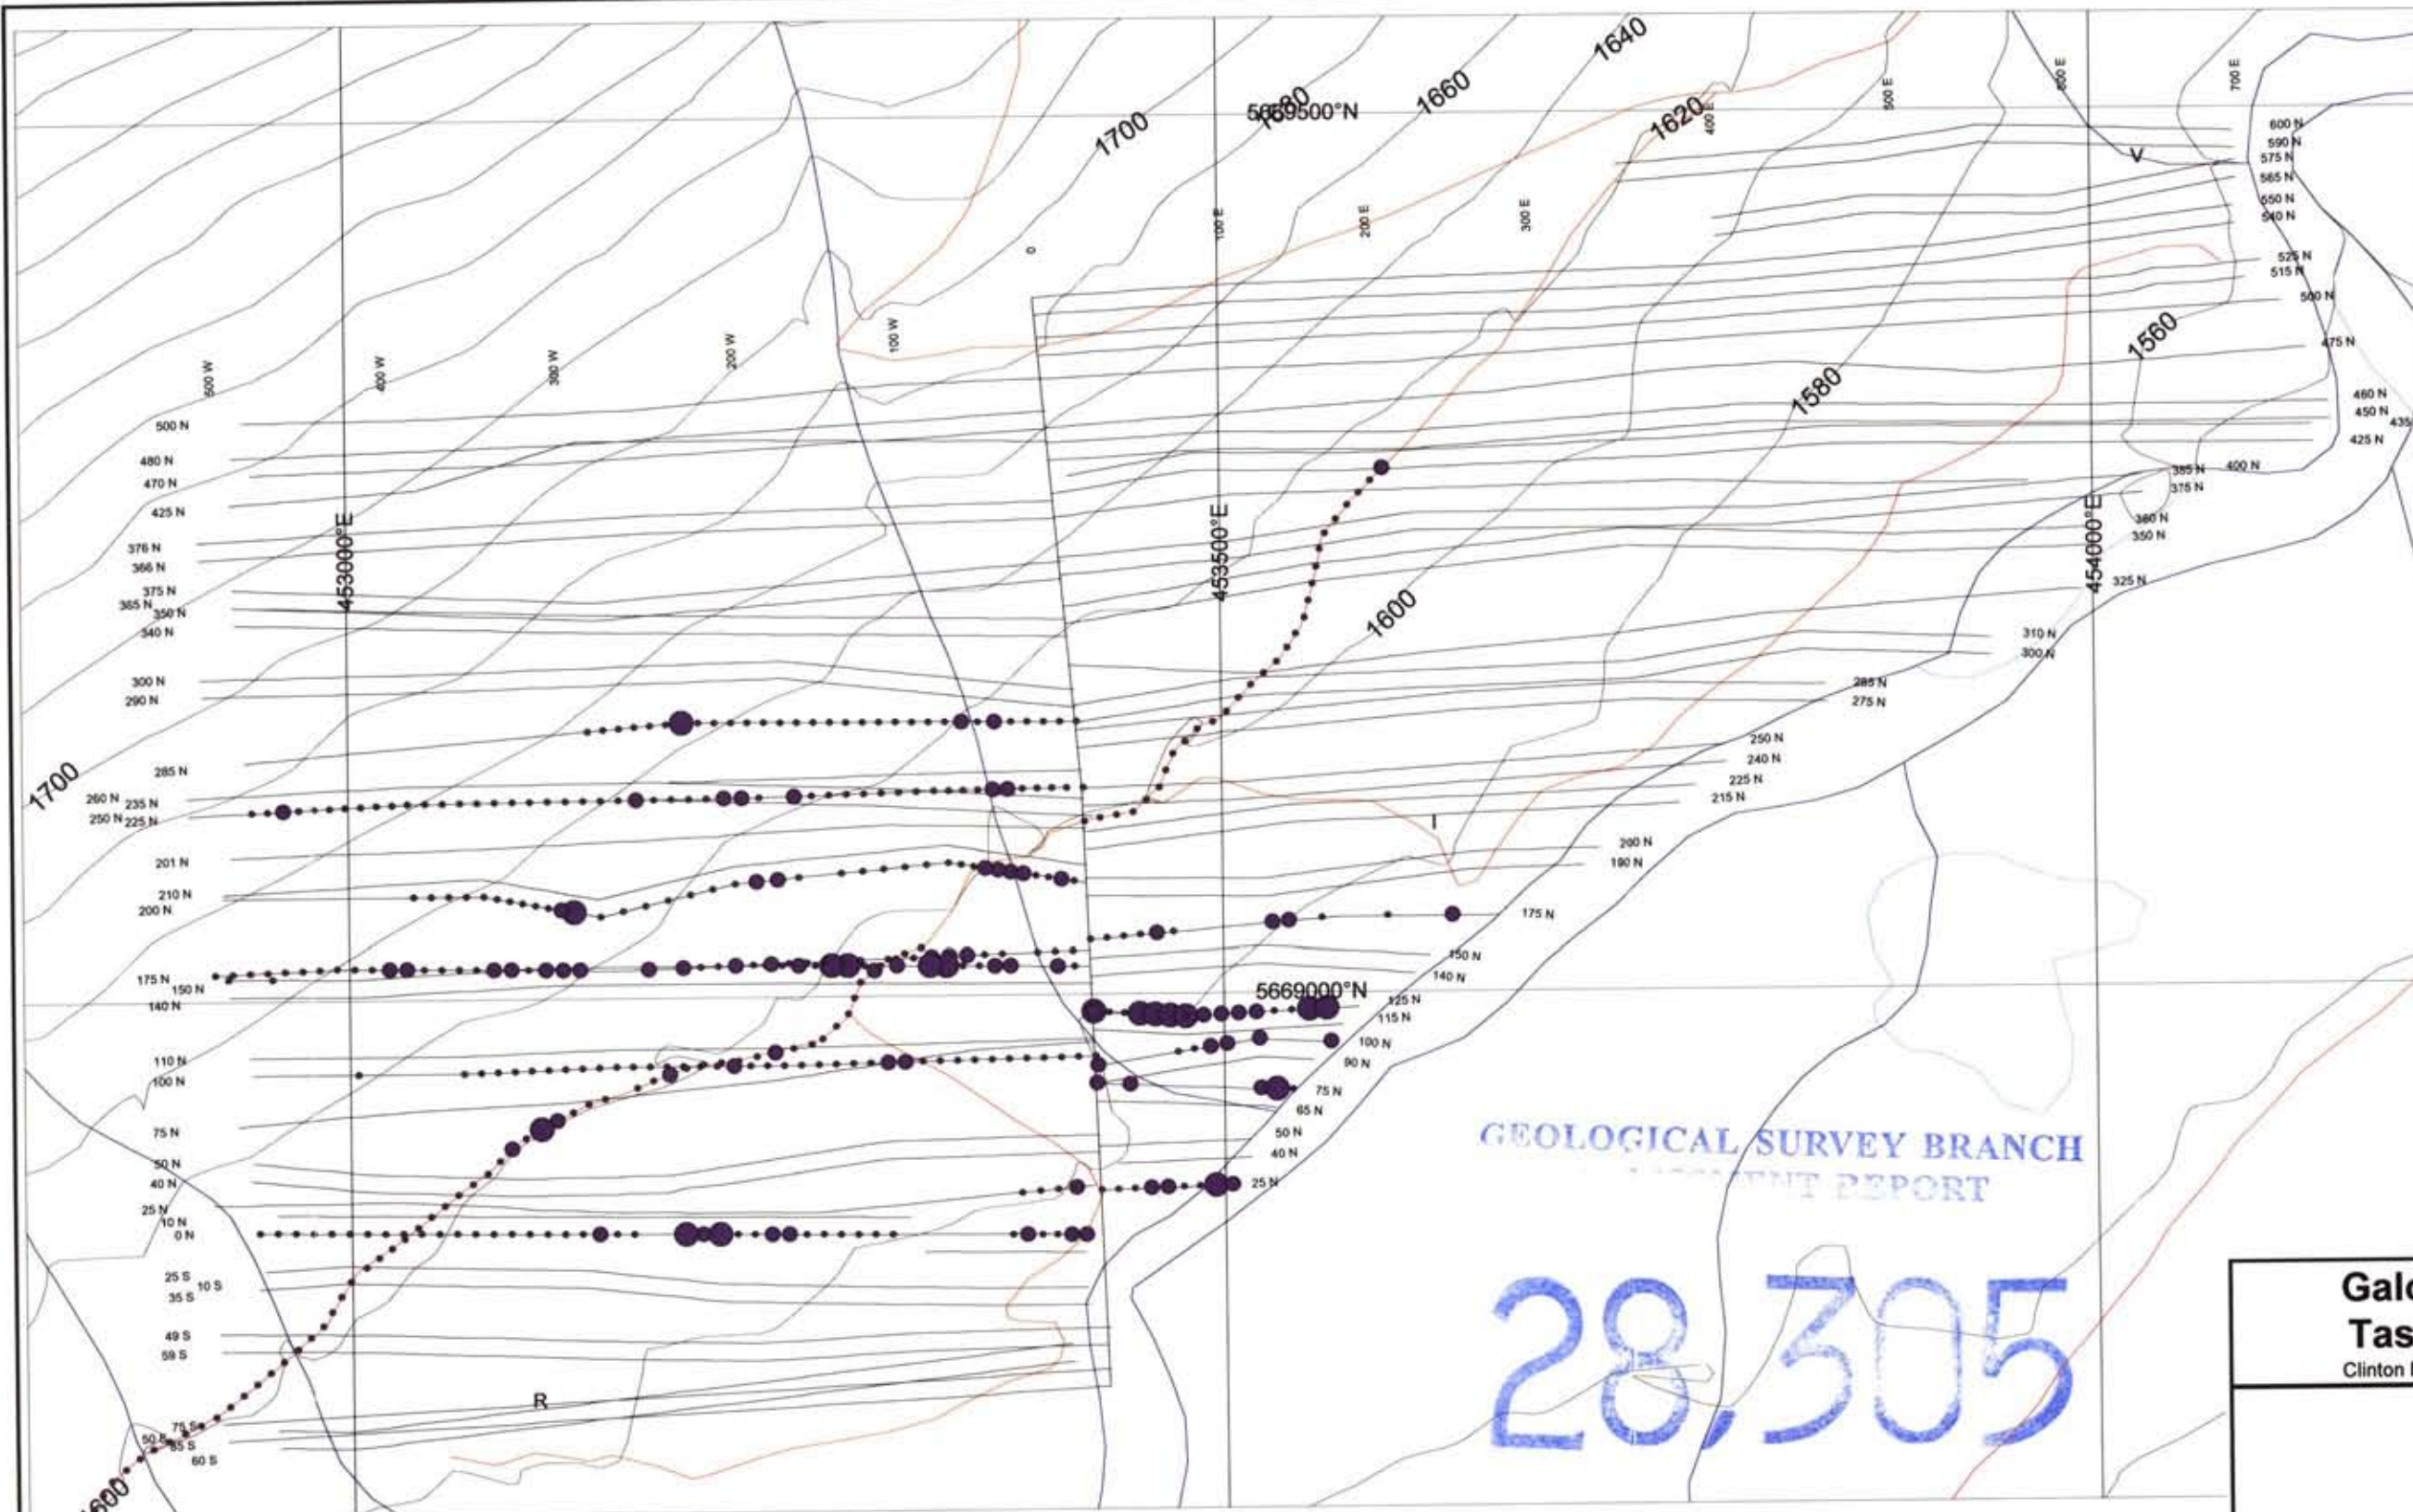

Geochem - Molybdenum

- 100 to 623 (18)
- 30 to 100 (73)
- 0 to 30 (326)

GEOLOGICAL SURVEY BRANCH  
 REPORT

28,305

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

---


**Hub Project**

**Soil Geochemistry**  
**Molybdenum (ppm)**  
**Thematic Map**


---

UTM Coordinate System: NAD 83, Zone 10N  
 Date: October, 2005 Plate: G-1f

UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Geochemical Soil Sampling  
 Map Scale 1:4,000





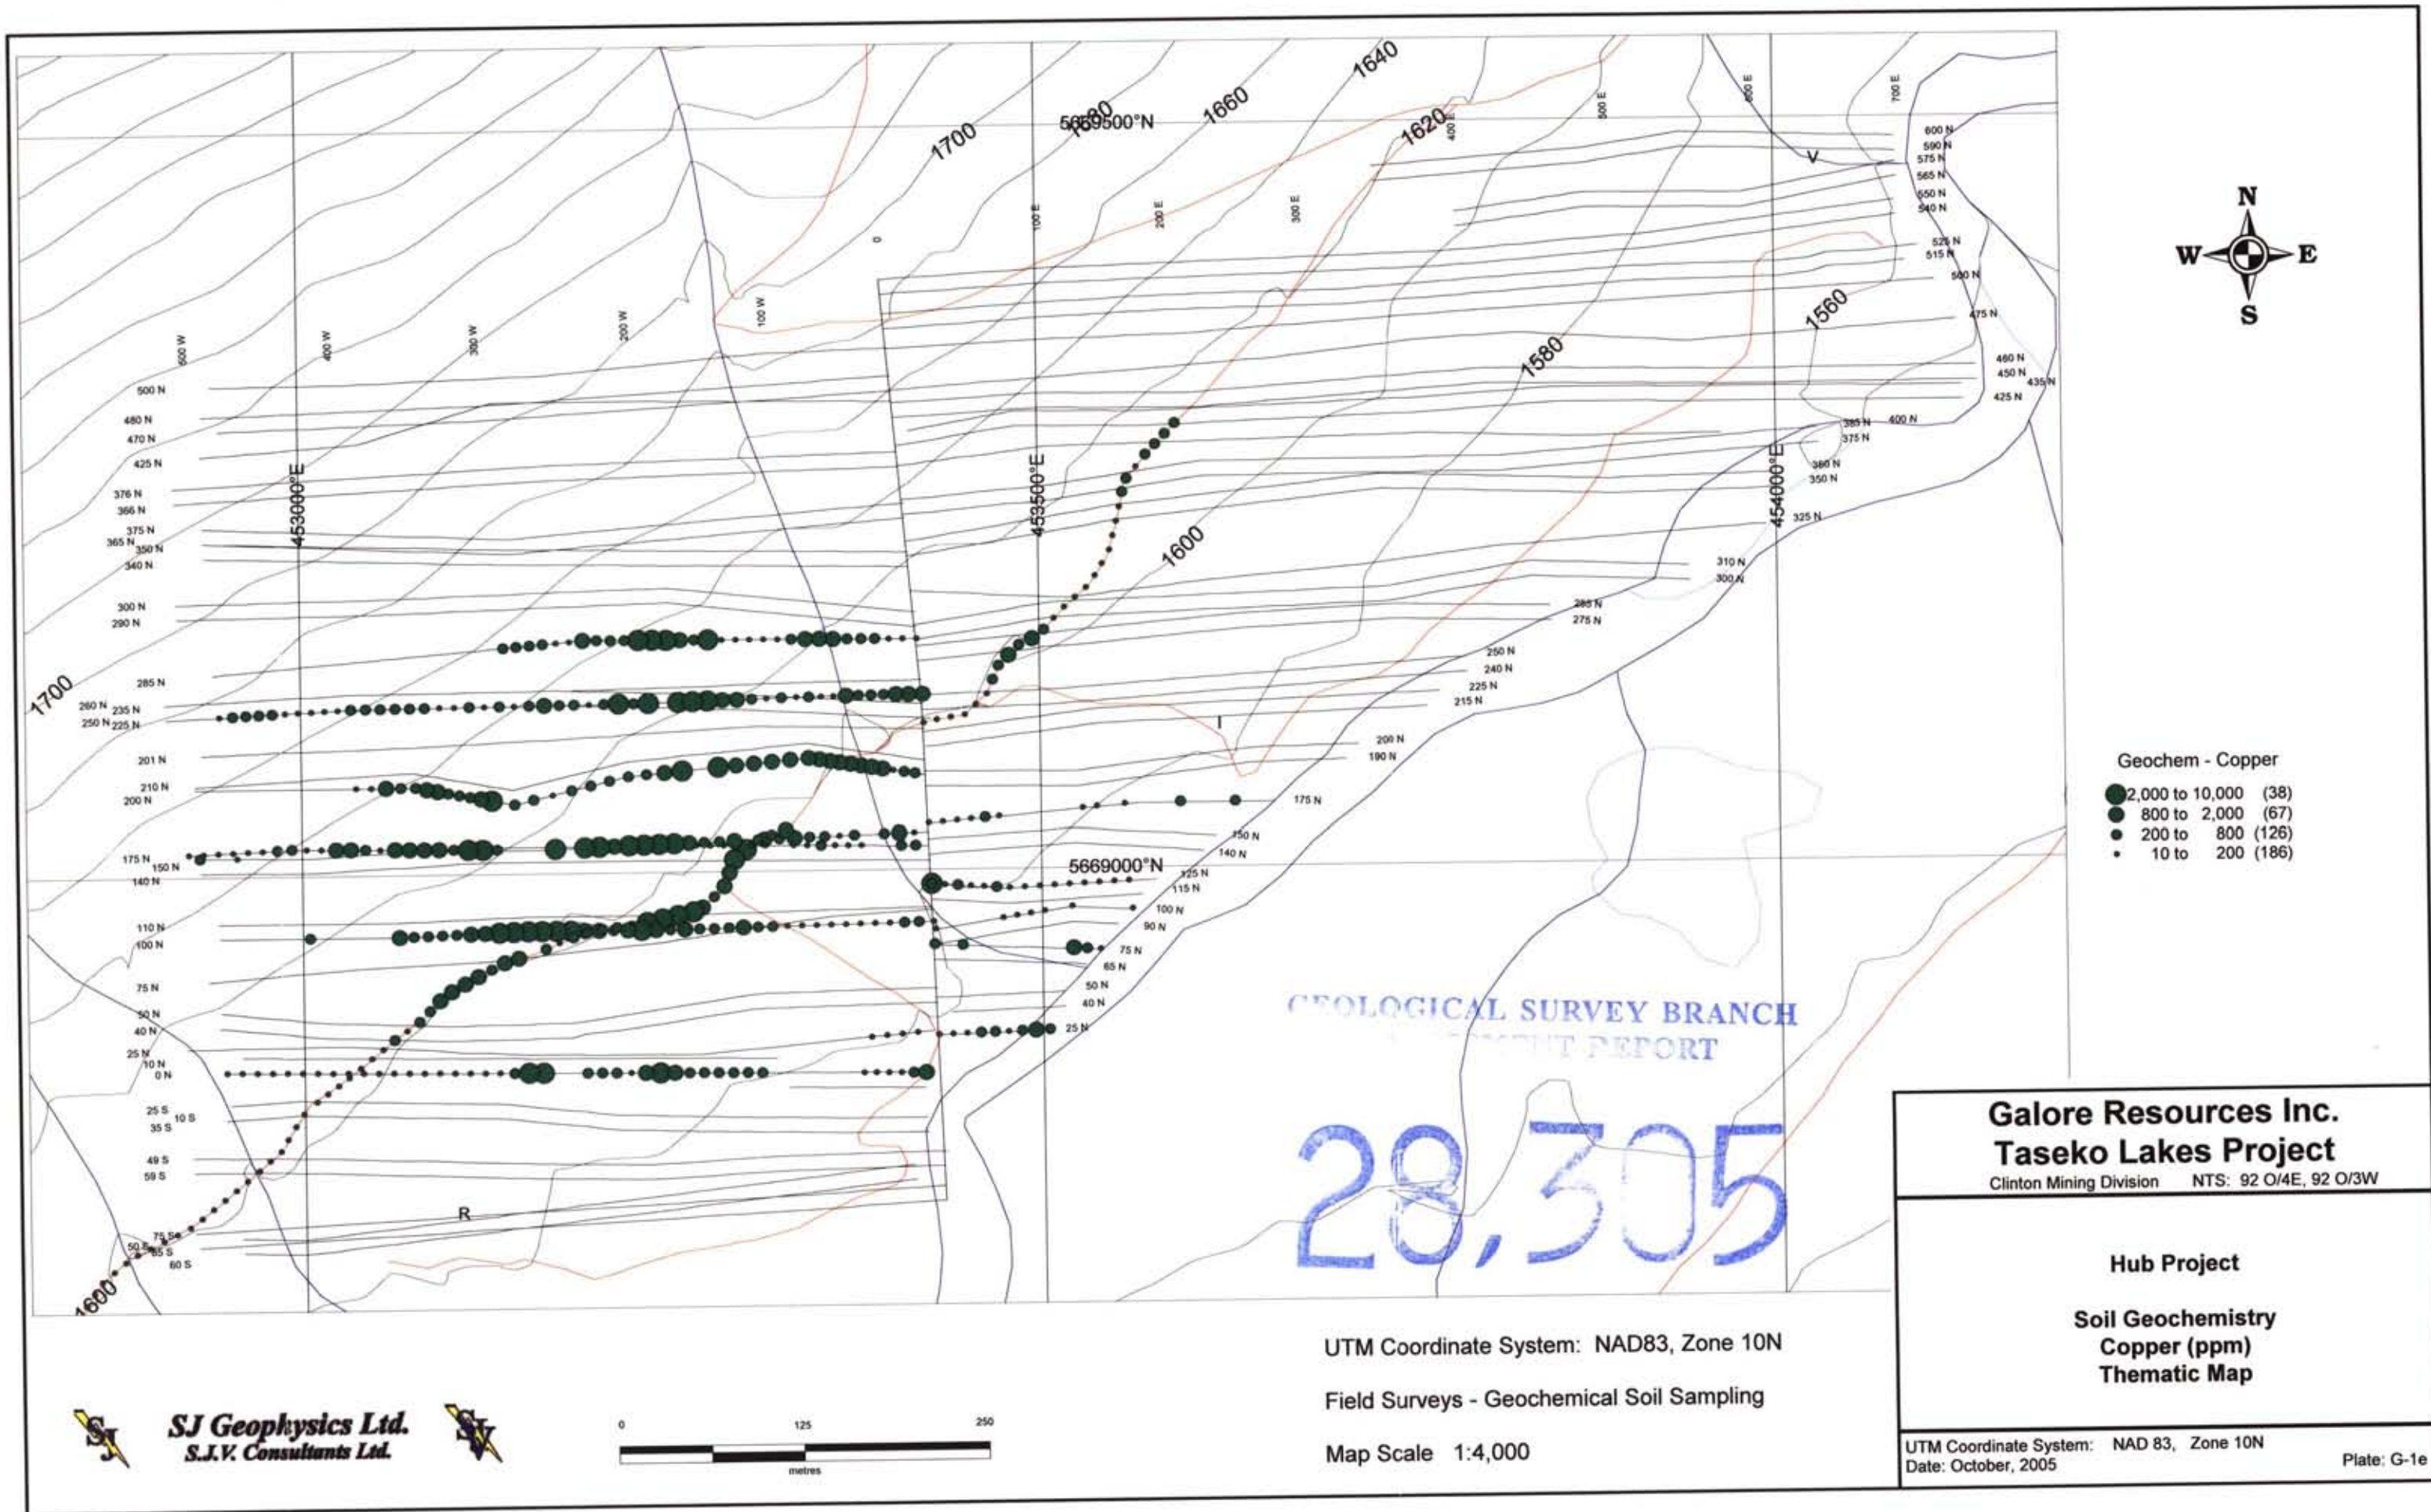

Geochem - Copper

- 2,000 to 10,000 (38)
- 800 to 2,000 (67)
- 200 to 800 (126)
- 10 to 200 (186)

GEOLOGICAL SURVEY BRANCH  
 REPORT

28,305

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Geochemical Soil Sampling

Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**


Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Hub Project


Soil Geochemistry  
 Copper (ppm)  
 Thematic Map

UTM Coordinate System: NAD 83, Zone 10N  
 Date: October, 2005

Plate: G-1e





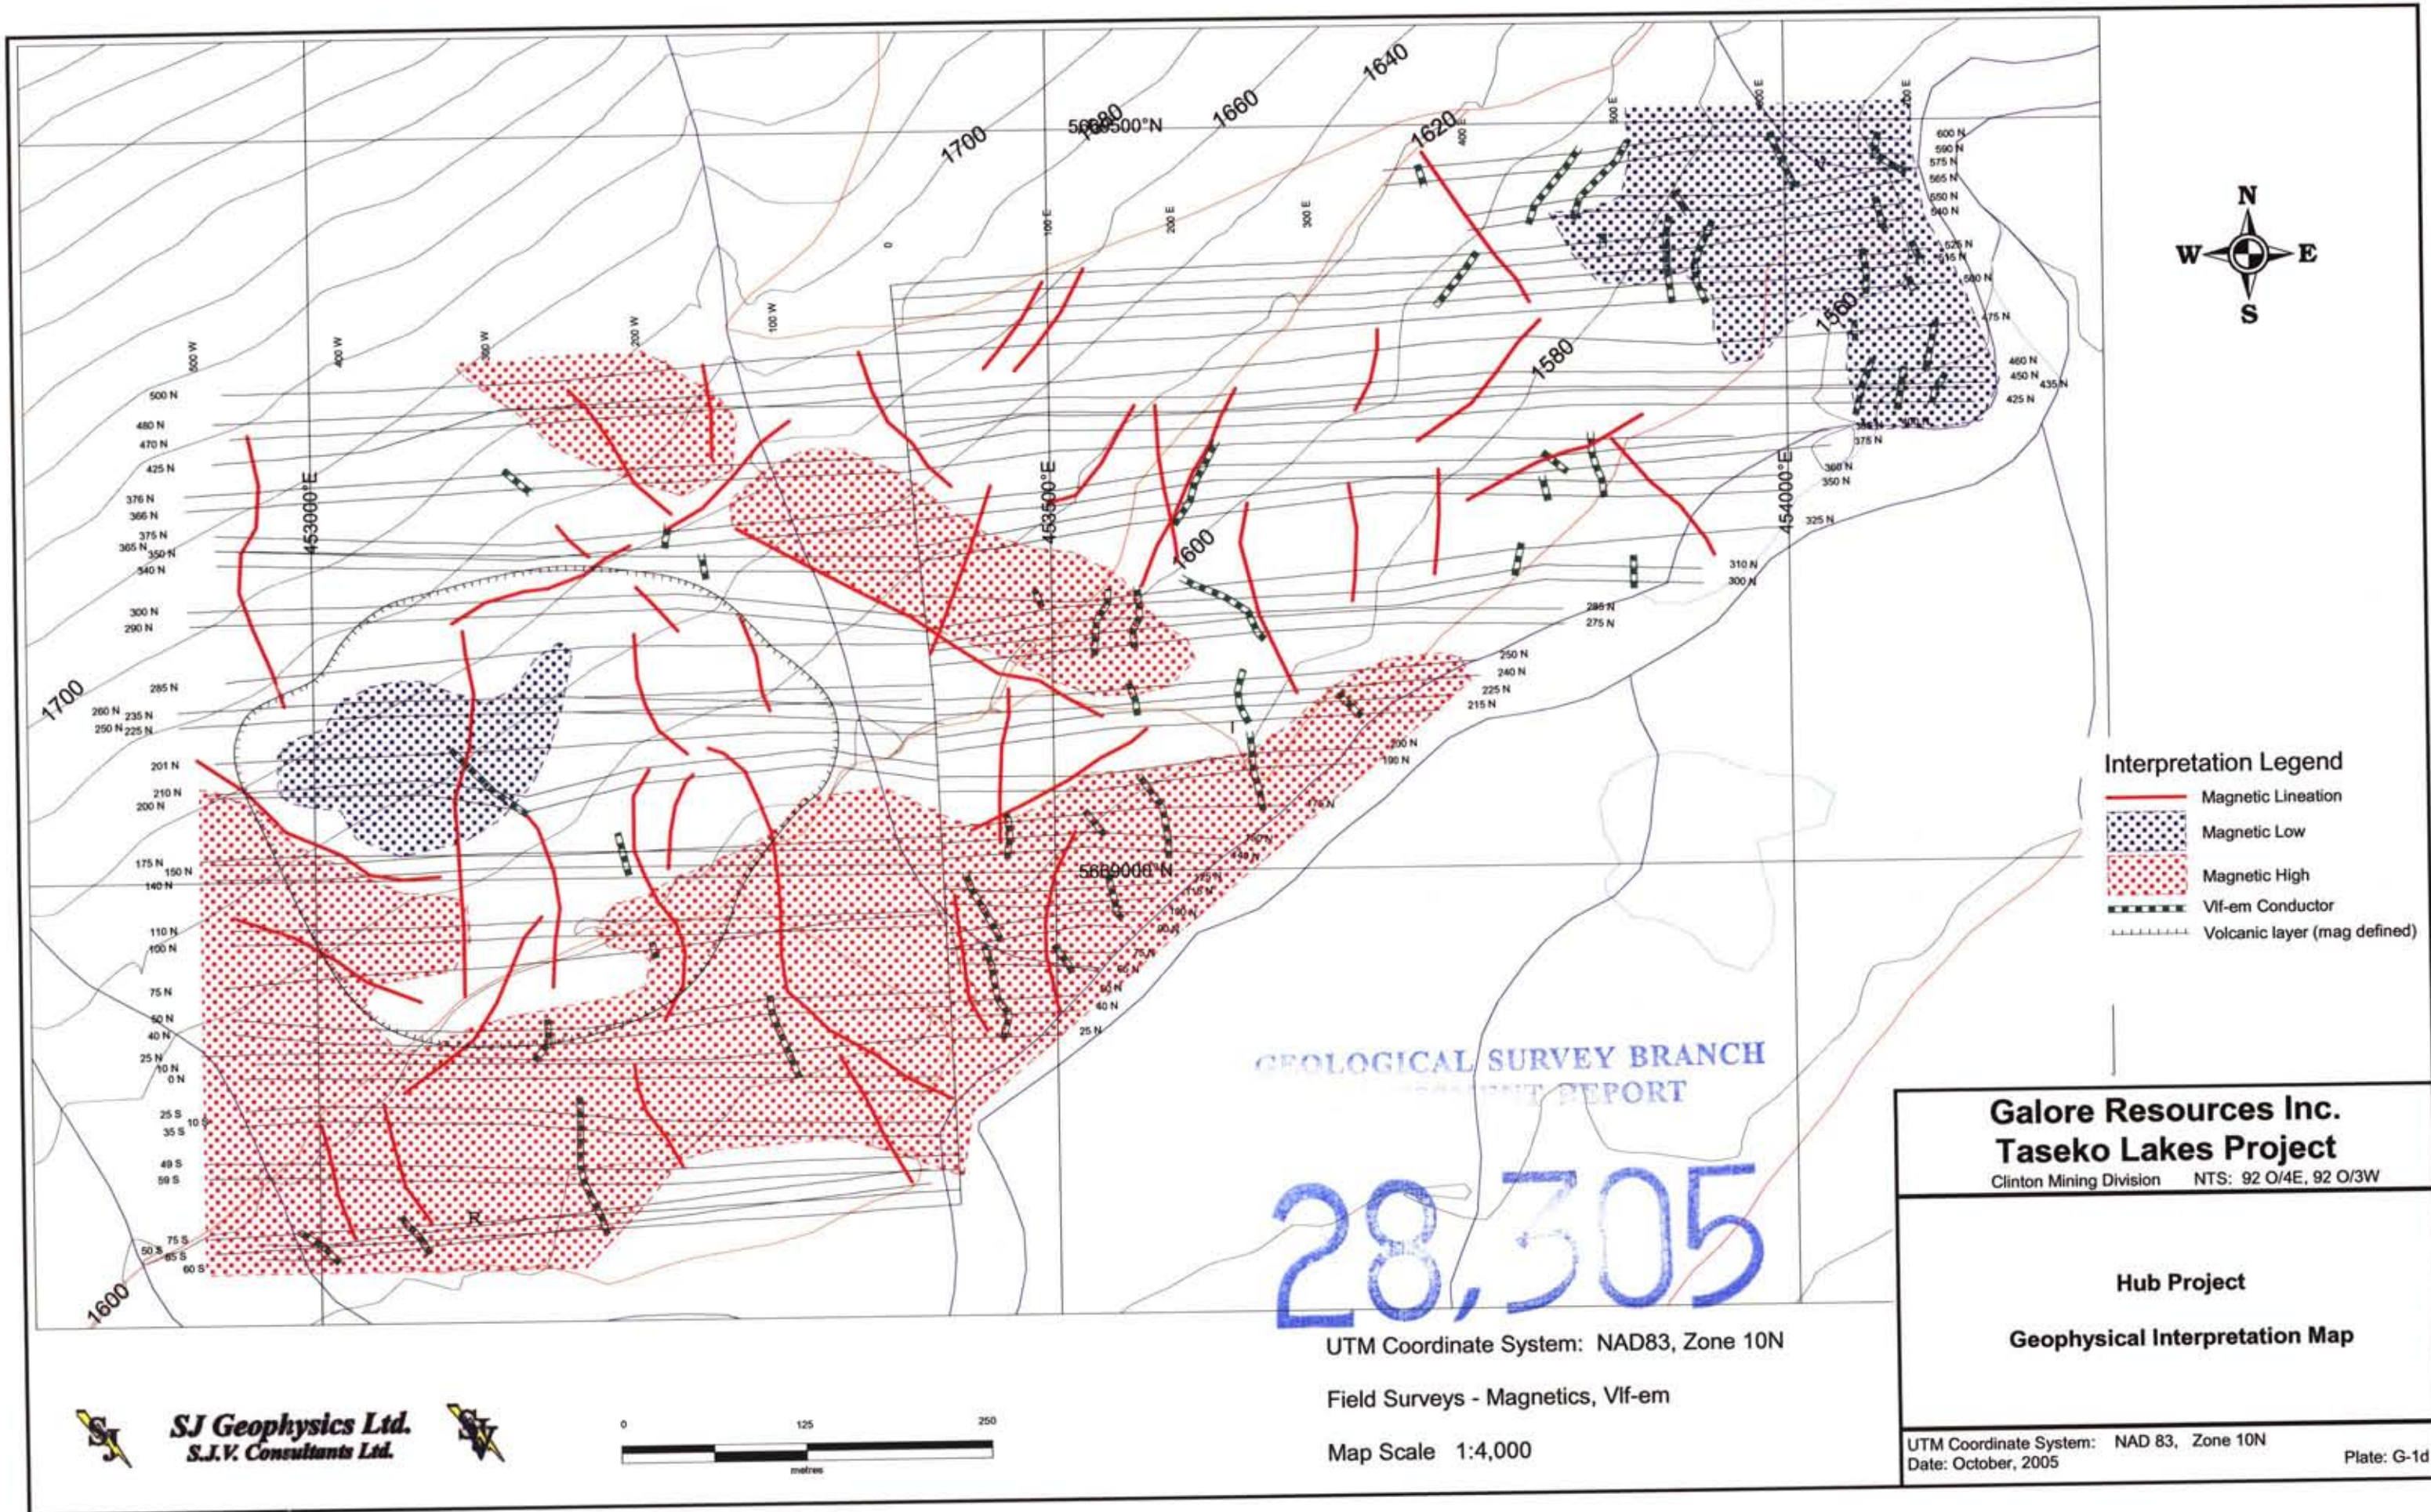

- Interpretation Legend**
- Magnetic Lineation
  - Magnetic Low
  - Magnetic High
  - Vlf-em Conductor
  - Volcanic layer (mag defined)

GEOLOGICAL SURVEY BRANCH  
 REPORT

28,305



UTM Coordinate System: NAD83, Zone 10N  
 Field Surveys - Magnetics, Vlf-em  
 Map Scale 1:4,000

**Galore Resources Inc.**  
**Taseko Lakes Project**  
 Clinton Mining Division NTS: 92 O/4E, 92 O/3W

**Hub Project**  
**Geophysical Interpretation Map**

UTM Coordinate System: NAD 83, Zone 10N  
 Date: October, 2005 Plate: G-1d



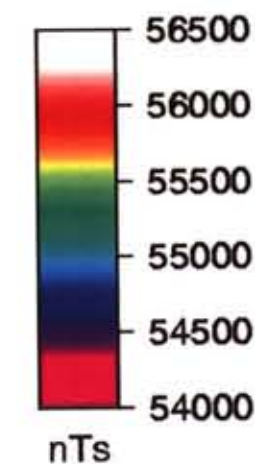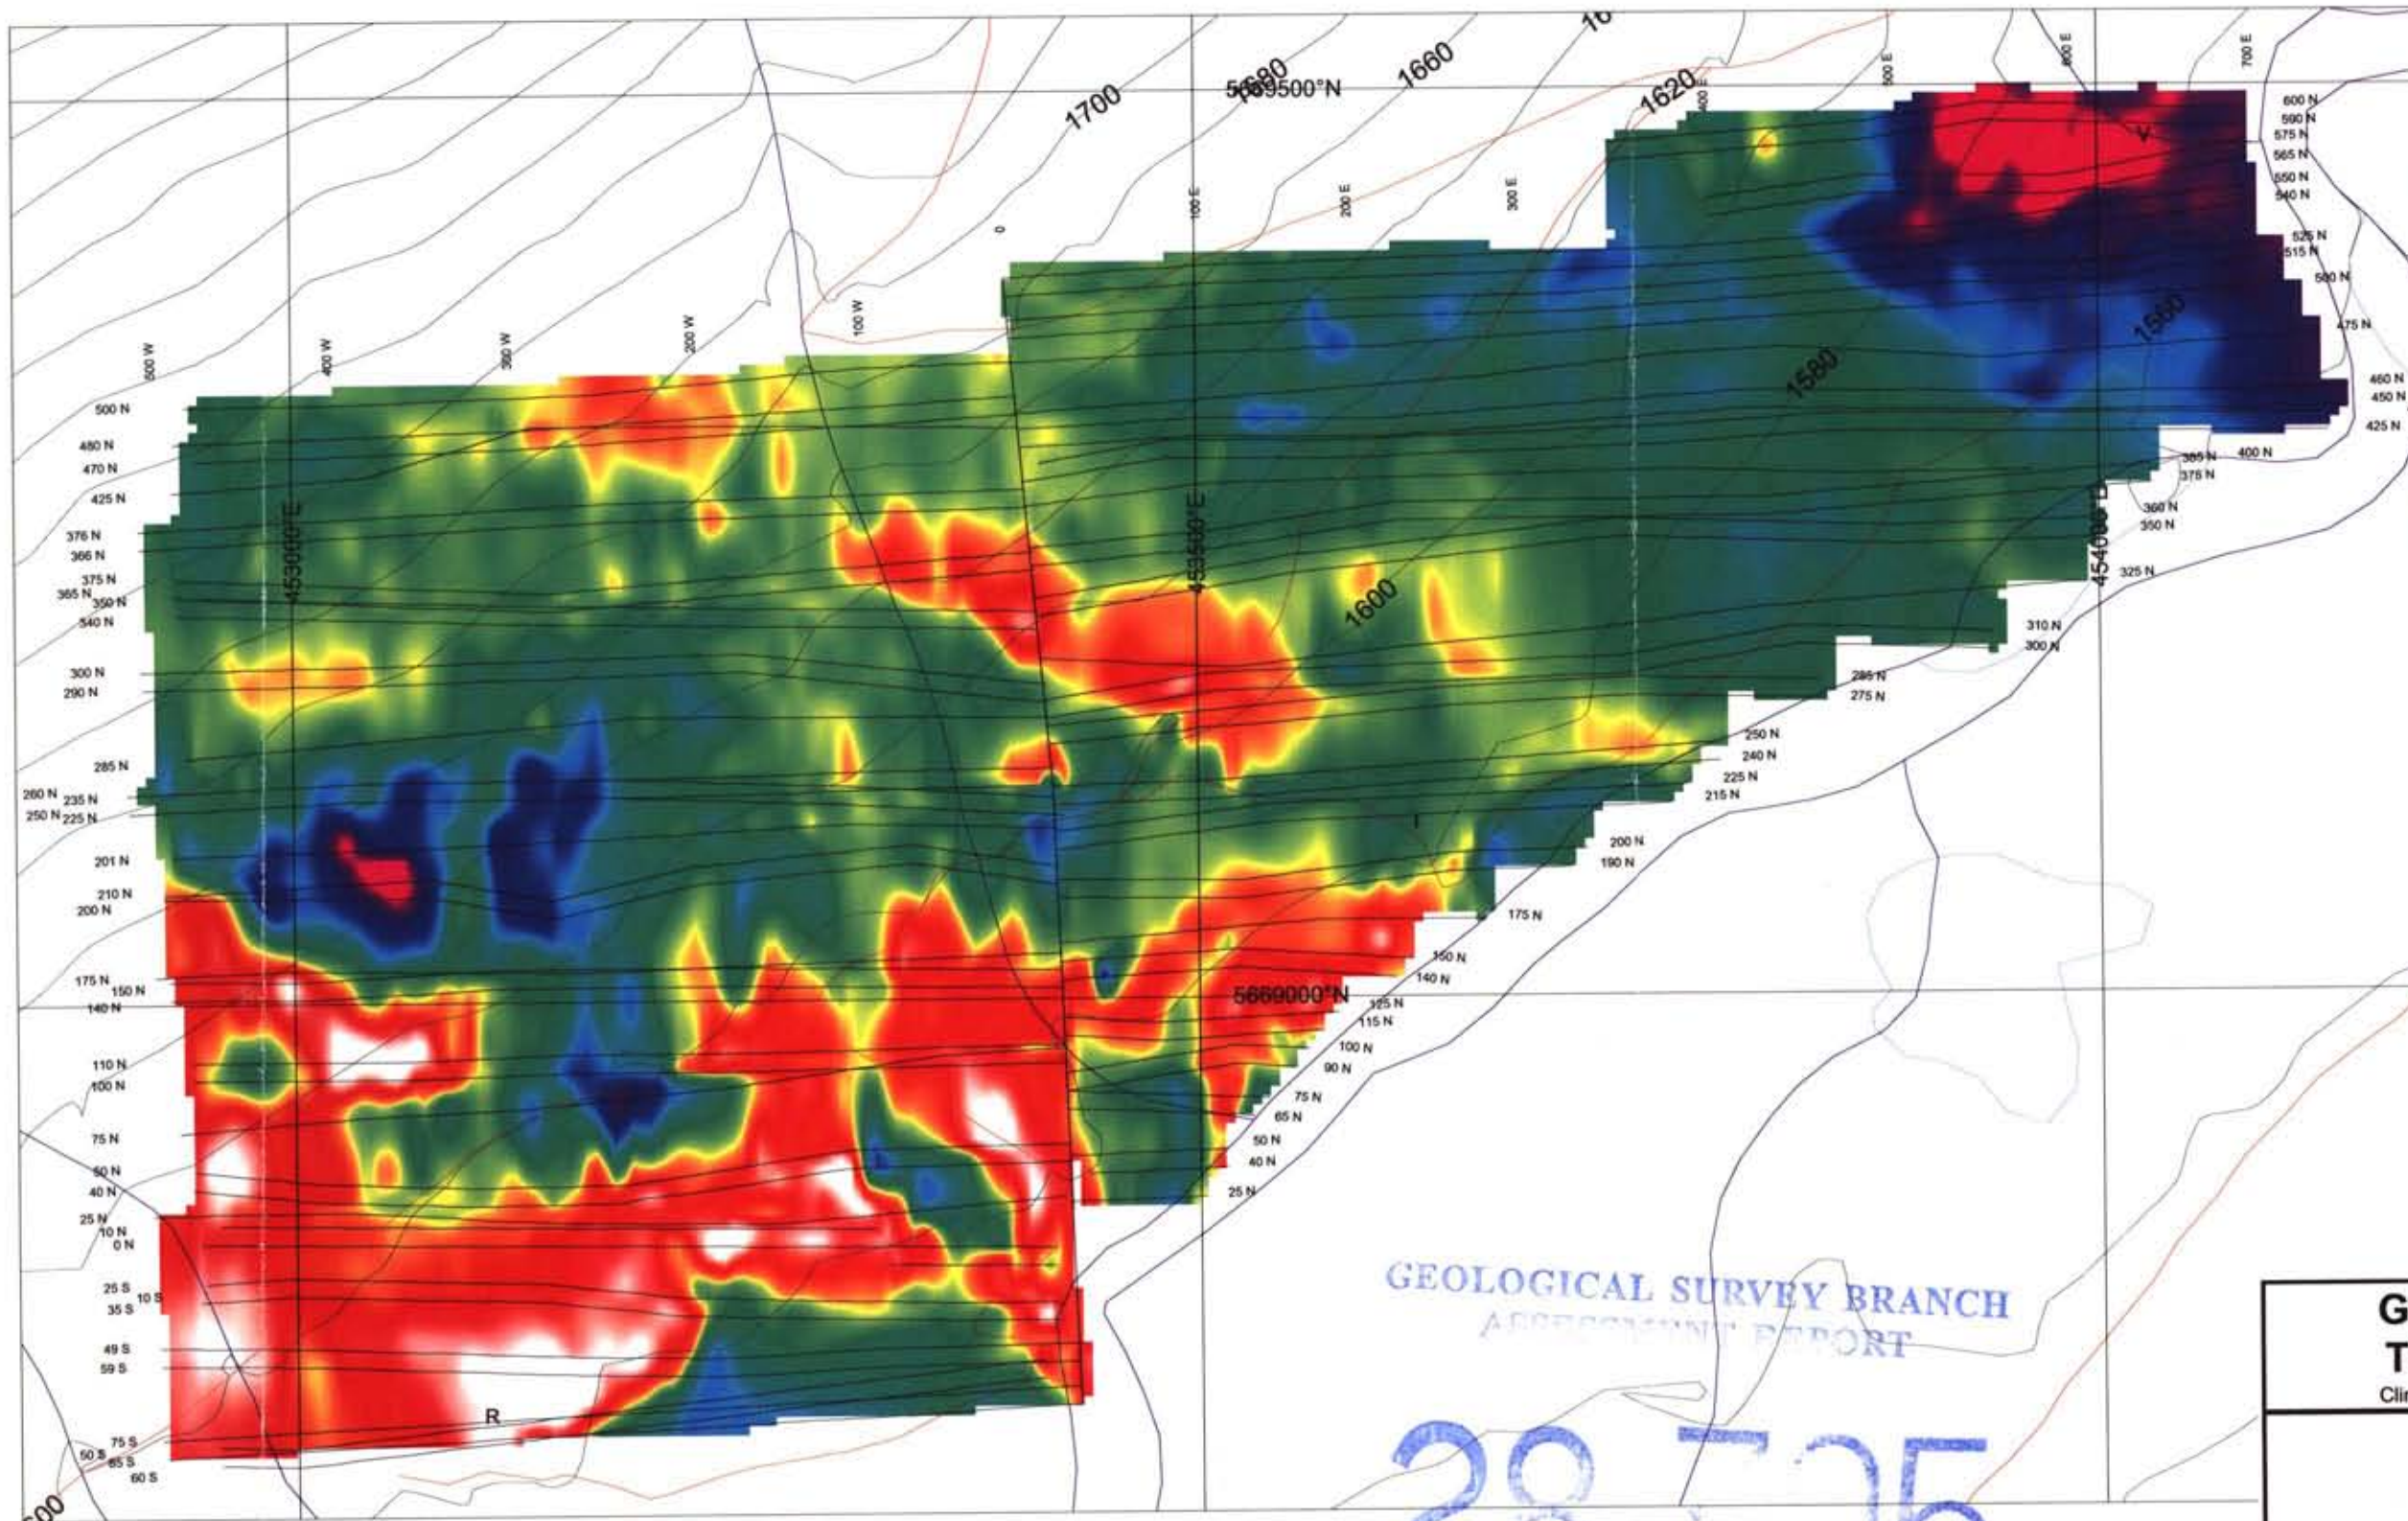

GEOLOGICAL SURVEY BRANCH  
APPROXIMATE REPORT

28,335

UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vlf-em

Map Scale 1:4,000


**Galore Resources Inc.**  
**Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W



**Hub Project**  
**False Colour Contour Map**  
**Total Magnetic Field Intensity**

UTM Coordinate System: NAD 83, Zone 10N  
Date: October, 2005

Plate: G-1c





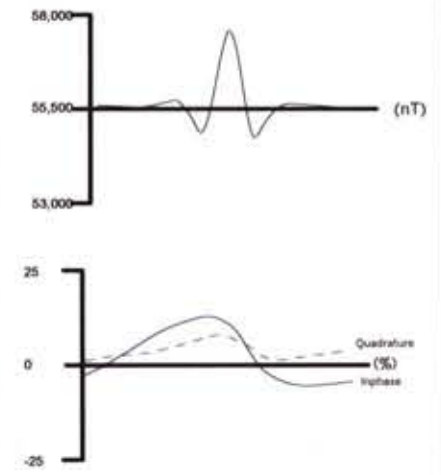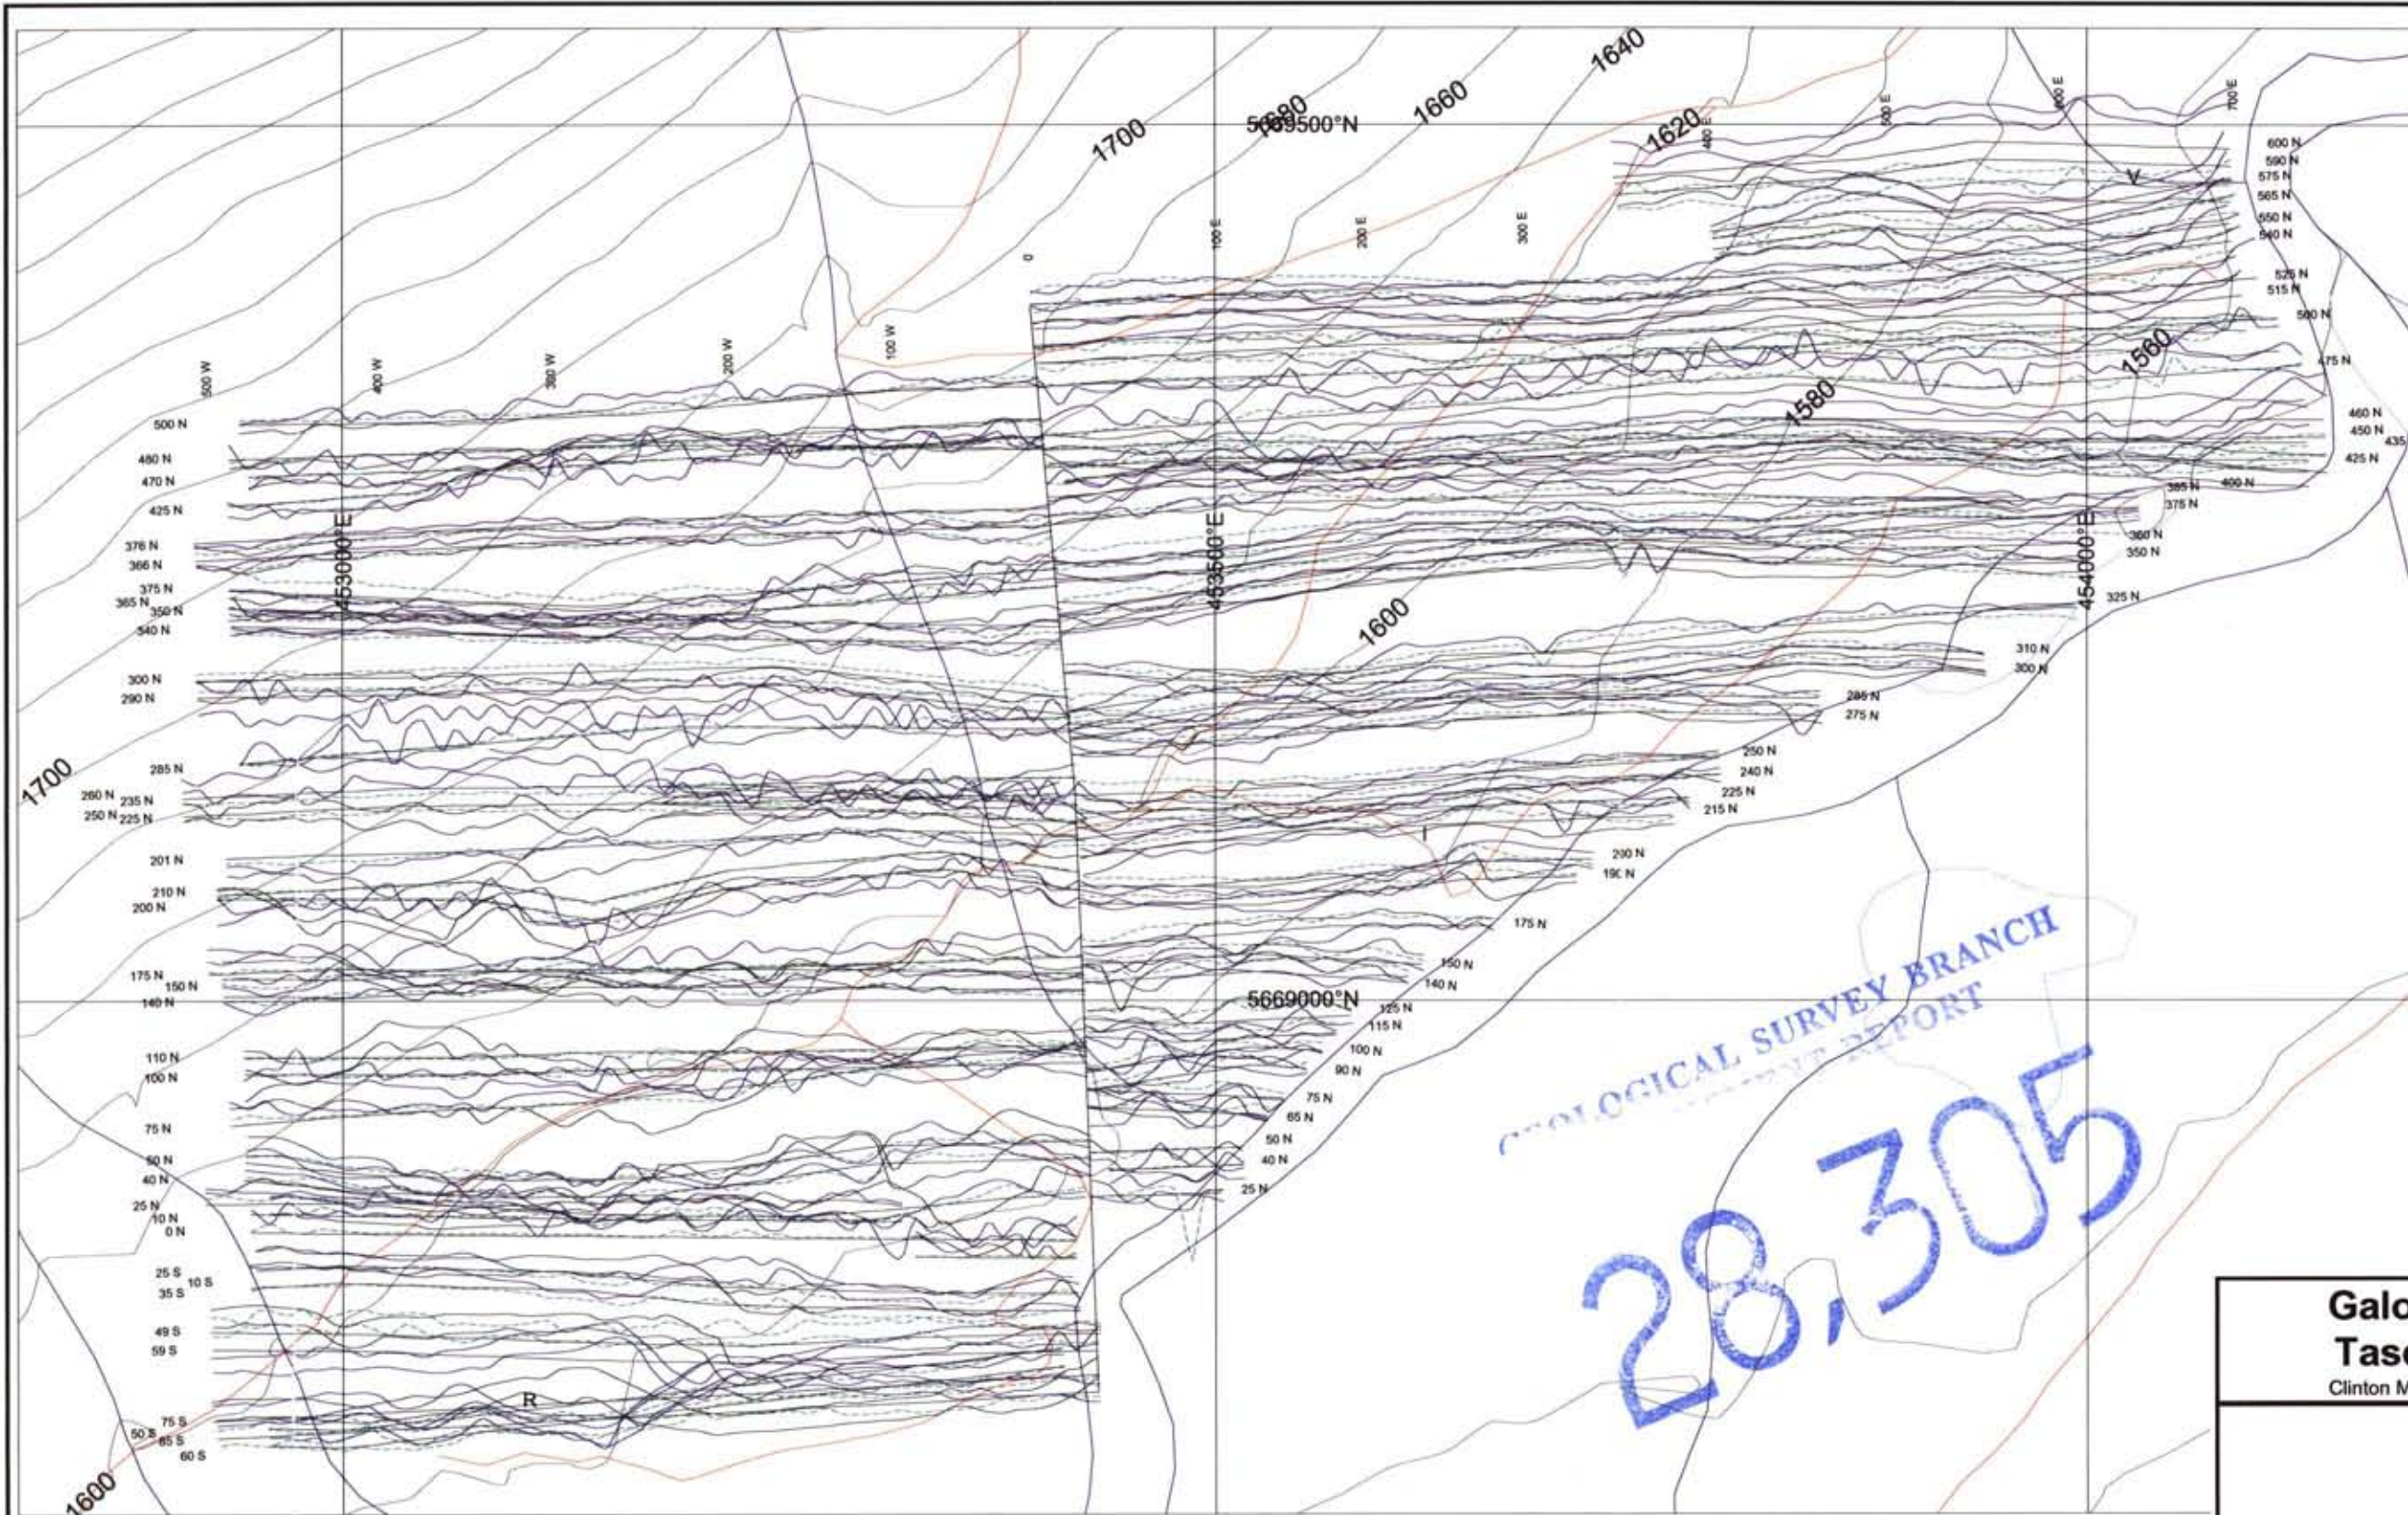

GEOLOGICAL SURVEY BRANCH  
REPORT  
28,305

**Galore Resources Inc.**  
**Taseko Lakes Project**  
Clinton Mining Division NTS: 92 O/4E, 92 O/3W


**Hub Project**  
**Stacked Profile Map**  
**Total Magnetic Field Intensity**  
**VLF-EM (Seattle) Inphase, Quadrature**

UTM Coordinate System: NAD83, Zone 10N  
Field Surveys - Magnetics, Vlf-em  
Map Scale 1:4,000

UTM Coordinate System: NAD 83, Zone 10N  
Date: October, 2005  
Plate: G-1b





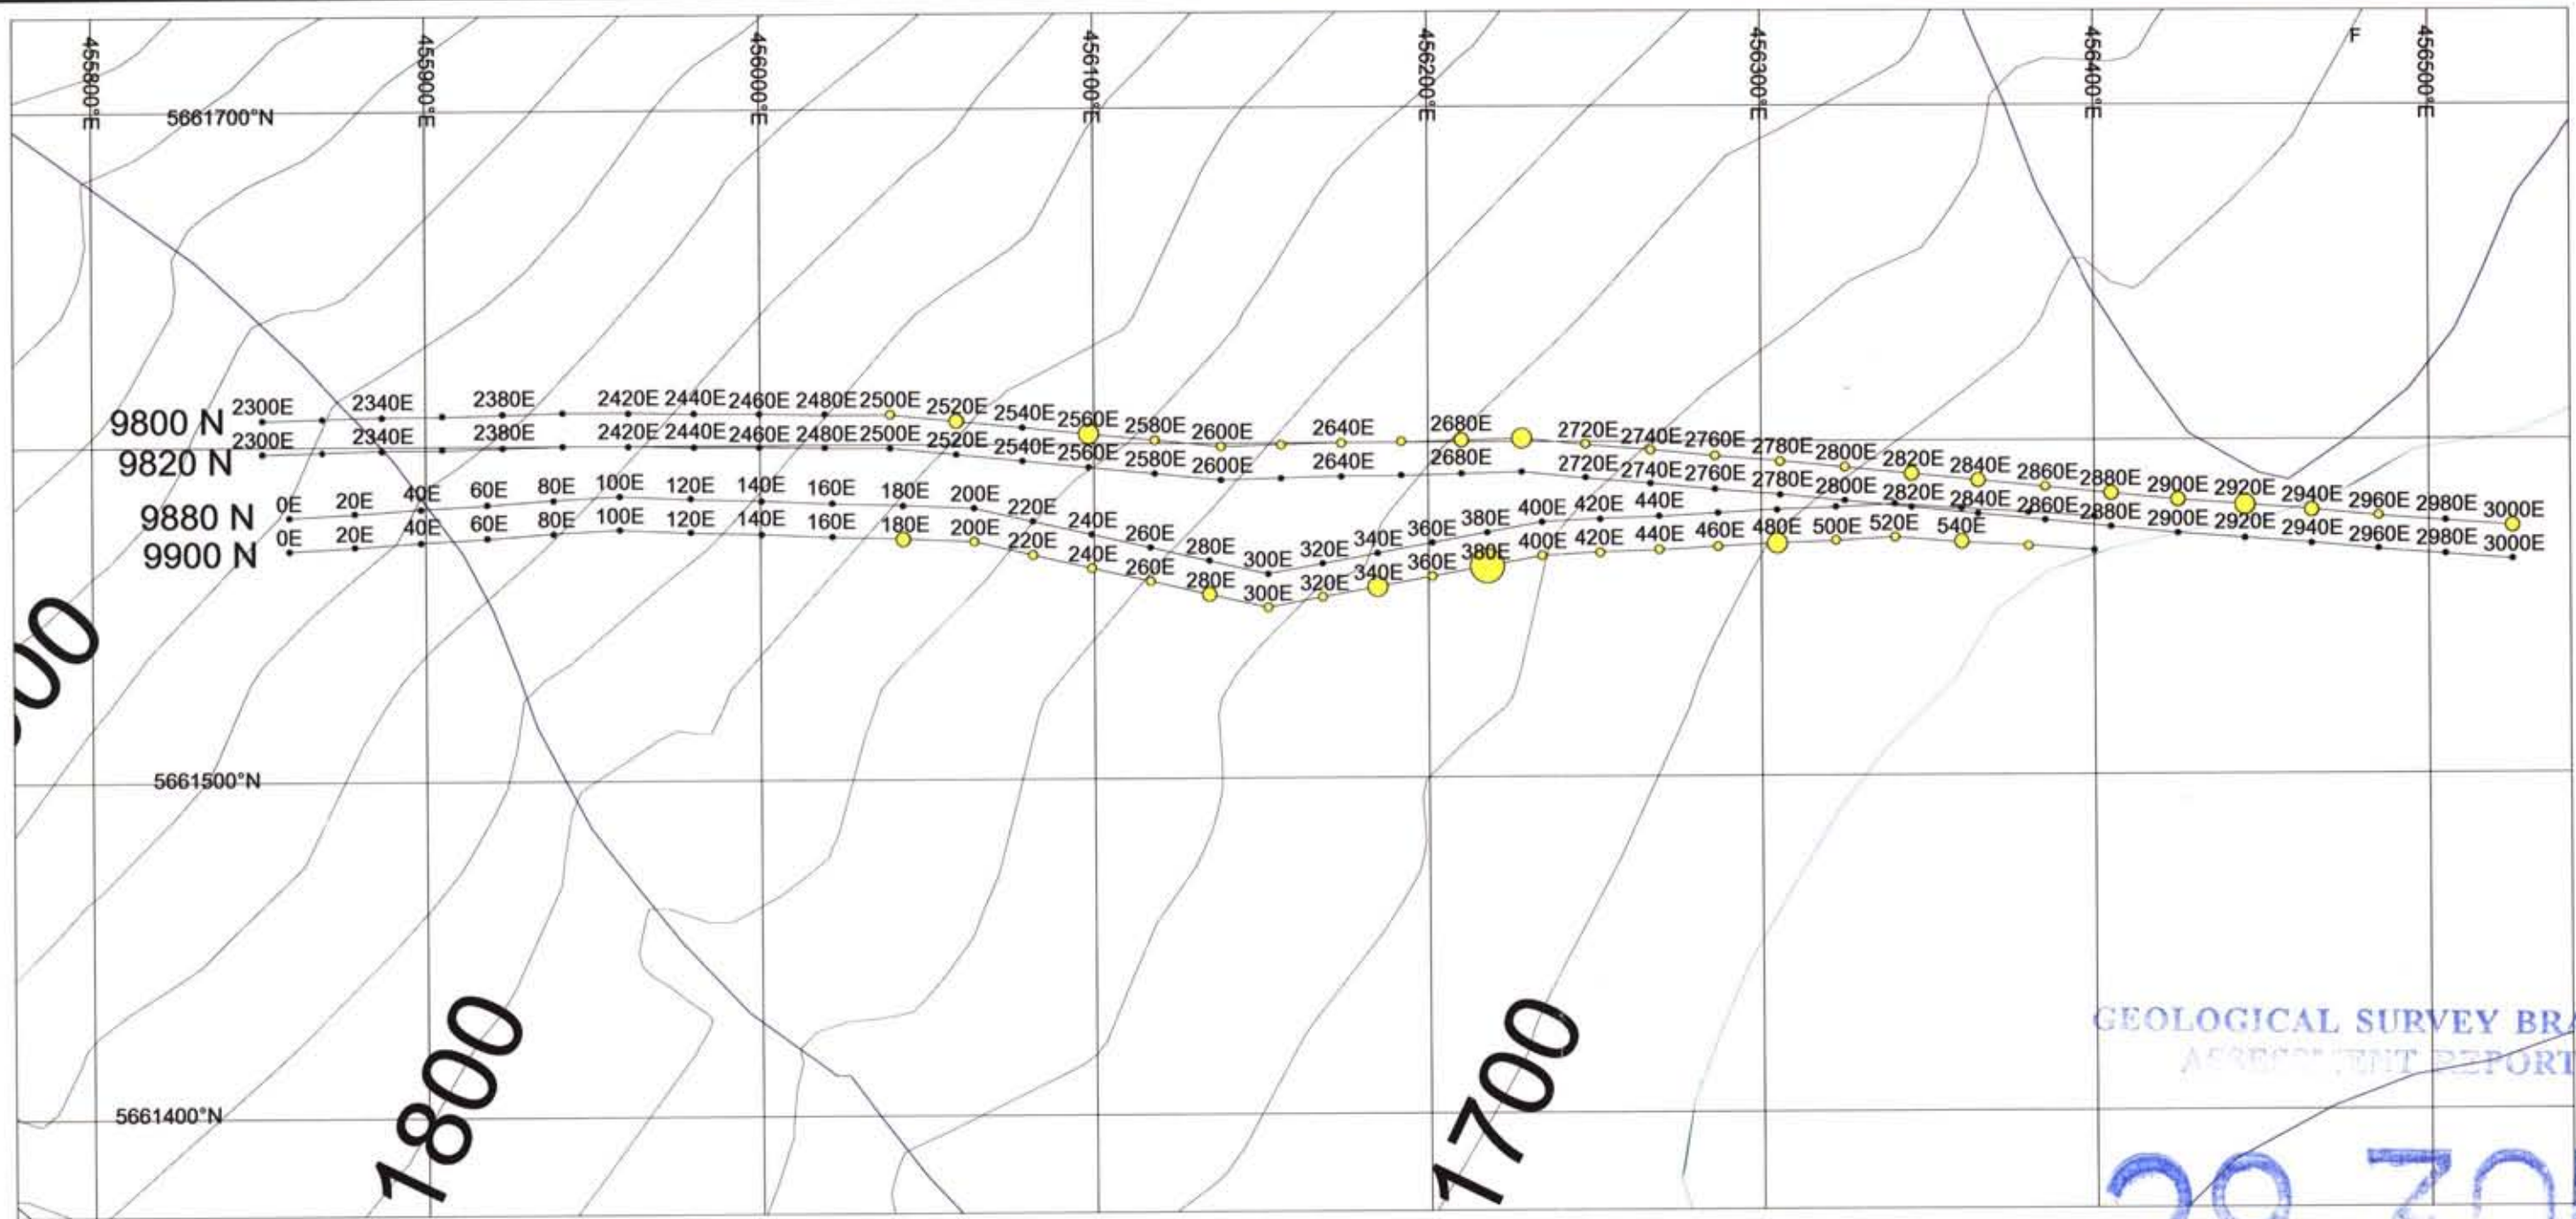

GEOLOGICAL SURVEY BRANCH  
ASSESSMENT REPORT

28,305


UTM Coordinate System: NAD83, Zone 10N

Field Surveys - Magnetics, Vlf-em

Map Scale 1:2,000

Soil Geochemistry (Gold) ppb

- 59.6 to 59.6 (1)
- 4.8 to 59.6 (5)
- 2.2 to 4.8 (11)
- 0.5 to 2.2 (27)

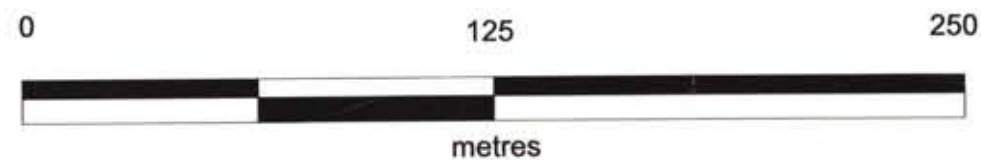

**Galore Resources Inc.**  
**Taseko Lakes Project**

Clinton Mining Division NTS: 92 O/4E, 92 O/3W

Twin Creeks Area

Ridge-River Grid

Soil Geochemistry  
Gold (ppb)  
Thematic Map

Date: October, 2005

Plate: G-4e

