

TITLE OF REPORT [type of survey(s)]
Diamond Drilling on the Captain Property

TOTAL COST
\$26,388.00

AUTHOR(S): B.K. Bowen, P. Eng.

SIGNATURE(S):



NOTICE OF WORK PERMIT NUMBER(S)/DATE(S): MX-13-154 (Jan. 11/08) YEAR OF WORK: 2008

STATEMENT OF WORK - CASH PAYMENT EVENT NUMBER(S)/DATE(S): 4218095 (May 28, 2008)

PROPERTY NAME: Captain

CLAIM NAME(S) (on which work was done): converted legacy claim (516408)

COMMODITIES SOUGHT: copper, gold

MINERAL INVENTORY MINFILE NUMBER(S), IF KNOWN: 093J 005, 093J 006, 093J 024

MINING DIVISIONS: Cariboo & Omineca

NTS: 93J/13W, 93K/16E, 93O/04W

LATITUDE 54° 57' 00" LONGITUDE 123° 50'
00" (at centre of work)

OWNER & OPERATOR [who paid for the work]:

1) Orestone Mining Corp. 2)

MAILING ADDRESS:

1) 975 – 163 Street 2)
Surrey, B.C.
V4A 9T8

PROPERTY GEOLOGY KEYWORDS (lithology, age, stratigraphy, structure, alteration, mineralization, size and attitude): Copper-gold mineralization at the Captain property is hosted in Triassic-Jurassic Takla Group volcanic rocks of Quesnellia Terrane in which numerous B.C. alkalic Cu-Au porphyries occur. Outcrops of one or more dioritic intrusions occur along the Salmon River and silicified dioritic to granodioritic intrusive rocks have been identified in the northern part of the property. Past drilling has intersected widespread Cu-Au mineralization, including 192 ppb Au and 1,622 ppm Cu over 38.4 m. Un-sourced massive sulphide float, grading up to 2.93% Cu, 32.17 g/t Au and 160 g/t Ag provides another target of considerable interest on the property.

In the northern part of the property, six holes totaling 1,103 m were completed in February and March 2008. Four holes (08-01, 08-04, 08-05 and 08-06) tested structurally-controlled mineralization and two holes (08-02 and 08-03) tested a small portion of a large, 3 km² chargeability anomaly east of Windy Lake. Only the results of Hole 08-02 are discussed in this report.

Hole 08-02 intersected mainly volcanic sediments cut by several feldspar porphyry, diorite and "light green" dikes. The latter contain 15-20%, 2-4 mm chloritized mafics set in an aphanitic and chloritized matrix. The highest copper-gold values encountered in the hole are 378.4 ppm Cu and 16 ppb Au in the down-hole interval 22.6-24.0 m which contains a 15 cm wide band of heavy (15-20%) pyrite and minor disseminated chalcopyrite.

REFERENCES TO PREVIOUS ASSESSMENT WORK AND ASSESSMENT REPORT NUMBERS:

- 1111, 1112, 10643, 11258, 11259, 12392, 12393, 14449, 15996, 16597, 17216, 17547, 17808, 17873, 18850, 18883, 19115, 19220, 19853, 20083, 20102, 20311, 20434, 20768, 21002, 21430, 21470, 21473, 22009, 22022, 22135, 23350, 23838, 23914, 24542, 24751, 24998, 27575, 28025

TYPE OF WORK IN THIS REPORT	EXTENT OF WORK (IN METRIC UNITS)	ON WHICH CLAIMS	PROJECT COSTS APPORTIONED (incl. support)
<u>GEOLOGICAL (scale, area):</u>			
Ground, mapping:			
Air photo interpretation:			
Satellite imagery analyses:			
<u>GEOPHYSICAL (line-km):</u>			
Ground:			
Magnetic:			
Electromagnetic:			
Induced Polarization:			
Radiometric:			
Seismic:			
Other:			
Airborne:			
<u>GEOCHEMICAL:</u>			
(number of samples analysed for ...)			
Soil:			
Silt:			
Rock (core): 5 multi-element (ICP-MS)	converted legacy (516408)		131.80
<u>DRILLING:</u>			
(total metres; number of holes, size)			
Core: Hole 08-02, 87.5 m of NQ2, pro-rated cost	converted legacy (516408)		24,946.20
Non-core:			
<u>RELATED TECHNICAL:</u>			
Sampling/assaying:			
Petrographic:			
Mineralographic:			
Technical report:			1,310.00
<u>PROSPECTING (scale, area):</u>			
<u>PREPARATORY/PHYSICAL:</u>			
Line/grid (kilometres):			
Topographic/Photogrammetric:			
(scale, area)			
Legal surveys (scale, area):			
Road, local access (kilometres)/trail:			
Trench (metres):			
Underground dev. (metres):			
Other:			
TOTAL COST:			\$26,388.00

ASSESSMENT REPORT

**BC Geological Survey
Assessment Report
30194**

**DIAMOND DRILLING
ON THE
CAPTAIN PROPERTY**

**WINDY LAKE AREA
NORTH-CENTRAL BRITISH COLUMBIA**

CARIBOO MINING DIVISION
LATITUDE 54° 52' N LONGITUDE 123° 55' W
NTS MAP SHEET 093J/13W
MINERAL CLAIM SHEETS 093J/091 & 092

CLAIMS: - Converted legacy claim: (516408)
(upon which work was done)

OWNER: Orestone Mining Corp., Surrey, B.C.

OPERATOR: Orestone Mining Corp., Surrey, B.C.

REPORT
AUTHOR: B. K. (Barney) Bowen, P. Eng., Consulting Geologist
12470 99A Avenue, Surrey, B.C., Canada, V3V 2R5

REPORT
DATE: September 16, 2008

TABLE OF CONTENTS

	<u>PAGE</u>
1.0 SUMMARY	5
2.0 CONCLUSIONS	6
3.0 RECOMMENDATIONS	6
4.0 INTRODUCTION	7
4.1 Location and Access	7
4.2 Claims	7
4.3 Topography, Vegetation and Climate	7
4.4 History and Development	7
4.5 Summary of 2008 Work Done	11
5.0 GEOLOGY AND MINERALIZATION	11
5.1 Regional Geology and Mineral Deposits	11
5.2 Property Geology and Mineralization	12
6.0 2008 DIAMOND DRILL PROGRAM	15
6.1 Introduction	15
6.2 DDH 08-02 Results	16
7.0 PROPOSED WORK	17
8.0 COST STATEMENT	18
9.0 REFERENCES	20
10.0 STATEMENT OF QUALIFICATIONS	25

FIGURES

IN FOLDER NAME

FIGURE 1	CAPTAIN PROPERTY GENERAL LOCATION PLAN Scale as shown File Name: Figure 1.pdf	Figures
FIGURE 2a	GREATER CAPTAIN PROPERTY CLAIM MAP - NORTH SHEET Scale 1:150,000 File Name: Figure 2a.pdf	Figures
FIGURE 2b	GREATER CAPTAIN PROPERTY CLAIM MAP - SOUTH SHEET Scale 1:150,000 File Name: Figure 2b.pdf	Figures
FIGURE 3	CAPTAIN PROPERTY REGIONAL GEOLOGY PLAN Scale as shown File Name: Figure 3.pdf	Figures
FIGURE 4	CAPTAIN PROPERTY COLLAR LOCATION PLAN (DDH 08-02) Scale 1:40,000 File Name: Figure 4.jpg	Figures
FIGURE 5	CAPTAIN PROPERTY 2007 TOTAL FIELD MAGNETIC MAP Scale as shown File Name: Figure 5.pdf	Figures
FIGURE 6	CAPTAIN PROPERTY MERGED 2007 & HISTORICAL (PLACER DOME) CHARGEABILITY MAP Scale as shown File Name: Figure 6.pdf	Figures
FIGURE 7	CAPTAIN PROPERTY MERGED 2007 & HISTORICAL (PLACER DOME) RESISTIVITY MAP Scale as shown File Name: Figure 7.pdf	Figures

TABLES

		<u>IN FOLDER NAME</u>
TABLE 1	GREATER CAPTAIN PROPERTY CLAIMS STATUS File Name: Table 1.xls	Tables
TABLE 2	CAPTAIN PROPERTY DRILL HOLE DATA (DDH 08-02) File Name: Table 2.xls	Tables
TABLE 3	CAPTAIN PROPERTY SELECTED ANALYTICAL RESULTS DDH 08-02 File Name: Table 3.xls	Tables

APPENDICES

APPENDIX 1	2008 DIAMOND DRILL HOLE & CORE RECOVERY RECORDS FOR DDH 08-02 File Name: Header 08-02.xls File Name: Log sheets 08-02.xls File Name: Recovery 08-02.xls	Appendices (sub- folder Appendix 1)
APPENDIX 2	ACME ANALYTICAL LABORATORIES LTD. CERTIFICATE OF ANALYSIS & ANALYTICAL METHODS File Name: VAN08004977.xls File Name: Analytical Methods.pdf	Appendices (sub- folder Appendix 2)

1.0

SUMMARY

The Captain property is located in north-central British Columbia about 40-65 km northeast of the town of Fort St. James. It is road-accessible from Fort St. James or Mackenzie, with about 1-1¼ hours driving time from either town to the property. It consists of 108 mineral claims totaling 37,036 hectares. All claims are 100%-owned by Orestone Mining Corp., a TSX-V listed junior mining company based in Surrey, B.C.

Copper mineralization was first located in the claims area in the mid 1980's by well-known prospector Richard Haslinger Sr. of Fort St. James. Placer Dome, Noranda and others worked on numerous areas of the property in the late 1980's and early 1990's, spending approximately \$1.7 million on targeted areas. Past work included blanket till geochemical, induced polarization, VLF-EM and magnetic surveys followed by limited diamond and percussion drilling programs. The drilling intersected widespread, low-grade copper-gold mineralization which may be peripheral to a more strongly mineralized center. Large IP chargeability anomalies, some only partially delineated, have yet to be drill-tested. Some of the IP anomalies are associated with widespread copper and gold soil anomalies and local areas of higher magnetic relief. Grab samples of massive sulphide float located south of Windy Lake grade up to 2.93% Cu, 32.17 g/t Au and 160 g/t Ag. This style of mineralization provides a secondary target on the property

Copper-gold mineralization on the Captain property is hosted in Triassic-Jurassic Takla Group volcanics of Quesnellia Terrane, the host of numerous alkalic copper-gold porphyries in B.C. such as Copper Mountain, Mount Polley, Kwanika and Mount Milligan. The latter lies about 30 km northwest of the Captain property. Outcrops of one or more dioritic intrusions occur along the Salmon River and silicified dioritic to granodioritic intrusive rocks have been identified in the northern part of the property. A veneer of till transported from the south in a direction of 010° covers most of the property. Glacio-fluvial outwash is widespread along the floodplain of the Salmon River and in other areas throughout the property.

During the period February 23 to March 14, 2008, Orestone Mining Corp. carried out a program of NQ2 diamond drilling in the northern part of the Captain property. Six holes totaling 1,103 m were completed. Four holes (08-01, 08-04, 08-05 and 08-06) tested structurally-controlled mineralization and two holes (08-02 and 08-03) tested a small portion of a large, 3 km² chargeability anomaly east of Windy Lake. Only the results of Hole 08-02 are discussed in this report. Costs of the six-hole drilling program totaled \$332,639.62. Pro-rated costs for Hole 08-02 only are \$26,388.00.

Hole 08-02 intersected mainly volcanic sediments cut by several feldspar porphyry, diorite and "light green" dikes. The latter contain 15-20%, 2-4 mm chloritized mafics set in an aphanitic, chloritized matrix. The highest copper-gold values encountered in the hole are 378.4 ppm Cu and 16 ppb Au in the down-hole interval 22.6-24.0 m which contains a 15 cm wide band of heavy (15-20%) pyrite and minor disseminated chalcopyrite.

2.0

CONCLUSIONS


The 2008 drilling results in the northern part of the Captain property fell short of expectations in that near-surface testing of both structurally-controlled and porphyry-type copper-gold targets failed to identify mineralized zones of economic tenor. The drilling did demonstrate, however, that chalcopyrite +/- gold mineralization is widespread over a large area.

On the Captain property, there remain large IP chargeability anomalies some of which are coincident with copper and gold soil anomalies. These areas, as yet drill-tested, represent a prime target for the discovery of large, porphyry-style, copper-gold deposits similar to others discovered within Quesnellia Terrane. The massive sulphide float south of Windy Lake, the bedrock source for which has not been located, provides another target on the property worthy of further work.

3.0

RECOMMENDATIONS

The two holes (including Hole 08-02) which tested a small portion of the 3 km² chargeability anomaly east of Windy Lake both intersected copper mineralization. Bedrock underlying untested portions of the anomaly may contain higher-grade concentrations of copper and accompanying gold. Further drill testing of this large, mainly overburden-covered geophysical target is recommended.



B.K. Bowen
SEPT. 16/08.

4.0

INTRODUCTION

4.1 Location and Access

The Captain property is located in north-central British Columbia about 40-65 km northeast of the town of Fort St. James (Figure 1). Specifically, the property is located on map sheets 93J/13W, 93K/16E and 93O/04W in the Cariboo and Omineca Mining Divisions. It is centered approximately at coordinates 54° 52' N and 123° 55' W.

Access to the property is via Highway 27 North from Fort St. James and then via three Forest Service roads which lead easterly and northeasterly into the northern, central and southern parts of the property. Driving time from Fort St. James is about 1-1¼ hours. Logging spur roads lead into many parts of the property, portions of which have been clear-cut logged. Prince George and Fort St. James are the two main centers which provide logistical support to the claims area.

4.2 Claims

The Captain (or "Greater Captain") property consists of 7 converted legacy claims and 101 contiguous MTO mineral claims which collectively cover an area of 37,036 hectares (Figures 2a and 2b; Table 1). The property is 100%-owned by Orestone Mining Corp., a TSX-V listed junior mining company based in Surrey, B.C.

4.3 Topography, Vegetation and Climate

The topography consists of rolling low hills with elevations ranging from about 900 to 1,200 m. The northern part of the property lies in the headwaters area of the Salmon River which drains out from Windy Lake.

Hills are heavily forested with spruce, fir and pine with logging clear-cuts present in many parts of the property. Tag alder occurs in some areas of up to several hectares. Small lakes, ponds and swampy areas are common in low-lying areas.

The climate in the region is characterized by short, cool summers and relatively cold winters. Climate statistics (AMEC, 2006) from the nearby Mt. Milligan project indicate total annual precipitation to be 730 mm and the minimum and maximum monthly mean temperatures to be -15.2° and 14.8° celcius in December and July respectively. Snow conditions persist from late October to the end of April, but with winter maintenance of access roads, exploration work can be conducted throughout the year.

4.4 History and Development

Exploration activity on the Captain property began in 1985 when prospector Richard Haslinger Sr. of Fort St. James discovered copper mineralization along the banks of the Salmon River in the northern part of the property. In 1987, prospector Gerry Klein located copper and molybdenum-bearing float in the northeastern part of the property.

These two discoveries, staked as the Windy and PM properties respectively, led to several major exploration programs being carried out in this part of the property by Placer Dome Inc., Noranda Exploration and others during the period 1985-96. Exploration expenditures related to this work (to October 2007) total about C\$1,400,000.

Exploration work carried out by the above past operators is summarized as follows:

Windy Property:

- 1985: Brinco Limited completed a soil geochemical survey over an area trenched by Richard Haslinger immediately north of the Salmon River. Brinco concluded that alteration, rock types and mineralization are compatible with a porphyry style of mineralization.
- 1986-90: Placer Dome Inc. optioned the Windy property in August 1986 and expanded their land holdings by staking additional legacy claims to the north and northeast. Work completed by Placer in 1986-90 included: soil geochemical, ground magnetometer, VLF-EM and IP surveys; the excavation of 11 trenches totaling 686 m; and the drilling of 15 NQ core holes totaling 2,180 m. In 1990, Placer optioned claims immediately to the west of Windy from Tex Gold Resources Ltd. and carried out a program of soil geochemical, ground magnetometer and VLF-EM surveys.
- 1991: Big Bar Gold Corp. farmed into Placer's option on the Windy property and funded a drilling program consisting of 24 percussion holes (total meterage unknown).
- 1996: Columbia Gold Mines Ltd. optioned the Windy property and drilled 8 NQ core holes totaling 547 m.
- 2003: The Windy property lapsed in July and was re-staked as the Captain claims in November by the writer and Gordon Richards.
- 2004-06: Bowen and Richards carried out modest assessment work programs consisting of MMI geochemical sampling and prospecting on the Captain claims.
- 2007: Bowen and Richards staked a large block of MTO cell claims east, northeast, west and south of the Captain property. The expanded property is referred to as the "Greater Captain" property. The claims to the east and northeast cover the old Alpha and PM properties. Those to the west and south were staked to cover various geochemical and geophysical targets underlain by favourable Quesnel Terrane geology. All claims were subsequently acquired by Orestone Mining Corp. through a property purchase agreement between Orestone (the Purchaser) and Ruanco Enterprises Ltd., Gordon Richards and Brian Bowen (collectively, the Vendors) dated April 30, 2007.
- 2007: During the months of June and July 2007, Orestone completed a program of MMI geochemical, induced polarization and ground magnetics surveys in the northern part of the property (in what was the old Windy property area). Highlight of the work was the identification of a large, approximately 3 km² chargeability anomaly locally associated with copper and gold soil anomalies. These coincident geophysical and geochemical anomalies are thought to be indicative of a porphyry-type copper-gold target.

PM Property:

- 1988: Noranda Exploration optioned Mr. Klein's PM property in (what is now) the northeast part of the Captain property and completed a small soil geochemical survey in the area of mineralized float.
- 1989-91: Noranda flew an airborne EM-magnetic survey over the property and also completed soil geochemical, ground magnetic and IP surveys and geological mapping.
- 1996: Guinet Management optioned the PM property, completed soil geochemistry and prospecting surveys on it and then drilled 27 percussion holes totaling 1,149 m.

Alpha Property:

- 1987: The Alpha claims, located between and contiguous with the Windy and PM properties, were staked in March by Mr. E.S. Peters of Vancouver, B.C. In October, a program of prospecting and soil, silt and rock geochemical sampling was completed under the supervision of John Poloni, P. Eng.
- 1989-91: Noranda optioned the Alpha claims and completed soil geochemical, ground magnetic and IP surveys.
- 1994: The Alpha claims lapsed and were re-staked in part by Hudson Bay Exploration & Development Co. Ltd. and in part by Talisman Silver Corporation. The former conducted prospecting traverses and collected a few rock samples for analyses. The latter completed a program of geological mapping in areas of copper +/- gold soil anomalies identified by Noranda.

Other "Greater Captain" claim groups include Admiral-Heading, Bridge and Commodore-Fathom-Plus-Anchor. During the period 1981-91, Noranda Exploration, Selco Inc., two junior mining companies and one individual carried out a variety of exploration programs in these claim group areas. A brief summary of the types of work, results and associated costs are presented below.

Admiral-Heading claims:

Work done on the Admiral-Heading claims by Placer Dome Inc. (1990) and Anthian Resource Corp. (1990) includes airborne and ground magnetometer surveys, a ground VLF survey, grid soil geochemistry, prospecting and geological mapping. Cost of the work totaled approximately C\$100,000. Soil geochemistry outlined a copper anomaly, measuring about 1 km long by 200-300 m wide, with some associated gold values, in the western part of the Admiral-Heading claims area. The anomaly is coincident with a magnetic high anomaly identified in both airborne and ground surveys. Prospecting and geological mapping identified some pyrite and traces of chalcopyrite in the anomalous area which has limited bedrock exposure.

Bridge claims:

Companies or individuals who carried out work in the Bridge claims area include Selco Inc. (1981-82), Mr. E.S. Peters (1987), Noranda Exploration (1989-91) and Taseko Mines Ltd. (1990). Work done includes ground magnetometer and EM surveys, silt sampling, prospecting, grid soil geochemistry, an induced polarization survey and the

drilling of one diamond drill hole to test a ground EM conductor. Past expenditures total about C\$90,000.

Ground magnetometer surveys outlined a magnetic high in an area of heavy drift cover south of the Salmon River. Readings from a small induced polarization survey over the magnetic high were considered unreliable. Some silt samples taken from streams draining this general area returned anomalous gold values to 550 ppb. Soil geochemical surveys did not identify any significant copper-gold anomalies, although it was noted in the reports that the effectiveness of conventional soil sampling in areas of heavy drift cover is limited. Prospecting did not locate any mineralized showings; this work was hampered by heavy drift cover which covers a good portion of the Bridge claims area. EM surveys identified a number of conductors, one of which was tested by a single drill hole, 89 m in length. In the drill hole, which cut a sequence of intercalated black shale and limy wacke, "geochemical values do not rise significantly above background" (AR 11258).

Commodore-Fathom-Plus-Anchor claims:

Noranda Exploration carried out several work programs on the old Tsil property in the western part of the Commodore-Fathom-Plus-Anchor claims area during the period 1986 and 1988-91. The work, which cost about C\$120,000, included an airborne magnetic/resistivity survey, ground magnetometer and induced polarization surveys, grid soil geochemistry, silt sampling, prospecting, geological mapping and the drilling of five diamond drill holes in two separate grid areas to test IP chargeability anomalies.

The airborne survey identified a number of magnetic highs which have been confirmed by ground magnetic surveys and may be associated with possible buried, mineralized alkalic stocks. In one magnetic high area, soil geochemistry outlined a copper anomaly measuring about 700 m x 500 m with values in the 100-200 ppm range, coincident with an IP chargeability anomaly. Anomalous gold-in-soil values occur in several grid locations, but in general sampling produced scattered and erratic gold results. This may reflect the variable depth and character of overburden in the area. Prospecting and geological mapping identified relatively weak propylitic alteration with pyrite, traces of chalcopyrite and weak copper-gold rock geochemical values near the northeast flank of an IP chargeability anomaly in another part of the property.

Five diamond drill holes tested two areas of anomalous IP chargeability response on the Tsil property; no results are available in assessment reports. Gord Maxwell, the geologist who supervised Noranda's past work at Tsil, informed the writer (personal communication, 2007) that "although the drill holes encountered variably pyritized rock, no significant copper or gold values were obtained".

There are no historic or current resource or reserve estimates for mineralization on the Greater Captain property.

4.5 Summary of 2008 Work Done

During the period February 23 to March 14, 2008, Orestone Mining Corp. carried out a program of NQ2 diamond drilling in the northern part of the Captain property. Six holes totaling 1,103 m were completed. Four holes (08-01, 08-04, 08-05 and 08-06) tested structurally-controlled mineralization and two holes (08-02 and 08-03) tested a small portion of the 3 km² chargeability anomaly described in Section 4.4. Only the results of Hole 08-02 are discussed in this report (see Section 6.2).

Costs of the February-March 2008 drilling program totaled \$332,639.62. Pro-rated costs for Hole 08-02 only are \$26,388.00.

5.0 GEOLOGY AND MINERALIZATION

5.1 Regional Geology and Mineral Deposits

The regional geology of the Fort St. James - McLeod Lake area is shown in Figure 3. The Greater Captain property is within Quesnel Terrane, part of the Intermontane Belt. The latter is comprised of low metamorphic grade magmatic arc segments consisting of mixed oceanic and continental affinities, and oceanic plates, which amalgamated with North America in the Early Jurassic Period.

Quesnel Terrane is characterized by a Late Triassic to Early Jurassic magmatic arc complex that formed along or near the western North American continental margin. Takla Group volcanic and sedimentary rocks comprise the majority of Quesnel Terrane in the map area. Comagmatic intrusions of similar age cut the volcano-sedimentary rocks. The geological setting represented by these lithologies is known to host many alkaline copper-gold porphyry deposits in British Columbia.

Quesnel Terrane is in contact to the east with Proterozoic and Paleozoic carbonates and siliciclastics of Cassiar Terrane, representing part of the ancestral North American miogeocline. In places the Quesnel and Cassiar terranes are separated by an intervening assemblage of Late Paleozoic oceanic rocks assigned to Slide Mountain Terrane. The boundary between the Quesnel and Cassiar terranes is a complex structural zone that includes Early Jurassic, east-directed thrust faults that juxtapose Quesnel Terrane above Cassiar Terrane. These east-directed faults and related folds are locally overprinted by somewhat younger west-directed structures that reverse this stacking order, as well as by dextral strike-slip and normal faults that formed in Cretaceous and early Tertiary time (Schiarrizza, 2005).

To the west Quesnel Terrane is in fault contact with Late Paleozoic through mid-Mesozoic oceanic rocks of the Cache Creek Terrane, interpreted to be part of the accretion-subduction complex that was responsible for generating the Quesnel magmatic arc. Younger rocks commonly found in the region include Cretaceous granitic stocks and batholiths, Upper Cretaceous to Eocene Wolverine Metamorphic Complex rocks, Eocene

volcanic and sedimentary rocks, and flat-lying basalt of both Neogene and Quaternary age.

Relevant data on three nearby properties hosted within Quesnel Terrane include information from the Mt. Milligan, Kwanika and Fran properties. The Mt. Milligan project, owned and operated by Terrane Metals Corp., is located about 30 km northwest of the Captain property. It is an advanced, potentially bulk mineable, alkalic copper-gold porphyry deposit(s) hosted in monzonitic stocks and adjacent volcanic wallrocks. Terrane (NR dated August 21, 2007) announced a NI 43-101 compliant, measured and indicated resource totaling 417.1 million tonnes grading 0.21% Cu and 0.41g/t Au containing 1.9 billion pounds of copper and 5.5 million ounces of gold.

The Kwanika project, owned and operated by Serengeti Resources Inc., is located at the western margin of Quesnel Terrane about 110 km northwest of the Captain property. The property had been the subject of previous exploration work during the period 1966-72 which identified a historic, non-NI 43-101 compliant resource of 36 million tonnes grading 0.20% Cu. A program of airborne and ground geophysics, conducted by Serengeti in 2005-06, identified a large IP chargeability anomaly in an overburden-covered area northwest of the historic copper resource. Diamond drill testing of this target in late 2006 led to the discovery of significant copper-gold mineralization in Hole K-06-09, which returned 111.1 m grading 0.69% Cu and 0.54 g/t Au. Mineralization is associated with a well-developed quartz stockwork within and adjacent to a monzonite intrusion. Subsequent drilling has yielded several significant intercepts (not true widths) in nearby holes, including 462.7 m grading 0.61% Cu and 0.38 g/t Au, 328.3 m grading 0.61% Cu and 0.72 g/t Au, 48.6 m grading 0.75% Cu and 2.5 g/t Au and 158.6 m grading 0.55% Cu and 0.44 g/t Au. An ongoing drilling program is focusing on the central core of higher-grade mineralization, with a drill hole spacing designed to support an eventual NI 43-101 compliant resource calculation.

The Fran project, held under option by Yankee Hat Minerals Ltd., is located about 35 km west of the Captain property. At Fran, trenching and drilling along about one kilometer of strike length in the west-northwest trending North Contact Zone has yielded several mineralized intercepts grading approximately 3-10 g/t Au over core lengths of 5-10 metres. The occurrence is hosted in Takla Group volcanic rocks along the northern contact of a granodiorite stock.

5.2 Property Geology and Mineralization

5.2.1 Lithology

The geology of the northern part of the Captain property, in which the February-March 2008 diamond drilling program was carried out, has been described by Deschenes (Placer, 1991, AR 21430), Walker (Noranda, 1991, AR 22009) and Myers (Talisman, 1995, AR 23914). The following geological description of this part of the Captain property is based on these authors' reports.

The area south and east of Windy Lake (see Figure 4 for location reference) is underlain mainly by dioritic intrusions flanked on the south, west and north by Takla Group volcanic rocks. Three distinct diorite phases have been mapped, including porphyritic, coarse grained and fine to medium grained varieties. The dioritic intrusions are thought to be co-magmatic with the volcanic rocks. The latter consist of hornblende porphyritic flows, agglomerates and lapilli, crystal and lesser ash tuffs. The diorite and volcanic rocks are locally cut by dikes and irregular bodies of fine to medium grained quartz monzonite or quartz diorite.

In the northeastern part of the Captain property, Takla Group andesites and basalts are commonly massive or augite-phyric, but may also be banded (tuffaceous) or foliated. Volcanic rocks are intruded by a small quartz monzonite stock near the eastern property boundary. Several bodies of syn-volcanic (?), magnetite-bearing gabbro and diorite intrude the volcanic rocks further to the west. Quartz monzonite dikes and quartz-rich granite dikes also cut the volcanic rocks at several localities.

In the extreme eastern parts of the Captain property, strongly foliated, micaceous and chloritic schists of the Wolverine Metamorphic Complex are exposed in road cuts and drainages. Slivers of the same rock type were also mapped as inclusions within the quartz monzonite stock.

Glacial till or outwash material covers much of the northern part of the Captain property area, requiring reliance on geophysical data for geological interpretation of lithological contacts.

5.2.2 Structure

In the extreme eastern parts of the Captain property, a series of northwest and northeast-trending fault structures form fault-bounded, rhombohedral-shaped blocks underlain by either Takla volcanic or intrusive rocks or Wolverine Metamorphic Complex rocks. Locally, volcanic and intrusive rocks are strongly foliated and sheared. The two prominent foliation directions, 090° - 110° and 030° - 050° , are also the direction of the dominant faults inferred from topography and magnetic data.

In the area south and east of Windy Lake (see again Figure 4 for location reference), numerous north-northwest and north-northeast trending fault structures are evidenced in trenches and interpreted from VLF-EM survey data and diamond drill core. They may be up to 30 m wide and are associated with strongly foliated, chlorite-sericite-carbonate altered rock, quartz-carbonate vein material and patchy silicification.

A northwest-trending, linear magnetic feature straddles the Salmon River over a distance of about 3 km. It is spatially associated with several known copper-gold occurrences and may represent a major fault structure of property-scale or regional extent.

5.2.3 Alteration and Mineralization

Historical exploration work in the northern part of the Captain property has identified several areas of mineralization, including:

- Copper-gold-palladium mineralization located approximately 350 m north of the Salmon River at the Windy minifile occurrence (093J 024 - see Figure 4). Bedrock chip samples in the Windy occurrence area averaged 0.9 ppm Au, 0.23% Cu and 885 ppb Pd across a sampled length of 8.0 m in a schistose, chloritized diorite unit (AR 16597, 1987). A few hundred metres west of the occurrence, a 1989 Placer Dome diamond drill hole, inclined easterly, encountered diorite-hosted copper and gold mineralization throughout its 104 metre length, including an intercept (true width unknown) of 192 ppb Au and 1,622 ppm Cu over 38.4 m (AR 19853, 1989). About 200 m southeast of the Windy occurrence, sub-angular, malachite-stained, chloritized diorite float returned a grab sample assay of 336 ppb Au and 7,341 ppm Cu (AR 28025, 2006). About 300 m south-southwest of the Windy occurrence, along the north bank of the Salmon River, a grab sample of malachite-stained diorite returned values of 200 ppb Au and 10,500 ppm Cu (AR 14449, 1985). Partial results from a 1991 percussion drilling program in the general area indicate the presence of several anomalous intercepts, including 15.2 m grading 0.12 g/t Au, 0.15% Cu and 9.1 m grading 0.30 g/t Au, 0.21% Cu (AR 23838, 1994).
- About 1.3 km west of the Windy occurrence, close to the Salmon River, a 1990 trenching program located a mineralized boulder train in ferricrete measuring 25 m wide by 55 m long and up to 5 m thick (AR 21430, 1990). Mineralized boulders reportedly vary in size up to 30-40 cm in diameter and consist of massive pyrrhotite with varying amounts of chalcopyrite, arsenopyrite, sphalerite and pyrite. Assays from select grab samples of individual boulders range up to 32.17 g/t Au, 2.93% Cu, 160 g/t Ag and 22.85% As. Bedrock chip samples from the trenches returned several anomalous intervals, including 825 ppb Au and 1,969 ppm Cu across 5.2 m. A 1996 diamond drill hole, angled northerly beneath the mineralized boulder train, intercepted 20.43 m grading 80 ppb Au and 758 ppm Cu. The source of the mineralized boulders has not been located.
- South of Windy Lake, a linear, 2.2 km-long, coincident gold, arsenic and copper soil anomaly is underlain by hematized and propylitically-altered, locally strongly foliated andesitic volcanic rocks which generally contain anomalous concentrations of gold and copper where tested by diamond drilling. One hole returned a 46.7 m-long interval grading 80 ppb Au and 1,160 ppm Cu (AR 24751, 1996).
- Near the western margin of the large, approximately 3 km² chargeability anomaly described in Section 4.4, three 1989 diamond drill holes east of Windy Lake have identified a 750 m wide zone of elevated gold and copper values generally in the range of 20-100 ppb and 100-500 ppm respectively (AR 19853, 1989). The holes cut long intervals of pyritized and variably chloritized and silica-altered diorite and andesitic volcanic rocks. About 1,100 m further east, within the same IP chargeability anomaly, outcrops of silicified quartz diorite contain up to 10%

disseminated pyrrhotite and lesser pyrite, with minor chalcopyrite as fracture fillings.

- In the northeastern part of the Captain property, a northeast-directed fan of mineralized float measures about 1,500 m long and 400-500 m wide. Here, mineralized boulders weighing up to 23 kg (50 lb.) have yielded values in the range of 0.1-1.0% Mo, 0.17-2.4% Cu, 9-33.9 g/t Ag and 0.1-1.5 g/t Au (AR 21473, 1991). Mineralization is described as “heavy concentrations of disseminated and veinlet pyrite, chalcopyrite and molybdenite hosted by strongly foliated, chlorite-rich rocks” (Walker, 1991). The area of mineralized float was tested by 27 shallow, vertical percussion drill holes which failed to intersect significant mineralization. A possible source area for the mineralized float lies further up-ice, in a 2.5 km² area containing a cluster of moderately to strongly anomalous IP chargeability anomalies. Silt samples taken from streams draining the IP anomalous area returned consistently anomalous gold values in the 200-500 ppb range. On the western flank of the IP anomalous area, a grab sample from an andesite outcrop containing chlorite, pyrite and chalcopyrite assayed 165 ppb Au and 2,250 ppm Cu.

6.0 2006 DIAMOND DRILLING PROGRAM

6.1 Introduction

During the period February 23 to March 14, 2008, Orestone Mining Corp. carried out a program of NQ2 diamond drilling in the northern part of the Captain property. The drilling was done by Radius Drilling Corp. of Prince George, B.C. Six holes totaling 1,103 m were completed. Four holes (08-01, 08-04, 08-05 and 08-06) tested structurally-controlled mineralization and two holes (08-02 and 08-03) tested a small portion of the 3 km² chargeability anomaly described in Section 4.4. Only the results of Hole 08-02 are discussed in this report. Drill hole data for this hole are presented in Table 2.

Table 2

Captain Property - Drill Hole Data
DDH 08-02

Hole #	Total Depth (meters)	Azimuth, Dip & (Elevation in meters) at collar	NAD 83 (Zone 10) East	NAD 83 (Zone 10) North
DDH 08-02	87.5	270/-60 (~1075)	448803	6090377

The drill hole collar for Hole 08-02 was surveyed using a Garmin 12 hand-held GPS unit. No down-hole surveys were done on the hole because of its shallow depth.

All core was photographed then logged in detail at the site. Five intervals 0.5 to 3.1 m in length were continuously sampled where chalcopyrite mineralization was observed in the core. Half the split core was retained in the core box and the other half was placed into numbered plastic sample bags which were then placed into a labeled and numbered rice bag. The latter was shipped by truck to Acme Analytical Laboratories in Vancouver for 36 element analysis by ICP-MS methods. All retained core is stored on the Bridge 8 (561723) mineral claim at UTM coordinates (NAD 83 - Zone 10) 439336 E and 6083136 N.

Results of Hole 08-02 are discussed in Section 6.2. A collar location plan is shown on Figure 4. Appendix 1 contains the 2008 diamond drill hole and core recovery records for Hole 08-02. The certificate of analysis and analytical methods are presented in Appendix 2. Selected analytical results for Hole 08-02 have been compiled in Table 3.

6.2 Results

The purpose of Hole 08-02 was to test an overburden-covered area of high chargeability, moderate to high resistivity and moderate magnetics located about 3 km east-southeast of Windy Lake. The collar location of Hole 08-02 relative to the geophysical signatures of the target area are shown in Figures 5 to 7.

Results for Hole 08-02 are summarized in bullet form as follows:

- The main rock type encountered in the hole was volcanic sediment characterized by finely bedded/laminated beds interlayered with more massive units. Some short sections containing lithic (feldspar) fragments, possibly crystal tuff, are also present.
- The volcanic sediments are cut by several feldspar porphyry, diorite and “light green” dikes. The latter contain 15-20%, 2-4 mm chloritized mafics set in an aphanitic, chloritized matrix.
- Chalcopyrite mineralization occurs as:
 - minor disseminations accompanying 15 cm of heavy (15-20%) pyrite, vaguely banded at 80° to the core axis, at a down-hole depth of 22.9 m;
 - locally abundant, fine grained disseminations accompanying disseminated pyrite in a 5 mm wide quartz vein at 5° to the core axis at a down-hole depth of 53.9 m;
 - fracture-filling accompanying pyrite at a down-hole depth of 83.6 m;
 - minor disseminations accompanying 8 cm of 10-20% blebby pyrite at a down-hole depth of 85 m; and
 - minor disseminations associated with pyrite in quartz veinlets and along chloritic foliation surfaces at a down-hole depth of 87.0-87.5 m.

- Table 3 analytical results show the highest values to be 378.4 ppm Cu and 16 ppb Au in the down-hole interval 22.6-24.0 m (which corresponds to the 15 cm wide band of heavy pyrite described above).
- Alteration overall in the hole is generally weak and is characterized by mainly chlorite in fault zones and along fractures.
- Possible tourmaline (black prismatic mineral) was noted at down-hole depths of 8.3 m and 87.0-87.5 m. Minor disseminated magnetite was noted at a down-hole depth of 22 m.
- Average core recovery for the hole was 86%.

7.0

PROPOSED WORK

The 2008 drilling results in the northern part of the Captain property fell short of expectations in that near-surface testing of both structurally-controlled and porphyry-type copper-gold targets failed to identify mineralized zones of economic tenor. The drilling did demonstrate, however, that chalcopyrite +/- gold mineralization is widespread over a large area.

The two holes (including Hole 08-02) which tested a small portion of the 3 km² chargeability anomaly described in Section 4.4 both intersected copper mineralization. Bedrock underlying untested portions of the anomaly may contain higher-grade concentrations of copper and accompanying gold. Further drill testing of this large, mainly overburden-covered geophysical target is recommended.

8.0

COST STATEMENT


The cost for the 1,103 m of NQ2 diamond drilling described in Section 4.5 is as follows:

	<u>\$CDN</u>	<u>\$CDN</u>
1) <u>Salaries:</u>		
- G. Richards, geologist:		
- Field organization (Feb. 16-17): 2 days @ \$630/d	1,260.00	
- Mob-demob (Feb. 19, Mar. 4): 2 days @ \$630/d	1,260.00	
- Field days (Feb. 20 - Mar. 3): 13 days @ \$630/d	8,190.00	
- B. Bowen, geologist:		
- Field organization (Feb. 12-15): 4 days @ \$630/d	2,520.00	
- Mob-demob (Mar. 4, Apr. 4): 2 days @ \$630/d	1,260.00	
- Field days (Mar. 5-29, Apr. 3):		
- 25 days @ \$630/d	15,750.00	
- Howard Sam, core splitter:		
- Field days (Feb. 28, Mar. 6-7, 10-15, Mar. 17, 19, 20, 22, 24-28, 29, 31)		
- 19 days @ \$250/d	<u>4,750.00</u>	
- Sub-total salaries:	34,990.00	34,990.00
2) <u>Diamond Drilling (Radius Drilling Corp.):</u>		
- 1,103 m of NQ2 diamond drilling (total cost)	\$220,617.83	
- water truck rental	3,937.50	
- core shack set-up	500.00	
- core boxes	2,705.52	
- core box lids	<u>1,055.86</u>	
- sub-total diamond drilling	228,816.71	228,816.71
3) <u>Analytical (Acme Labs Ltd.):</u>		
- 221 core samples @ \$26.36 per sample	\$5,824.46	
- sample shipment	<u>553.09</u>	
- sub-total analytical	6,377.55	6,377.55
4) <u>Room & Board (Kalder Lake camp)¹:</u>		
- G. Richards (Feb. 20 - Mar. 3):	1,092.00	
- B. Bowen (Mar. 5-29, Apr. 3):	2,100.00	
- Howard Sam (Feb. 28, Mar. 6-7, 10-15, Mar. 17, 19, 20, 22, 24-28, 29, 31)	1,596.00	
- diamond drilling crew (Feb. 22 - Mar. 14)	<u>12,022.50</u>	
- sub-total room & board	16,810.50	16,810.50
¹ Room & board cost at Kalder Lake = \$80/m.d + GST		

Cost statement - continued

	\$CDN	\$CDN
5) <u>Snow Clearing & Access Road Construction:</u>		
- Stewart Lake Logging (D-9 cat)	21,714.82	
- Hat Lake Logging (grader)	<u>4,449.38</u>	
- sub-total:	26,164.20	26,164.20
6) <u>Diesel:</u>		
- bulk diesel (Imperial Oil) - for drill equipment, D-9 cat, grader, 4x4 crew cabs)	13,534.85	
- retail diesel – for 4x4 crew cab only	<u>323.20</u>	
- sub-total diesel cost:	13,858.05	13,858.05
7) <u>Truck Rentals:</u>		
- Bowmac Truck Rentals: 4x4 crew cab	2,679.58	
- Howard Sam: ½ ton pick-up (includes diesel)	<u>375.13</u>	
- Sub-total truck rentals:	3,054.71	3,054.71
8) <u>Motels & Meals:</u>		
- Motels	220.35	
- Meals	<u>82.81</u>	
- sub-total motels & meals:	303.16	303.16
9) <u>Airfares:</u>		441.35
10) <u>Field Supplies:</u>		295.12
11) <u>Telephone expense:</u>		218.27
12) <u>Report Cost:</u>		
- B. Bowen, 2 days @ \$630/d	1,260.00	
- drafting, copies	<u>50.00</u>	
- sub-total report cost	1,310.00	1,310.00
 GRAND TOTAL 1,103 M DIAMOND DRILLING:		\$332,639.62
 PRO-RATED COST OF HOLE 08-02:		
(87.5 m/1,103 m) x (\$332,639.62) =		\$26,388.00

B. B. Bowen
SEPT. 16/08.



9.0

REFERENCES

AMEC

2006. Mt. Milligan Pre-Feasibility Study, Unpublished Report prepared by AMEC Americas Limited for Placer Dome Inc., Report #149582, May 2006

Campbell, T.

1989. Geochemical Report on the Tsil Property, Cariboo Mining Division, B.C., June 1989; Assessment Report 18850

Campbell, T. and Wong, T.

1990. Geochemical and Geophysical Report on the Tsil Property, Cariboo Mining Division, B.C., March 1990; Assessment Report 20083
1990. Geochemical and Geophysical Report on the Alpha and Beta Claims, Cariboo Mining Division, B.C., March 1990; Assessment Report 20102

Cannon, R.W.

1989. Geophysical Survey Report on the Windy 1-18, 19 Fr. Claims, Cariboo Mining Division, B.C., September, 1989; Assessment Report 19220
1988. Geophysical Survey Report on the Windy 1-5 Claims, Cariboo Mining Division, B.C., September, 1988; Assessment Report 17873

Carter, J.S.

1990. Geochemical Survey Conducted on the Jay 2 Mineral Claim, Cariboo Mining Division, B.C., October 1990; Assessment Report 20434

Cochrane, D.R.

1991. Assessment Report on the R.B. South Group of Four Located Mineral Claims, Cariboo Mining District, B.C., September 20, 1991; Assessment Report 21002

Deschenes, M.

1991. Property and Assessment Report for the 1990 Work Program on the Windy Property, Cariboo and Omineca Mining Divisions, B.C., May 1991; Assessment Report 21430

References - continued:

Farmer, R.

- 1983. Summary of Diamond Drilling on the Sask Claims, Cariboo Mining Division, B.C., January 20, 1983; Assessment Report 11258
- 1983. Summary of Diamond Drilling on the Sask Claims, Cariboo Mining Division B.C., January 20, 1983; Assessment Report 11259

Farmer, R. and Rebagliati, C.M.

- 1984. Summary of Diamond Drilling on the Sask 45 Claim, Cariboo Mining Division, B.C., May, 1984; Assessment Report 12393

Frostad, S.

- 1989. Geological, Geochemical and Diamond Drilling Report on the Windy 1-27 Claims, Cariboo Mining Division, B.C., December, 1989; Assessment Report 19853

Hewton, R.S.

- 1985. Results of an Examination of the Windy Property, Cariboo Mining Division, B.C.; Assessment Report 14449

Leishman, D.A.

- 1990. Geophysical and Geochemical Report on the Tex Gold Property, Cariboo Mining Division, B.C., December 1990; Assessment Report 20768

Lustig, G.

- 2006. Technical Report on the Mount Milligan Project, Omineca Mining Division, British Columbia, prepared for Atlas Cromwell Ltd., June 2006

MacArthur, R.

- 1989. Follow-Up Geochemical Report on the PM Claim, Omineca Mining Division, B.C., September 1989; Assessment Report 19115
- 1988. Geochemical Report on the PM Claim, Omineca Mining Division, B.C., September 1988; Assessment Report 17808

Maxwell, G.

- 1989. Geochemical Report on the Alpha and Beta Claims, Cariboo Mining Division, B.C., June 1989; Assessment Report 18883
- 1988. Geochemical Report on the Tsil Property, Cariboo Mining Division, B.C., June 1988; Assessment Report 17547

References - continued:

Montgomery, A. and Weekes, S.

1994. 1994 Summary Report on the Windy 1-27 Mineral Claims, Cariboo Mining Division, B.C., November 1994; Assessment Report 23838

Mowat, U.

1996. Report Covering the 1996 Drilling Program on the Windy 1-5 Claims, Cariboo Mining Division, B.C., December 1996; Assessment Report 24751

Myers, D.

1995. Geology and Geochemistry of the Gut Property, Cariboo Mining Division, B.C., May 18, 1995; Assessment Report 23914

Nelson, J., Bellefontaine K., Green, K. and MacLean, M.

1990. Regional Geological Mapping Near the Mount Milligan Copper-Gold Deposit (93K/16, 93N/1), in Geological Fieldwork 1990, BCGS Branch Paper 1991-1

Panteleyev, A.

1995. Porphyry Cu-Au: Alkalic, in Selected British Columbia Mineral Deposit Profiles, Volume 1 – Metallics and Coal, Lefebure, D.V. and Ray, G.E., Editors, British Columbia Ministry of Employment and Investment, Open File 1995-20, pages 83-86

Pentland, W. and Cannon, R.W.

1986. A Geological, Geophysical and Geochemical Report on the Windy 1-5 Claims, Cariboo Mining Division, B.C.; Assessment Report 15996

Poloni, J.R.

1988. Report on the Alpha and Beta Claims, Salmon River Project, Cariboo Mining Division, B.C., February 13, 1988; Assessment Report 17216

Price, S.

1987. A Geochemical, Geophysical and Trenching Report on the Windy 1-5 Claims, Cariboo Mining Division, B.C.; Assessment Report 16597

Rebagliati, C. M.

1984. Summary of Diamond Drilling on the Sask 44 Claim, Cariboo Mining Division, B.C., May 1984; Assessment Report 12392

References - continued:

Richards, G.

- 2006. Geophysical and Geochemical Report on the Captain Claims, Cariboo Mining Division, B.C., January 9, 2006; Assessment Report 28025
- 2004. Assessment Report Covering MMI Geochemistry on the Captain Claims, Cariboo Mining Division, B.C., December 6, 2004; Assessment Report 27575

Richards, J. P.

- 2003. Tectono-Magmatic Precursors for Porphyry Cu – (Mo-Au) Deposit Formation,
Economic Geology, Volume 98, 2003, pp. 1515-1533

Walcott, P. E.

- 2007 A Report on Magnetic and Induced Polarization Surveying on the Captain Property, Cariboo Mining Division, B.C., for Orestone Mining Corp., October 2007.
- 1982. A Geophysical Report on a Ground Electromagnetic and Magnetic Survey on the Sask, Stuart and Butcher Flats Claims, Cariboo and Omineca Mining Divisions, B.C., April 1982; Assessment Report 10643

Walker, T.

- 1992. Geological, Geochemical and Geophysical Report on the Tsil Property, Cariboo Mining Division, B.C., February 1992; Assessment Report 22135
- 1991. Geological, Geochemical and Geophysical Report on the PM Group of Claims, Omineca Mining Division, B.C., December 1991; Assessment Report 22009
- 1991. Geochemical and Geophysical Report on the PM Group of Claims, Omineca and Cariboo Mining Divisions, B.C., April 1991; Assessment Report 21473
- 1990. Airborne Geophysical Report on the PM Group of Claims, Omineca and Cariboo Mining Divisions, B.C., September 1990; Assessment Report 20311

Walker, T., Stewart, F. and Bradish, L.

- 1991. Geological, Geochemical and Geophysical Report on the Alpha and Beta Claims, Cariboo Mining Division, B.C., December 1991; Assessment Report 22022

References - continued:

Walker, T. and Wong, T.

- 1991. Geochemical and Geophysical Report on the Alpha and Beta Claims, Cariboo Mining Division, B.C., June 1991; Assessment Report 21470

White, G.E.

- 1982. Geophysical Report on the Sask 38 Claim (Grid 78-13), Salmon Lake, Cariboo Mining Division, B.C., December 3, 1982; Assessment Report 1112
- 1982. Geophysical Report on the Sask 39, 40 and 41 (Grid 78-1), Salmon River, Cariboo Mining Division, B.C., December 1, 1982; Assessment Report 1111

Yarrow, E.W.

- 1995. Prospecting and Geochemistry on the Sam Property, Cariboo and Omineca Mining Divisions, B.C., March 1995; Assessment Report 23350

Yorston, R.

- 1996. Percussion Drilling on the PM Claims, Omineca Mining Division, B.C., December 1996; Assessment Report 24998
- 1996. Geology and Geochemical Report on the PM Claim, Omineca Mining Division, B.C., July 1996; Assessment Report 24542

10.0

STATEMENT OF QUALIFICATIONS

I, Brian K. Bowen, of Surrey, in the Province of British Columbia, DO HEREBY CERTIFY THAT:

1. I am a Consulting Geological Engineer with an office at 12470 99A Avenue, Surrey, British Columbia, V3V 2R5, Telephone (604) 930-0177.
2. I am a graduate of the University of British Columbia with a degree of Bachelor of Applied Science in Geological Engineering, obtained in 1970. I have been practicing my profession continuously in Canada and elsewhere since graduation.
3. I am a member in good standing of the Association of Professional Engineers and Geoscientists of the Province of British Columbia.
4. This report is based on my personal knowledge of the Captain property obtained from on-site supervision of the current diamond drilling program carried out during the period February 23 to March 14, 2008 and from my ongoing association with the property since first staking the original Captain legacy claims in November 2003.
5. I have an indirect interest in the property through my share holdings in Orestone Mining Corp., the 100% owner of the Greater Captain property. I am also a Director of Orestone Mining Corp.


Dated at Surrey, British Columbia, this sixteenth day of September, 2008.

September 16, 2008
Surrey, B.C.
BKB/bb

B. K. Bowen, P. Eng.
Consulting Geologist

B.K. Bowen
SEPT. 16/08.



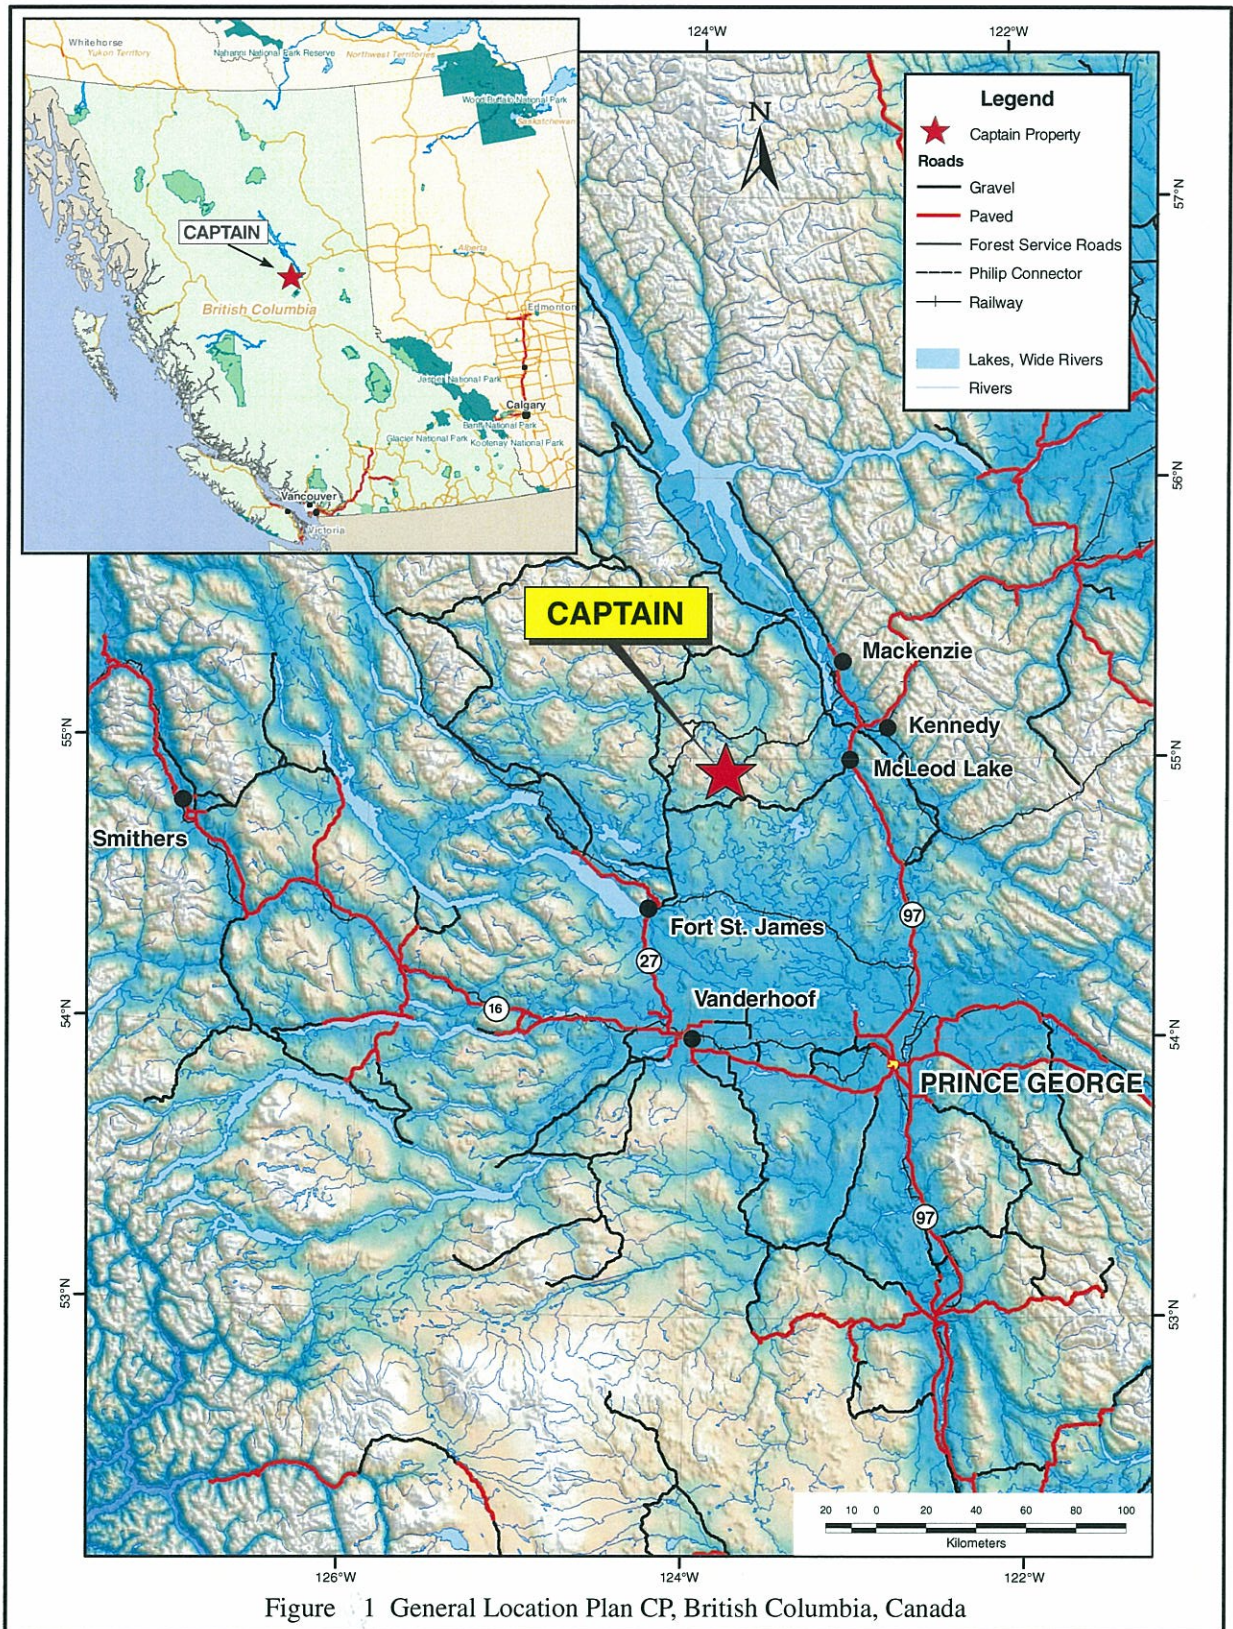


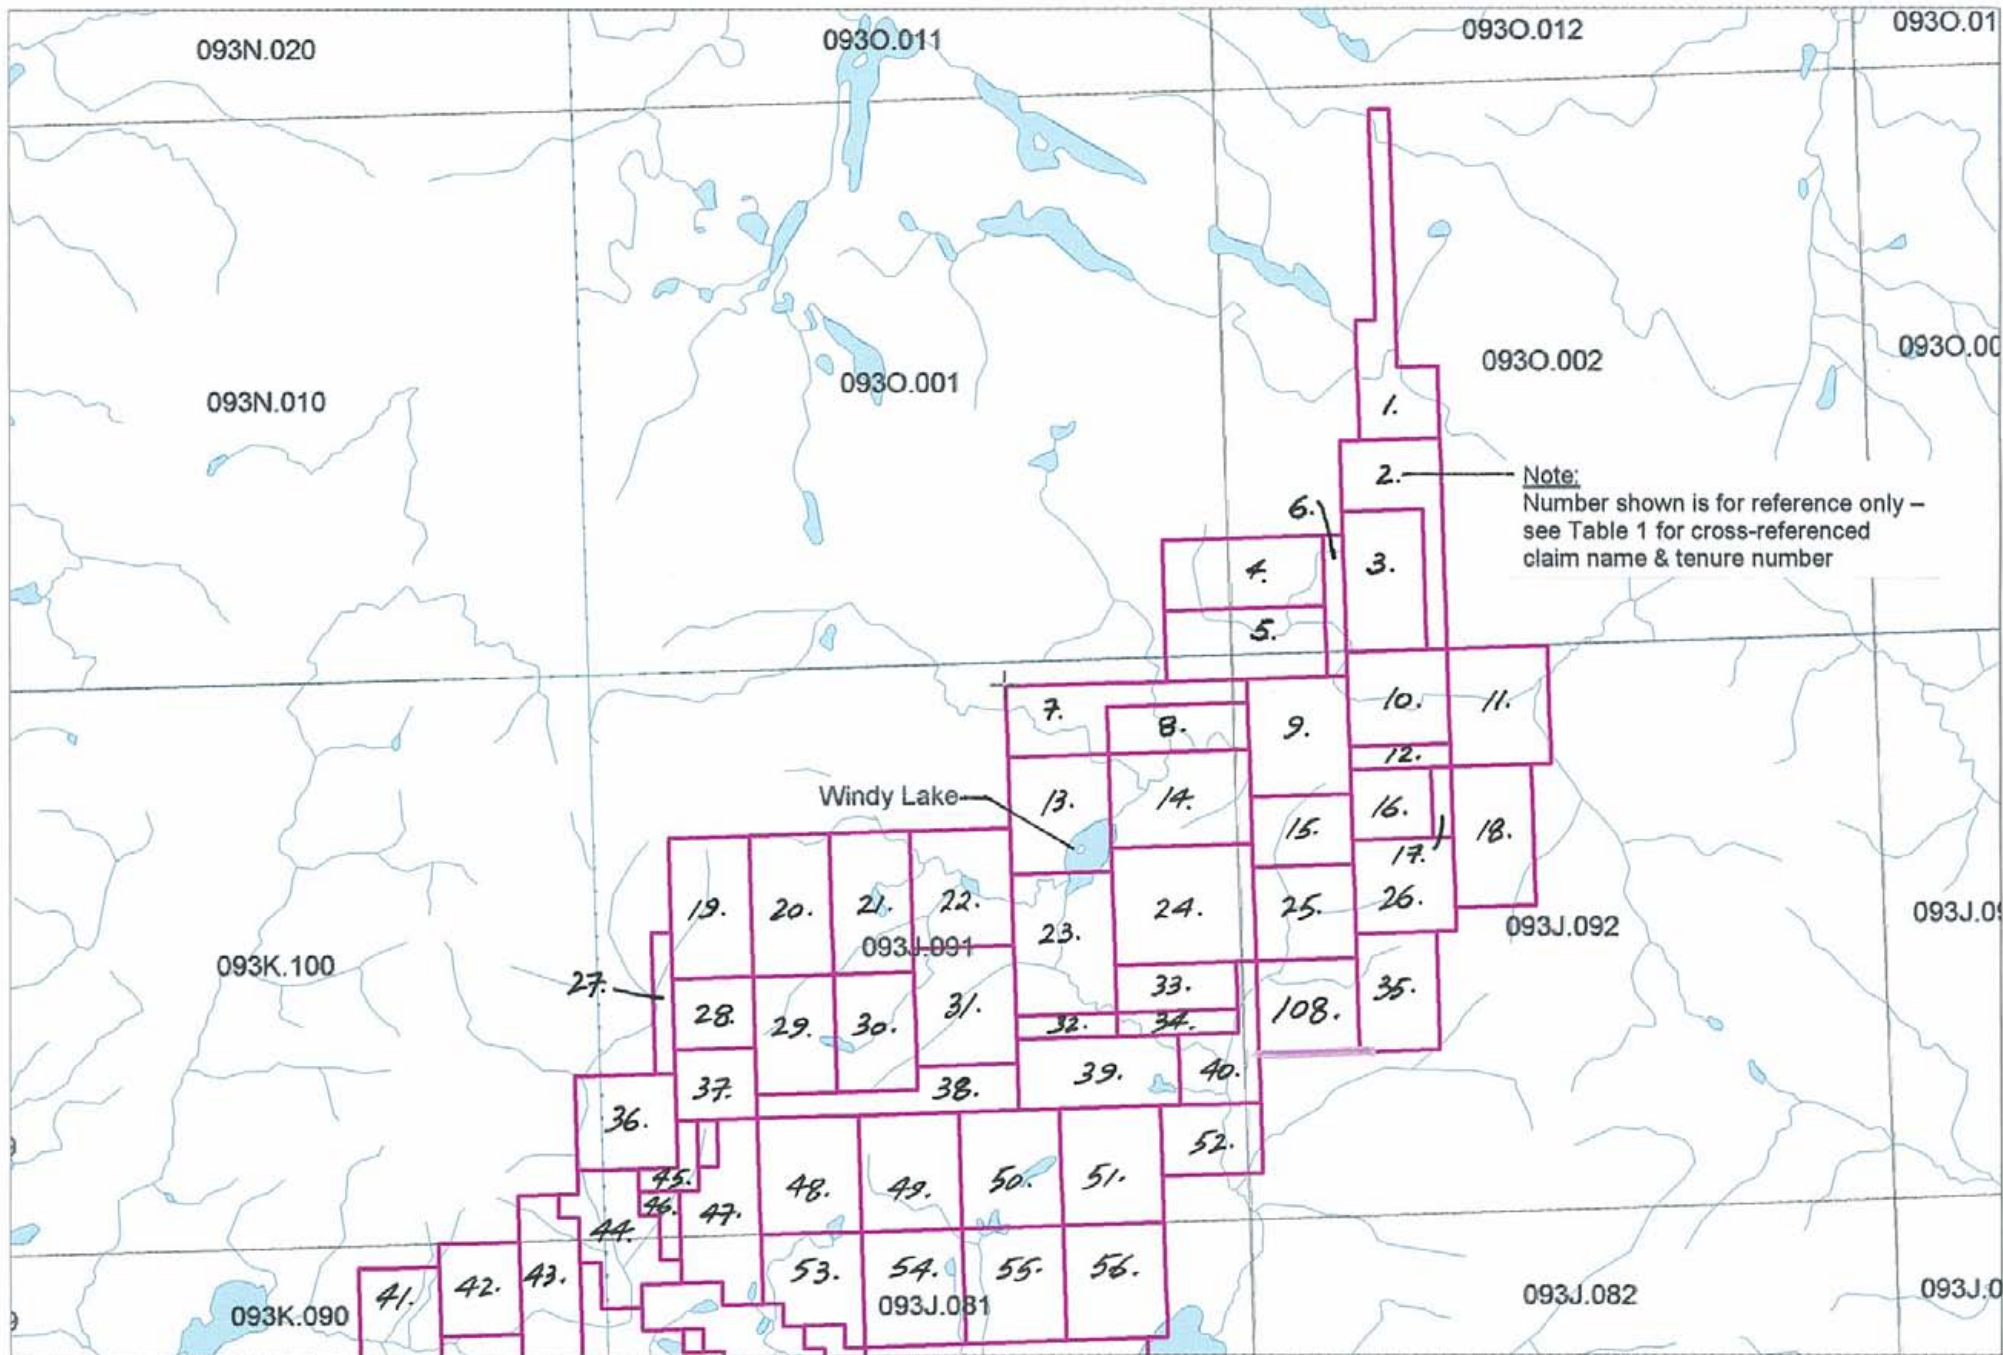


Figure 2a

ORESTONE MINING CORP.
 GREATER CAPTAIN PROPERTY
 CARIBOO & OMINICA M.D.
 93J/13, 93K/16, 930/04

CLAIM MAP - NORTH SHEET



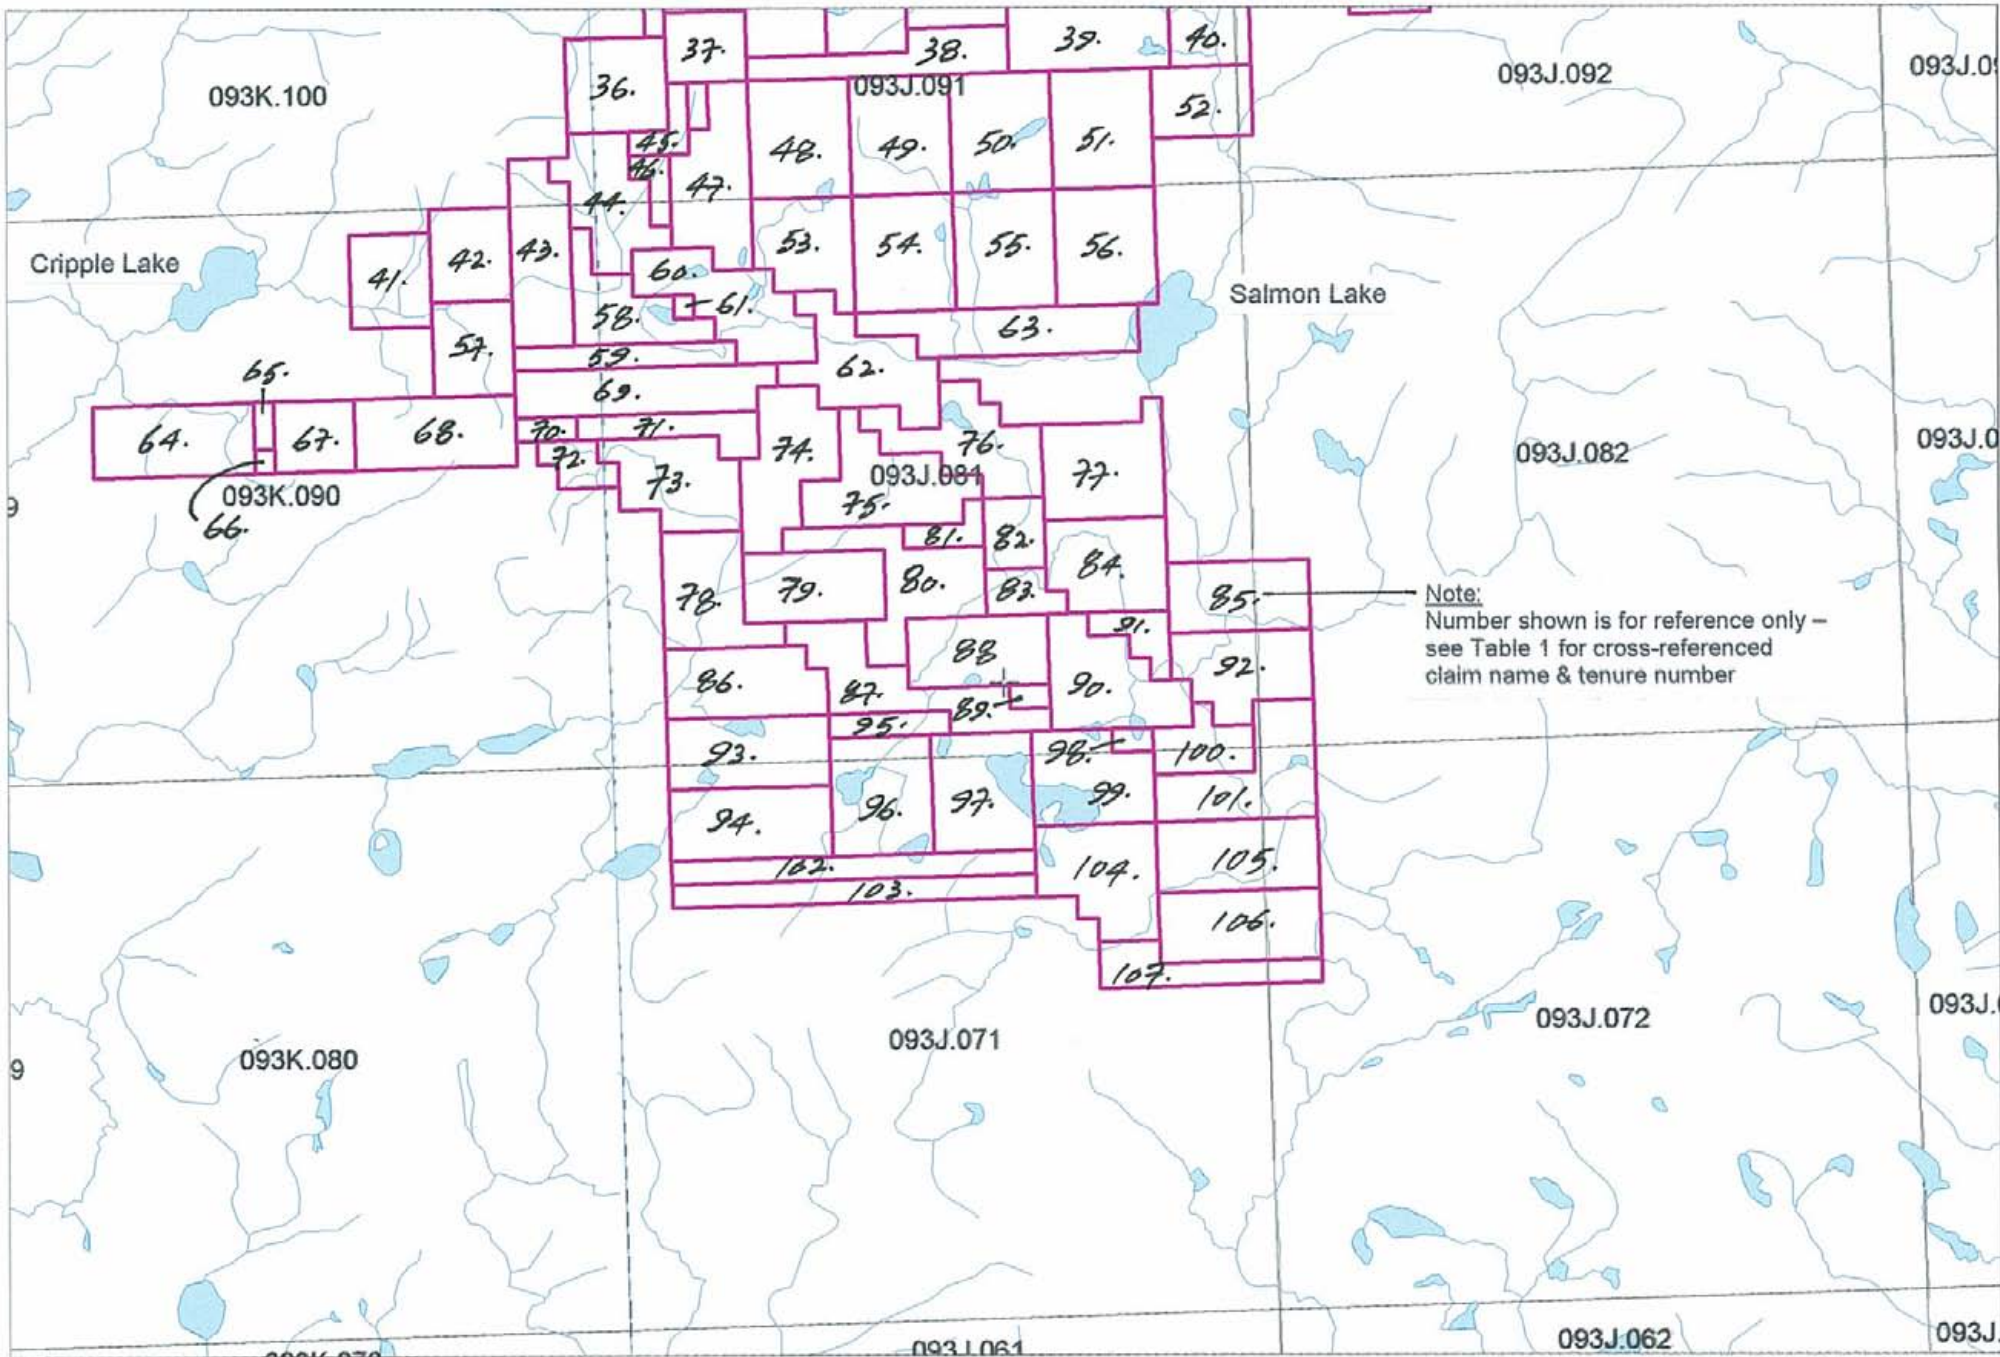

SCALE 1 : 150,000



KILOMETERS


Figure 2b

ORESTONE MINING CORP.
GREATER CAPTAIN PROPERTY
CARIBOO & OMINECA M.D.
93J/13, 93K/16, 930/04

CLAIM MAP – SOUTH SHEET

N



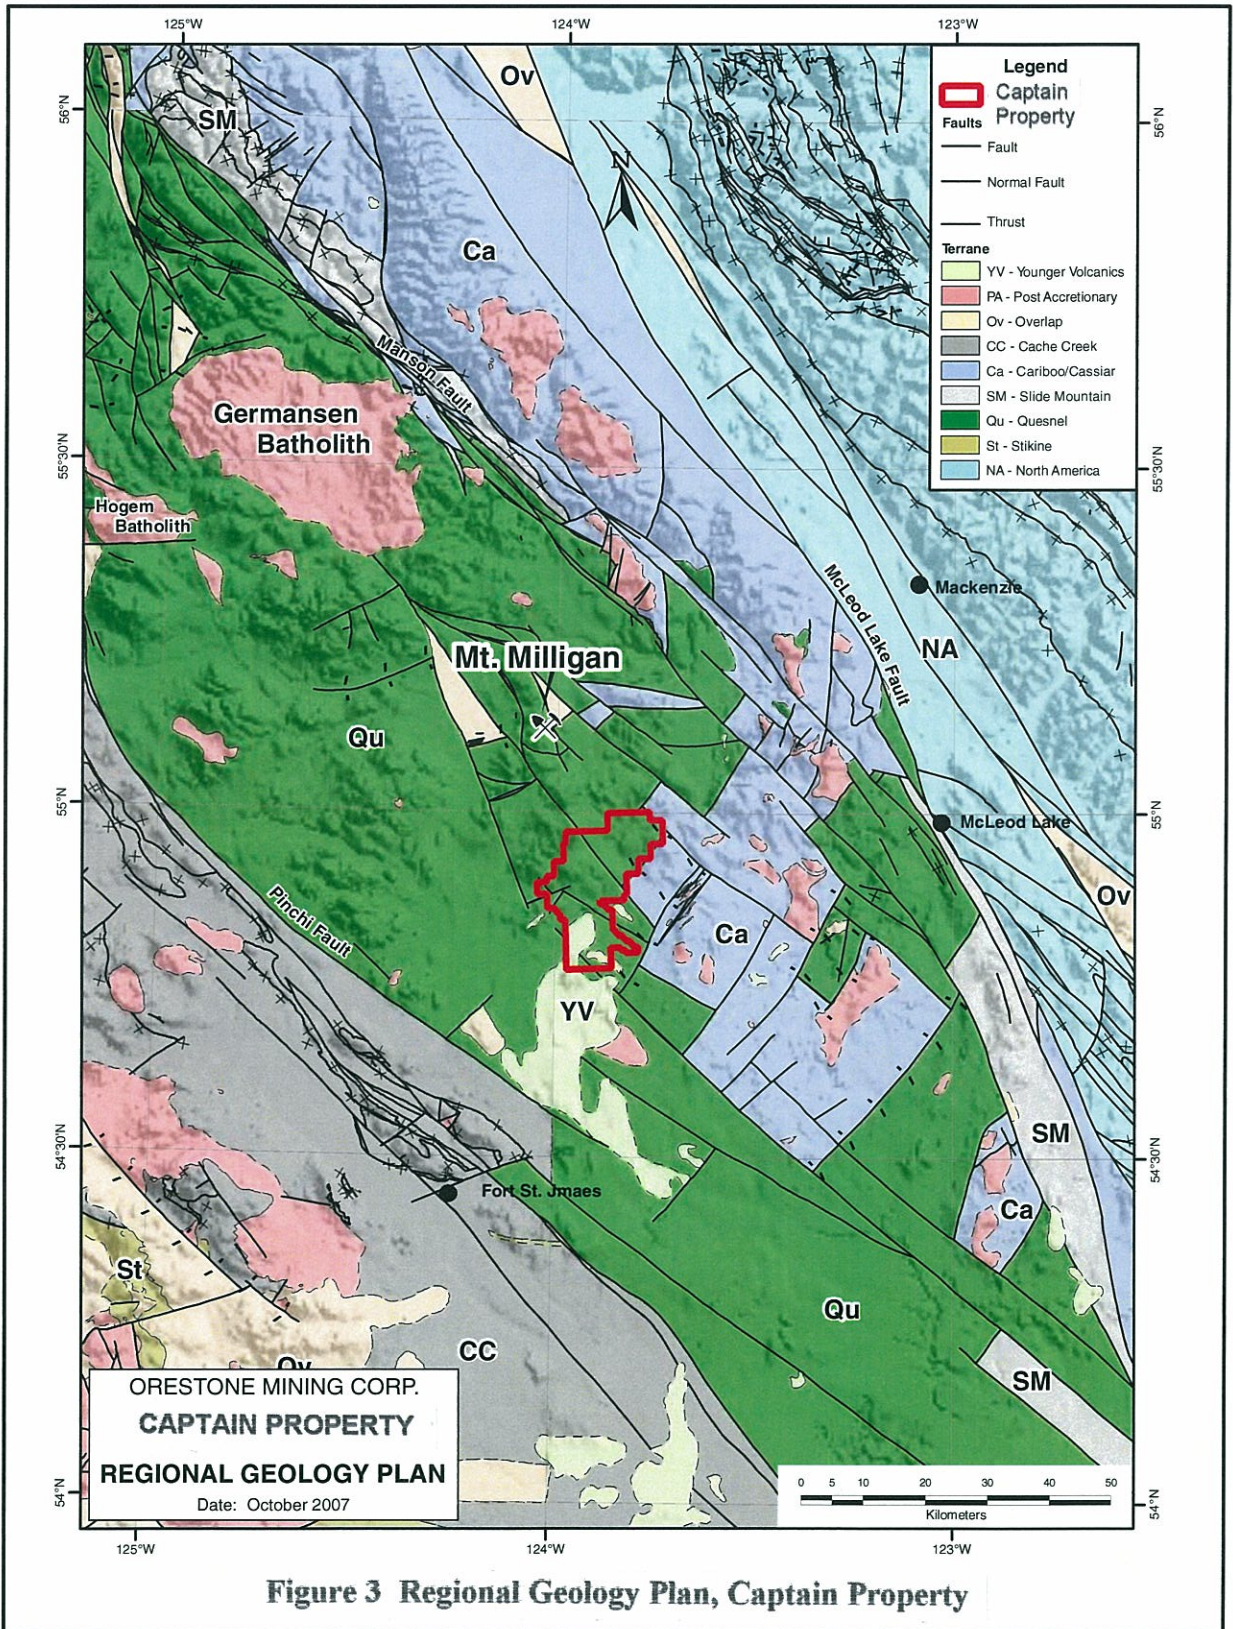

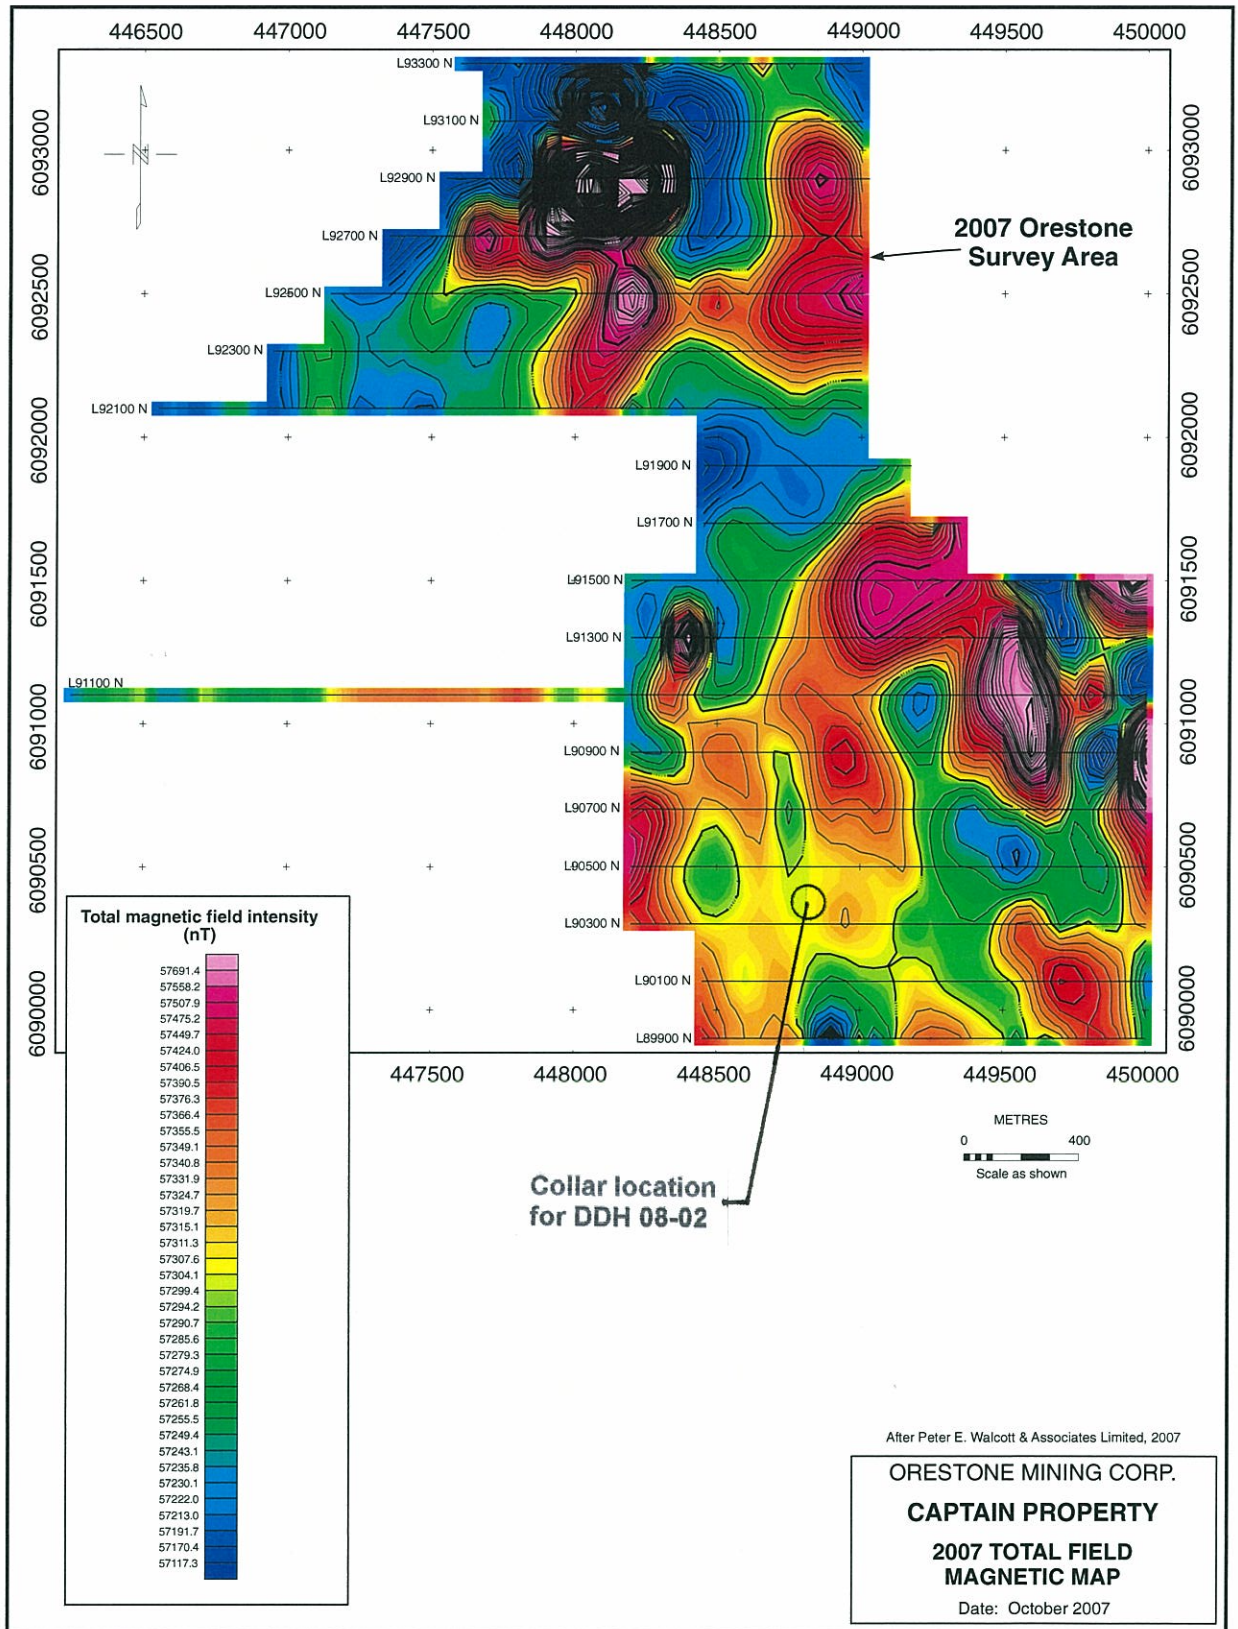


Figure 5 - 2007 Total Field Magnetic Map, Captain Property (CP)

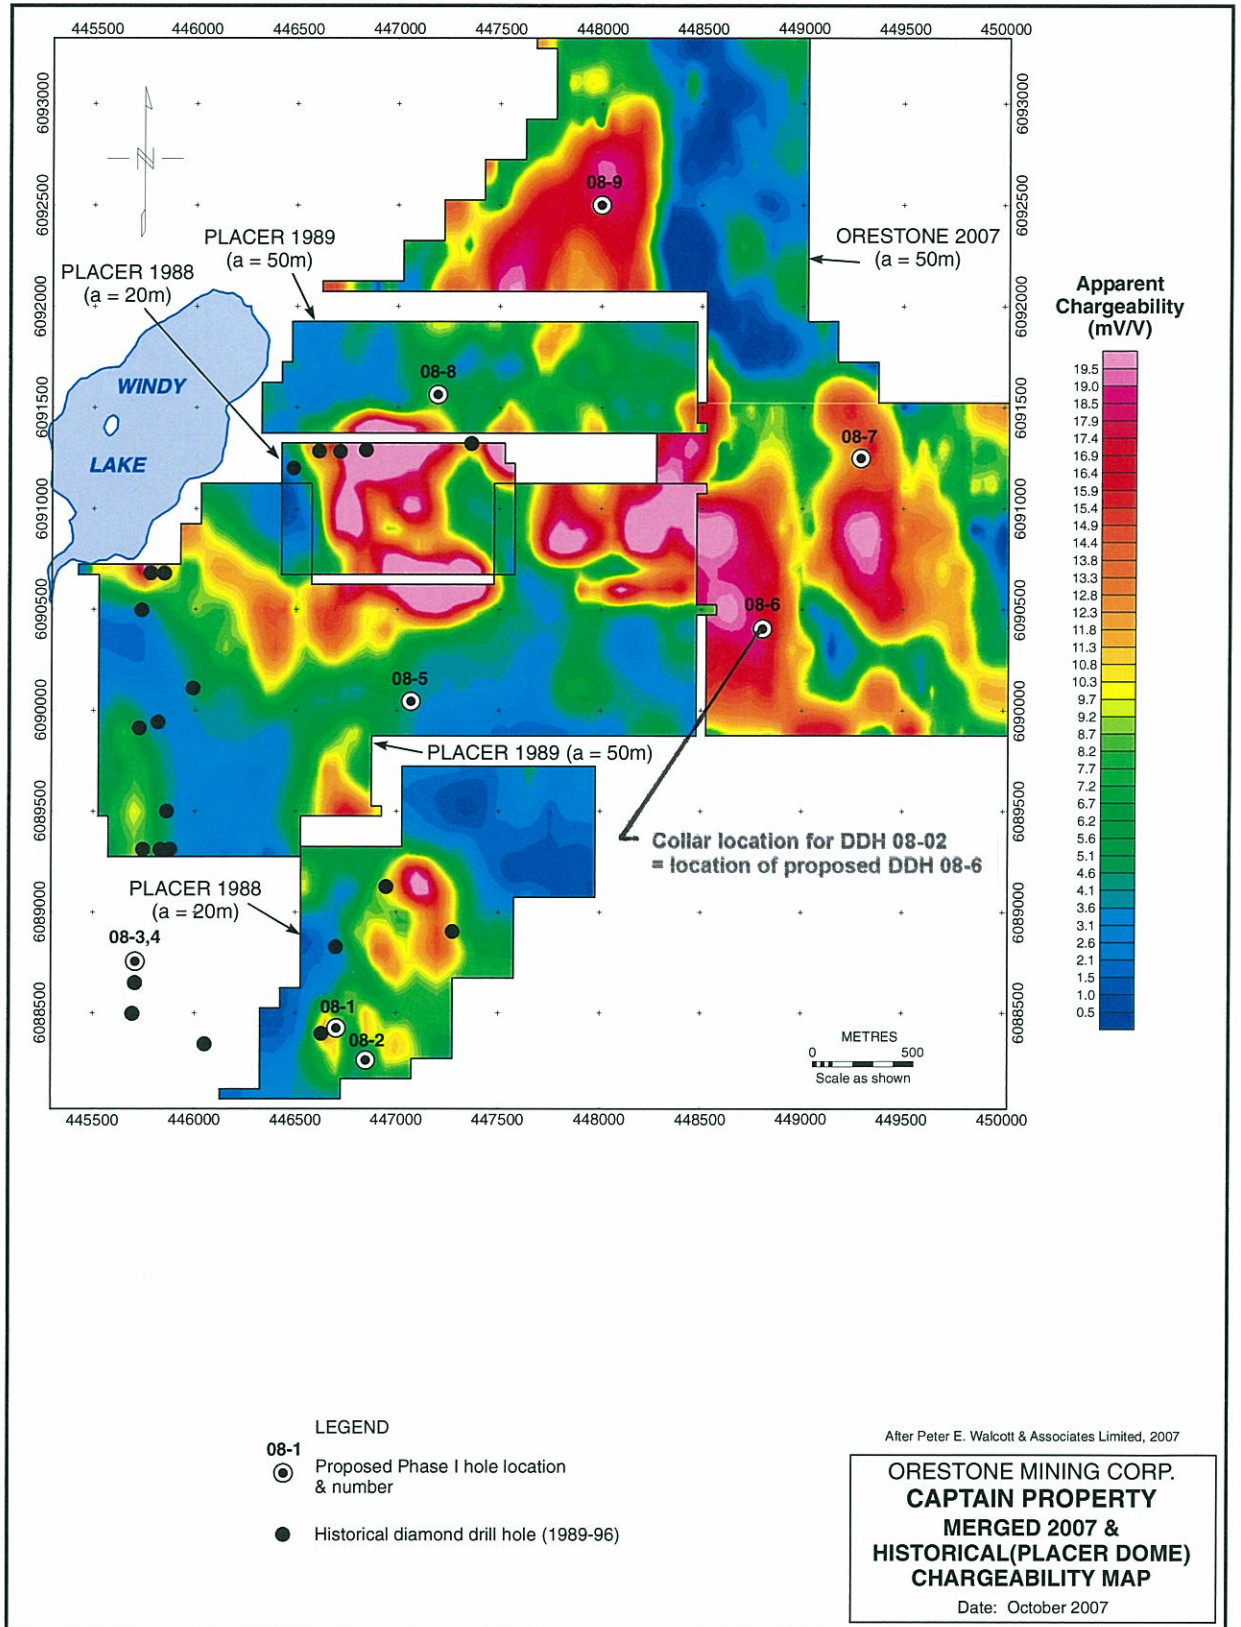


Figure 6 - Merged 2007 & Historical (Placer Dome) Chargeability Map, CP

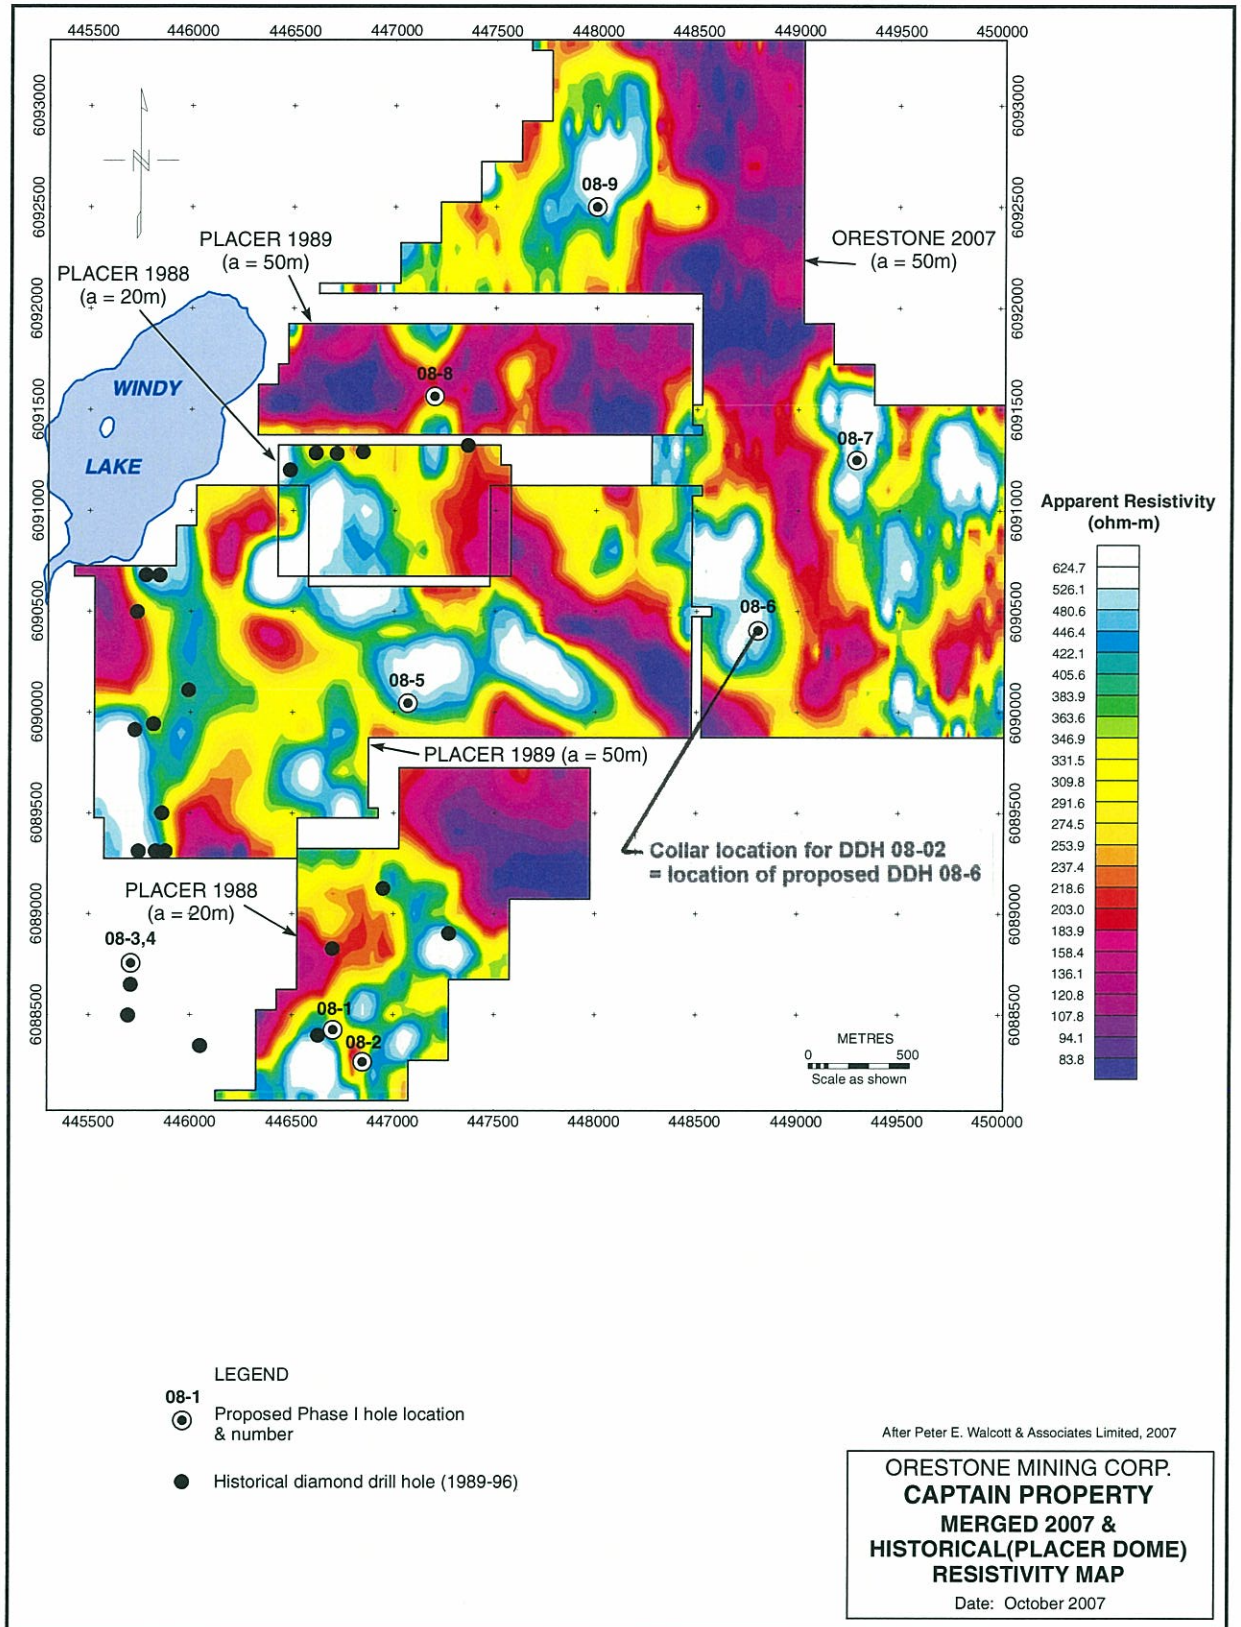


Figure 7 - Merged 2007 & Historical (Placer Dome) Resistivity Map, CP

Table 1
Claims Status, Greater Captain Property

Map Reference No.	Claim Name	Tenure #	Claim Type	Owner (100%)	Area (hectares)	Expiry Date
<i>Claim Map - North Sheet (see Figure 2a):</i>						
1	Salmon 4	558761	MTO Cell	Orestone*	463.2	15-Aug-09
2	Salmon 5	558762	MTO Cell	Orestone	389.4	15-Aug-09
3	Northeaster 3	582110	MTO Cell	Orestone	445.1	21-Apr-09
4	Salmon 1	558754	MTO Cell	Orestone	445.1	15-Aug-09
5	Salmon 2	558751	MTO Cell	Orestone	445.2	15-Aug-09
6	Salmon 3	558753	MTO Cell	Orestone	111.3	15-Aug-09
7	Captain 20	532786	MTO Cell	Orestone	408.3	15-Aug-09
8		516387	CLC**	Orestone	259.8	15-Aug-09
9	Captain 25	556721	MTO Cell	Orestone	464	15-Aug-09
10	Salmon 6	558763	MTO Cell	Orestone	371.1	15-Aug-09
11	Northeaster 1	582092	MTO Cell	Orestone	463.9	21-Apr-09
12	Captain 29	561493	MTO Cell	Orestone	92.8	15-Aug-09
13	Captain 19	532784	MTO Cell	Orestone	464.1	15-Aug-09
14		516406	CLC	Orestone	519.8	15-Aug-09
15	Captain 26	556719	MTO Cell	Orestone	278.5	15-Aug-09
16	Captain 27	561488	MTO Cell	Orestone	222.8	15-Aug-09
17	Captain 30	561495	MTO Cell	Orestone	55.7	15-Aug-09
18	Northeaster 2	582094	MTO Cell	Orestone	445.6	21-Apr-09
19	Admiral 2	549075	MTO Cell	Orestone	445.7	15-Aug-09
20	Admiral 1	549073	MTO Cell	Orestone	445.7	15-Aug-09
21	Admiral 3	550337	MTO Cell	Orestone	445.7	15-Aug-09
22	Admiral 6	550343	MTO Cell	Orestone	464.30	15-Aug-09
23		516410	CLC	Orestone	557.3	15-Aug-09
24		516408	CLC	Orestone	650.1	15-Aug-09
25	Captain 23	549277	MTO Cell	Orestone	371.5	15-Aug-09
26	Captain 28	561484	MTO Cell	Orestone	371.4	15-Aug-09
27	Heading 3	561727	MTO Cell	Orestone	111.5	15-Aug-09
28	Admiral 9	550353	MTO Cell	Orestone	223	15-Aug-09
29	Admiral 5	550340	MTO Cell	Orestone	371.6	15-Aug-09
30	Admiral 4	550338	MTO Cell	Orestone	371.6	15-Aug-09
31	Admiral 7	550345	MTO Cell	Orestone	464.5	15-Aug-09
32		516418	CLC	Orestone	92.9	15-Aug-09
33		516455	CLC	Orestone	223	15-Aug-09
34		516420	CLC	Orestone	111.5	15-Aug-09
35	Deck 1	584576	MTO Cell	Orestone	371.6	19-May-09
36	Heading 2	561726	MTO Cell	Orestone	371.8	15-Aug-09
37	Admiral 10	552555	MTO Cell	Orestone	223	15-Aug-09
38	Admiral 8	550346	MTO Cell	Orestone	334.6	15-Aug-09
* Orestone Mining Corp. (209946)						
** CLC = converted legacy claim						

Map Reference No.	Claim Name	Tenure #	Claim Type	Owner (100%)	Area (hectares)	Expiry Date
39	Captain 21	532788	MTO Cell	Orestone	446.1	15-Aug-09
40	Captain 22	532789	MTO Cell	Orestone	278.8	15-Aug-09
41	Keel 4	580513	MTO Cell	Orestone	297.7	05-Apr-09
42	Fathom 7	550947	MTO Cell	Orestone	297.6	15-Aug-09
43	Fathom 5	550740	MTO Cell	Orestone	427.9	15-Aug-09
44	Fathom 3	550344	MTO Cell	Orestone	390.6	15-Aug-09
45	Heading 1	560302	MTO Cell	Orestone	93	15-Aug-09
46	Bridge 10	561725	MTO Cell	Orestone	74.4	15-Aug-09
47	Bridge 9	561724	MTO Cell	Orestone	464.9	15-Aug-09
48	Bridge 7	561721	MTO Cell	Orestone	464.8	15-Aug-09
49	Bridge 5	561716	MTO Cell	Orestone	464.8	15-Aug-09
50	Bridge 2	561707	MTO Cell	Orestone	464.8	15-Aug-09
51	Bridge 1	561705	MTO Cell	Orestone	464.8	15-Aug-09
52	Bridge 12	561729	MTO Cell	Orestone	278.9	15-Aug-09
53	Bridge 8	561723	MTO Cell	Orestone	372	15-Aug-09
54	Bridge 6	561718	MTO Cell	Orestone	465.1	15-Aug-09
55	Bridge 4	561712	MTO Cell	Orestone	465.1	15-Aug-09
56	Bridge 3	561710	MTO Cell	Orestone	465.1	15-Aug-09
<i>Claim Map - South Sheet (see Figure 2b):</i>						
57	Keel 1	580507	MTO Cell	Orestone	297.8	05-Apr-09
58	Fathom 6	550741	MTO Cell	Orestone	316.30	15-Aug-09
59	Fathom 8	551575	MTO Cell	Orestone	204.7	15-Aug-09
60	Fathom	550336	MTO Cell	Orestone	465.2	15-Aug-09
61	Fathom 4	550354	MTO Cell	Orestone	18.6	15-Aug-09
62	Fathom 1	550339	MTO Cell	Orestone	465.3	15-Aug-09
63	Bridge 11	561728	MTO Cell	Orestone	465.2	15-Aug-09
64		583599	MTO Cell	Orestone	446.8	04-May-09
65	Lynx 2	564539	MTO Cell	Orestone	37.2	15-Aug-09
66	Lynx 3	564540	MTO Cell	Orestone	18.6	15-Aug-09
67	Lynx 1	564538	MTO Cell	Orestone	223.4	15-Aug-09
68	Lynx 2	583501	MTO Cell	Orestone	446.8	02-May-09
69	Commodore 9	552154	MTO Cell	Orestone	465.3	15-Aug-09
70	Keel 2	580510	MTO Cell	Orestone	55.9	05-Apr-09
71	Commodore 11	552157	MTO Cell	Orestone	204.8	15-Aug-09
72	Keel 2	580512	MTO Cell	Orestone	111.7	05-Apr-09
73	Commodore 13	553521	MTO Cell	Orestone	409.7	15-Aug-09
74	Commodore 10	552155	MTO Cell	Orestone	446.9	15-Aug-09
75	Commodore 7	551573	MTO Cell	Orestone	465.5	15-Aug-09
76	Fathom 2	550341	MTO Cell	Orestone	428.2	15-Aug-09
77	Anchor 1	586434	MTO Cell	Orestone	465.5	16-Jun-09
78	Commodore 14	553522	MTO Cell	Orestone	409.9	15-Aug-09
79		550248	MTO Cell	Orestone	391.2	15-Aug-09
80	Commodore 1	550254	MTO Cell	Orestone	465.7	15-Aug-09
81	Commodore 8	551574	MTO Cell	Orestone	93.1	15-Aug-09
82	Commodore 12	552158	MTO Cell	Orestone	167.6	15-Aug-09
83	Commodore 3	550257	MTO Cell	Orestone	130.4	15-Aug-09

Map Reference No.	Claim Name	Tenure #	Claim Type	Owner (100%)	Area (hectares)	Expiry Date
84	Anchor 2	586435	MTO Cell	Orestone	428.5	16-Jun-09
85	Anchor 4	586437	MTO Cell	Orestone	391.3	16-Jun-09
86	Plus 1	556860	MTO Cell	Orestone	428.7	15-Aug-09
87	Commodore 7	550948	MTO Cell	Orestone	466	15-Aug-09
88	Commodore	550251	MTO Cell	Orestone	391.4	15-Aug-09
89	Commodore 5	550347	MTO Cell	Orestone	37.3	15-Aug-09
90	Commodore 2	550256	MTO Cell	Orestone	466	15-Aug-09
91	Anchor 3	586436	MTO Cell	Orestone	130.4	16-Jun-09
92	Anchor 7	586442	MTO Cell	Orestone	410	16-Jun-09
93	Plus 2	556861	MTO Cell	Orestone	447.5	15-Aug-09
94	Plus 4	556863	MTO Cell	Orestone	447.6	15-Aug-09
95	Commodore 8	550949	MTO Cell	Orestone	111.8	15-Aug-09
96	Plus 3	556862	MTO Cell	Orestone	466.2	15-Aug-09
97	Plus 5	556865	MTO Cell	Orestone	466.2	15-Aug-09
98	Commodore 6	550348	MTO Cell	Orestone	37.3	15-Aug-09
99	Anchor 5	586439	MTO Cell	Orestone	410.2	16-Jun-09
100	Commodore 4	550261	MTO Cell	Orestone	205.1	15-Aug-09
101	Anchor 6	586440	MTO Cell	Orestone	466.2	16-Jun-09
102	Plus 6	556868	MTO Cell	Orestone	335.8	15-Aug-09
103	Plus 7	556875	MTO Cell	Orestone	335.8	15-Aug-09
104	Anchor 8	586443	MTO Cell	Orestone	466.4	16-Jun-09
105	Anchor 9	586444	MTO Cell	Orestone	447.7	16-Jun-09
106	Anchor 10	586445	MTO Cell	Orestone	447.8	16-Jun-09
107	Anchor 11	586446	MTO Cell	Orestone	261.3	16-Jun-09
108	Captain 24	549278	MTO Cell	Orestone	371.6	15-Aug-09
				Total area:	37,035.85	

Table 2

Captain Property - Drill Hole Data
DDH 08-02

Hole #	Total Depth (meters)	Azimuth, Dip & (Elevation in meters) at collar	NAD 83 (Zone 10) East	NAD 83 (Zone 10) North
DDH 08-02	87.5	270/-60 (~1075)	448803	6090377

Orestone Mining Corp.

Captain Property

Hole Number: DDH 08-02

2008 Diamond Drill Hole Record

Page: 2 of 6

From (m)	To (m)	Lithology	Graphic Column	Structure, Alteration & Mineralization			Average Rec.
				Sub Interval	CA	Remarks	
0	6.1	OVERBURDEN					
6.1	19.3	VOLCANIC SEDIMENT					
		Fine to medium grained, locally bedded/ banded sediments with more massive units being fine to medium grained & medium grey in colour; some short sec- tions with lithic (feldspar) fragments - possible crystal tuff		6.1 - 19.3	50	Bedding at 50 degrees CA; otherwise in sub-interval, weak to moderate calcite vlt. at 30-50 degrees CA + irregular; most fracture surfaces with limonite-goethite & a number have Py fracture-filling. Rock relatively fresh - may be some pervasive sericite locally	
				at 8.3		crystal aggregates of black mineral (slender, prismatic) - possibly tourmaline; nearby is 2 mm Py vlt. with trace Cp	
				19.0-19.3	50	<u>Fault</u> : Strong chlorite-altered gouge + shearing at 50 degrees CA; trace to minor fine grained diss. Py	
19.3	21.2	FELDSPAR PORPHYRY DIKE					
		20-30% anhedral feldspar phenocrysts & 10-15% 2-3 mm chloritized mafic phe- nocrysts set in a medium grey aphanitic matrix.		19.3-21.3		Dike is cut by 1-3 mm wide carbonate vlt. s; chlorite +/- (Py) on some fracture surfaces	
				at 21.2	45	Lower contact dike sharp at 45 degrees CA	
21.2	25.4	VOLCANIC SEDIMENT					
		similar to 6.1-19.3		21.2-25.4	50- 60	Calcite vlt. s, goethite & limonite on fractures +/- Py loc.;	
				at 22.0		minor diss. Mt	
				at 22.9	80	~15 cm heavy Py (20-30%) with minor Cp; vaguely banded at 80 degrees CA	


From (m)	To (m)	Lithology	Graphic Column	Structure, Alteration & Mineralization			Average Rec.
				Sub Interval	CA	Remarks	
25.4	28.95	LIGHT GREEN DIKE					
		Distinct from feldspar porphyry dike above; light green coloured, chloritized & aphanitic matrix with 15-20% 2-4 mm chloritized mafics					
				at 25.4	45	Upper contact sharp at 45 degrees; dike is cut by 1-2 mm carbonate vlt. at 30-50 degrees + irregular; minor Py on fractures	
28.95	35.85	VOLCANIC SEDIMENT					
		Similar to 6.1-19.3 m, but with lesser fine grained banded sediments & increase of possible crystal tuff		28.95-35.85		Alteration/mineralization similar to volcanic sediment intervals above; decrease in limonite & goethite on fractures (but still present)	
35.85	38.6	FINELY BANDED META-SEDIMENT(?)					
		Overall, medium grey in colour; very finely banded or foliated		35.85-38.6	20-30	Banding/foliation at 20-30 degrees CA; chlorite & loc. Py on foliation surfaces; minor carbonate vlt.; no limonite & goethite on fracture surfaces	
38.6	49.6	VOLCANIC SEDIMENT					
		Similar to 28.95-35.85			45-60	Bedding (finer-grained layers), where present, at 45 degrees CA; otherwise for sub-interval, minor carbonate vlt., chlorite +/- Py on fractures	
				at 40.3		<i>Minor Fault:</i> 5 cm gouge	
				at 43.1	40	12 mm quartz-carbonate vein	
				48.3-49.4		<i>Fault:</i> Chloritic slips & fault breccia at low angle to CA; minor carbonate vlt. - some with Py	

From (m)	To (m)	Lithology	Graphic Column	Structure, Alteration & Mineralization			Average Rec.
				Sub Interval	CA	Remarks	
49.6	50.4	DIORITE DIKE					
		Medium grained, medium grey-green in colour		49.6-50.4		Mafics chloritized; minor carbonate-(quartz) vlt. with minor blebby Py	
				at 50.4		Lower contact at 45 degrees CA	
50.4	65.9	VOLCANIC SEDIMENT					
		Similar to volcanic sediments above; only minor fine-grained banded sediments		50.4-65.9		In sub-interval, minor carbonate vlt., subtle increase in quartz vlt., Py-chlorite on fractures, very minor Py diss.	
					45-60	Bedding in fine grained layers at 45-60 degrees CA	
				at 53.9	5	5 mm quartz vein at 5 degrees CA with locally abundant fine grained diss. Cp + Py	
				58.8-60.3		<u>Minor Fault</u> : broken core, some chloritic gouge	
				at 62.1		Trace Cp with Py-chlorite on fracture	
65.9	67.4	LIGHT GREEN DIKE					
		Similar to dike from 25.4-28.95; possibly a little coarser grained - dioritic			45	Upper & lower contacts sharp at 45 degrees; otherwise in sub-interval, mafics chloritized, minor blebby Py in occasional carbonate vlt., trace Py diss.	
67.4	72.5	VOLCANIC SEDIMENT					
		Similar to volcanic sediment units above		at 69.1	45	3 mm wide quartz-chlorite vlt. with trace Cp & minor Py; otherwise in sub-interval, minor quartz vlt. now > carbonate vlt.	

From (m)	To (m)	Lithology	Graphic Column	Structure, Alteration & Mineralization			Average Rec.
				Sub Interval	CA	Remarks	
72.5	73.6	LIGHT TO MEDIUM GREEN DIKE					
		Similar to 65.9-67.4; dioritic		72.5-73.6		Chlorite on fractures, minor blebby Py; possible trace Cp in occasional quartz vlt.	
				at 73.6	35	Lower contact sheared, chloritic at 35 degrees CA	
73.6	83.4	VOLCANIC SEDIMENT					
		Fine grained banded volcanic sediment > more massive volcanic sedimentary units			45-60	Banding in fine grained volcanic sediment units at 45-60 degrees CA; otherwise in sub-interval, minor quartz & carbonate vlts., occasional chlorite-Py on fractures	
				at 78.2	70	<i>Minor Fault:</i> 8 cm chloritic gouge	
				80.2-83.3	40	<i>Fault:</i> Broken core & minor chloritic gouge zones; upper contact sharp at 40 degrees CA; in broken core, Py common on chloritic fractures	
83.4	83.6	FELDSPAR PORPHYRY DIKE					
		20-30% anhedral feldspar phenocrysts to 5 mm & 10-15% chloritized mafic phenocrysts set in fine grained dark grey groundmass				Dike cut by several hair-line quartz vlts. at 40 degrees CA; also some Py fracture-filling	
				at 83.55		Cp+ on fracture with Py	
83.6	87.5	VOLCANIC SEDIMENT					
				83.6-87.0		Minor quartz vlts. now >carbonate vlts. (very few); Py-chlorite on fractures common; Py diss. locally 1%+; otherwise sub-interval mineralization as follows:	
				at 85.0	60	8 cm 10-20% blebby Py with minor Cp	
				at 86.5	55	2 mm quartz vlt. with Py, Cp? & minor grey sulphide (possibly MoS2 or galena); otherwise in general sub-interval, trace Cp associated with one or two qtz. vlts.	



METHODS AND SPECIFICATIONS FOR ANALYTICAL PACKAGE GROUP 1D & 1DX – ICP & ICP-MS ANALYSIS – AQUA REGIA

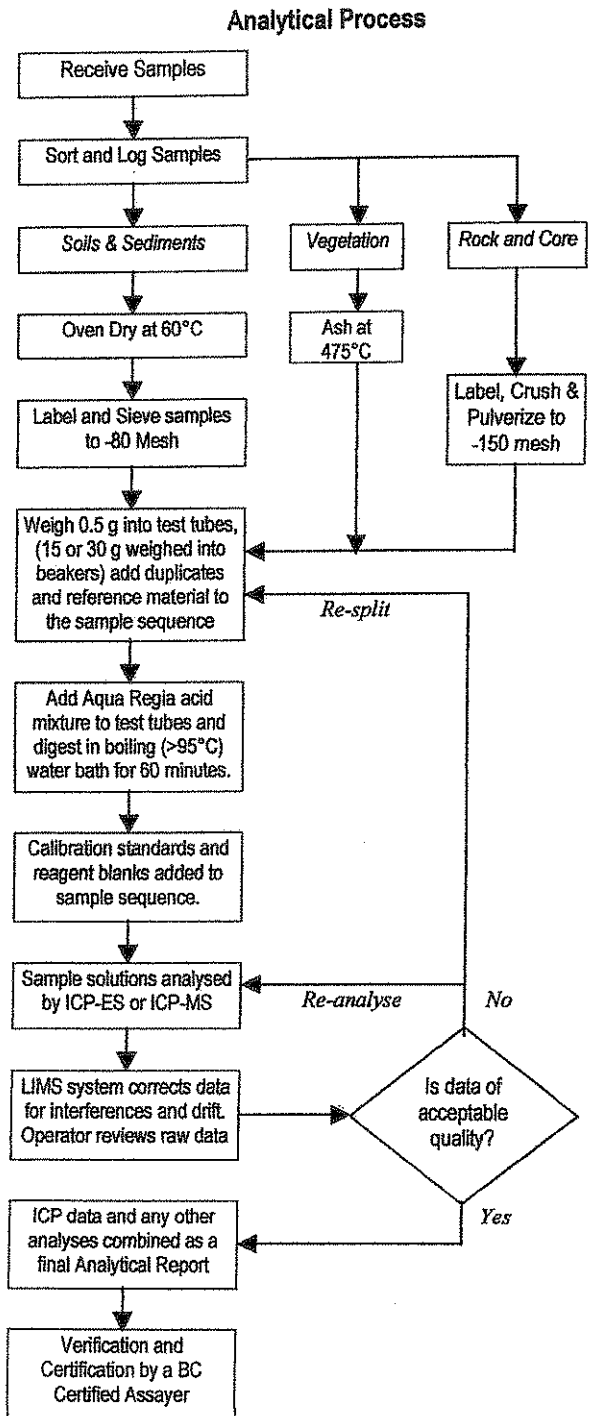

Comments

Sample Preparation

All samples are dried at 60°C. Soil and sediment are sieved to -80 mesh (-177 µm). Moss-mats are disaggregated then sieved to yield -80 mesh sediment. Vegetation is pulverized or ashed (475°C). Rock and drill core is jaw crushed to 70% passing 10 mesh (2 mm), a 250 g riffle split is then pulverized to 95% passing 150 mesh (100 µm) in a mild-steel ring-and-puck mill. Pulp splits of 0.5 g are weighed into test tubes, 15 and 30 g splits are weighed into beakers.

Sample Digestion

A modified Aqua Regia solution of equal parts concentrated ACS grade HCl and HNO₃ and de-mineralised H₂O is added to each sample to leach for one hour in a hot water bath (>95°C). After cooling the solution is made up to final volume with 5% HCl. Sample weight to solution volume is 1 g per 20 mL.

Sample Analysis

Group 1D: solutions aspirated into a Jarrel Ash AtomComp 800 or 975 ICP or Spectro Ciros Vision emission spectrometer are analysed for 30 elements: Ag, Al, As, Au, B, Ba, Bi, Ca, Cd, Co, Cr, Cu, Fe, K, La, Mg, Mn, Mo, Na, Ni, P, Pb, Sb, Sr, Th, Ti, U, V, W, Zn.

Group 1DX: solutions aspirated into a Perkin Elmer Elan 6000/9000 ICP mass spectrometer are analysed for 36 elements: Ag, Al, As, Au, B, Ba, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, Hg, K, La, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Se, Tl, Sr, Th, Ti, U, V, W, Zn.

Quality Control and Data Verification

An Analytical Batch (1 page) comprises 33 samples. QA/QC protocol incorporates a sample-prep blank (SI or G-1) carried through all stages of preparation and analysis as the first sample, a pulp duplicate to monitor analytical precision, a -10 mesh rejects duplicate to monitor sub-sampling variation (drill core only), two reagent blanks to measure background and aliquots of in-house Standard Reference Materials like STD DS6 to monitor accuracy.

Raw and final data undergo a final verification by a British Columbia Certified Assayer who signs the Analytical Report before it is released to the client. Chief Assayer is Clarence Leong, other certified assayers are Leo Arciaga, Marcus Lau, Ken Kwok and Jacky Wang.

ACME ANALYTICAL LABORATORIES LTD. Final Report
 Client: Orestone Mining Corp.
 File Created: 22-Apr-08
 Job Number: VAN06004977
 Number of Samples: 221
 Project: CAPTAIN
 Shipment ID:
 P.O. Number:
 Received: 01-Apr-08

Hole 08-02

Sample	Type	Method Analyte	WGHT Unit	1DX15 MDL	1DX15 Cu	1DX15 Pb	1DX15 Zn	1DX15 Ag	1DX15 Ni	1DX15 Co	1DX15 Mn	1DX15 Fe	1DX15 As	1DX15 U	1DX15 Au	1DX15 Th	1DX15 Sr	1DX15 Cd	1DX15 Sb	1DX15 Bi	1DX15 P	1DX15 La	1DX15 Cr	1DX15 Mg	1DX15 Ba	1DX15 Ti	1DX15 B	1DX15 Al	1DX15 Na	1DX15 K	1DX15 W	1DX15 Hg	1DX15 Sc	1DX15 Tl	1DX15 S	1DX15 Ga	1DX15 Se		
			KG	0.01	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.1	0.5	1	0.1	0.1	0.1	0.1	0.01	0.001	1	0.01	1	0.01	1	0.01	0.001	0.01	0.01	0.1	0.1	0.05	1	0.5			
812001	Drill Core	0.71	1.5	435.9	2	16	0.2	25.9	16.8	582	2.57	1.1	<-0.1	31.3	1.2	366	0.3	0.9	<-0.1	18	5.07	0.127	1	7	2.34	61	0.002	<1	0.33	0.033	0.18	<-0.1	0.02	3.7	<-0.1	1.51	1	3.1	
812002	Drill Core	0.72	0.7	4405.2	2.3	38	0.9	39.7	25.5	615	3.51	2.1	0.1	454.2	1	343	0.5	1.6	<-0.1	29	5.38	0.134	4	21	2.68	72	0.003	1	0.78	0.029	0.18	0.1	0.25	4.5	<-0.1	1.67	2	3.4	
812003	Drill Core	0.47	1.1	>10000.0	1.1	34	1.4	30	16.8	317	2.25	1.7	<-0.1	143.6	1.4	241	0.5	4.4	<-0.1	7	3.68	0.126	1	4	1.44	20	0.001	<1	0.15	0.056	0.05	<-0.1	0.21	3.7	<-0.1	1.03	<1	3.1	
812004	Drill Core	2.55	0.6	8235.2	2.1	35	1.4	34.6	27.8	603	2.98	2.1	0.1	919.1	0.8	368	0.3	2	0.1	17	5.74	0.142	3	5	2.5	57	0.002	<1	0.35	0.028	0.2	<-0.1	0.12	4.4	<-0.1	1.34	<1	3	
812005	Drill Core	4.18	0.8	381.4	2.8	22	0.2	25.8	24.8	586	3.07	2.8	0.1	47.5	1.7	343	0.2	1.2	0.1	20	4.29	0.127	4	8	1.79	108	0.007	2	0.76	0.026	0.34	0.1	0.01	2.3	<-0.1	1.51	1	1.7	
812006	Drill Core	4.4	0.4	70.9	1.9	21	<-0.1	18	12.5	599	2.45	1.5	0.1	10.4	1.9	236	<-0.1	0.8	<-0.1	23	3.23	0.132	5	22	1.39	163	0.006	<1	0.67	0.037	0.31	<-0.1	0.67	<-0.1	1.6	<-0.1	0.22	1	0.5
812007	Drill Core	2.76	0.9	133.4	2.8	24	<-0.1	15.2	14.4	717	2.81	1.5	0.1	12.8	1.5	351	0.1	0.9	<-0.1	19	3.91	0.125	4	10	1.55	113	0.01	2	0.8	0.032	0.34	<-0.1	0.01	2.2	<-0.1	0.54	1	<-0.5	
812008	Drill Core	4.07	0.9	175.3	3.4	44	<-0.1	16.6	18.5	1067	4	1.8	0.2	14	1.4	480	0.2	1.1	<-0.1	32	5.4	0.162	4	14	1.99	108	0.02	2	1.14	0.025	0.43	0.1	<-0.01	3.1	<-0.1	0.18	2	<-0.5	
812009	Drill Core	5.54	0.6	319.3	2.7	20	0.2	16.3	12.2	515	2.61	2.4	0.2	20	2.5	309	0.2	0.7	<-0.1	18	3.73	0.138	6	17	1.51	288	0.004	1	0.65	0.029	0.3	<-0.1	0.01	1.8	<-0.1	0.54	1	0.9	
812010	Drill Core	4.05	1	72.1	2.3	19	<-0.1	22.4	14.1	536	2.92	1.6	0.1	12.1	1.8	224	<-0.1	1	<-0.1	24	3.46	0.141	5	20	1.56	222	0.007	1	0.56	0.031	0.33	<-0.1	0.01	2	<-0.1	0.8	1	<-0.5	
812011	Drill Core	1.05	0.5	279.2	1.6	19	0.3	28.2	14.7	551	2.87	4	0.2	29.8	2.1	220	0.1	1.5	<-0.1	25	3.58	0.127	5	29	1.63	181	0.018	2	0.74	0.022	0.44	0.1	0.02	1.9	<-0.1	0.85	2	<-0.5	
812012	Drill Core	0.83	0.6	3231.2	2.7	34	1.1	33.2	17	560	3.27	3.5	0.2	674.8	1.2	313	0.4	0.9	<-0.1	83	5.1	0.152	5	34	2.06	112	0.034	<1	1.78	0.04	0.39	0.2	0.03	6.3	<-0.1	0.94	6	1.8	
812013	Drill Core	4.13	3.2	1030.1	1.4	33	0.4	19.7	14.7	444	2.6	4.9	0.2	143	1.7	218	0.1	1	<-0.1	63	4.18	0.128	4	32	1.93	69	0.018	1	2.07	0.057	0.27	0.3	0.07	5.3	<-0.1	0.87	6	1.7	
812014	Drill Core	3.92	1.2	374.8	1.6	27	0.2	32.3	19	513	2.88	3	0.2	67.6	1.7	290	0.2	0.6	0.2	61	4.63	0.128	4	42	2.18	52	0.009	2	1.57	0.059	0.21	0.2	0.03	5.8	<-0.1	0.98	5	2.6	
812015	Drill Core	4.39	1	219.2	2.5	62	<-0.1	29	23.9	1016	4.61	4.5	0.2	31.7	1.1	271	<-0.1	1.8	<-0.1	98	5.61	0.155	4	38	2.29	129	0.053	2	2.84	0.035	0.53	0.2	0.01	5.7	<-0.1	0.53	8	1.1	
812016	Drill Core	4.91	1.4	4265.1	0.9	51	0.9	22.6	15.5	435	1.84	1.8	0.2	427.5	1.2	146	0.4	2.1	<-0.1	42	4.16	0.094	2	33	1.61	71	0.02	1	1.68	0.048	0.22	0.2	0.28	3.5	<-0.1	0.54	5	2.4	
812017	Drill Core	4.02	1.2	945.7	1.3	25	0.2	24.2	22.8	372	2.04	4.6	0.3	80.3	1.6	122	0.1	2	<-0.1	56	2.85	0.147	3	35	1.28	108	0.086	2	1.46	0.073	0.34	0.3	0.06	3.5	<-0.1	1.01	4	2.1	
812018	Drill Core	5.97	2.2	162	1.9	82	<-0.1	18.3	26.4	911	4.21	6.8	0.2	91.4	0.8	167	<-0.1	4.7	<-0.1	101	2.82	0.176	3	31	2.5	318	0.216	2	2.74	0.031	1.72	0.2	0.01	2.1	0.3	0.41	6	0.9	
812019	Drill Core	4.68	1	350.3	1.8	76	<-0.1	17	24.2	810	4.05	7	0.2	300.6	0.9	172	<-0.1	3.5	<-0.1	104	3.01	0.178	3	28	2.38	229	0.2	2	2.71	0.047	1.7	0.2	0.03	2.5	0.4	0.48	7	<-0.5	
812020	Drill Core	1.99	1	3083.6	0.9	35	0.6	23.7	14.5	559	1.98	3.6	0.2	898	0.9	163	0.3	2.7	<-0.1	73	5.46	0.127	3	26	1.58	53	0.078	<1	1.51	0.043	0.3	0.3	0.14	4.2	<-0.1	0.58	6	1.6	
812021	Drill Core	6.53	0.8	3288	0.8	23	0.5	26.6	21.4	311	1.5	3.5	0.3	490.7	1.4	125	0.3	3.4	<-0.1	48	3	0.147	3	15	1	59	0.09	2	1.13	0.059	0.25	0.2	0.15	2.8	<-0.1	0.8	4	1.7	
812022	Drill Core	4.83	0.9	2105.7	0.7	14	0.3	16	10.7	269	1.04	3	0.2	512.8	1	111	0.2	2.1	<-0.1	47	2.73	0.164	3	14	0.85	88	0.099	3	1.14	0.063	0.32	0.2	0.09	2.3	<-0.1	0.41	3	1.2	
812023	Drill Core	5.57	0.8	1514.3	1.4	21	0.3	19.4	14.6	352	1.8	4.4	0.3	281.5	1.2	147	0.2	2.9	<-0.1	57	3.07	0.163	3	25	1.09	94	0.114	2	1.3	0.068	0.29	0.2	0.11	2.6	<-0.1	0.91	3	1.5	
812024	Drill Core	3.38	0.6	84.2	0.7	20	<-0.1	50.4	11.4	542	1.36	4.1	0.1	4.3	0.7	195	<-0.1	2	<-0.1	54	5.81	0.14	2	108	1.59	96	0.102	2	1.58	0.042	0.35	0.3	0.01	2.8	<-0.1	0.25	4	1.1	
812025	Drill Core	6.06	0.8	43	0.7	10	<-0.1	15	5.3	295	0.73	3.5	0.2	3.4	0.8	143	<-0.1	1.8	<-0.1	46	3.37	0.172	2	12	0.89	75	0.091	2	1.12	0.061	0.18	0.3	<-0.01	2.7	<-0.1	0.19	3	<-0.5	
812026	Drill Core	6.86	0.8	107.4	0.6	11	<-0.1	39.1	10.5	240	0.96	4.1	0.2	11.4	0.9	113	<-0.1	2.2	<-0.1	46	2.22	0.163	2	58	1.16	76	0.111	2	1.21	0.063	0.18	0.2	0.01	2.4	<-0.1	0.32	3	1.1	
812027	Drill Core	7.56	0.7	91.4	0.7	13	<-0.1	97.8	20.6	280	1.62	4.9	0.2	7.4	0.9	139	<-0.1	2.8	<-0.1	59	2.5	0.152	2	193	1.58	88	0.163	2	1.45	0.058	0.2	0.2	<-0.01	2.3	<-0.1	0.61	4	1.4	
812028	Drill Core	9.74	1.3	138.9	1.8	62	<-0.1	15.1	24.8	647	3.19	6.2	0.2	14	0.8	118	<-0.1	3.9	<-0.1	78	1.47	0.177	4	24	1.87	268	0.207	2	2.21	0.058	1.22	0.2	0.02	2.5	0.2	0.59	4	0.5	
812029	Drill Core	3.62	0.7	256.8	1.1	22	<-0.1	18.7	18.3	291	1.47	6.5	0.3	11.4	0.8	149	<-0.1	3.2	<-0.1	53	1.87	0.184	3	14	0.84	135	0.136	1	1.02	0.055	0.36	0.2	<-0.01	2.4	<-0.1	0.54	2	1.6	
812030	Drill Core	6.58	0.8	623.8	0.7	7	0.2	16	12.2	248	0.97	4.5	0.2	23	0.7	222	<-0.1	3.3	<-0.1	57	2.77	0.198	4	14	0.7	53	0.119	2	0.89	0.058	0.1	0.2	0.02	2.9	<-0.1	0.42	2	1.5	
812031	Drill Core	5.97	0.6	293.9	0.8	15	<-0.1	49.7	10.7	325	1.47	4.8	0.2	23	0.8	267	<-0.1	3.2	<-0.1	61	3.17	0.161	3	84	1.34	36	0.144	3	1.15	0.039	0.05	0.2	0.01	3.5	<-0.1	4	1.3		
812032	Drill Core	5.94	0.8	173.7	0.8	10	<-0.1	19.4	9.9	324	1.05	4.2	0.2	3.6	0.8	207	<-0.1	2.4	<-0.1	66	3.57	0.128	2	44	1.06	48	0.107	2	1.14	0.061	0.1	0.2	<-0.01	3.5	<-0.1	0.35	3	1.2	
812033	Drill Core	5.6	0.5	515.8	0.9	17	<-0.1	48.2	23.8	363	2.27	5.6	0.2	25.1	0.8	191	<-0.1	1.5	<-0.1	61	3.79	0.153	2	58	1.64	40	0.096	2	1.59	0.054	0.11	0.2	0.02	3.1	<-0.1	1.09	4	4.6	
812034	Drill Core	5.56	0.4	128.9	1	18	<-0.1	36.4	14.1	512	2.13	2.4	0.2	11.6	0.6	202	<-0.1	1.6	<-0.1	77	6.18	0.129	2	78	2.31	69	0.098	2	2.15	0.035	0.21	0.3	<-0.01	4.6	<-0.1	0.39	5	0.7	
812035	Drill Core	5.74	0.5	107.7	0.9	14	<																																

812074	Drill Core	5.85	1.7	106.4	1.6	44	<0.1	37.6	28.3	911	5.19	5.4	0.2	<0.5	0.9	218	0.1	0.2	0.1	189	5.3	0.122	3	91	2.92	65	0.089	<1	3.07	0.023	0.24	<0.1	<0.01	12.2	<0.1	0.48	11	0.8	
812075	Drill Core	6.31	1.7	251.7	2.4	41	<0.2	26.6	50	775	5.4	18.5	0.2	3.3	0.5	196	0.3	0.8	0.2	182	3.38	0.129	4	35	2.78	136	0.165	<1	2.94	0.039	0.32	0.2	<0.01	12.2	<0.1	1.25	9	2.1	
812076	Drill Core	6.73	3	134.4	1.3	42	<0.1	63	35.7	691	4.2	11.3	0.2	1.2	0.5	165	0.2	0.4	<0.1	141	3.45	0.112	2	215	3.09	311	0.181	1	2.93	0.028	0.88	0.2	<0.01	12.1	0.1	0.28	8	0.7	
812077	Drill Core	8.73	1.8	236.2	1.5	46	<0.1	55.8	38.8	636	4.58	8.5	0.2	1.9	0.7	143	0.1	0.4	<0.1	143	2.44	0.124	3	141	2.78	350	0.202	<1	2.82	0.035	1.18	0.2	<0.01	8.6	0.2	0.65	7	1.7	
812078	Drill Core	6.06	1.5	431.6	3.4	54	0.2	65.4	69.5	629	4.6	16.1	0.2	0.1	16	0.1	103	0.2	0.7	<0.1	103	2.57	0.124	2	151	2.23	222	0.174	<1	2.23	0.025	0.88	0.2	<0.01	5.2	0.2	1.48	6	4.2
812079	Drill Core	6.69	45.4	728.1	1.6	44	0.4	62.9	32.5	798	4.46	5.9	0.3	7.6	0.9	223	0.3	0.3	<0.1	131	4.21	0.138	4	186	2.68	298	0.191	<1	2.54	0.035	0.9	0.2	<0.01	10.6	0.1	0.61	6	1.6	
812080	Drill Core	6.78	1.4	105.9	1.6	26	0.1	43.5	25.4	511	2.88	9.1	0.3	5.2	0.9	204	0.1	0.3	<0.1	100	3.4	0.127	3	130	1.77	130	0.169	<1	1.79	0.032	0.46	0.2	<0.01	6.8	<0.1	0.22	5	0.6	
812081	Drill Core	7.04	1.5	117.5	1.6	21	<0.1	33.5	28.2	398	2.36	9.3	0.3	14	0.9	224	0.1	0.5	<0.1	88	2.86	0.134	3	112	1.27	56	0.193	<1	1.42	0.035	0.3	0.2	<0.01	5.2	<0.1	0.32	4	0.8	
812082	Drill Core	7.78	1	185.1	1.9	44	<0.2	28.7	29.5	767	4.18	6	0.3	3	0.9	316	0.1	0.3	<0.1	155	4.23	0.149	4	97	2.76	102	0.156	<1	2.37	0.034	0.42	0.2	<0.01	16.7	<0.1	0.41	7	0.8	
812083	Drill Core	5.66	1.3	169.9	1.2	26	0.2	36.4	25.3	412	2.53	7.4	0.3	3.7	0.8	154	0.1	0.4	<0.1	93	2.26	0.127	3	125	1.66	113	0.156	<1	1.59	0.027	0.59	0.2	<0.01	6	<0.1	0.25	4	0.6	
812084	Drill Core	6.55	4.4	486.3	2	59	0.7	40.7	44.8	1062	5.78	8	0.2	1.2	0.8	344	0.4	0.3	<0.1	210	6.16	0.161	4	157	3.77	259	0.113	1	3.48	0.028	0.88	0.1	<0.01	18.5	<0.1	0.56	9	0.9	
812085	Drill Core	5.51	2.6	172.1	1.7	61	0.2	35.7	31.9	1332	5.3	6.1	0.2	4.8	0.6	296	0.2	0.2	<0.1	187	8.42	0.135	3	147	3.69	245	0.1	<1	3.54	0.02	0.73	0.1	<0.01	14.7	<0.1	0.41	9	0.6	
812086	Drill Core	6.93	2.3	633.8	1.9	44	0.4	28.7	66.6	502	3.98	7.6	0.3	25.5	0.4	205	0.4	0.2	0.3	108	2.39	0.148	3	60	1.66	122	0.118	<1	1.85	0.032	0.61	0.2	<0.01	5.2	<0.1	1.2	5	3.1	
812087	Drill Core	6.9	1.4	167.2	1.5	36	<0.1	22.8	23.2	484	3.15	3.7	0.4	5.9	1.2	190	0.1	0.2	<0.1	113	2.39	0.15	4	63	1.71	103	0.189	1	1.86	0.047	0.54	0.2	<0.01	6.3	<0.1	0.26	6	<0.5	
812088	Drill Core	6.12	1.3	182.5	1.3	37	0.1	25.4	29	759	3.63	3.8	0.4	4.8	1	279	0.1	0.3	<0.1	121	4.22	0.151	4	69	1.99	225	0.197	1	2.19	0.054	0.88	0.2	<0.01	9.7	<0.1	0.34	5	0.9	
812089	Drill Core	5.44	2	324.9	1.6	33	0.2	32.2	34.8	584	3.68	6.5	0.2	13.9	0.6	245	0.1	0.2	<0.1	117	3.46	0.136	3	98	1.94	179	0.19	<1	1.96	0.044	0.54	0.2	<0.01	9.5	<0.1	0.66	5	1.5	
812090	Drill Core	5.86	5.3	204.6	1.8	45	0.6	32.3	34.8	870	4.42	6.9	0.3	3.3	0.9	409	0.2	0.2	<0.1	187	5.38	0.119	4	142	3.88	61	0.11	<1	2.95	0.028	0.27	0.1	<0.01	18	<0.1	0.38	9	1	
812091	Drill Core	5.92	1.2	353.1	1.5	43	0.3	46.7	44.5	811	4.27	4.7	0.2	7.4	0.7	336	0.3	0.2	<0.1	151	4.9	0.117	3	157	2.79	266	0.184	<1	2.54	0.04	0.73	0.2	<0.01	14.4	<0.1	0.56	7	1.3	
812092	Drill Core	6.42	5.1	867	1.5	58	0.7	42.4	70.4	911	5.48	9.4	0.2	18.1	0.7	272	0.7	0.1	0.2	188	4.82	0.101	3	123	3.43	134	0.104	<1	3.13	0.033	0.35	0.1	<0.01	15.5	<0.1	1.24	9	2.8	
812093	Drill Core	6.77	1	1197.8	1.4	53	0.9	56.4	53.9	781	4.95	5.9	0.2	76.8	0.5	264	0.9	0.2	0.1	147	4.37	0.113	2	114	2.82	163	0.145	<1	2.6	0.034	0.42	0.2	<0.01	10.8	<0.1	1.18	7	3.3	
812094	Drill Core	6.39	1.8	347.1	1.7	39	0.2	39.3	37.3	552	3.92	3.3	0.2	16	0.5	233	0.3	0.3	<0.1	152	2.7	0.105	2	90	2.28	216	0.197	<1	2.29	0.035	0.61	0.2	<0.01	9.8	<0.1	0.53	6	1.4	
812095	Drill Core	9.51	1.1	353.7	1.3	32	0.2	36.3	29	531	3.35	3.3	0.2	18.8	0.5	223	0.2	0.2	<0.1	125	3.12	0.091	2	122	1.86	215	0.206	<1	1.91	0.033	0.65	0.2	<0.01	8.4	<0.1	0.35	5	0.8	
812096	Drill Core	5.63	0.9	328.3	1.2	34	0.2	27.4	32	451	3.81	2.3	0.2	20.6	0.6	188	0.2	0.4	<0.1	149	2.23	0.084	2	31	1.63	358	0.253	<1	2	0.037	1	0.2	<0.01	5.9	0.1	0.4	5	0.8	
812097	Drill Core	4.93	0.8	170	1.1	36	<0.1	23.4	33.1	521	3.78	2	0.2	3.3	0.6	223	<0.1	0.2	<0.1	152	2.39	0.103	2	43	1.77	396	0.222	<1	2.24	0.049	1.11	0.2	<0.01	5.4	0.1	0.19	6	0.5	
812098	Drill Core	5.74	1	404.3	1.3	41	0.2	29.4	42.6	560	4.37	4.1	0.2	14.4	0.7	217	0.3	0.4	<0.1	176	2.76	0.104	2	48	1.91	368	0.246	<1	2.28	0.044	1.05	0.2	<0.01	6.8	<0.1	0.77	6	1.5	
812099	Drill Core	3.22	1.3	217.7	1.5	62	0.2	40.4	40.1	1087	6.18	6.2	0.2	6.1	0.4	267	0.1	0.2	0.1	211	4.48	0.134	3	106	4	236	0.164	2	3.72	0.026	0.67	0.2	<0.01	15.3	<0.1	1.1	10	1.1	
812100	Drill Core	6.39	2.6	327.6	1.5	42	0.2	34.8	34.5	767	4.39	6.2	0.3	9.8	1	261	0.2	0.3	<0.1	167	3.48	0.127	4	79	2.6	297	0.208	<1	2.66	0.048	0.89	0.2	<0.01	14.1	<0.1	0.83	7	1.1	
812101	Drill Core	5.65	2.5	260.3	1.5	44	0.5	32	30.8	916	3.84	8.7	0.2	4.3	0.8	354	0.3	0.3	<0.1	134	5.69	0.107	3	141	2.61	129	0.11	<1	2.33	0.047	0.32	0.2	<0.01	14.2	<0.1	0.73	6	0.7	
812102	Drill Core	6.97	1	149.4	1.6	45	0.1	34.4	30.5	1067	5.16	5.5	0.1	4.8	0.4	343	0.1	0.1	0.1	208	6.25	0.102	3	133	3.29	43	0.093	<1	3.08	0.031	0.09	0.1	<0.01	19.5	<0.1	0.73	9	1	
812103	Drill Core	6.44	1.1	381.6	1.6	37	0.3	33.1	36.7	813	4.73	6.5	0.2	6.6	0.6	342	0.2	0.3	<0.1	172	4.57	0.15	3	58	2.72	93	0.147	<1	2.51	0.036	0.2	0.2	<0.01	12.8	<0.1	1.1	7	1.4	
812104	Drill Core	6.04	0.5	268.2	1.2	38	0.1	40	36.8	648	4.13	3.9	0.1	3.2	0.3	239	<0.1	0.2	<0.1	140	2.76	0.133	2	75	2.41	74	0.125	<1	2.21	0.044	0.16	0.1	<0.01	11.5	<0.1	0.66	5	0.9	
812105	Drill Core	6.22	0.6	212.2	1.9	46	0.2	43.1	35.1	955	5.06	7.1	0.2	4	0.6	394	<0.1	0.3	<0.1	196	5.5	0.125	3	98	3.08	95	0.128	<1	2.68	0.057	0.2	0.2	<0.01	18.2	<0.1	0.93	8	1.2	
812106	Drill Core	6.03	0.8	176.4	0.8	31	<0.1	39.1	34.4	661	3.9	5	<0.1	0.9	0.3	200	<0.1	0.3	0.1	120	3.21	0.117	2	79	2.15	104	0.112	<1	2.03	0.042	0.19	0.2	<0.01	8.6	<0.1	0.89	5	1.2	
812107	Drill Core	6.16	0.8	220.4	1.9	33	0.3	37.3	34.1	763	4.81	5.4	0.1	3.5	0.3	275	0.1	0.3	0.2	181	4.04	0.122	3	83	2.62	57	0.116	<1	2.42	0.056	0.12	0.2	<0.01	12.1	<0.1	1.45	7	1.9	
812108	Drill Core	6.37	0.4	142.9	0.9	27	<0.1	37.6	36	544	3.73	5.1	0.1	1.8	0.4	216	<0.1	0.4	<0.1	105	2.15	0.121	2	68	2.02	87	0.139	<1	1.82	0.062	0.13	0.1	<0.01	8.6	<0.1	0.8	4	0.9	
812109	Drill Core	4.68	1.7	537.7	2.6	73	0.6	14.8	24.9	1477	5.13	5	0.4	14.5	1.5	400	<0.1	0.3	0.9	127	3.45	0.193	6	28	2.47	96	0.052	2	2.8	0.041	0.33	0.2	<0.01	6.9	<0.1	0.08	9	<0.5	
812110	Drill Core	5.93	1.6	563.1	2.3	73	0.7	14.1	24.9	1577	5.37	5.5	0.4	9.8	1.6	419	<0.1	0.4	1	134	3.56	0.2	6	29	2.54	92	0.04												

812162	Drill Core	3.99	1.1	532.9	3	23	0.6	9.4	12.5	652	2.27	2.4	0.5	100.6	2.1	174	0.2	0.4	<-0.1	21	2.88	0.124	5	12	0.95	100	0.01	2	0.58	0.035	0.37	<-0.1	<-0.01	1.6	<-0.1	0.27	2	<-0.5
812163	Drill Core	3.1	1.1	205.4	22.4	52	1.1	8.2	21.5	1591	3.65	1.8	1.6	809.7	1.3	449	0.5	0.9	0.1	26	5.26	0.197	4	4	1.41	163	0.005	2	1.14	0.016	0.37	0.3	0.02	2	<-0.1	1.39	2	0.7
812164	Drill Core	5.7	1.3	409	326.4	447	2.3	19	16.9	2011	2.93	11.5	0.7	120.3	2	371	7.9	0.8	1.5	34	5.21	0.109	6	8	1.01	101	0.002	1	0.84	0.01	0.28	<-0.1	0.13	2	<-0.1	2.01	2	2.3
812165	Drill Core	5.42	1.6	156.8	2.5	59	0.2	28	15.7	645	3.1	4.2	0.7	20.4	2.6	151	<-0.1	0.5	<-0.1	83	2.81	0.129	7	47	1.39	171	0.041	3	1.83	0.068	0.59	<-0.1	0.01	4.6	<-0.1	0.31	6	<-0.5
812166	Drill Core	4.87	1.3	289.9	4.7	55	0.2	28.2	16.9	624	2.6	7.2	0.8	22.1	2.6	146	0.2	0.8	<-0.1	86	2.41	0.142	7	48	1.17	342	0.089	2	1.61	0.042	0.74	<-0.1	0.42	4.3	0.1	0.21	5	<-0.5
812167	Drill Core	5.64	1.2	200.4	12	89	0.8	24.6	19.7	1218	3.54	21.9	0.5	32	1.7	486	1	0.5	0.2	36	4.96	0.117	3	10	1.98	131	0.005	1	1.15	0.034	0.33	0.2	<-0.01	4.1	<-0.1	0.97	3	<-0.5
812168	Drill Core	4.22	0.8	135.2	5.1	39	0.4	28.7	17.2	1161	3.18	6	0.4	15.8	2.6	325	0.2	0.4	0.1	65	4.26	0.143	4	22	1.51	73	0.005	1	1.54	0.042	0.19	<-0.1	<-0.01	4.3	<-0.1	1.28	4	1
812169	Drill Core	6.19	1	111.5	4.2	31	0.4	24	17.4	1201	2.85	8.2	0.5	28.4	2.8	288	0.2	0.4	0.1	31	4.02	0.138	4	13	1.39	86	0.004	1	1.12	0.036	0.3	<-0.1	<-0.01	2.5	<-0.1	0.93	2	<-0.5
812170	Drill Core	5.32	1.9	501.5	5	18	1.6	29.9	18.9	1561	3	6.7	0.6	25.5	1.4	432	0.2	0.5	<-0.1	24	8.19	0.121	4	25	1.33	95	0.004	<-1	0.52	0.03	0.21	<-0.1	<-0.01	3	<-0.1	1.1	1	0.8
812171	Drill Core	5.45	0.8	133.1	8.3	56	0.4	18.9	26.1	1286	4.14	4.5	0.4	16.3	1	529	0.2	0.4	<-0.1	54	5.21	0.144	3	21	2.4	169	0.008	1	1.32	0.017	0.29	0.1	<-0.01	4.3	<-0.1	0.34	3	<-0.5
812172	Drill Core	5.21	1.3	168.9	10.1	144	0.3	15.4	21.2	1046	3.62	25.9	1	14.4	1.5	351	0.3	2.6	0.2	23	4.06	0.144	4	9	1.82	127	0.009	2	0.92	0.024	0.31	0.2	0.07	2.8	0.1	0.5	2	<-0.5
812173	Drill Core	6.13	1.8	423.8	22.2	101	0.8	11	13.6	630	2.78	34.4	0.7	17.8	2.3	239	0.8	2.1	0.4	29	2.44	0.114	4	7	1.07	135	0.01	2	1.08	0.044	0.31	0.2	0.03	2.1	<-0.1	0.88	3	<-0.5
812174	Drill Core	3.04	57	259.4	9.2	65	0.4	9.1	9.1	657	2.54	12.9	0.6	41.5	2	338	0.5	0.3	0.1	19	2.37	0.114	4	6	0.96	114	0.016	1	0.78	0.049	0.34	0.2	0.01	1.9	<-0.1	0.52	2	<-0.5
812175	Drill Core	2.52	24.9	2193.7	18.9	130	2.9	23.3	52.1	1051	9.2	47.8	1	255.4	1.1	390	1.1	0.8	0.2	77	3.01	0.092	2	22	2.1	50	0.085	<-1	1.78	0.021	0.74	0.1	<-0.01	6	0.2	4.84	5	<-0.5
812176	Drill Core	6.08	4	89	4.5	57	0.2	10.2	14.7	678	2.72	9.1	0.7	257.7	2.4	251	0.1	0.4	<-0.1	38	2.74	0.117	4	11	1.1	126	0.011	1	1.13	0.037	0.27	<-0.1	<-0.01	2.3	<-0.1	0.46	4	<-0.5
812177	Drill Core	5.71	1.8	123.1	3.9	56	0.1	11.9	14.4	711	2.62	7	0.7	24.4	2.7	215	0.2	0.3	<-0.1	55	2.71	0.119	6	17	1.04	161	0.136	1	1.27	0.037	0.99	<-0.1	<-0.01	2.4	0.1	0.23	4	<-0.5
812178	Drill Core	5.35	1	85.7	3.5	42	<-0.1	20.8	13.9	749	3.09	6.5	0.7	11.5	2.3	262	0.1	0.4	<-0.1	76	3.03	0.119	5	38	1.28	205	0.168	1	1.48	0.044	1.19	<-0.1	<-0.01	3.7	0.2	0.18	5	<-0.5
812179	Drill Core	9.16	1.1	100.9	5.3	57	<-0.1	11.6	12.5	724	2.68	8.2	0.6	12.7	2.6	279	0.2	0.4	<-0.1	47	2.97	0.107	5	16	0.98	144	0.114	1	1.05	0.036	0.81	<-0.1	<-0.01	2.2	0.1	0.45	3	<-0.5
812180	Drill Core	4.88	1.3	100.2	5.7	57	<-0.1	11.6	13.1	732	2.74	3.1	0.6	5.3	2.8	249	0.2	0.3	<-0.1	55	2.99	0.115	6	19	0.96	185	0.149	2	1.34	0.045	1.1	<-0.1	<-0.01	2.4	0.2	0.15	4	<-0.5
812181	Drill Core	6.65	1.1	82.5	2.2	45	<-0.1	12.3	12.9	608	2.43	5.1	0.6	10.4	2.8	140	0.1	0.6	<-0.1	51	2.42	0.114	6	17	1.03	156	0.106	2	1.4	0.039	0.98	<-0.1	<-0.01	2.2	0.1	0.46	4	<-0.5
812182	Drill Core	3.79	1	191.4	2.9	59	0.2	16.2	14.4	698	2.78	6.2	0.5	9.5	2.3	196	0.2	0.6	<-0.1	60	3.12	0.113	6	24	1.26	147	0.073	<-1	1.58	0.04	0.86	<-0.1	0.01	2.9	0.1	0.48	5	<-0.5
812183	Drill Core	5.02	1	249.4	1500.8	523	0.9	13.2	13	498	2.68	7.3	0.9	35.3	2.8	92	5	1	0.5	49	1.34	0.116	5	18	1.02	129	0.078	2	1.46	0.033	0.95	0.1	0.2	1.9	0.1	0.73	4	0.5
812184	Drill Core	2.13	7.7	3259.5	8649.5	3236	9.1	8.9	10.3	713	3.36	9	0.5	556.8	2.1	169	37.6	1.3	14.4	50	3.41	0.078	4	14	0.69	77	0.022	2	1.05	0.055	0.22	0.1	1.58	2.4	<-0.1	2.15	5	4.6
812185	Drill Core	2.59	1.9	178.7	14	173	0.3	12.8	17.9	501	3.29	8.3	0.5	153.8	2.6	108	0.3	0.6	0.2	57	1.86	0.122	5	17	1.09	96	0.064	1	1.47	0.034	0.69	0.1	0.02	2.5	<-0.1	1.33	6	<-0.5
812186	Drill Core	2.74	0.7	206.5	39.9	117	0.2	14.2	12.6	466	2.79	4.3	0.7	40.5	3.3	109	0.8	0.6	<-0.1	57	2.13	0.125	6	20	1.16	152	0.074	2	1.72	0.043	0.9	<-0.1	0.02	3.2	0.1	0.51	5	<-0.5
812187	Drill Core	1.6	1.3	201.6	4.9	76	0.2	12.8	9.7	478	1.87	4	0.5	13.4	3.1	235	0.2	0.4	<-0.1	58	2.45	0.121	6	20	1.17	65	0.016	1	1.24	0.034	0.3	0.1	0.01	3.7	<-0.1	0.33	5	<-0.5
812188	Drill Core	6.35	0.8	959.3	496.9	235	1.1	13.7	14.8	500	3.29	6.3	0.5	78.9	2.8	134	1.8	0.9	0.3	63	2.04	0.114	6	20	1.13	165	0.099	2	1.53	0.044	0.98	0.1	0.14	2.7	0.1	1	5	1.5
812189	Drill Core	5.76	1.5	348.6	61.9	152	0.3	26.8	30.3	967	4.01	9.8	0.3	26.9	1.3	353	0.6	0.8	<-0.1	110	3	0.156	6	63	2.43	253	0.147	<-1	2.63	0.019	1.66	0.1	0.06	7.1	0.2	0.25	6	0.6
812190	Drill Core	5.06	0.5	85.4	10.8	201	0.1	11.1	7.2	393	2.26	5.1	0.4	10.1	2.5	92	0.8	0.4	<-0.1	61	1.99	0.118	4	16	1.22	174	0.045	1	1.47	0.059	0.6	<-0.1	0.04	3	<-0.1	0.33	5	<-0.5
812191	Drill Core	1.8	0.5	1246.6	>10000.0	>10000.0	8.3	16.5	25.5	413	10.97	24.3	0.5	227.1	1.7	65	111.5	4.9	2.5	50	1.64	0.116	3	14	0.96	46	0.105	3	1.35	0.031	0.61	0.1	12.2	1.7	0.2	>10.00	4	5.2
812192	Drill Core	5.83	0.5	281.2	644.1	614	0.8	12.4	11.1	475	2.74	7.7	0.5	1883.1	2.4	109	6.5	0.9	0.1	61	2.05	0.123	4	20	1.09	141	0.089	2	1.48	0.052	0.98	0.1	0.52	2.7	0.1	1	5	0.8
812193	Drill Core	5.53	1	355.6	1437.6	801	1	14.1	12.6	434	2.97	6.3	0.5	286.2	2.5	91	10.6	1	0.3	67	1.77	0.12	4	19	1.1	114	0.083	1	1.46	0.051	0.99	0.1	0.73	2.3	0.1	1.23	5	3.7
812194	Drill Core	5.41	1.2	335.3	7.3	86	0.3	11.9	10.2	384	2.11	4.4	0.5	132.2	2.7	96	0.1	0.5	<-0.1	70	1.93	0.123	4	19	1.16	96	0.064	2	1.42	0.076	0.64	0.1	0.03	3.9	<-0.1	0.4	6	<-0.5
812195	Drill Core	4.91	1.1	274.1	19.1	62	0.2	12.9	9.9	341	1.96	4	0.5	35	2.7	91	0.2	0.5	0.1	70	1.98	0.129	4	20	1.21	99	0.057	2	1.35	0.054	0.72	0.1	0.02	3.5	<-0.1	0.38	5	<-0.5
812196	Drill Core	4.62	0.6	337.4	63	70	0.2	13.7	12.1	429	2.48	6.3	0.4	28.7	2.5	88	0.3	0.7	0.1	58	1.72	0.123	3	18	1.22	155	0.098	2	1.62	0.054	1.16	<-0.1	0.01	2.8	0.1	0.36	5	0.8
812197	Drill Core	4.98	0.8	75.2	4.4	48	0.1	12	8.9	517	2.35	4.2	0.5	140.9	2.7	213	<-0.1	0.6	<-0.1	60	3.5	0.115	5	19	1.12	115	0.015	2	1.41	0.048	0.27	<-0.1	0.02	3.6	<-0.1	0.4	5	<-0.5
812198	Drill Core	6.78	0.6	347.4	4.9	23	0.1	15.3	17.3	405	2.63	6.5	0.3	22.7	2	116	<-0.1	1.5	<-0.1	62	1.93	0.143	3	23	1.36	222	0.16	2	1.74	0.053	1.29	<-0.1	0.02	2.4	0.2	0.43	5	0.7

Reference Materials																																							
STD DS7	STD	21.8	117.3	65.3	396	0.9	59.1	11.7	682	2.54	50.7	5.1	141.8	4.8	64	6.9	6.3	4.8	100	0.93	0.083	12	182	1.13	392	0.151	39	1.08	0.087	0.52	3.5	0.19	2.7	4.3	0.2	5	3.5		
STD DS7	STD	21.1	115.8	68.8	394	0.8	58.3	11.6	673	2.52	49.6	4.9	58.7	4.7	66	6.7	6.5	4.7	98	0.91	0.082	12	184	1.11	407	0.151	38	1.07	0.084	0.51	3.4	0.19	2.7	4.1	0.2	5	3.4		
STD DS7	STD	20.6	114	74.6	381	0.8	58.2	11.2	675	2.53	49.2	5.5	59.5	5.3	75	6.5	6.3	4.7	96	0.97	0.08	14	186	1.14	393	0.16	35	1.17	0.094	0.53	3.7	0.19	2.9	4.1	0.18	5	3.3		
STD DS7	STD	21.6	114.4	75.7	387	0.8	58.3	10.9	688	2.51	49.6	5.6	62.8	5.5	79	6.6	6.5	4.6	96	1	0.081	15	194	1.14	411	0.164	37	1.22	0.099	0.52	3.7	0.18	3.1	4.1	0.19	5	3.2		
STD DS7	STD	22.7	123.2	75.1	413	0.9	60.8	11.9	689	2.61	53.5	5.6	84.8	5.1	72	7.2	6.9	5.1	102	0.98	0.087	13	185	1.19	422	0.156	37	1.14	0.091	0.54	3.8	0.21	2.8	4.4	0.21	5	3.4		
STD DS7	STD	18.7	99.5	67.5	380	0.8	49.9	9.2	644	2.4	49.2	4.7	87.2	4.3	76	6.2	6.3	4.7	84	0.9	0.076	13	188	1.1	412	0.132	39	1.09	0.094	0.56	3.4	0.19	2.4	4	0.18	5	3.1		
STD DS7	STD	18.2	106.5	68.7	392	0.8	53.3	9.5	677	2.44	47.7	4.6	57.3	4.4	77	5.8	6.4	4.6	84	0.91	0.073	13	179	1.1	406	0.136	37	1.09	0.09	0.53	3.5	0.19	2.5	4	0.18	5	3.8		
STD DS7	STD	19.9	105.5	69	419	0.8	52.3	9.6	679	2.49	49.8	4.8	89.8	4.4	70	6.5	6.5	4.8	83	0.9	0.074	12	174	1.1	416	0.125	40	1.08	0.083	0.53	3.7	0.2	2.3	4	0.2	5	3.6		
STD DS7	STD	21.6	110.8	81.3	434	0.9	55.9	9.6	702	2.6	54	5.6	68.9	5	78	6.5	6.6	5.2	93	0.95	0.077	13	193	1.16	453	0.139	41	1.13	0.093	0.55	3.9	0.2	2.4	4.5	0.21	6	4.9		
STD DS7	STD	23.1	119.9	75.6	400	0.9	61.4	10.2	696	2.57	47.6	5.4	72.3	5	71	6.4	6.4	5.2	98	0.94	0.072	13	205	1.15	418	0.151	38	1.11	0.093	0.52	3.8	0.21	2.5	4.4	0.19	5	3.6		
STD DS7	STD	21.7	113	69.7	388	0.9	58	10	699	2.44	46.4	5	68	4.6	70	6.8	6.2	4.8	96	0.93	0.074	12	196	1.12	405	0.146	39	1.1	0.086	0.49	3.6	0.2	2.6	4.1	0.19	5	3.2		
STD DS7	STD	22.2	116.3	76.5	384	0.8	59.1	10.5	671	2.5	48.7	5.4	67.8	5.2	76	6.6	6.6	4.6	92	0.98	0.081	14	186	1.13	415	0.155	37	1.16	0.095	0.51	3.8	0.18	2.9	4.1	0.18	5	3.4		
STD DS7	STD	21.6	123.9	77.8	397	0.8	58.9	10.5	696	2.58	50.9	5.8	71.5	5.6	78	6.9	6.6	4.8	94	1.02	0.082	15	189	1.17	438	0.163	37	1.2	0.097	0.54	3.8	0.2	3	4.4	0.19	6	3.4		
STD DS7	STD	21.5	116.3	77.5	414	0.9	59.5	9.8	673	2.6	54.1	5.4	66.3	4.9	75	7	6.6	5.3	89	0.93	0.075	13	185	1.13	414	0.146	38	1.13	0.094	0.57	3.8	0.21	2.6	4.2	0.19	5	3.3		
STD DS7	STD	20.1	112.7	69.3	390	0.8	55.5	9	648	2.47	50.3	5.1	64.5	4.5	73	6.5	6.3	4.6	86	0.91	0.074	13	176	1.07	397	0.145	34	1.12	0.09	0.51	3.5	0.17	2.5	4.1	0.18	5	2.7		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
BLK	BLK	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.1	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5		
Prep Wash																																							
G1	Prep Blank	1.1	1.1	2.8	48	<0.1	7	4.3	557	1.82	<0.5	2.4	4.9	4.4	62	<0.1	<0.1	<0.1	38	0.54	0.078	6	11	0.58	222	0.11	2	1.37	0.096	0.55	0.2	<0.01	1.9	0.4	<0.05	5	<0.5		
G1	Prep Blank	0.7	1.2	3	45	<0.1	5.9	4.3	577	1.9	<0.5	2.6	2.3	4.8	61	<0.1	<0.1	<0.1	39	0.56	0.079	7	9	0.6	217	0.116	3	1.26	0.095	0.54	<0.1	<0.01	1.8	0.3	<0.05	5	<0.5		