374000 E 376000 E 378000 E 380000 E 382000 E 384000 E 386000 E 388000 E

6296000 N 6294000 N 6292000 N 6290000 N 6288000 N 6286000 N 6284000 N 6282000 N

BC Geological Survey
Assessment Report
30282m

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	30 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM^V
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◕	50–100 siemens
5	◑	20–50 siemens
4	◔	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly identifier → Interpretive symbol (e.g. c lu)


Depth is greater than
- 15 m
: 30 m
⋮ 45 m
⋮ 60 m

Inphase and Quadrature of coaxial coil is greater than
. 5 ppm
.. 10 ppm
... 15 ppm
.... 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

nT
57483
57329
57230
57153
57091
57044
57006
56974
56949
56923
56901
56882
56864
56847
56831
56817
56803
56790
56777
56765
56755
56745
56736
56728
56720
56714
56707
56702
56695
56689
56683
56677
56671
56664
56658
56651
56643
56635
56627
56618
56610
56601
56592
56583
56574
56565
56555
56546
56536
56525
56512
56499
56483
56466
56450
56429
56407
56381
56350
56315
56273
56218
56115

FLIGHT LINES WITH EM ANOMALIES




TOTAL MAGNETIC FIELD CONTOURS

- ——— . . . . . 250 nT
- ——— . . . . . 50 nT
- ——— . . . . . 10 nT
- — — — — . . . . . 5 nT
- ⬭ . . . . . magnetic low

Magnetic inclination within the survey area: 74 degrees N
Magnetic declination within the survey area: 22 degrees E

LOCATION MAP

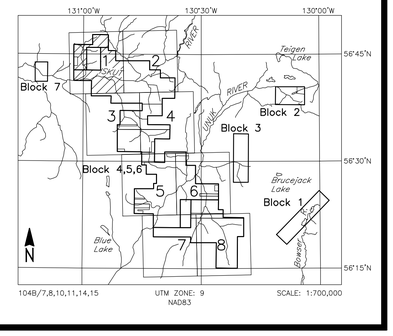

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

TOTAL MAGNETIC FIELD

FUGRO DIGHEM^V/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 1

Fugro Airborne Surveys

0 1 2 Km
0 1 MI
Scale 1:20 000

FUGRO AIRBORNE SURVEYS

406000 E | 408000 E | 410000 E | 412000 E | 414000 E | 416000 E | 418000 E | 420000 E

6248000 N | 6246000 N | 6244000 N | 6242000 N | 6240000 N | 6238000 N | 6236000 N | 6234000 N

ICEFIELD

MOUNT FRANK MACKIE

BALL CREEK

ROBERT

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM*
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◕	50–100 siemens
5	◑	20–50 siemens
4	◔	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly Identifier; Interpretive symbol; Inphase and Quadrature of coaxial coil is greater than 5 ppm, 10 ppm, 15 ppm, 20 ppm; Depth is greater than 15 m, 30 m, 45 m, 60 m

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5

FLIGHT LINES WITH EM ANOMALIES


13010 | 13020 < 2 | 125 | 100 | F B

- Flight number
- Flight direction
- Flight line number
- 11020: Reflight Number, Line Number, Area Number
- Fiducials identified on profiles
- Dip direction
- EM anomaly (see EM legend)
- Conductor axis (on EM maps only)
- Arcs indicate the conductor has a thickness > 10m
- Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

- 100 cps
- 20 cps
- 4 cps
- 2 cps
- low

LOCATION MAP

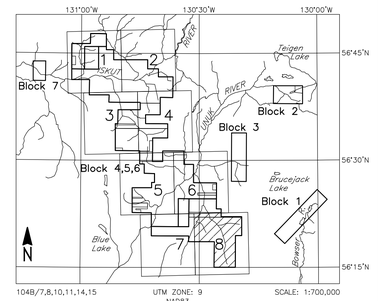

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM*/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 8

Fugro Airborne Surveys

0 1 2 Km

0 1 Mi

Scale 1:20 000

FUGRO AIRBORNE SURVEYS

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM^V
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◕	50–100 siemens
5	◑	20–50 siemens
4	◔	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly Identifier: C-L-H

Interpretive symbol

Depth is greater than
- 15 m
: 30 m
⋮ 45 m
⋮ 60 m

Inphase and Quadrature of coaxial coil is greater than
- 5 ppm
.. 10 ppm
... 15 ppm
.... 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5


FLIGHT LINES WITH EM ANOMALIES

- Flight number
- Flight direction
- Flight line number
  - 11020
  - Reflight Number
  - Line Number
  - Area Number
- Fiducials identified on profiles
- Dip direction
- EM anomaly (see EM legend)
- Conductor axis (on EM maps only)
- Arcs indicate the conductor has a thickness > 10m
- Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

- . . . . . 100 cps
- . . . . . 20 cps
- . . . . . 4 cps
- . . . . . 2 cps
- . . . . . low

LOCATION MAP

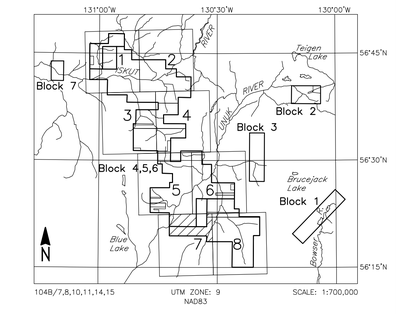

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM^V/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 7


Fugro Airborne Surveys

0 1 2 Km

0 1 Mi

Scale 1:20 000

FUGRO AIRBORNE SURVEYS

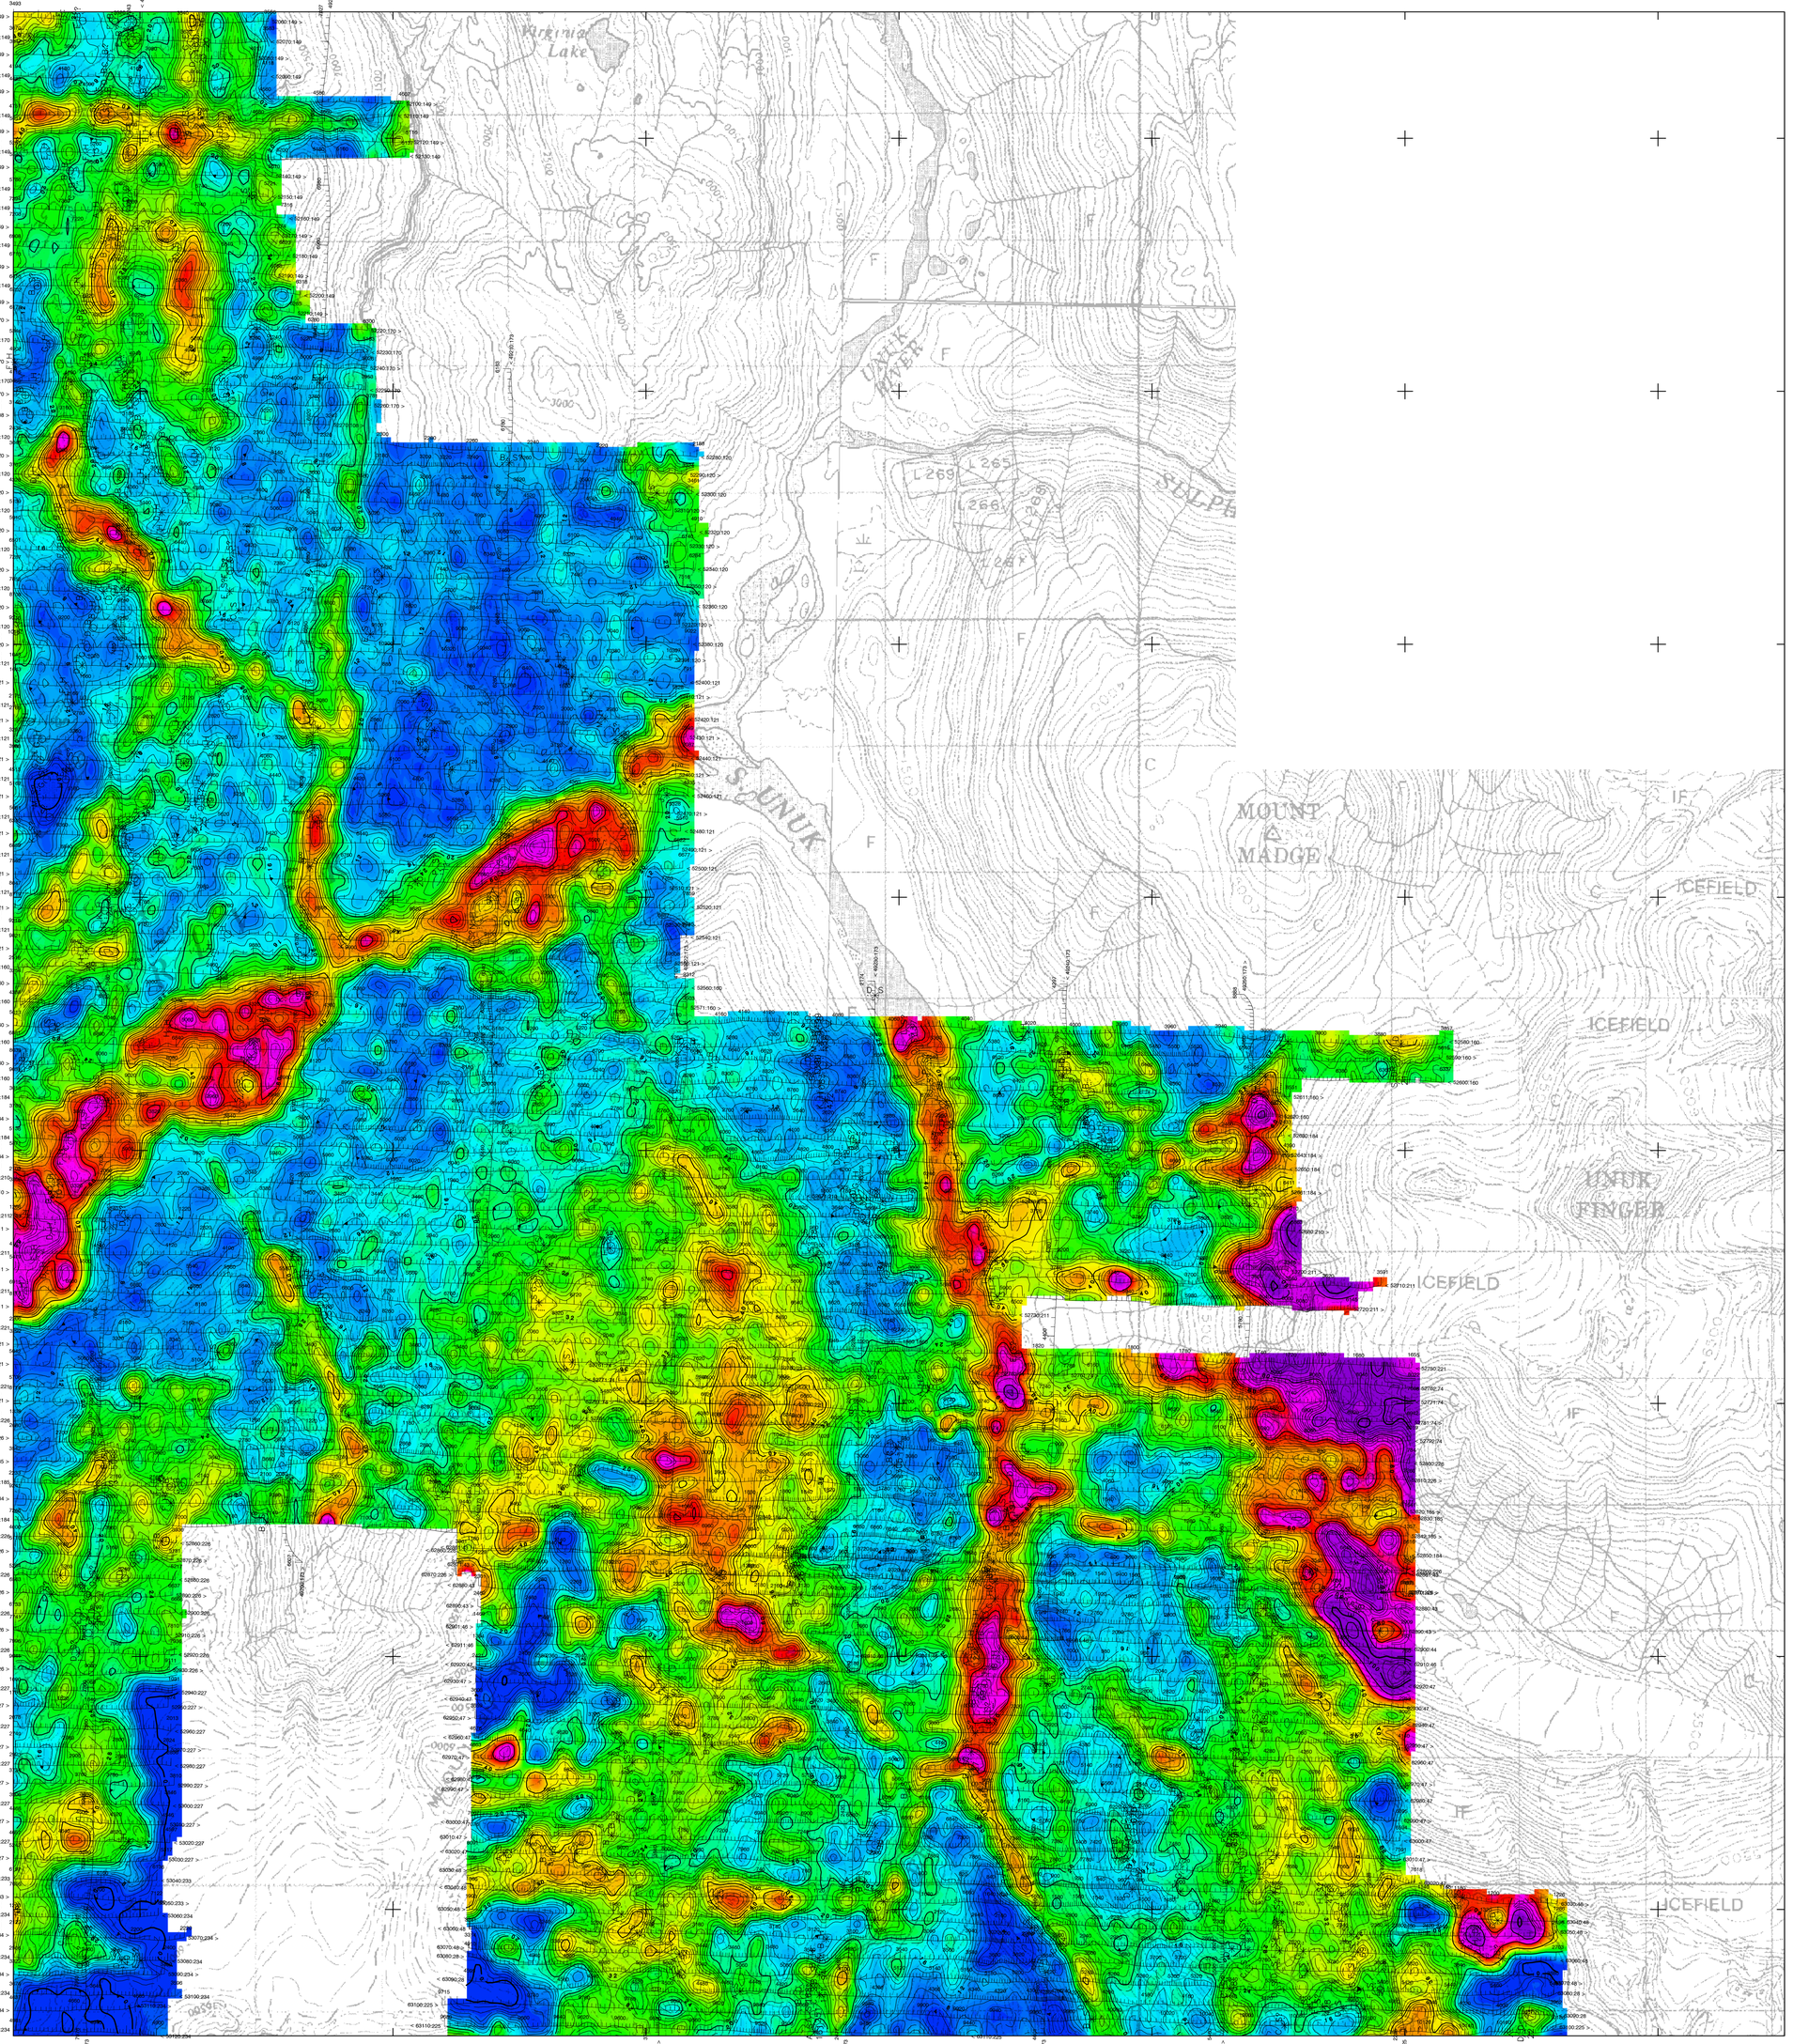

TECHNICAL SUMMARY

Navigation	Differentially-corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM*
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◐	50–100 siemens
5	◑	20–50 siemens
4	◒	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly identifier; Interpretive symbol; Depth is greater than: · 15 m, : 30 m, ⋮ 45 m, ⋮ 60 m; Inphase and Quadrature of coaxial coil is greater than: · 5 ppm, ·· 10 ppm, ··· 15 ppm, ···· 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)
88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5


FLIGHT LINES WITH EM ANOMALIES

Flight number
Flight direction
Flight line number
11020
Reflight Number
Line Number
Area Number
Fiducials identified on profiles
Dip direction
EM anomaly (see EM legend)
Conductor axis (on EM maps only)
Arcs indicate the conductor has a thickness > 10m
Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

100 cps
20 cps
4 cps
2 cps
low

LOCATION MAP

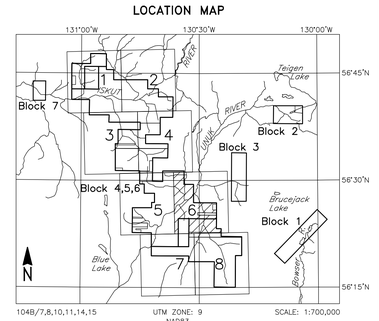

HATHOR EXPLORATION LIMITED
ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM*/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 6
Fugro Airborne Surveys		

0 1 2 Km
0 1 Mi
Scale 1:20 000

FUGRO AIRBORNE SURVEYS

388000 E | 390000 E | 392000 E | 394000 E | 396000 E | 398000 E | 400000 E

6264000 N | 6262000 N | 6260000 N | 6258000 N | 6256000 N | 6254000 N | 6252000 N | 6250000 N

BOUNDARY RAN

ICEFIELD

Glacier

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM*
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◐	50–100 siemens
5	◑	20–50 siemens
4	◒	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly identifier; Interpretive symbol; Depth is greater than: . 15 m, : 30 m, ⋮ 45 m, ⋮ 60 m; Inphase and Quadrature of coaxial coil is greater than: . 5 ppm, .. 10 ppm, ... 15 ppm, ... 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5

FLIGHT LINES WITH EM ANOMALIES


13010 | 13020 < 2

Flight number
Flight direction
Flight line number
11020
Reflight Number
Line Number
Area Number
Fiducials identified on profiles
Dip direction
EM anomaly (see EM legend)
Conductor axis (on EM maps only)
Arcs indicate the conductor has a thickness > 10m
Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

. . . . . 100 cps
. . . . . 20 cps
. . . . . 4 cps
. . . . . 2 cps
. . . . . low

LOCATION MAP

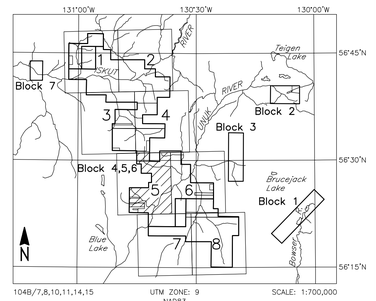

104B/7,8,10,11,14,15 | UTM ZONE: 9 NAD83 | SCALE: 1:700,000

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM*/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 5

Fugro Airborne Surveys

0 1 2 Km
0 1 Mi
Scale 1:20 000

FUGRO AIRBORNE SURVEYS

392000 E | 394000 E | 396000 E | 398000 E | 400000 E | 402000 E | 404000 E | 406000 E

6280000 N | 6278000 N | 6276000 N | 6274000 N | 6272000 N | 6270000 N | 6268000 N | 6266000 N

M O U N T A I N S

Copper King Glacier

Glacier

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM⁵
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◐	50–100 siemens
5	◒	20–50 siemens
4	◓	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly identifier; Interpretive symbol; Depth is greater than: . 15 m, : 30 m, ⋮ 45 m, ⋮ 60 m; Inphase and Quadrature of coaxial coil is greater than: . 5 ppm, .. 10 ppm, ... 15 ppm, ... 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5

FLIGHT LINES WITH EM ANOMALIES

Flight number; Flight direction; Flight line number (13010, 13020 < 2, 11020); Reflight Number; Line Number; Area Number; Fiducials identified on profiles; Dip direction; EM anomaly (see EM legend); Conductor axis (on EM maps only); Arcs indicate the conductor has a thickness > 10m; Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

. . . . . 100 cps


. . . . . 20 cps

. . . . . 4 cps

. . . . . 2 cps

. . . . . low

LOCATION MAP

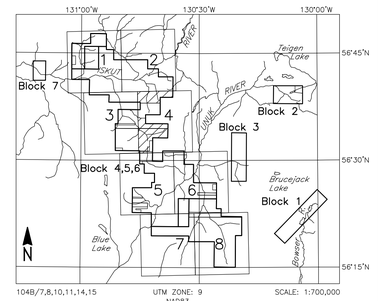

104B/7,8,10,11,14,15 | UTM ZONE: 9 NAD83 | SCALE: 1:700,000

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM⁵/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 4


Fugro Airborne Surveys

0 1 2 Km

0 1 Mi

Scale 1:20 000

FUGRO AIRBORNE SURVEYS

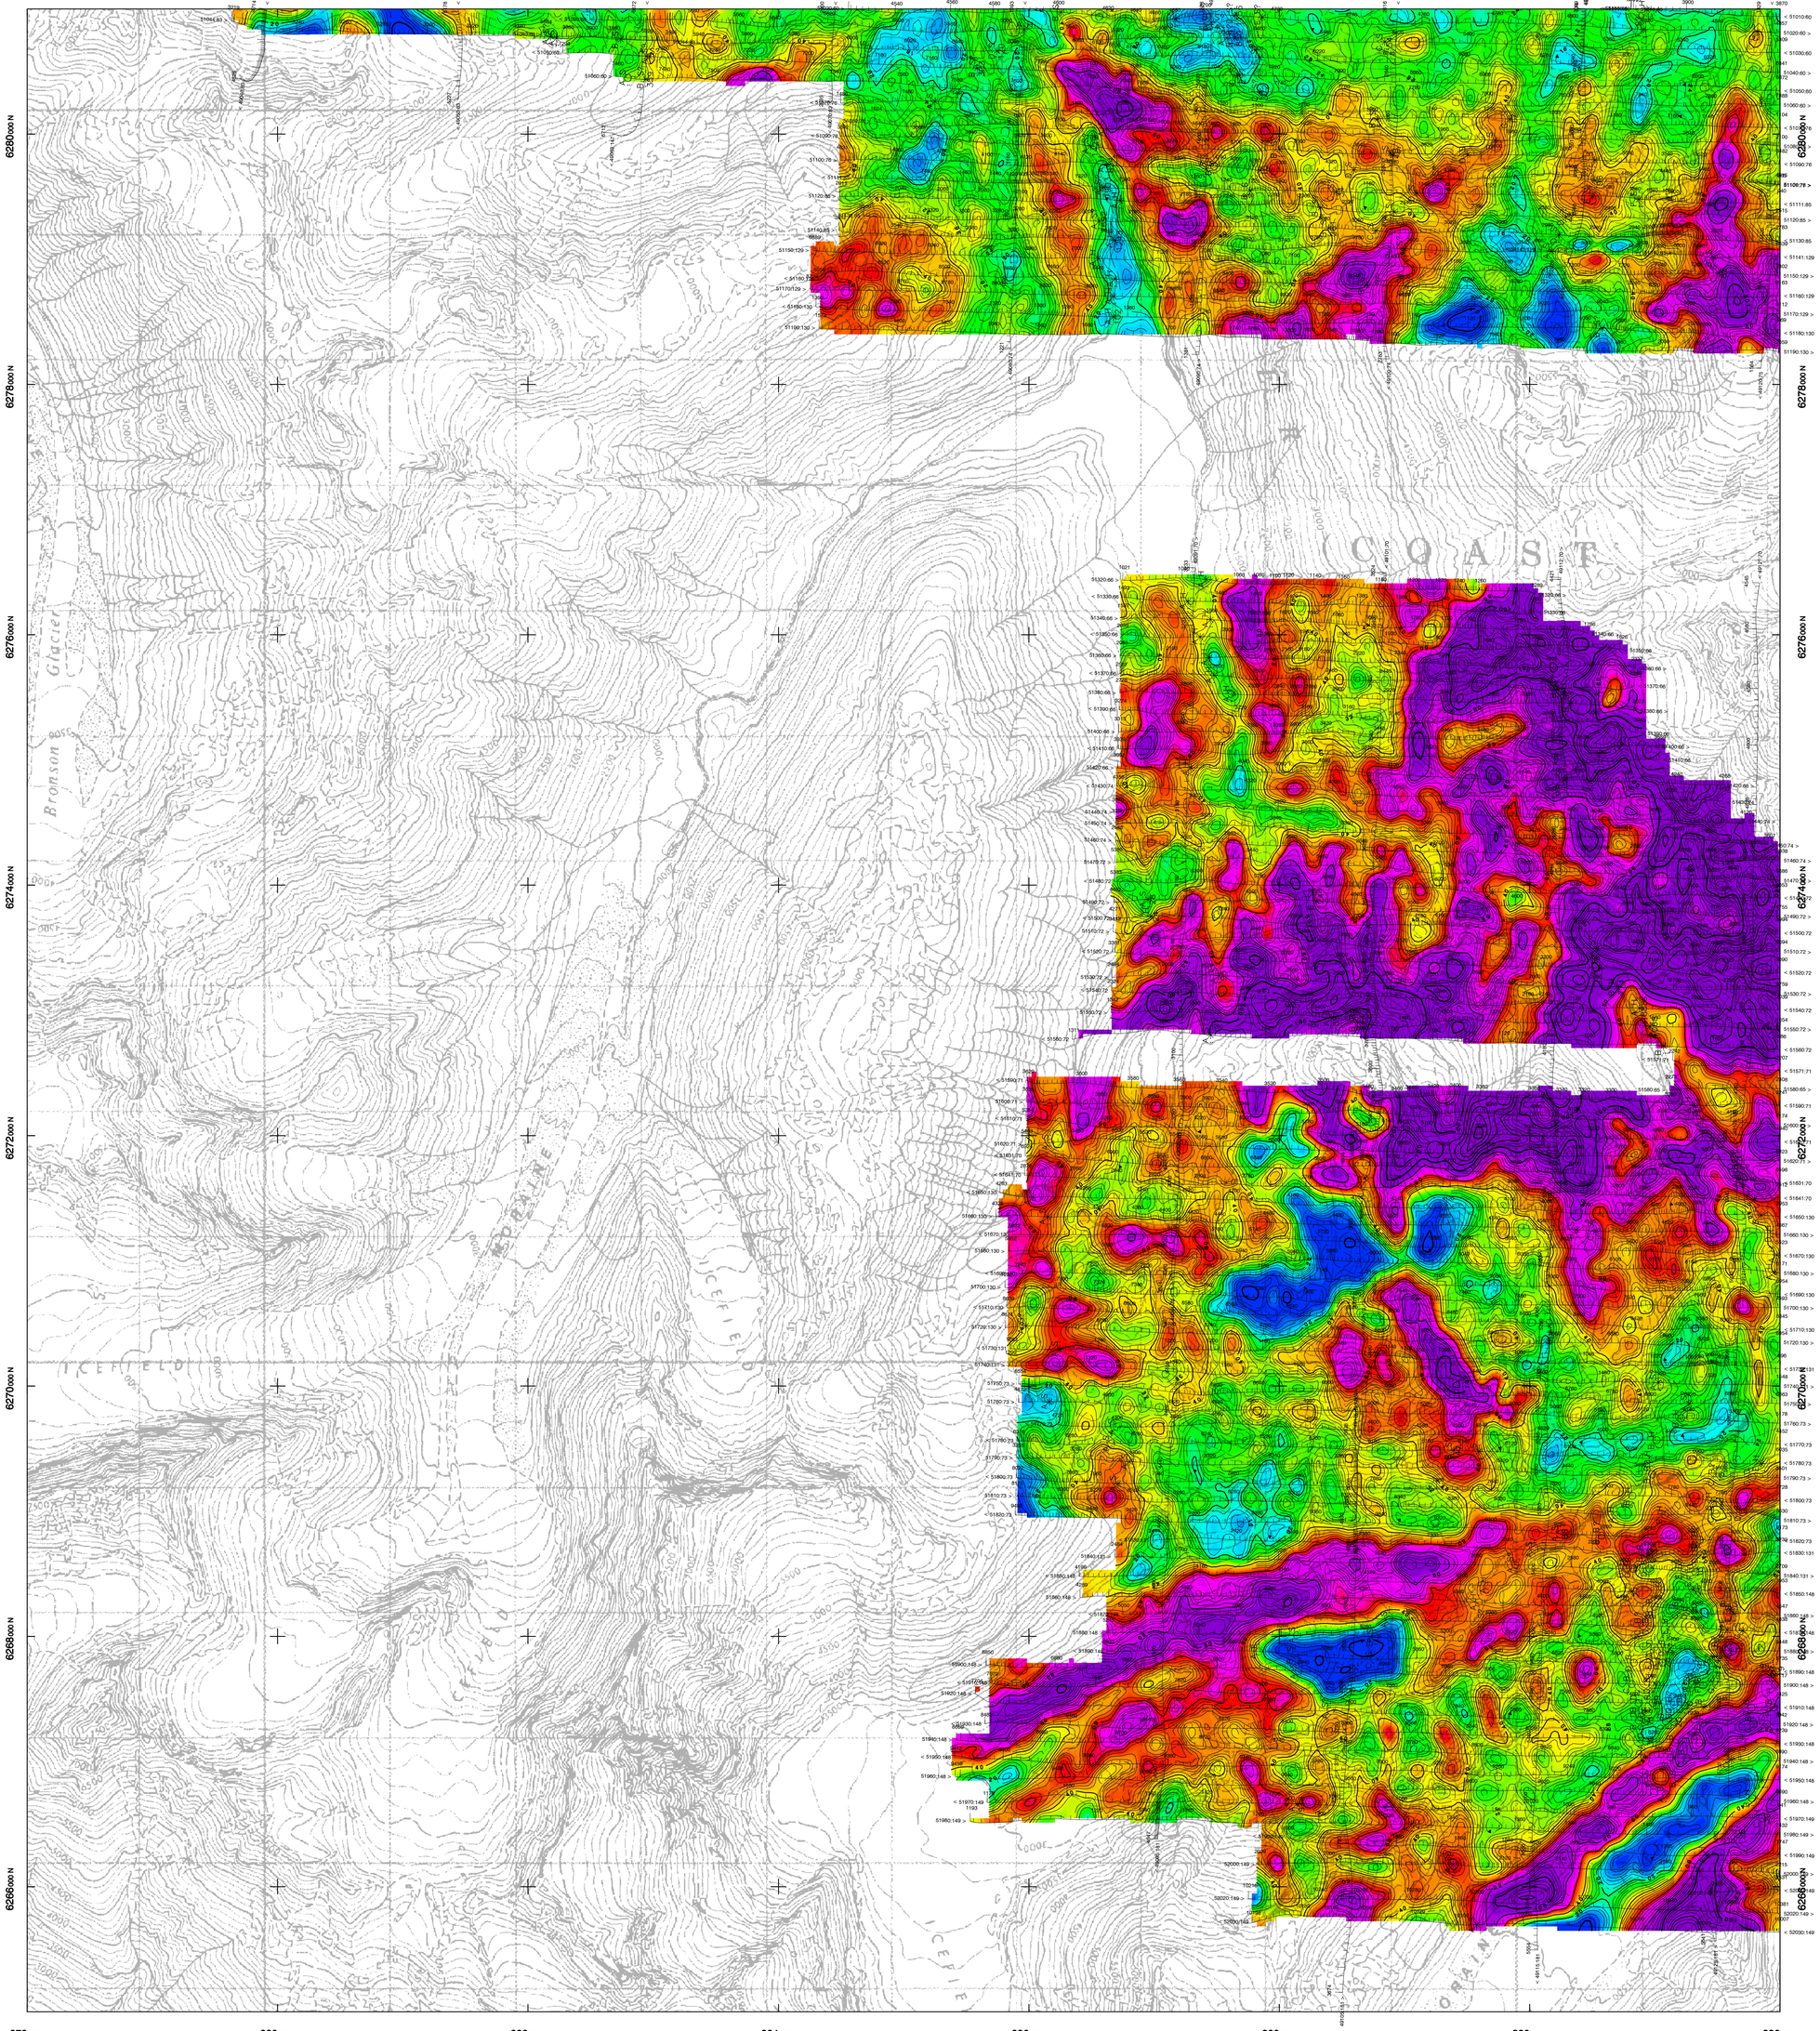

TECHNICAL SUMMARY

Navigation	Differentially-corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM*
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	◐	50–100 siemens
5	◑	20–50 siemens
4	◒	10–20 siemens
3	⊕	5–10 siemens
2	○	1–5 siemens
1	◌	< 1 siemens
–	✳	Questionable anomaly

Anomaly identifier; Interpretive symbol; Depth is greater than: . 15 m, : 30 m, ⋮ 45 m, ⋮ 60 m; Inphase and Quadrature of coaxial coil is greater than: . 5 ppm, .. 10 ppm, ... 15 ppm, ... 20 ppm

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5


FLIGHT LINES WITH EM ANOMALIES

Flight number; Flight direction; Flight line number; 11020: Reflight Number, Line Number, Area Number; Fiducials identified on profiles; Dip direction; EM anomaly (see EM legend); Conductor axis (on EM maps only); Arcs indicate the conductor has a thickness > 10m; Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

100 cps
20 cps
4 cps
2 cps
low

LOCATION MAP

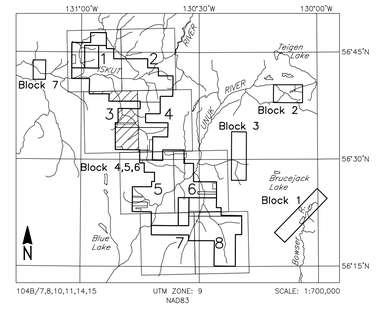

HATHOR EXPLORATION LIMITED
ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM*/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 3


Fugro Airborne Surveys

0 1 2 Km
0 1 Mi
Scale 1:20 000

FUGRO AIRBORNE SURVEYS

388000 E 390000 E 392000 E 394000 E 396000 E 398000 E 400000 E 402000 E

6296000 N 6294000 N 6292000 N 6290000 N 6288000 N 6286000 N 6284000 N 6282000 N

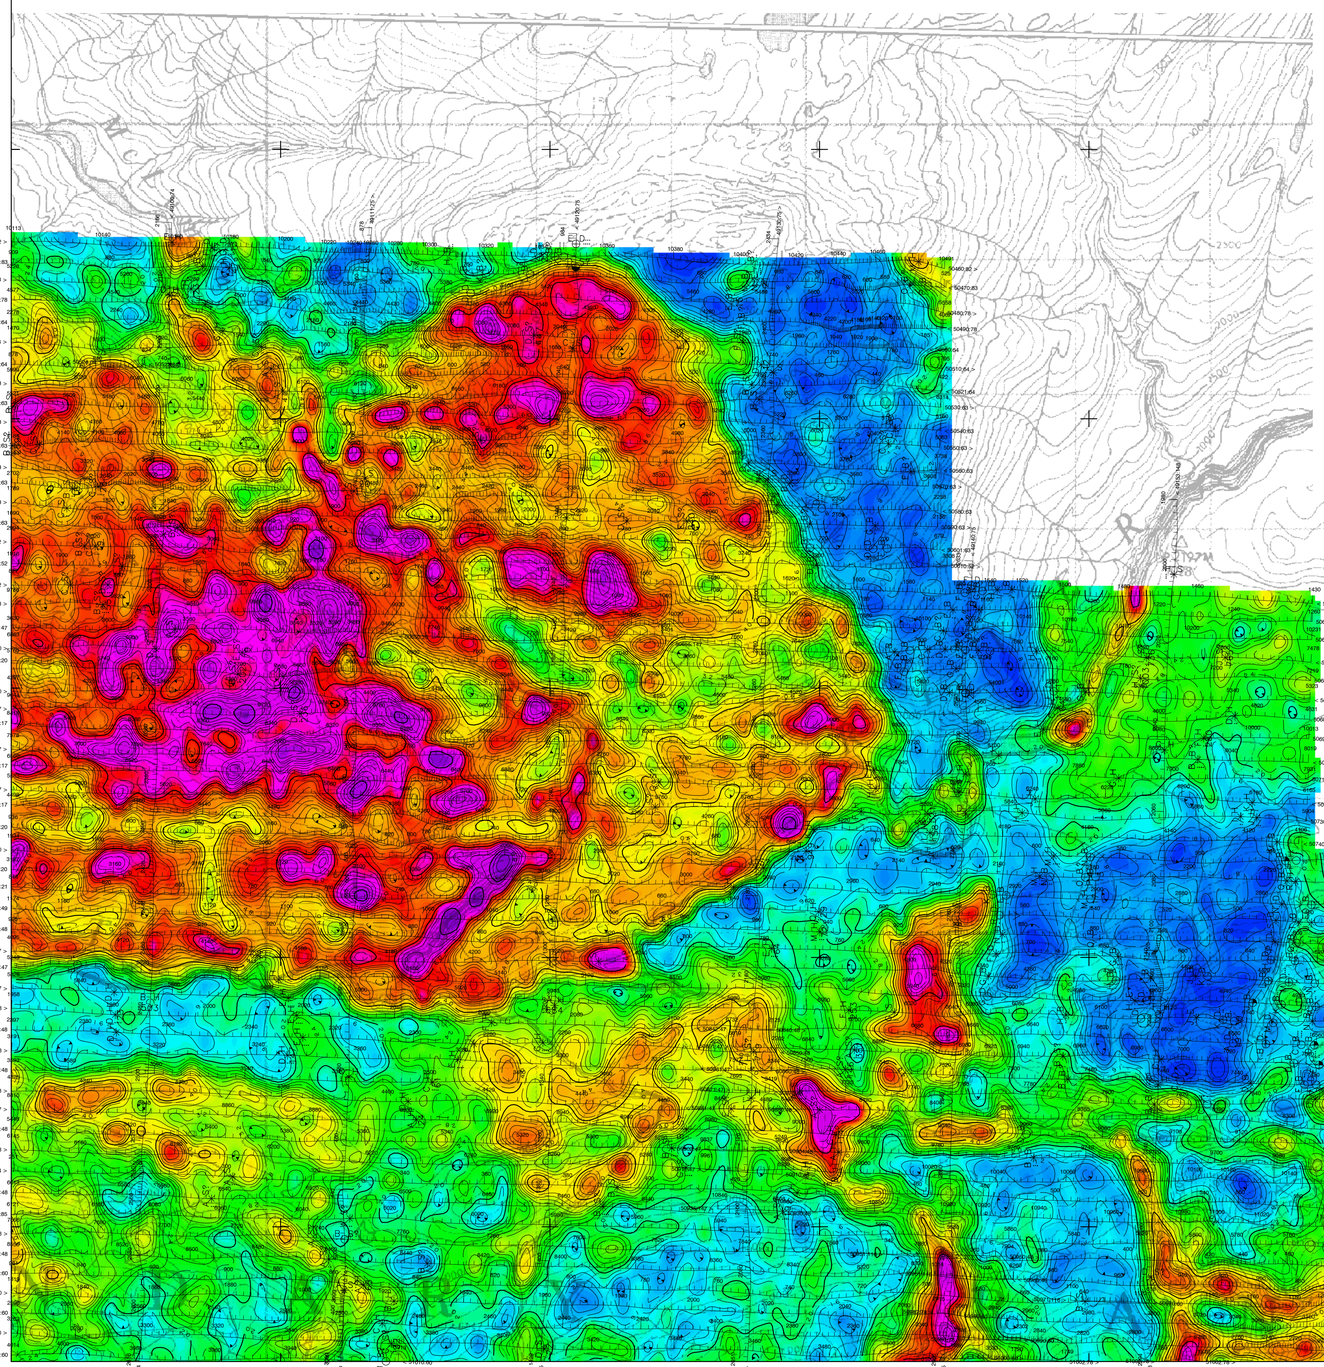

TECHNICAL SUMMARY

Navigation	Differentially–corrected GPS
Data reduction grid interval	38 metres
Terrain clearance	Helicopter, Spectrometer 57 m Electromagnetic sensor 30 m Magnetometer 30 m
Data sampling interval	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	DIGHEM*
Spectrometer	GR820

Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7		>100 siemens
6		50–100 siemens
5		20–50 siemens
4		10–20 siemens
3		5–10 siemens
2		1–5 siemens
1		< 1 siemens
–		Questionable anomaly

Anomaly identifier; Interpretive symbol; Inphase and Quadrature of coaxial coil is greater than . 5 ppm, .. 10 ppm, ... 15 ppm, ... 20 ppm

Depth is greater than · 15 m, : 30 m, ⋮ 45 m, ⋮ 60 m

Interpretive symbol	Conductor ("model")
B	Bedrock conductor
D	Narrow bedrock conductor ("thin dike")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g. power line, metal building or fence

K (cps)

88 80 74 69 65 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 5

FLIGHT LINES WITH EM ANOMALIES

Flight number; Flight direction; Flight line number 11020 (Reflight Number, Line Number, Area Number); Fiducials identified on profiles; Dip direction; EM anomaly (see EM legend); Conductor axis (on EM maps only); Arcs indicate the conductor has a thickness > 10m; Magnetic correlation in nT (gammas)

CONTOUR INTERVALS

. . . . . 100 cps


. . . . . 20 cps

. . . . . 4 cps

. . . . . 2 cps

. . . . . low

LOCATION MAP

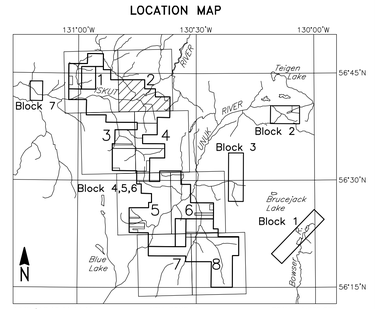

HATHOR EXPLORATION LIMITED

ESKAY AREA BLOCKS 4–6, B.C.

RADIOMETRIC POTASSIUM COUNTS

FUGRO DIGHEM*/RAD SURVEY	NTS: 104B/7,8,10,11,14,15	GEOPHYSICIST:
DATE: DECEMBER, 2007	JOB: 06041	SHEET: 2

Fugro Airborne Surveys

0 1 2 Km

0 1 Mi

Scale 1:20 000

FUGRO AIRBORNE SURVEYS