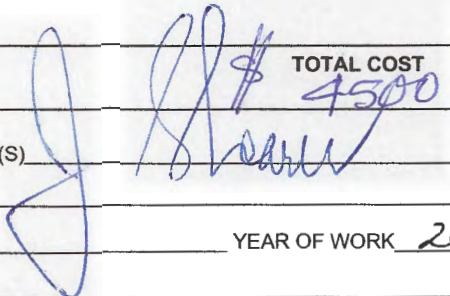


Ministry of Energy & Mines
Energy & Minerals Division
Geological Survey Branch

**ASSESSMENT REPORT
TITLE PAGE AND SUMMARY**

TITLE OF REPORT [type of survey(s)] Geochemical TOTAL COST \$ 4500

AUTHOR(S) J. T. Shearer, M.Sc., P. Geo. SIGNATURE(S) 

NOTICE OF WORK PERMIT NUMBER(S)/DATE(S) _____ YEAR OF WORK 2012

STATEMENT OF WORK - CASH PAYMENT EVENT NUMBER(S)/DATE(S) _____

PROPERTY NAME Lang Bay

CLAIM NAME(S) (on which work was done) Duck Lake

574 349

COMMODITIES SOUGHT _____

MINERAL INVENTORY MINFILE NUMBER(S), IF KNOWN _____

MINING DIVISION Vancouver NTS 92F/16W

LATITUDE 49 ° 48 ' 48 " LONGITUDE 124 ° 24 ' 29 " (at centre of work)

OWNER(S)

1) Electra Gold Ltd 2) _____

MAILING ADDRESS

Units - 2330 Tyner Street
Port Coquitlam BC V3C 2Z1

OPERATOR(S) [who paid for the work]

1) same as above 2) _____

MAILING ADDRESS

Same as above

PROPERTY GEOLOGY KEYWORDS (lithology, age, stratigraphy, structure, alteration, mineralization, size and attitude):

Small cretaceous sedimentary basin contains siltstones shales, sandstones, conglomerates and minor coal. The basin is about 3km wide and 6km long. Previous samples report up to 1.4m of 136 grams GeO₂ per tonne

REFERENCES TO PREVIOUS ASSESSMENT WORK AND ASSESSMENT REPORT NUMBERS Assess Rpt

10384, 29, 269

TYPE OF WORK IN THIS REPORT	EXTENT OF WORK (IN METRIC UNITS)	ON WHICH CLAIMS	PROJECT COSTS APPORTIONED (incl. support)
GEOLOGICAL (scale, area)			
Ground, mapping _____			
Photo interpretation _____			
GEOPHYSICAL (line-kilometres)			
Ground			
Magnetic _____			
Electromagnetic _____			
Induced Polarization _____			
Radiometric _____			
Seismic _____			
Other _____			
Airborne _____			
GEOCHEMICAL			
(number of samples analysed for ...)			
Soil _____			
Silt _____			
Rock _____			
Other _____			
DRILLING			
(total metres; number of holes, size)			
Core _____			
Non-core _____			
RELATED TECHNICAL			
Sampling/assaying _____			
Petrographic _____			
Mineralographic _____			
Metallurgic _____			
PROSPECTING (scale, area) _____			
PREPARATORY/PHYSICAL			
Line/grid (kilometres) _____			
Topographic/Photogrammetric (scale, area) _____			
Legal surveys (scale, area) _____			
Road, local access (kilometres)/trail _____			
Trench (metres) _____			
Underground dev. (metres) _____			
Other _____			
		TOTAL COST	\$4,500.00

**GEOCHEMICAL
ASSESSMENT REPORT
on the
LANG BAY (DUCK LAKE) KAOLINITE DEPOSIT**

**Tenure # 514350, 514352, 514363, 514264, 514349, 514353-
355, 514357, 514362**

Longitude 124°24'29"/Latitude 49°48'48"

NTS: 92F/16W (92F.088)

Vancouver M.D.

EVENT # 5403976

Prepared for

**BC Geological Survey
Assessment Report
33894**

Electra Gold Ltd.

Unit 5 – 2330 Tyner St.,

Port Coquitlam, BC

V3C 2Z1

Phone: 604-970-6402 / Fax: 604-944-6102

Website: www.ElectraGoldLtd.com

Prepared by

J. T. Shearer, M.Sc., P.Geo. (BC & Ontario)

Geologist

November 10, 2012

Fieldwork completed between May 1, 2012 and September 8, 2012

TABLE OF CONTENTS

	<u>Page</u>
LIST OF ILLUSTRATIONS and TABLES.....	ii
SUMMARY	iii
INTRODUCTION	1
LOCATION and ACCESS	3
CLAIM STATUS.....	7
HISTORY	8
REGIONAL GEOLOGY	13
LOCAL GEOLOGY.....	14
GEOPHYSICS	18
EXPLORATION 2012	22
CONCLUSIONS and RECOMMENDATIONS	28
COST ESTIMATE for FUTURE WORK.....	30
REFERENCES	31
APPENDICES	
Appendix I Statement of Qualifications.....	34
Appendix II Statement of Costs.....	35
Appendix III Assay Certificates.....	36
Appendix IV Sample Description	37

LIST of ILLUSTRATIONS and TABLES

ILLUSTRATIONS and TABLES

		<u>Following Page</u>
FIGURE 1	Location Plan,	2
FIGURE 2	Claim Map.....	4
FIGURE 3	Drilling Area	5
FIGURE 4	Location Map, Kaolin Prospect	6
FIGURE 5	Surface Tenure Map, 1:20,000	10
FIGURE 6	Regional Geology	11
FIGURE 7	Lang Bay Outlier (after Mustard & Rouse).....	15
FIGURE 8	Drill Hole Locations 2006	17
FIGURE 9	Powell River Basin.....	19
FIGURE 10	Overburden Countours.....	20
FIGURE 11	Lang Bay Geology	21
FIGURE 12	1986 Drilling Areas 1 & 2	27


TABLES

		<u>Page</u>
TABLE I	List of Claims.....	7
TABLE II	Diamond Drill Hole Data 1999	9
TABLE III	Diamond Drill Hole Data 2006	16

SUMMARY

- 1) The Lang Bay (Duck Lake) Property consists of the 16 cell mineral claims totalling 1,271.92 ha.
- 2) The claims are located 3 km north of Highway 101 at Myrtle Point. Access is via the Duck Lake Forest Service Road or along the powerline from Zilinski Road.
- 3) The claims cover the western and eastern margins of an Upper Cretaceous sedimentary basin (Nanaimo Group) containing shale, sandstone and minor coal.
- 4) Work on the sedimentary basin originally (1940's to 1960's) focussed on germanium in the ash of the coal beds exposed in Lang Creek. Subsequently the kaolinite potential was comprehended in 1986.
- 5) A previous owner entered into a joint-venture agreement with Brenda Mines Ltd., a Noranda Group company, in September 1987. An extensive exploration program was initiated in September 1987, which continued until February 1989. Work completed during that time consisted of 6,700 metres of seismic refraction survey, 10,500 metres of magnetometer survey, 11,000 metres of Dipole-Dipole resistivity survey, 4 Schlumberger electrical soundings and 2,100 metres of reverse circulation and diamond drilling.
- 6) In February 1992 Fletcher Challenge Canada carried out a trial at Elk Falls paper mill near Campbell River. The trial produced 60 tonnes of newsprint containing up to 5% load of kaolin from the eastern margin of the Duck Lake area. This test was apparently favourable.
- 7) Overburden consisting of bouldery gravels, sand, till and clay-rich glaciofluvial units, is highly variable in thickness.
- 8) In 1999, a program by Homegold Resources Ltd. was completed of 4 diamond drill holes (198.88m) and 4.3 km of seismic refraction geophysics and metallurgical work was done in 2006.
- 9) In 2006, a 5 hole diamond drill program completed by Electra Gold Ltd in December 2006 for a total footage of 293.53m (963 ft.).
- 10) The 2006 drill program intersected a series of interbedded kaolinized sandstone and shale beds in 5 holes, however the overburden was relatively deep, up to 27m deep.
- 11) Placing the resulting filler products with industrial end users is recommended to obtain feedback on optimizing product specifications.
- 12) Sampling in 2012 focussed on the continued re-examination of the trace element content of previous drill core. Future sampling should focus on carbonaceous or coaly intervals.

Respectfully submitted,



J.T. (Jo) Shearer, M.Sc., P.Geo.
Geologist
November 10, 2012

INTRODUCTION

In 1999, the Duck Lake Mineral Claims were staked covering the western margin of the Cretaceous Sedimentary Basin near Powell River, British Columbia. Subsequently, the eastern portion was acquired in 2001. These claims cover a basin, which contains a large inferred resource of kaolin. Additionally, the property is known to contain highly anomalous values of germanium and gallium in some of the more carbonaceous horizons of the deposit.


Basement granitoid rocks, which in places are extensively altered to kaolin, are overlain by shales containing kaolin clays. Work in 1999 consisted of 4 diamond drillholes and 4.3 km of seismic refraction surveys. In the late 1980's and early 1990's an effort was made to evaluate the eastern margin of the basin. In February 1992 Fletcher Challenge Canada carried out a trial at Elk Falls paper mill near Campbell River. The trial produced 60 tonnes of newsprint containing up to 5% load of kaolin from the eastern margin of the Duck Lake area. This test was apparently favourable.

A calcining test was carried out on a sample of Lang Bay kaolin by Nord Kaolin Company of Jeffersonville, Georgia. The sample was first beneficiated by Magnetic separation and ozone bleaching and this improved the brightness to that of a standard performance filler. The sample was then calcined and brightness values equivalent to those of imported calcined grades were achieved. This is significant because calcined kaolin produces a superior performance and sells for up to four times the price of filler grade. The calcined grade requires heating by natural gas, which only recently has been made available for industrial users in the Powell River area.

Previously in 2006, a program consisting of continued organizing of the core logging facility, continuing assessing the previously drilled core and reverse circulation samples and completing a 293.53m (963 ft.) diamond drill program in 5 holes during December 2006.

The current program included a re-evaluation of the trace element content of previous drill core.

Renewed industry interest in Germanium prompted by the Company to re-evaluate this property. The purpose of our program was to reconsider the area underlain by this small sedimentary outlier and examine the best with reported anomalous germanium values; the aim was to assess the germanium potential at Lang Bay.

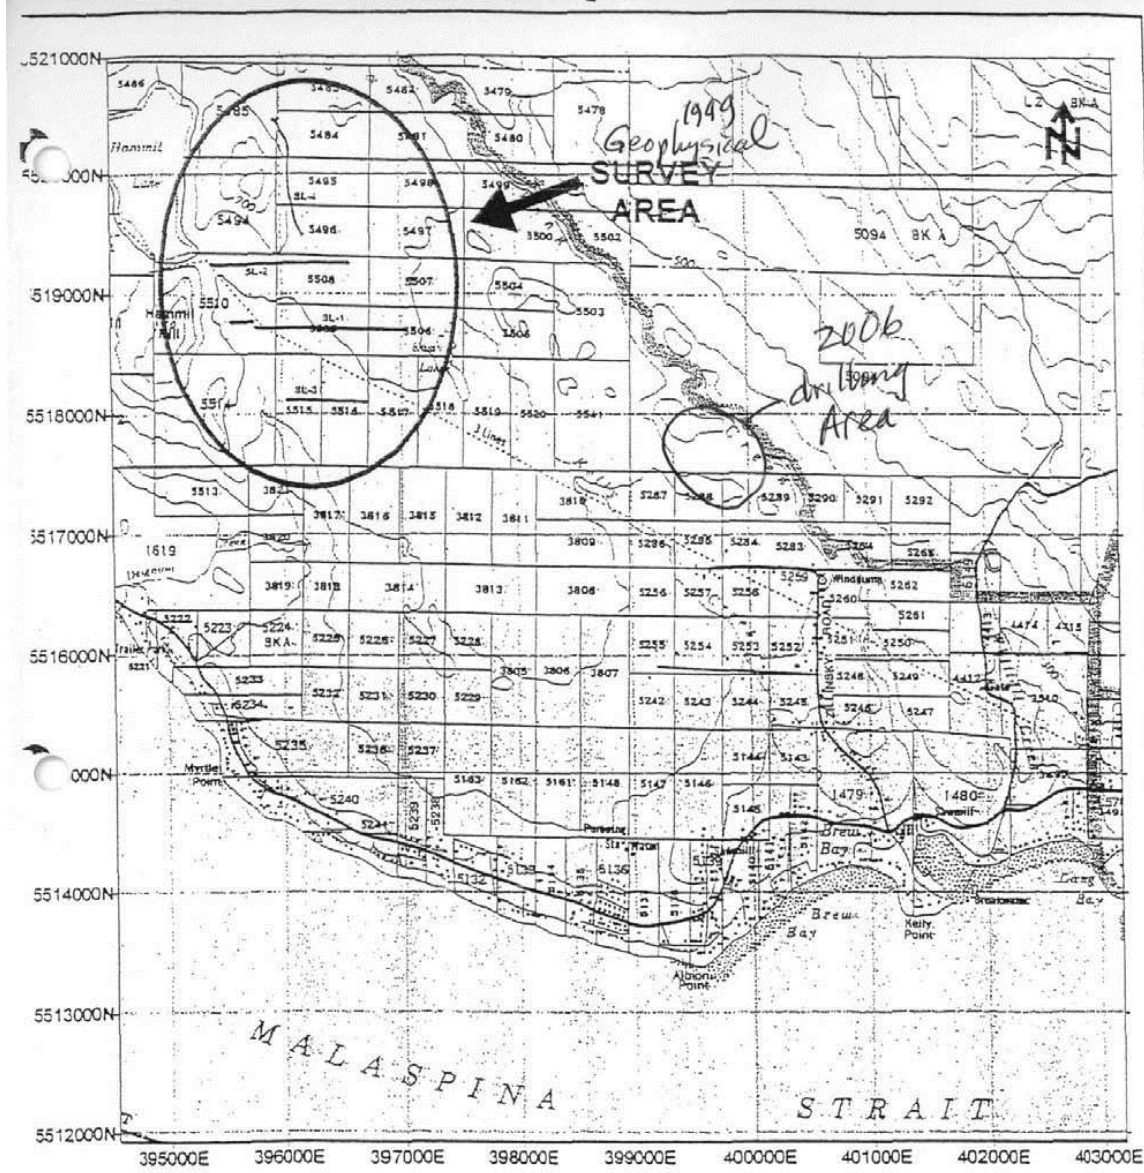

LANG BAY SHALE/SANDSTONE PROSPECT, POWELL RIVER AREA, B.C.		
SEISMIC REFRACTION SURVEY		
LOCATION PLAN		
DATE: SEPTEMBER 1999	SCALE 1:50,000	FIG. 1

NOTE:
 This map is a segment of the NTS map sheet 92 F/16, "HASLAM LAKE".

LOCATION and ACCESS

The Duck Lake Claims are northeast of Myrtle Point near the town of Powell River. Highway 101 follows the coast from Saltery Bay to Powell River and passes 2 km south of the southern border of the Duck Lake claim group. A good paved secondary road (Zilinski Road) connecting to Highway 101 between Lang Creek and Kelly Creek extends north end then west where a tote road along the power line in useable condition, gives access to the area where the drilling was undertaken. The drill area is also accessible by driving north along the Duck Lake Forest Service Road to the power line area.

The claim group lies 15 km southeast of the town of Powell River, British Columbia and centred on Kelly Creek. General physiographic boundaries are Malaspina Strait between Lang Bay and Myrtle Point to the south, Myrtle Creek and Hammil Lake to the west and northwest, Lang Creek to the north and Whittall Creek to the east. The approximate co-ordinates are 49°48'N and 124°25'W. The NTS map reference for the area is 92F/16W.

The moderately undulating terrain has a maximum elevation of approximately one hundred and eighty metres above sea level near the northeast corner of the property. The ground slopes gently to the southeast. Kelly Creek has cut its valley about 10 metres below the general level of the surrounding area.

The area is covered with a mixed second growth forest consisting mainly of fir, hemlock, cedar and alder. The area was first logged around 1920.



The water supply is plentiful due to the many streams and creeks on the property, the main ones being centrally located, Lang Creek and Kelly Creek, both flowing southeasterly and to the west, Deighton Creek flowing southerly into Malaspina Strait.

The climate is mild with an annual rainfall from 40 to 50 inches (100 – 125mm) and minimal snowfall in the winter.

Dissecting the property in a northwest to southeast line is a high voltage power line to the town of Powell River and the pulp mill.

The most recent drill sites were accessed by the old road which continues north on crownland from the core logging facility.

CLAIM MAP

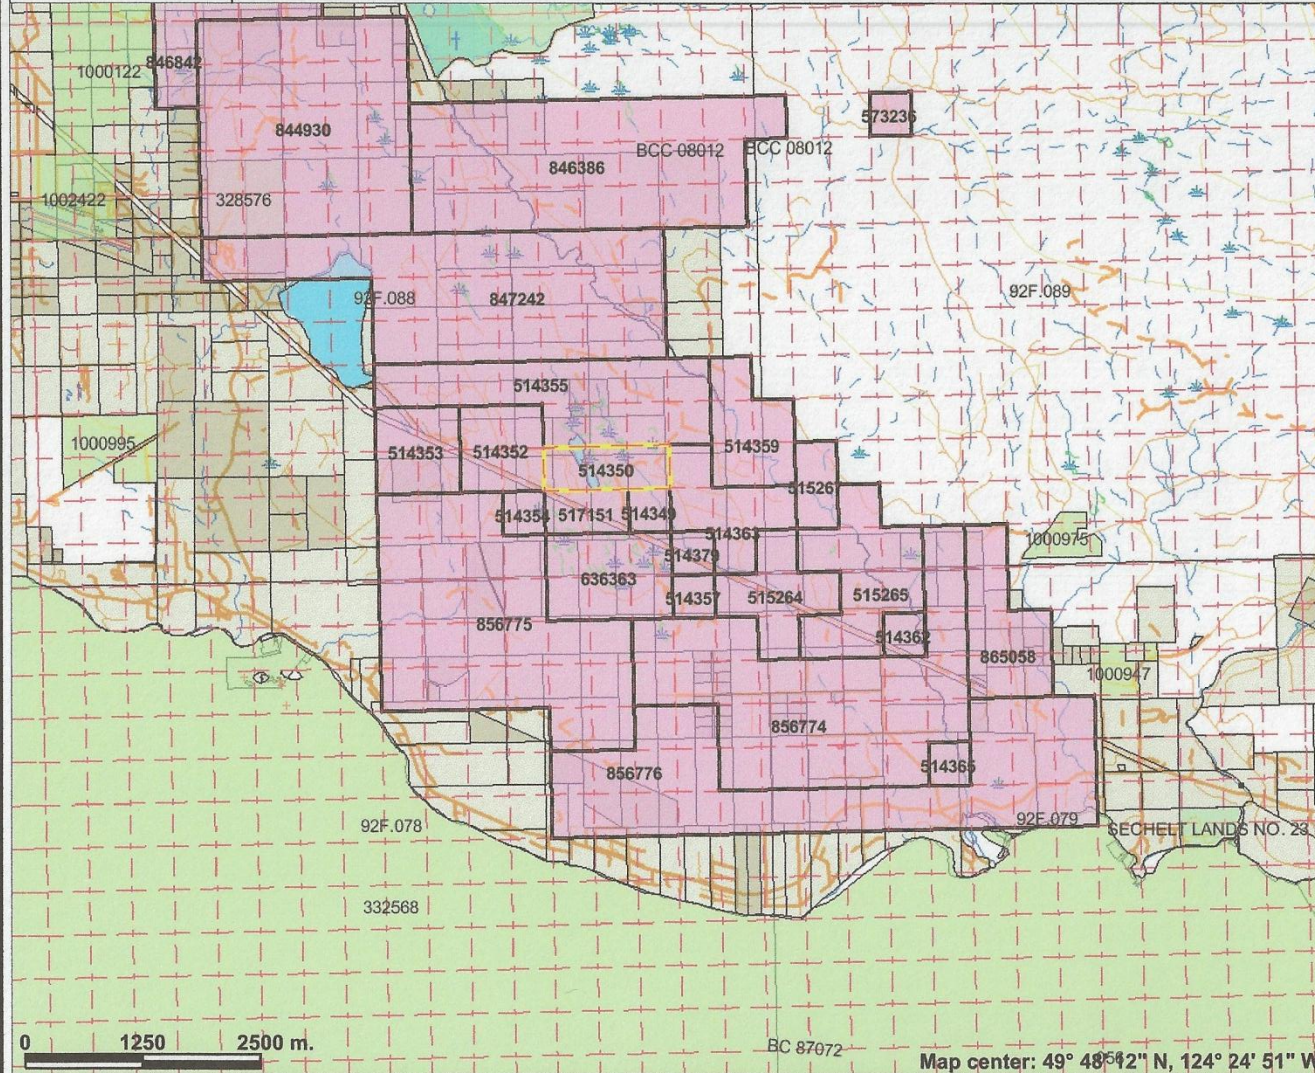

Legend

- Indian Reserves
- National Parks
- Conservancy Areas
- Parks
- MTO Grid (MTO)
- Blocked by MEM
- Other
- Mineral Tenure (current)**
- Mineral Claim
- Mineral Lease
- Mineral Reserves (current)**
- Placer Claim Designation
- Placer Lease Designation
- No Staking Reserve
- Conditional Reserve
- Release Required Reserve
- Surface Restriction
- Recreation Area
- Others
- Survey Parcels
- BCGS Grid
- Contours (1:250K)
- Contour - Index
- Contour - Intermediate
- Area of Exclusion
- Area of Indefinite Contours
- Transportation - Points (TRIM)**
- Helipad
- Transportation - Lines (TRIM)**
- Airfield
- Airport
- Airstrip

0 1250 2500 m.

BC 87072


Map center: 49° 48' 42" N, 124° 24' 51" W




Scale: 1:70,514

This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.

Notes: Lang Bay Project

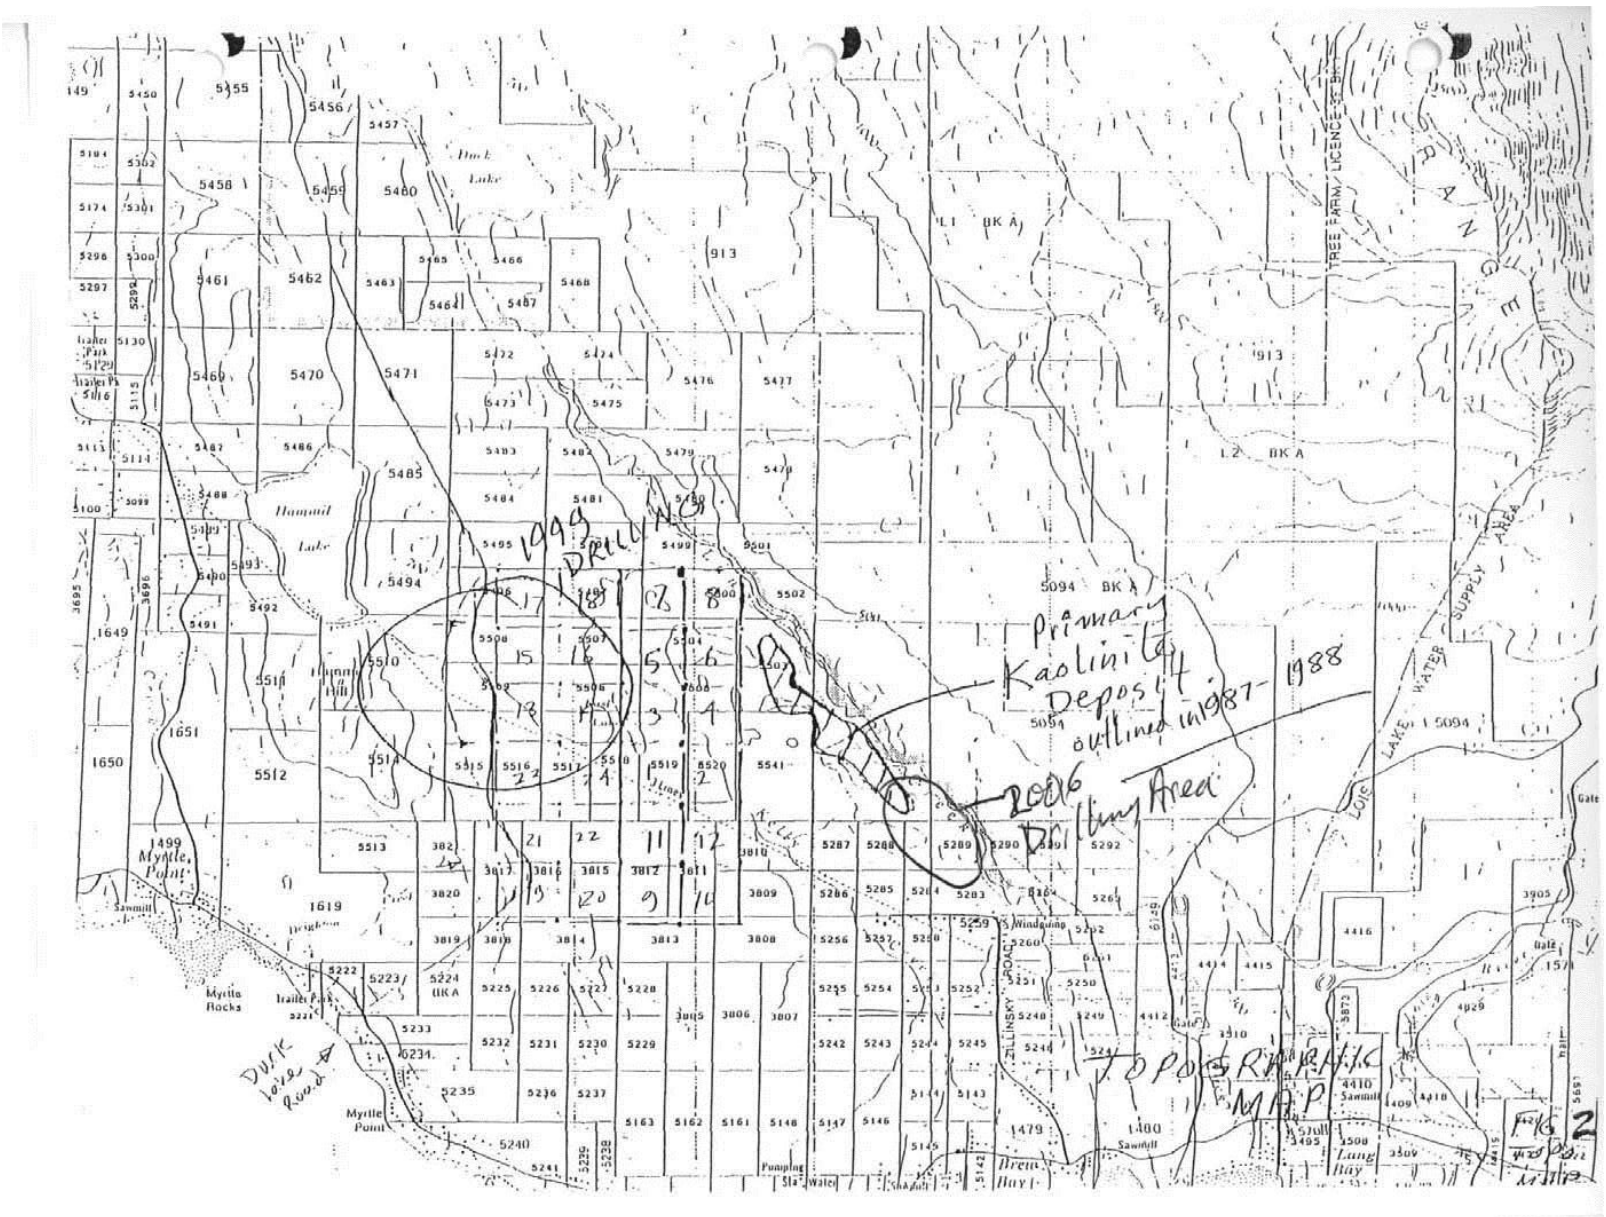

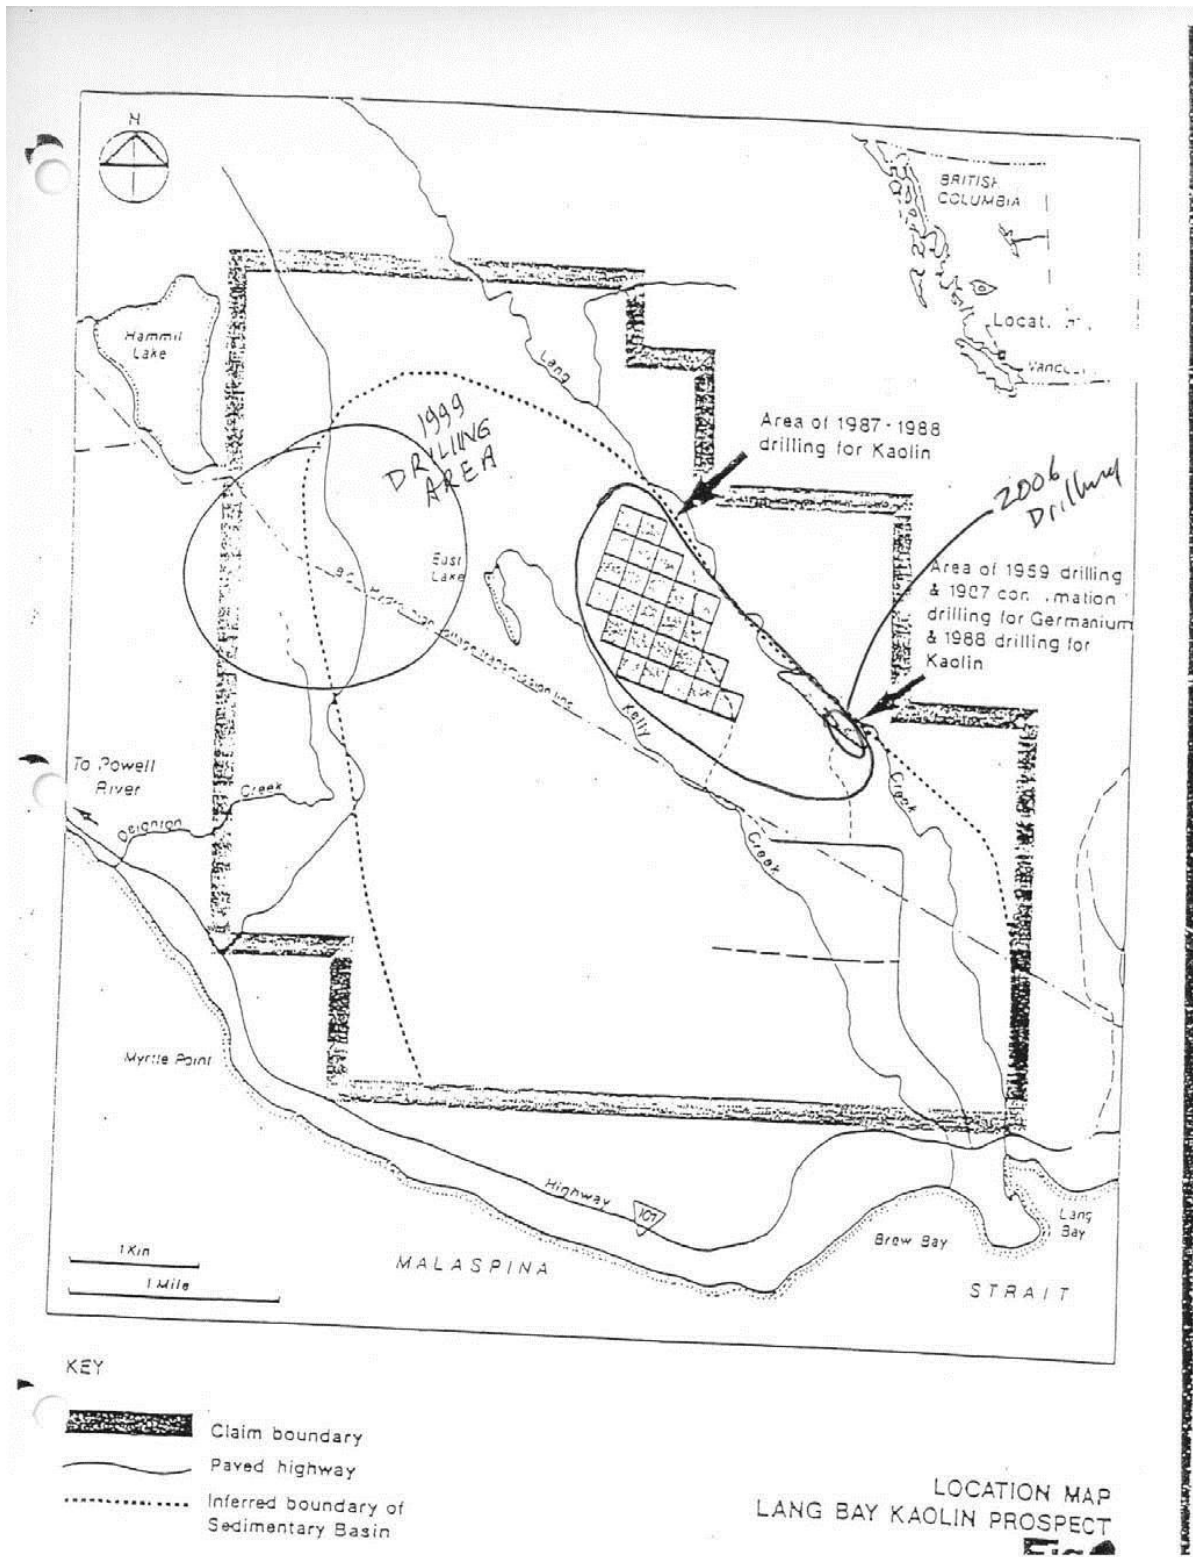

CLAIM STATUS

The Duck Lake Property consists of the 19 claims totalling 16 cells of 1,271.92 ha as tabulated in Table I and shown on Figure 3.

TABLE I
List of Claims

Claim Name	Tenure #	Cells	Area (ha)	Registered Owner	Issue Date	Current Good To Date*
Duck Lake	514349	1	20.85	J. T. Shearer	June 11, 2005	September 11, 2013
	514350	3	62.55	J. T. Shearer	June 11, 2005	September 11, 2013
	514352	4	83.40	J. T. Shearer	June 11, 2005	September 11, 2013
	514353	4	83.40	J. T. Shearer	June 11, 2005	September 11, 2013
Duck Lake Southwest	514354		20.85	J. T. Shearer	June 11, 2005	September 11, 2013
	514355	12	250.16	J. T. Shearer	June 11, 2005	September 11, 2013
Duck Lake South	514357		20.86	J. T. Shearer	June 11, 2005	September 11, 2013
	514359	5	104.24	J. T. Shearer	June 11, 2005	September 11, 2013
Duck Lake Southeast	514362		20.86	J. T. Shearer	June 11, 2005	September 11, 2013
	514363	5	104.26	J. T. Shearer	June 11, 2005	September 11, 2013
	514379	1	20.85	J. T. Shearer	June 11, 2005	September 11, 2013
	515264	5	104.28	Electra Gold Ltd	June 11, 2005	September 11, 2013
	515265	8	166.84	J. T. Shearer	June 25, 2005	September 11, 2013
	515267	2	41.70	Electra Gold Ltd	June 11, 2005	September 11, 2013
Lang Bay Pick up	517151	2	41.70	J. T. Shearer	July 12, 2005	September 11, 2013
Duck Lake Fill 2	636363	125.12	125.12	J. T. Shearer	September 17, 2009	September 11, 2013

Total 1,271.92ha

* with application of assessment work documented in this report.

Under the present status of mineral claims in British Columbia, the consideration of industrial minerals requires careful designation of the product end use. An industrial mineral is a rock or naturally occurring substance that can be mined and processed for its unique qualities and used for industrial purposes (as defined in the *Mineral Tenure Act*). It does not include "Quarry Resources". Quarry Resources includes earth, soil, marl, peat, sand and gravel, and rock, rip-rap and stone products that are used for construction purposes (as defined in the *Land Act*). Construction means the use of rock or other natural substances for roads, buildings, berms, breakwaters, runways, rip-rap and fills and includes crushed rock. Dimension stone means any rock or stone product that is cut or split on two or more sides, but does not include crushed rock.

The apparent expected end use of the Alumina resource (that of supporting a cement plant raw materials) from Duck Lake Mineral Claim comes within the Industrial Use definition and therefore can be considered under the *Mineral Tenure Act*. Following revisions to the Mineral Tenures Act on July 1, 2012, claims bear the burden of \$5 per hectare for the initial two years, \$10 per hectare for year three and four, \$15 per hectare for year five and six and \$20 per hectare each year thereafter.

HISTORY

In 1948 a spectrographic research study on the coals of British Columbia discovered high values of germanium in the carbonaceous shales and sandstones found in the Lang Creek area. In 1957 the mineral rights to the area were acquired by the now defunct Taiga Mines Ltd. who carried out a bulldozer trenching and a churn and diamond drilling program throughout 1958 and 1959.

In 1981 the property was acquired by Fargo Resources Limited, who conducted a number of trenching and sampling programs between August 1981 and April 1984. Work in 1985 consisted of research on methods of recovering germanium from the arkosic sandstone formation.

In 1986-1987, a drilling program of 9 holes was carried out for a more detailed exploration of germanium bearing brown beds. Tests on clay/shale horizons contained within the brown beds determined that they contain a high quality kaolin.

In May 1987, a hole drilled a distance of 1 km to the northwest of the previous area of sampling also contained kaolin, indicating a potentially large resource of this commodity at Lang Bay.

Starting in May 1987, most of the work at Lang Bay centred on evaluating the property as a kaolin deposit. It was envisaged that if a mine were to ever come into production, the primary product would be kaolin clay with germanium and gallium being valuable by-products.

The 1987 Program

The 1987 drilling program confirmed the presence of a significant thickness of kaolin clay within the prospect. However, the reverse circulation drilling method destroyed the texture of the Insitu clay structure and confused any distinction between:

- a) primary kaolins derived from Insitu alteration (weathering or basement granitoid rocks; or
- b) secondary kaolins within the basin sediments.

The geophysical surveys included seismic profiling, ground magnetic surveys, dipole-dipole resistivity surveys and Schlumberger vertical electric soundings. The seismic surveys were undertaken to define the profile of the basement rocks across the basin. The magnetic surveys were carried out to locate near surface basement rocks, which were found to have strong magnetic signatures. The electrical resistivity surveys were used to locate conductive clay horizons in the subsurface.

The magnetic surveys successfully modelled the shallowing of the basement rocks towards the edge of the basin, although significant 'geologic noise' was encountered due to the presence of large altered granitic boulders in the glacial till. Interpretation of the seismic profiling was constrained by the complexity of the sedimentary units in the basin and the lack of contrast in seismic velocity between certain of these units and the basement. The electrical resistivity surveys successfully delineated conductive clay horizons although it was not possible to distinguish between the primary and secondary kaolins.

Beneficiation studies and laboratory testing of selected samples from the 1987 reverse circulation drilling were carried out by Sutton (1987) who confirmed that certain of the clay horizons were suitable for processing to paper filler clay specifications. Mineralogical investigations of borehole samples from the 1987 drilling by Mak (1987) demonstrated that the kaolin content of the primary kaolin (weathered granitoid rocks) decreases with increasing depth below the surface.

Preliminary testing and examination of cores of the secondary kaolin indicates that the quality and composition of these clays may be highly variable. A test sample of 6 tonnes was shipped to the Elk Falls paper mill near Campbell

River in 1992 with apparently favourable results. Other samples were sent to pulp and paper concerns to be mill tested for linerboard and filler in the manufacture of adhesives.

A calcining test was carried out on a sample of Lang Bay kaolin by Nord Kaolin Company of Jeffersonville, Georgia. The sample was first beneficiated by Magnetic separation and ozone bleaching and this improved the brightness to that of a standard performance filler. The sample was then calcined and brightness values equivalent to those of imported calcined grades were achieved. This is significant because calcined kaolin produces a superior performance and sells for up to four times the price of filler grade. The calcined grade requires heating by natural gas, which only recently has been made available for industrial users in the Powell River area.

1999 DIAMOND DRILLING

In May 1999 a program of 4 diamond drill holes were completed as summarized in Table II.


Hole #	Location		Elevation	Azimuth	Dip	Length	Comments
	Northing	Easting					
DL-99-01	2600N	2400E	154m	000	-90	56.24m (184.5ft)	92 ft overburden
DL-99-02	0600N	2200W	135m	000	-90	50.29m (165ft)	15 ft overburden
DL-99-03	3800N	6000W	142m	000	-90	47.85m (153ft)	115 ft overburden
DL-99-00	9200N	1600W	156m	000	-90	(150ft)	>150' of overburden
Total						198.88m (652.5ft)	

Grid centre was at the intersection of the Duck Lake Road and the Powerline Road.

The drill used was a unitized Boyles 37A which was required to penetrate the variable thickness of boulder gravel, sand and till.

Hole #DL-99-01, located 260m north of the powerline encountered 92 feet (28.04m) of coarse gravel and till. The Cretaceous section consists of dark green shale which grades to shaly sandstone. Well altered green pebble conglomerate occurs between 152'2" to 156'5". Green to brown sandstone was found below the pebble conglomerate horizon which contain minor slickensides at 30° to core axis. A well altered, friable pebble conglomerate occurs at the bottom of the hole. This pebble conglomerate is characterized by matrix supported granite clasts. More whitish matrix is found at the bottom of the hole.

Diamond drill hole #DL-99-02 was located west of Duck Lake Road on the north side of the powerline. Overburden was only 16.5fr (4.72m) and consists of boulders, glaciomarine stony clay over 1 foot of granitic boulders. The Cretaceous sequence was similar to Hole #1 which was alternating green-brown shale and coarse green speckled sandstone. Minor wispy coal partings were noted in the sandstone between 50.3m to 51.4m. The layering bedding is at 82° to core axis. The sequence appears to be a prograding deltaic depositional environment in which minor coal is forming elsewhere in lagoonal portions in the immediate vicinity and being eroded and redeposited in the outer delta turbiditic sequence. Near the bottom of Hole #2 an intense brown shale was encountered. Some sections are a dark red brown. Slickensides at 55° to core axis were noted between 137.10 ft to 139.5ft.

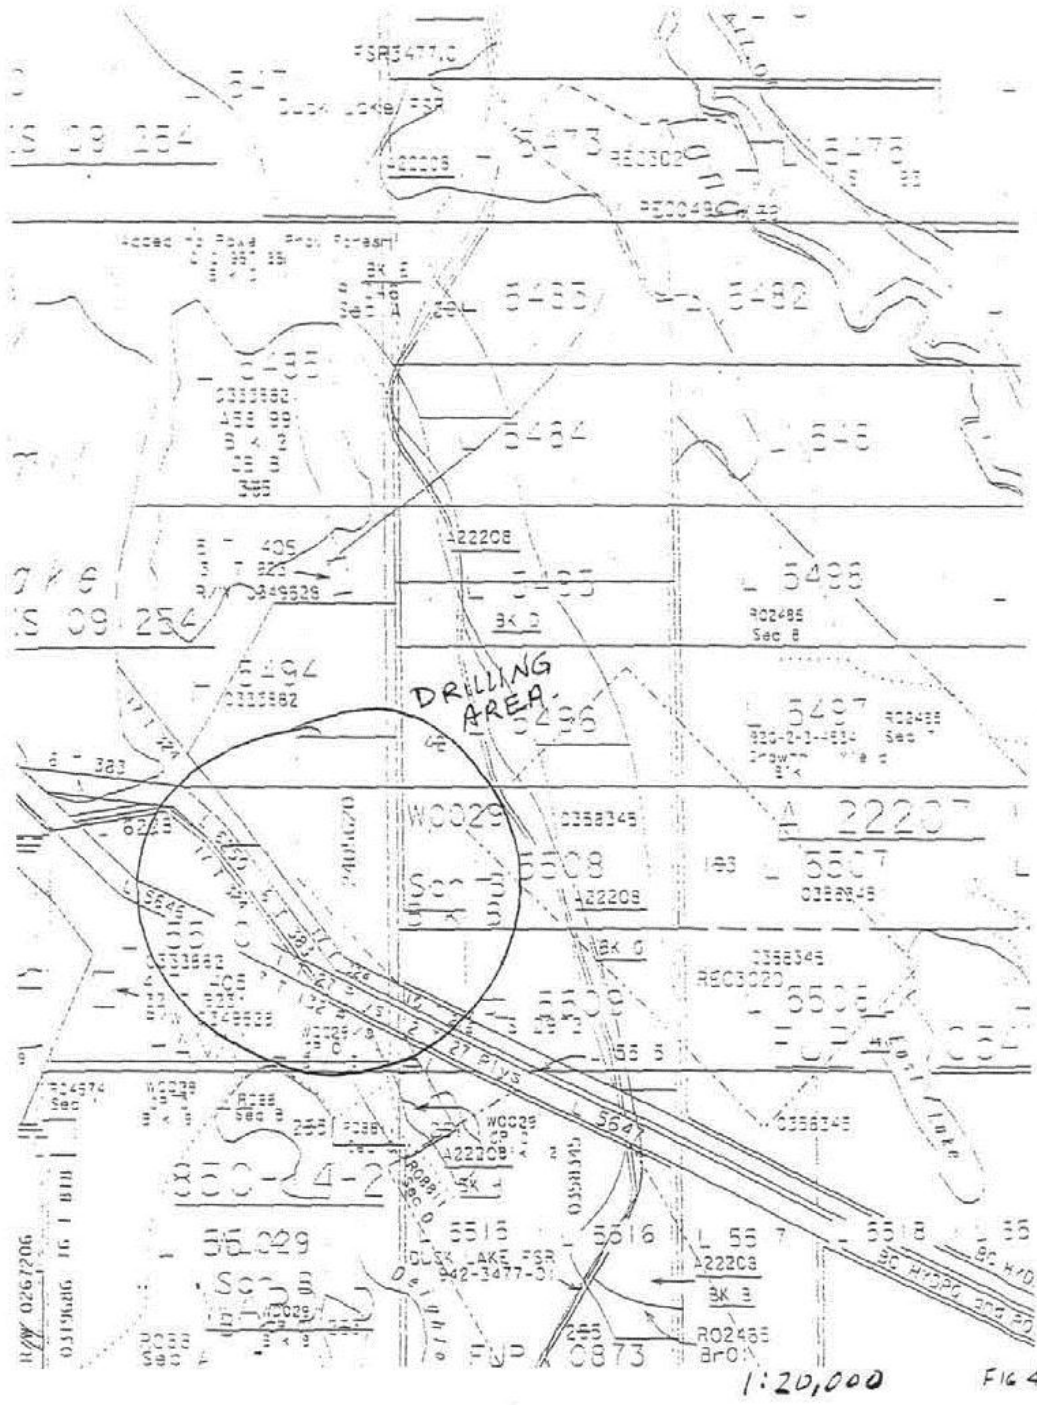

SURFACE TENURE

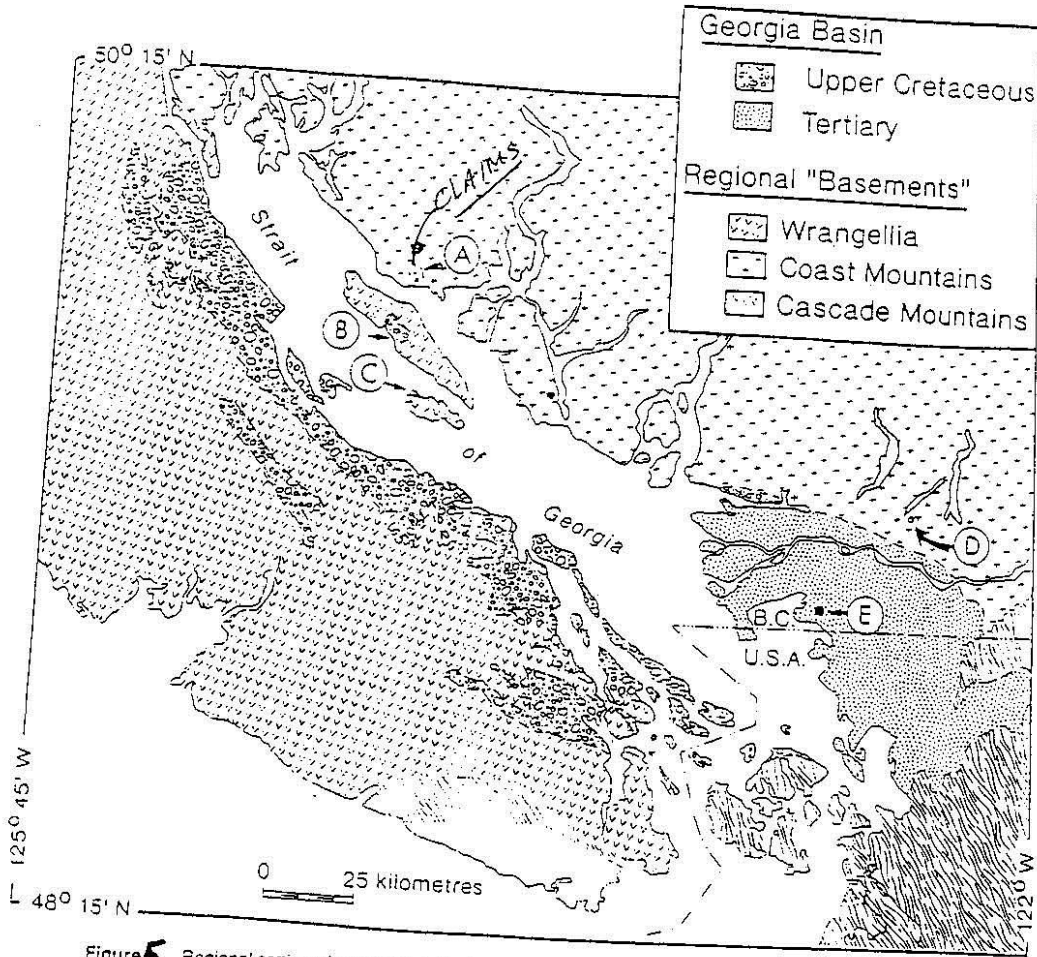


Figure 5 Regional setting of the Georgia Basin (modified from Monger, 1990). Letters indicate localities discussed in this study. A. Lang Bay outlier; B. Mouet Creek outlier; C. Lasqueti Island outlier; D. Blue Mountain outlier; E. Richfield-Pure Sunnyside exploration well.

REGIONAL GEOLOGY

Figure 5

130

Hole #DL-99-03 was drilled close to the west edge of the basin west of hole #2 along the powerline. There was over 115 feet of coarse gravel and sand overburden. Strong water inflow at 52' and again at 80' made driving of the casing difficult. The Cretaceous sequence is characterized by dark brown shale. The bottom of the hole encountered grey-green conglomerate composed of matrix supported rounded to angular fragments of mostly lighter grey shale. Numerous narrow lamphrophic dykes were noted. Some sections (approx 15%) are heavily oxidized and leached particularly at the bottom of the hole.

Hole #DL-99-04 was located on the Duck Lake Road, however over 150 feet of sand and gravel was encountered without hitting bedrock.

REGIONAL GEOLOGY

The sedimentary rocks underlying the Duck Lake Claims are a small outlier of the extensive Georgia Basin, which is well known in the Nanaimo-Comox area due to large scale coal mining.

The Georgia Basin overlies three different basement entities: Wrangellia terrane on Vancouver Island; the Coast Belt on the mainland of British Columbia; and Cascade terranes in northwest Washington State. The main structural control on the sub-Georgia Basin rocks and the Georgia Basin itself is underthrusting of the Farallon/Kula oceanic plates beneath the North American Plate (Mustard and Rouse, 1991). A mid to late Cretaceous west-vergent thrust system is preserved at the southern margin of the Georgia Basin and in the eastern Coast Belt, mainly east of Harrison Lake. Dextral strike-slip faults influenced both basin formation and depositional patterns during the Tertiary. The basin has also been affected by early Tertiary compression, which resulted in southwest directed thrusting in the Nanaimo Group and possibly caused northwest plunging folds in the Chuckanut Formation. Younger (Miocene?) northeast trending faults and folds are evident on gravity and seismic profiles of the Fraser River lowlands. These are probably the subsurface expression of Tertiary structures preserved in the Coast and Cascade Mountains to the east and north (Mustard and Rouse, 1991).

The Nanaimo Group constitutes up to 4 km of Santonian (locally Turonian) to Maastrichtian age sedimentary rocks. The strata are commonly subdivided into nine formations comprising conglomerate, sandstone and mudstone with coal in lower units. The basal, coal-bearing formations appear to have formed in coastal plain, deltatic and shallow marine environments. Most recent interpretations of the other formations emphasize submarine fan models. Interpretations of the tectonic controls on basin sedimentation include forearc, strike-slip and foreland models (Mustard and Rouse, 1991).

Except for an isolated occurrence of Paleocene rocks on Lasqueti Island, the Tertiary rocks of the Georgia Basin are only exposed in the lower Fraser Valley and northwestern Washington. The main stratigraphic components are non-marine clastics of the Paleocene-Eocene Chuckanut Formation of Washington State, the partly equivalent upper Burrard and Kitsilano Formations of the Vancouver area, the late Eocene to Oligocene age Huntingdon Formation and younger (mostly Miocene) sedimentary rocks known from a few surface exposures and subsurface drilling. Upper Cretaceous rocks occur disconformably beneath the Tertiary strata at Burrard Inlet in Vancouver (Rouse et al., 1975) and in the western Fraser River delta subsurface.

LOCAL GEOLOGY

A sedimentary outlier of about 35 km is preserved at Lang Bay, about 13 km southeast of Powell River. Outcrop is limited to discontinuous exposures in Lang Creek (Mustard and Rouse, 1991). Conglomerate, sandstone and mudstone dip 10-15° to the southwest. The sequence unconformably overlies granodiorite and, in the northwest, part of the outlier, mafic volcanics. Crickmay and Pocock (1963) and Bradley (1972) reported late Cretaceous palynomorphs from this outlier and suggested correlation with the lower Nanaimo Group (Comox or Extension Formations). White (1986) reviewed the exploration history of the area, which most recently was evaluated for industrial kaolin. More than 50 drillholes were emplaced during 1987-89 by Fargo Resources Ltd. and Brenda Mines Ltd. to evaluate the kaolin deposits. The thickest drill intersection of Upper Cretaceous strata is about 70m, with Quaternary alluvium directly overlying the Cretaceous strata.

Two of the core logs from the 1987 work are shown in Figure 7 (Mustard and Rouse, 1991). Fining and thinning upward trends are apparent, both on the scale of the preserved sequence (tens of metres) and as smaller cycles (a few metres or less). Conglomerates are clast-supported and moderately sorted with subround pebbles and rare cobbles in an arkosic matrix. Conglomerate clasts are predominantly granitic or mafic volcanic in composition, compatible with local derivation. Sandstones are arkosic or lithic arenites. Mudstones are brown or grey-green and massive, rarely laminated. Normal grading is common in both conglomerate and sandstone beds. Many sandstones display planar or (less common) trough crossbedding. The few well-exposed crossbeds in Lang Creek indicate paleoflow towards the southwest. The small scale fining upward cycles display gradational upward change from coarse, graded sandstone with abundant mudstone ripups to trough crossbedded medium grained sandstone, to rippled or wavy bedded fine grained sandstone and siltstone, to massive mudstone. Many mudstones are carbonaceous and contain abundant plant debris. Rare coal lenses are present in Lang Creek and in one place; in situ root systems are preserved (Mustard and Rouse, 1991).

The metre-scale cycles display features of fluvial channel and point-bar deposits. The isolated graded sandstone beds in mudstones are interpreted as crevasse-splay deposits. These features, plus the presence of coal lenses, and in situ rootlets support a fluvial-floodplain depositional model.

Palynomorph assemblages have been obtained from about 6 surface samples along Lang Creek and 6 mudstone layers in drillcore (Table 1). Most palynomorphs range from the Santonian to Campanian, but a few range to Albian-Cenomanian, and others into the Maastrichtian. The Santonian-Campanian range agrees with the invertebrate-based range given for the Comox through Extension Formations.

At Lang Bay, several palynomorph species appear restricted to the upper beds, viz. *Proteacidites thalmani*, *P. marginus*, *Tricolpopollenites divergens*, and *Tricolporopollinites punctatus* (Mustard and Rouse, 1991). These are also found in the Extension-Protection Formations of Vancouver Island, and the Lions Gate Formation at Vancouver (Rouse et al., 1975, p. 469, Table 1), but appear absent from Comox and older equivalents. Hence, preliminary results suggest that there is a contact between younger and older segments of the Santonian-Campanian series near the top of the Lang Bay sequence.

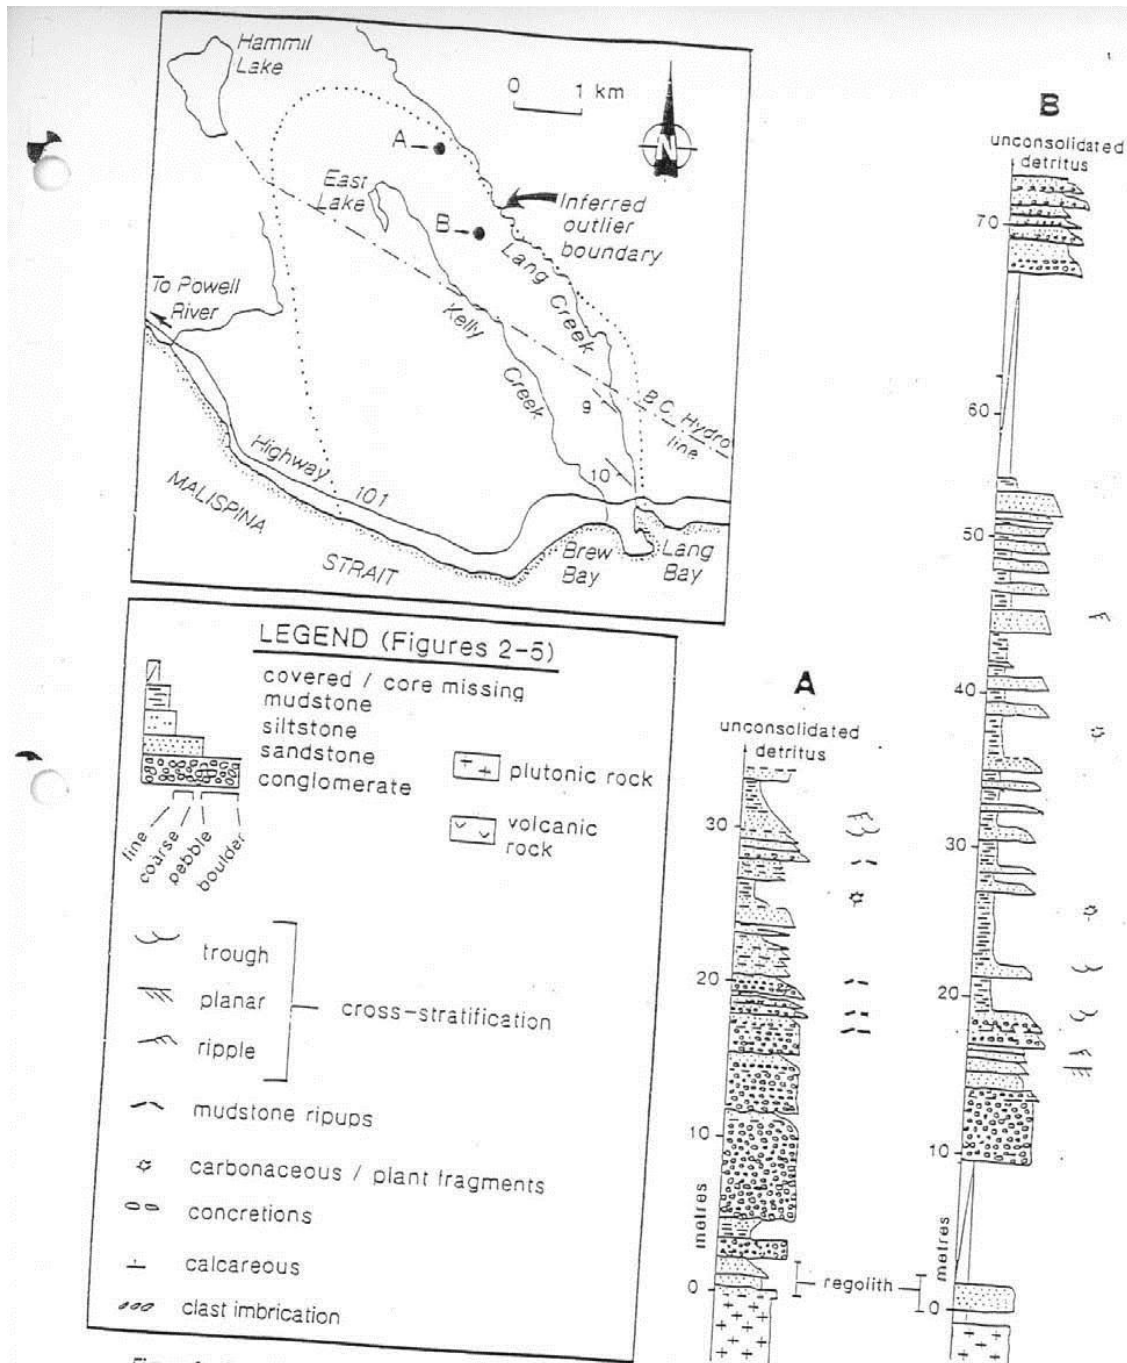


Figure 2. Lang Bay outlier with logs from two drillholes. Outlier boundary is modified from White (1986). (after Mustard + Rowsee).

2006 DIAMOND DRILLING

A short program of diamond drilling was completed in December 2006.

Hole locations are plotted on Figure 7. The core was split and assayed at Chemex Labs Ltd. The drillcore is stored in our locked core shed located on private property just south of the 2006 drilled area located at N49°49.881 + W124°23.253

Hole #	Location		Elevation	Azimuth	Dip	Length
	Northing	Easting				
LB-06-01	49°48.320	124°23.318	125m	Vertical	-90	92.97m (305 ft)
LB-06-02	49°48.370	124°23.533	125m	Vertical	-90	71.62m (235 ft)
LB-06-03	49°48.410	124°23.609	125m	Vertical	-90	51.21m (168 ft)
LB-06-04	49°48.417	124°23.645	125m	Vertical	-90	48.77m (160 ft)
LB-06-05	49°48.368	124°23.492	125m	Vertical	-90	28.96m (95 ft)
Total						293.53m (963 ft)

The sequence of sandstone and shale encountered in the 2006 program consisted of lesser shale and more abundant kaolinized sandstone.


Chemical analysis by Chemex Labs was by MEXRF06 protocol for high precision results plus loss on ignition. All elements were by lithium meta or tetra borate fusion.

Discussions have been held with major cement producers as to the suitability of the sandstone-shale sequence for cement raw materials as a source of SiO₂ and Al₂O₃.

Average chemistry of the drillholes is as follows:

	Weighted average SiO ₂	Weighted average Al ₂ O ₃	Weighted average Alkali (Na ₂ O + K ₂ O)
Hole LB-06-1	62.15%	16.01%	2.49%
Hole LB-06-2	59.63%	15.88%	2.38%
Hole LB-06-3	63.03%	14.35%	2.42%
Hole LB-06-04	62.03%	16.16%	2.44%

These averages are within the specifications of the cement producers and further work will be done by the Cement Plant in house XRF and pulps have been delivered to the Cement Plant.

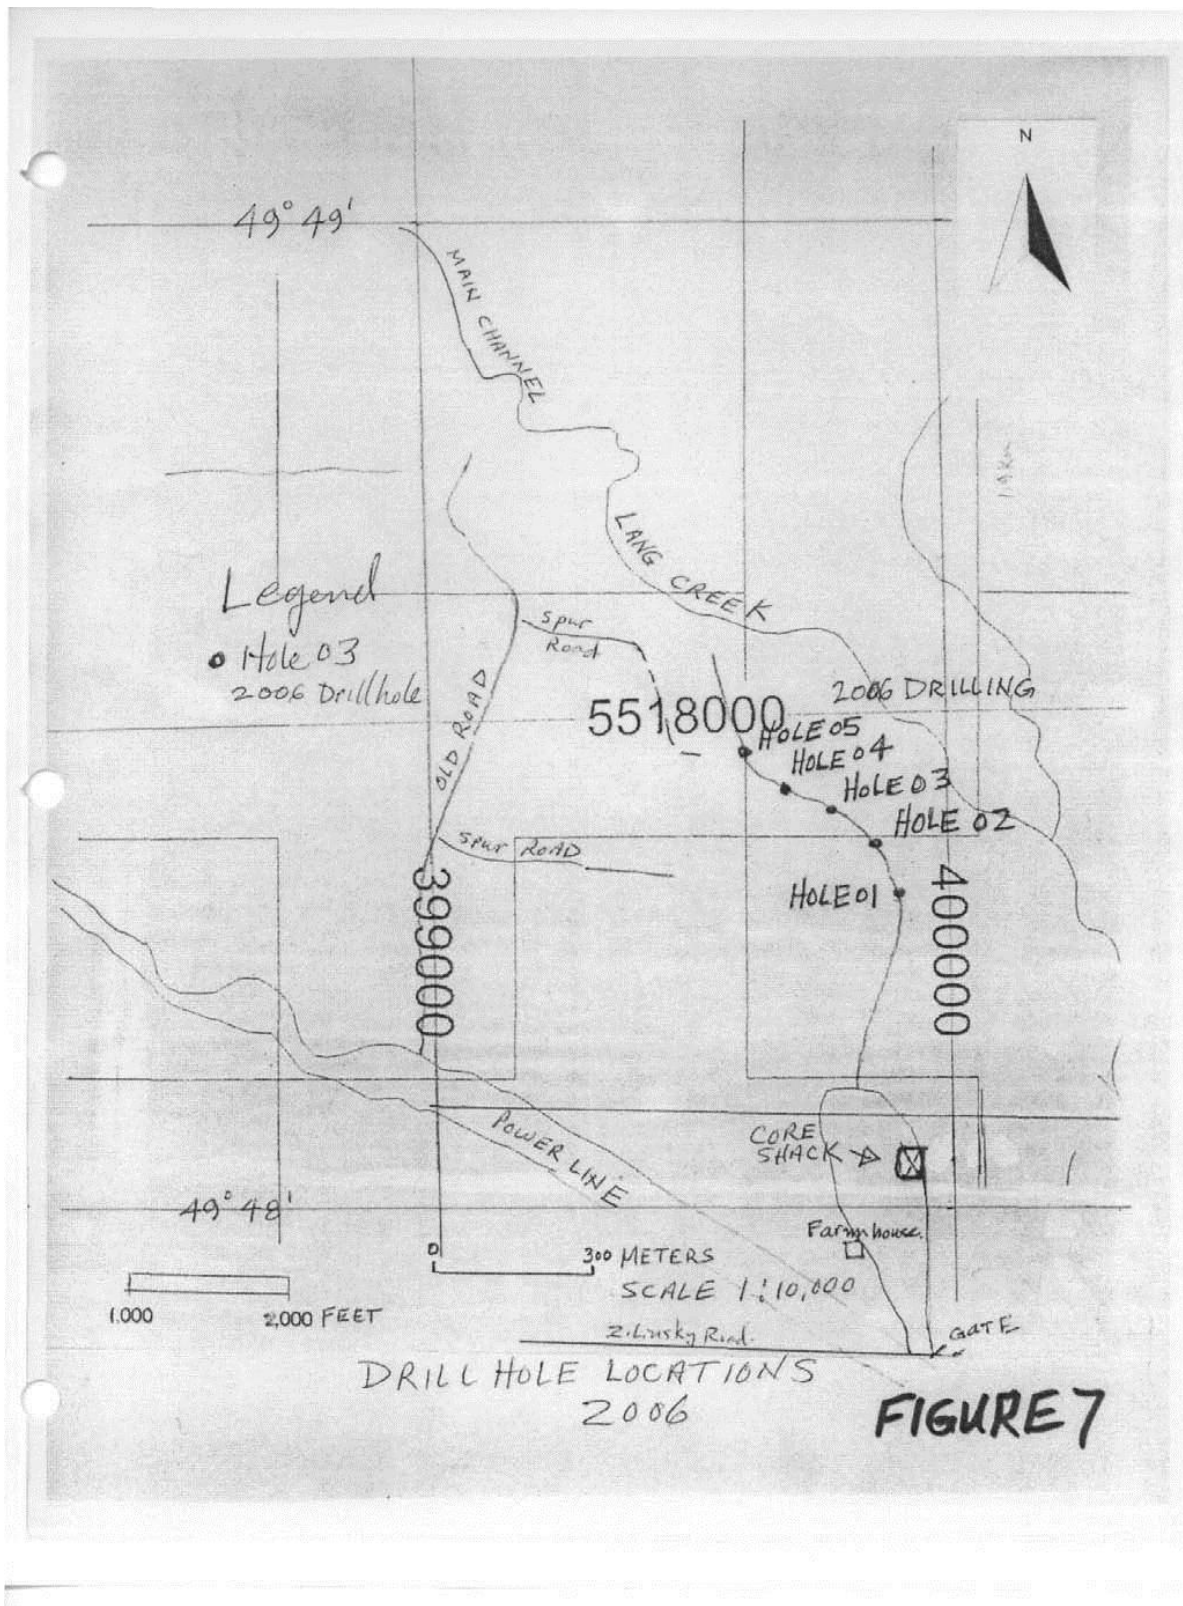


GEOPHYSICS

A large amount of geophysical testing was completed in the period 1986 to 1989 including ground magnetometer, seismic refraction, electrical conductivity, dipole-dipole resistivity and some down-the-hole electrical soundings.

Seismic refraction work in 1999 was carried out primarily to give some indication on the areas of thinner overburden but unfortunately the velocities of the compacted clay-rich till and glacial-fluvial stony clays give very similar values to the velocities encountered in the Cretaceous shales which form the bedrock.

POWELL RIVER BASIN.

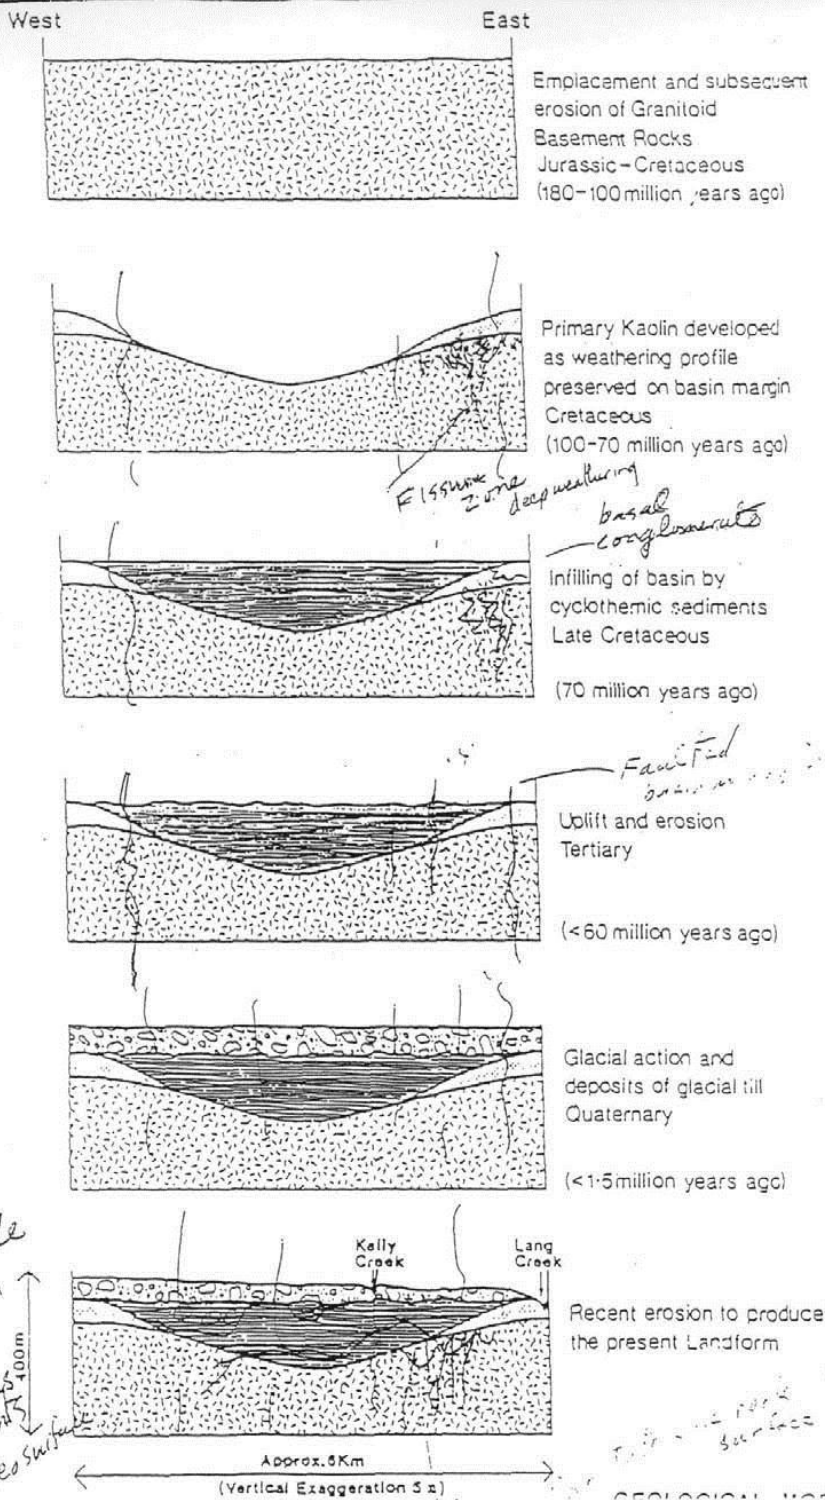

Considerable elevation contrast to top of Cretaceous sediments "paleo surface"

100m

Top of the 100m surface













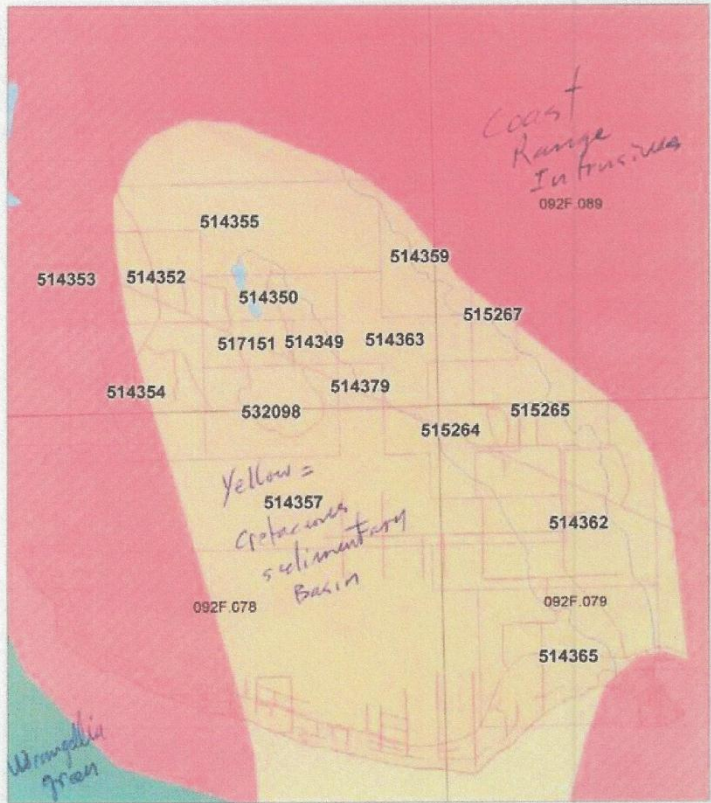


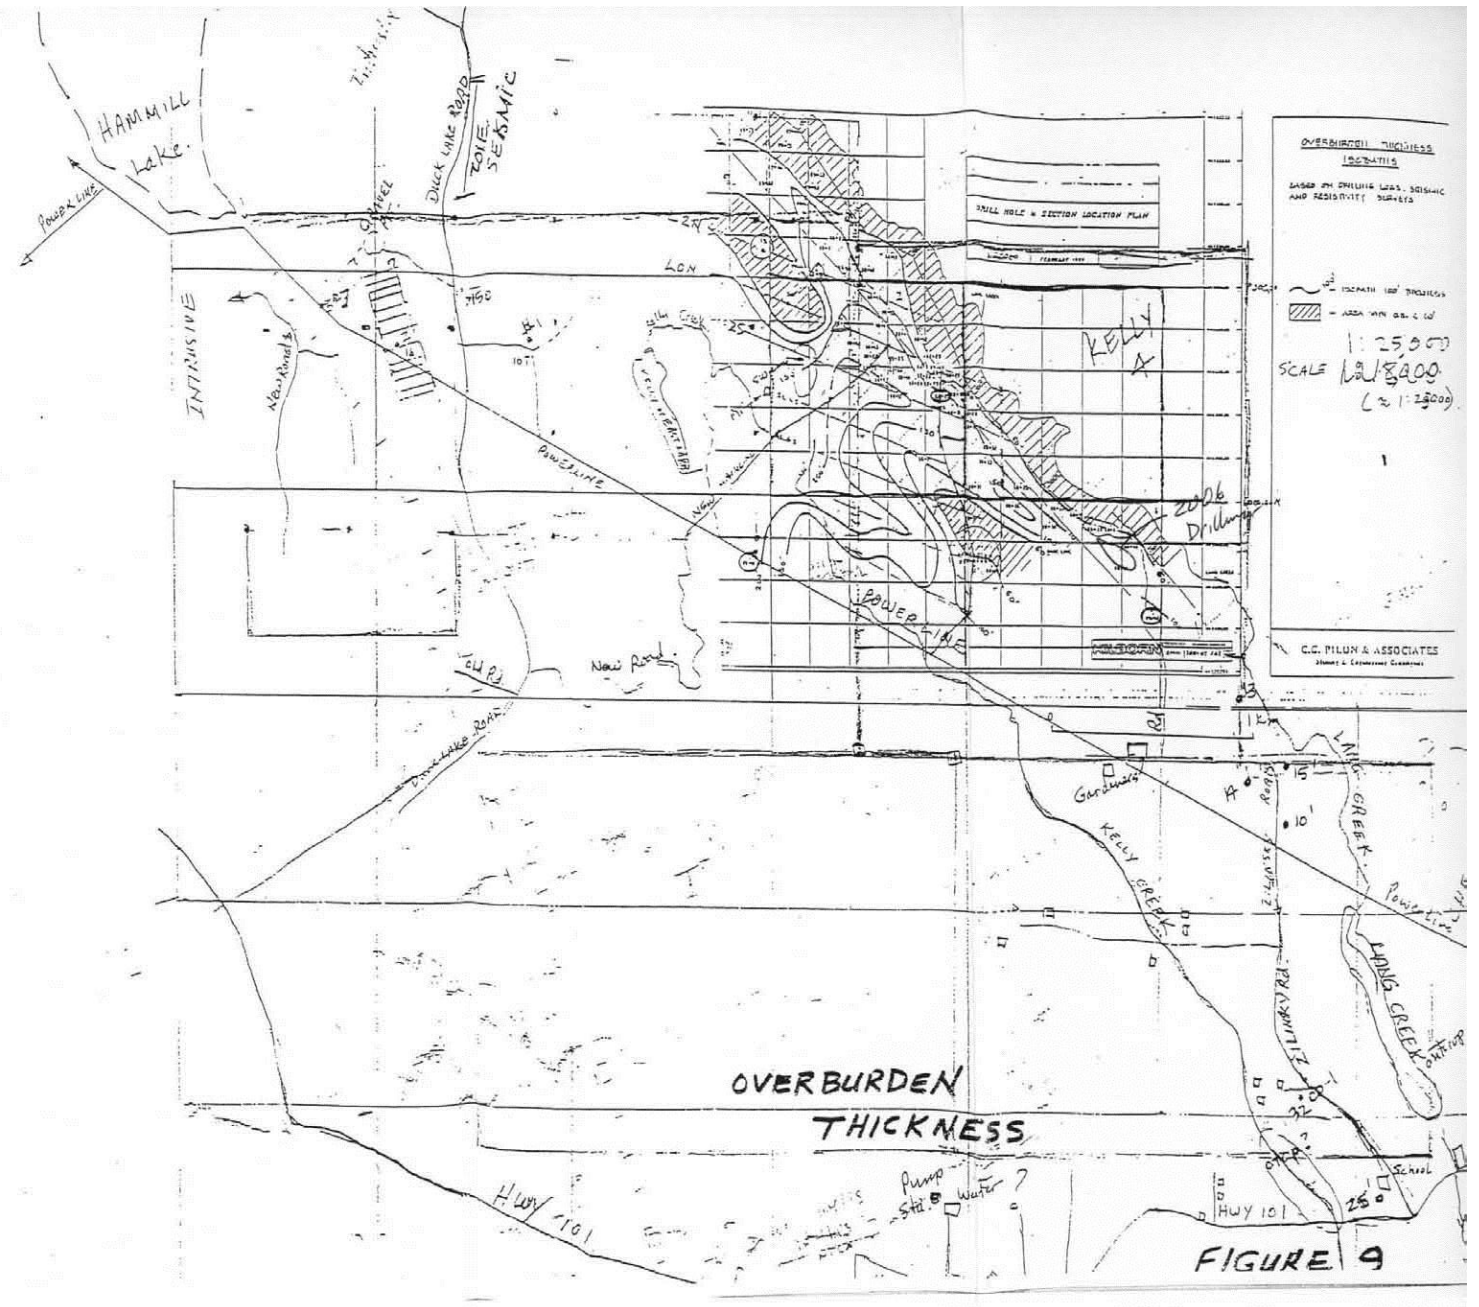
FIGURE 9

LANG BAY Geology

- First Nations Layers**
-  Indian Reserves
- Parks Layers**
-  BC Parks (July 2004) outline (<1M)
- Mineral Titles Layers**
-  MTO Mineral Titles Online Labels <200K
 - Placer
 - Mineral
 -  MTO Mineral Titles Online Polygons
 - Placer
 - Mineral
- Topographic Layers**
-  Roads 1:20K undefined
 -  Coast 1:20K (<1M)
 -  Lakes 1:50K (<300K)
 -  Rivers 1:50K (<300K)
 -  Border line 1:250K (<2M)
- Grid Layers**
-  Grid 1:20K maps - labels
 -  Grid 1:20K maps - outline
 -  Grid 1:250K maps - outline



SCALE 1 : 62,010



EXPLORATION 2012

In 1949, the British Columbia Ministry of Mines reported results of a reconnaissance examination of coal samples from Lang Bay: the germanium values in as were reported as high as 1%. This report led Dr. F. C. Buckland to Taiga Mines Ltd. to stake 136 claims in the Lang Creek area. Subsequently, the company drilled 7 auger holes and 19 churn holes near the northeast edge of the property to examine the coal strata at depth, and excavated 6 trenches and a few small pits.

Reported results (Skerl. 1959) indicated intersections of:

- 1.4 metres with 68 grams GeO₂ per tonne,
- 1.4 metres with 136 grams GeO₂ per tonne,
- 0.6 metres with 139 grams GeO₂ per tonne,
- 0.7 metres with 90 grams GeO₂ per tonne.

Fargo Oil Corporation of Vancouver acquired the preproperty in 1981 and has carried out laboratory studies and beneficiation tests on samples recovered from two re-opened trenches.

The two samples, Hole 87-17: 170'-122'; and Hole 87-19: 80'-82' (see figure ? for Locations) assayed 2.13 and 2.07 g/tonne. Other Ge assay values are listed on the flowing pages 23, 24 and 25.

ICPMS 50 element 4 acid Ultra Trace Level was applied to sample intervals Lang Bay 87-17, 120' to 122' and Lang Bay 87-19, 80' to 82' and confirmed Germanium and Gallium as well as additional rare earth element presence:

This 2011 testing analyzed for Germanium and Gallium, also gave values for Scandium, Sc, 11.7 and 15.9 ppm; Yttrium, Y, 15.4 and 16.4ppm; Lantharum 15.7 and 16.8ppm; and Cerium, Ce, 49 and 70ppm. These values point to broad potential for greater concentration of rare earth elements in selected beds.

Investigation into understanding of Rare Earth Element potential recovery continues.

The Lang Bay shale and their high purity alumina rating and related REE recovery ranking from proponent of similar shale units in Quebec is still awaited from acid process innovator, Orbite.

Orbite Aluminae Inc. continues to take steps that may enable Orbite to provide rare earths and rare metals as early as 2013. The high purity acid plant will allow rare earth and rare metal concentrates from third parties such as Lang Bay to be processed and separated in parallel to Orbites production of high purity alumina.

Besides REE it is further suggested that iron and silica recovery might also be possible from high aluminous shale.

Favourable transportation logistics, especially closeness to tidewater barge transportation, make Lang Bay a resource worthy of continued research.

Investigation into understanding of Rare Earth Element potential recovery continues.

The Lang Bay shale and their high purity alumina rating and related REE recovery ranking from proponent of similar shale units in Quebec is still awaited from acid process innovator, Orbite.

Orbite Aluminae Inc. continues to take steps that may enable Orbite to provide rare earths and rare metals as early as 2013. The high purity acid plant will allow rare earth and rare metal concentrates from third parties such as lang Bay to be processed and separated in parallel to Orbite's production of high purity alumina.

Besides REE it is further suggested that iron and silica recovery might also be possible from high aluminous shale.

Favorable transportation logistics, especially closeness to tidewater barge transportation, make Lang Bay a resource worthy of continued research.

Samples assayed in 2012 assayed 17.84%, 19.94% and 20.69% Al_2O_3 . The combined P_2O and Na_2O varied from less than 1% to a high of 2.50% alkalis.

Ge and Ga Analyses of Lang Bay Samples

<u>Sample</u>	<u>Footage</u>	<u>Ge g/T</u>	<u>Ga g/T</u>
86-1	68-70	36	18
86-1	70-72	34	15
86-1	72-74	73	16
86-1	74-76	4	8
86-1	76-78	3	12
86-2	72-74	4	16
86-2	74-76	40	17
86-2	76-78	3	7
86-3	85-87	18	13
86-3	87-89	112	15
86-3	89-91	8	19
86-4	62-64	8, 16	--
86-4	64-66	17	33
86-4	66-68	12	32
86-4	68-70	4, 5	19
86-4	70-72	129	28
86-4	72-74	196, 210	26
86-4	74-76	48	23
86-4	76-78	9, 13	--
86-4	78-80	<3	--
86-5	64-66	15	8
86-5	66-68	2, 6	15
86-5	68-70	5	19
86-5	70-72	21	39
86-5	72-74	27	39
86-5	74-76	28	29
86-5	76-78	137	40
86-5	78-80	17, 19	32
86-6	66-68	12	25
86-6	68-70	11, 14	32
86-6	70-72	12	33
86-6	72-74	10	11
86-6	74-76	5	23
86-6	76-78	13	17
86-6	78-80	12	35
86-6	80-82	63, 66	34
86-6	82-84	36	36

Ge and Ga Analyses of Lang Bay Samples (Continued)


<u>Sample</u>	<u>Footage</u>	<u>Ge g/T</u>	<u>Ga g/T</u>
86-7	72-74	<3	20
86-7	74-76	<3	10
86-7	76-78	<3	20
86-7	78-80	<3	25
86-7	80-82	<3	25
86-7	82-84	<3	20
86-7	84-86	<3, 3	30
86-7	86-88	<3	20
86-7	88-90	<3	30
86-7	90-92	4, 7	30
86-7	92-94	<3	30
86-7	94-96	<3	25
86-8	57-59	17	30
86-8	59-61	<3, 2	10
86-8	61-63	9	25
86-8	63-65	28, 37	20
86-8	65-67	26	20
86-8	67-69	8, 12	35
86-8	69-71	30	30
86-9	73-75	8	10
86-9	75-77	115, 114	20
86-9	77-79	88	10
86-9	79-81	44, 40	10
86-9	81-83	<3	<5

The following data represent semiquantitative analyses of raw and calcined coal ores, previously prepared for Germanium and Gallium analyses. The sample dissolution process is effective for dissolving Ge and Ga but may not be sufficient for all other elements present in these materials. Care should be exercised when evaluating this data since it is semiquantitative. Some precipitated species existed in most of the samples. These species are assumed to be fluoride salts of calcium, magnesium, aluminum and possibly silicon.

ST-S15683 p 170,172

E l e	Raw	Raw	Calcined	Raw	Raw	Calcined	Raw	Raw	Raw
	86-4 72-74	86-4 70-72	86-5 76-78	86-5 76-78	86-6 80-82	86-6 80-82	86-7 72-74	86-8 69-71	86-9 75-77
Si	18%	14%	18%	17%	15%	16%	18%	17%	18%
Al	7"	9"	10"	10"	9"	11"	6"	8"	10"
Fe	1.3"	1.2"	2.7"	2.5"	2.0"	2.5"	2.6"	3.3"	1.5"
Ca	.2"	.1"	.2"	.2"	.3"	.2"	.2"	.2"	.2"
Mg	.6"	.3"	.1"	.1"	.2"	.2"	.2"	.4"	.1"
Ti	.3"	.4"	.4"	.4"	.4"	.2"	.3"	.3"	.4"
Mn	.01"	.01"	.03"	.03"	.02"	.02"	.04"	.05"	.02"
Ba	.01"	.01"	.01"	.01"	<.01"	<.01"	.01"	.01"	.01"
Zn	60ppm	90ppm	90ppm	80ppm	30ppm	50ppm	100ppm	100ppm	100ppm
B	100 "	200 "	200 "	200 "	100 "	100 "	100 "	200 "	200 "
Cr	20 "	20 "	20 "	20 "	30 "	20 "	20 "	30 "	20 "
Cu	40 "	40 "	70 "	70 "	50 "	60 "	40 "	60 "	50 "
Ni	10 "	10 "	10 "	10 "	10 "	10 "	10 "	10 "	10 "
Sr	50 "	40 "	60 "	70 "	70 "	60 "	40 "	50 "	90 "
Mo	<50 "	<50 "	<50 "	<50 "	<50 "	<50 "	<50 "	<50 "	<50 "
Co	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "
Sn	<100 "	<100 "	<100 "	<100 "	<100 "	<100 "	<100 "	<100 "	<100 "
V	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "	<10 "
Be	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "
Au	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "
In	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "
Ir	<2 "	<2 "	<2 "	<2 "	<2 "	<2 "	<2 "	<2 "	<2 "
Pd	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "
Pt	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "	<3 "
Ag	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "	<1 "
Y	10 "	<10 "	10 "	<10 "	10 "	<10 "	<10 "	<10 "	<10 "
Ge	200 "	140 "	160 "	160 "	60 "	160 "	<3 "	30 "	120 "

Stan K...

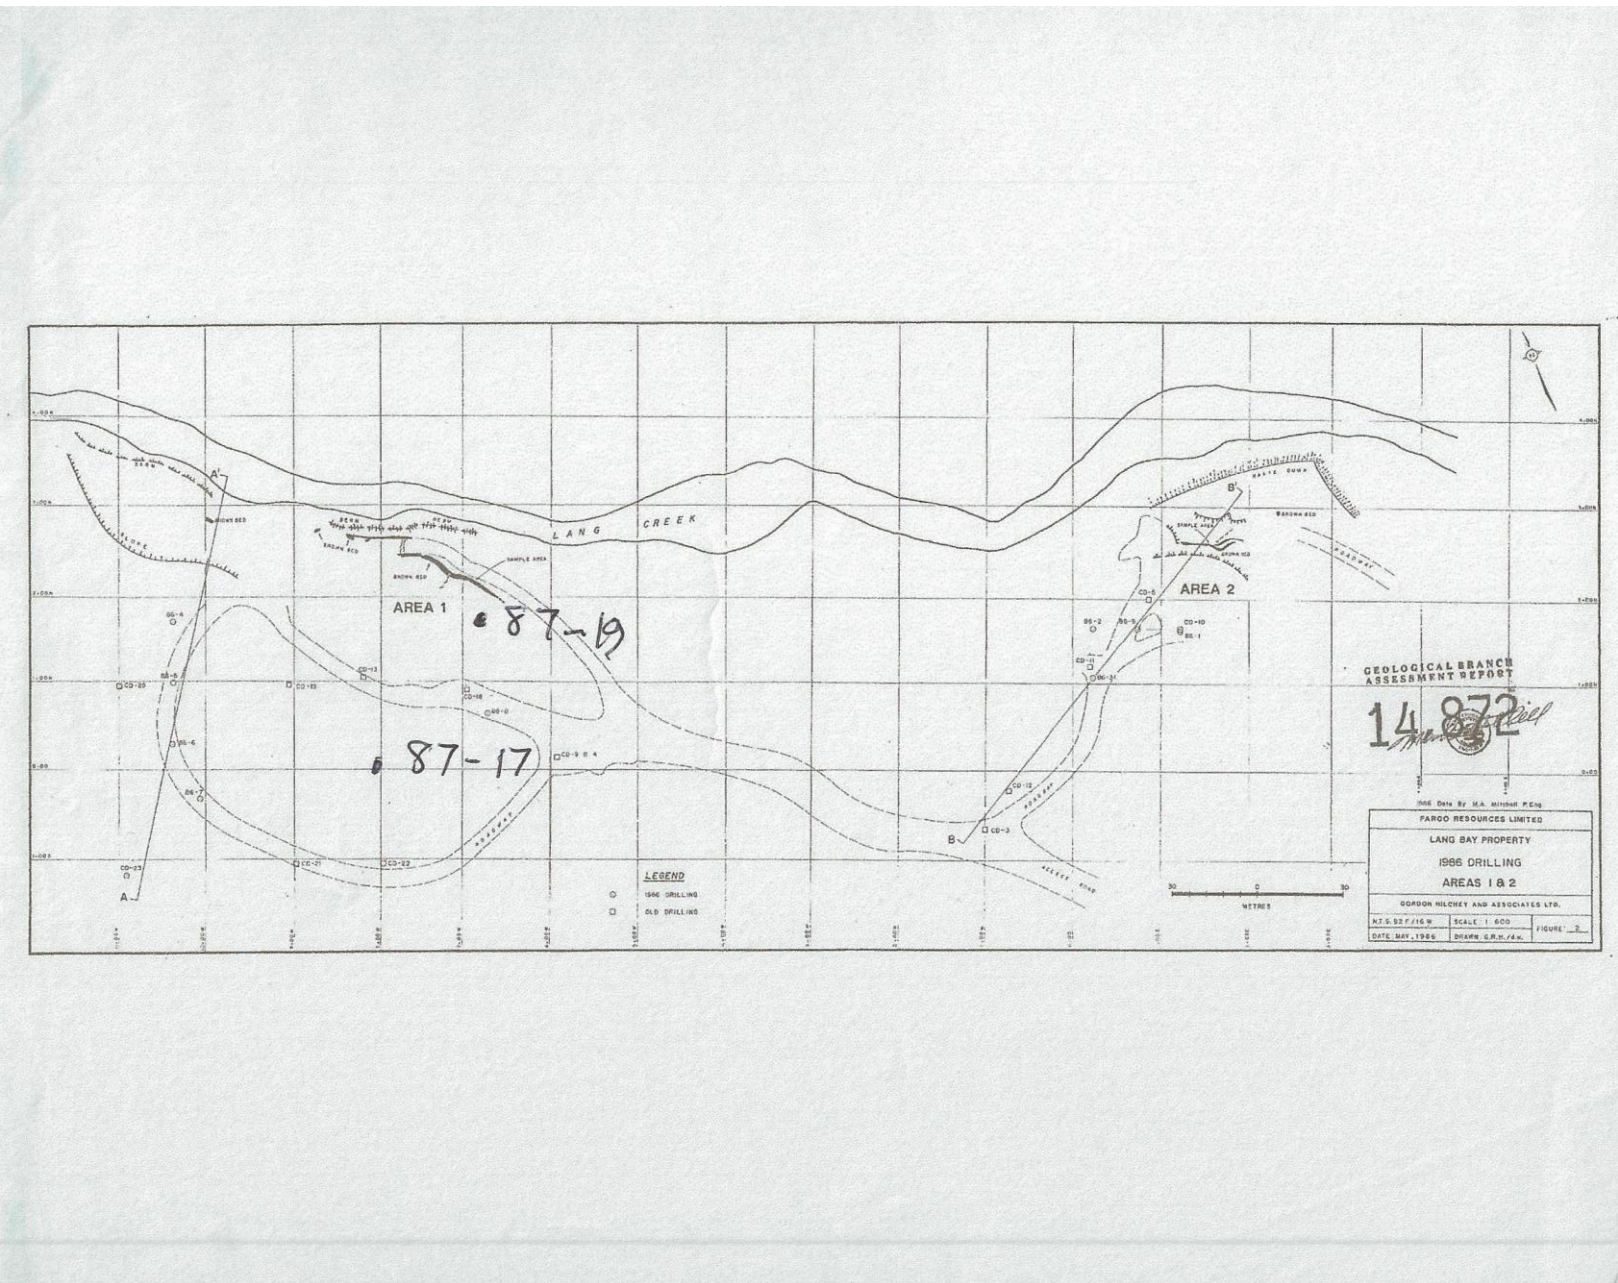

CONCLUSIONS and RECOMMENDATIONS

The Duck Lake Property (Lang Bay Project) consists of 20 cell claims located about 15 km southeast of Powell River Townsite. The claims are 3 km north of Highway 101 at Myrtle Point. Access is via the Duck Lake Forestry Road or alternatively along the Powerline of Zilinsky Road.

The area is underlain by Upper Cretaceous shale-sandstone and minor coal, which can be correlated with the Nanaimo Group.

Previous work on the eastern margin of the outlier basin in the 1980's and early 1990's suggest that there is good potential to define primary and secondary low alkali kaolin deposits.

A 1999 program consisted of 4 diamond drillholes (totalling 198.88m) and 4.3 km of seismic refraction geophysics. The drilling encountered dark green shale, shaly sandstone and green pebble conglomerate. In some holes a distinct alternating sequence of green to very brown shale. The interval appears to be a prograding detritic depositional environment in which minor coal is forming in lagoonal portions in the immediate vicinity and then being eroded and redeposited in the outer delta-turbiditic sequence.

The five holes drilled in the 2006 program intersected a series of interbedded green and brown sandstone and shale.

A major problem in the economic evaluation the area is the variable thickness of till and clay-rich overburden which ranges from <15 feet to >150 feet within relatively short distances.

The seismic refraction survey gave ambiguous results since the velocities of the compacted till are very similar to the velocities in the Cretaceous shale. It is recommended that a resistivity survey be done over the seismic lines to differentiate between overburden and altered bedrock. The resistivity data will provide location and depth distribution of shallow, electrically conductive materials that may be correlated with alteration zones. Based on previous experience in the area, the sedimentary bedrock where the alteration occurs has seismic velocities of the order of 2500 m/s to 3100 m/s. In order to clarify that the conductive anomalies are in the sedimentary rock sequence and not within the overburden, seismic refraction surveying should be carried out in the target areas. This seismic information together with the resistivity data would be used to select drillhole locations and would serve as the basis for additional exploration in the area.

The Lang Bay outlier consists of interbedded chert-quartzite conglomerates, arkosic sandstones, siltstones, mudstones and coals. The sediments were deposited in a fluvial environment of varying intensity which is reflected in the generalized geological section.

Past exploration near the northeast edge of the outlier has identified coal-bearing sediments of variable thickness, which have anomalous germanium values and which extend over at least a 350 metre distance.

Investigation into understanding of Rare Earth Element potential recovery continues.

The Lang Bay shale and their high purity alumina rating and related REE recovery ranking from proponent of similar shale units in Quebec is still awaited from acid process innovator, Orbite.

Orbite Aluminae Inc. continues to take steps that may enable Orbite to provide rare earths and rare metals as early as 2013. The high purity acid plant will allow rare earth and rare metal concentrates from third parties such as Lang Bay to be processed and separated in parallel to Orbite's production of high purity alumina.


Besides REE it is further suggested that iron and silica recovery might also be possible from high aluminous shale.

Favorable transportation logistics, especially closeness to tidewater barge transportation, make Lang Bay a resource worthy of continued research.

Samples assayed in 2012 assayed 17.84%, 19.94% and 20.69% Al_2O_3 . The combined P_2O and Na_2O varied from less than 1% to a high of 2.50% alkalis.

These beds which lie immediately above basement rocks belonging to the Coast Plutonic Complex have been the main exploration target. If the beds host economic grades of germanium and a successful recovery process can be developed, then excellent potential for expanding the reserves westward exists. Coal-bearing sediments situated Stratigraphically above these beds may host significant germanium values as well, although further investigation is required to assess their potential.

Respectfully submitted,

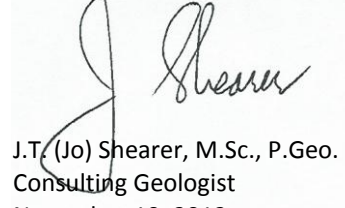A handwritten signature in black ink, appearing to read 'J. Shearer', is written over a light blue rectangular background.

J.T. (Jo) Shearer, M.Sc., P.Geol.
Consulting Geologist
November 10, 2012

COST ESTIMATE for FUTURE WORK

The Duck Lake Claims require continued geological mapping and hand trenching in certain areas. A small diamond drill program is recommended. The nature of industrial minerals suggests that a bulk sample would be useful to conduct test work for specific markets.

Drill Supervision			
Senior Geologist, 12 days @ \$500			\$ 6,000.00
Assistant, 12 days @ \$250		3,000.00	
		GST	<u>540.00</u>
		Subtotal	\$ 9,540.00
Diamond Drilling of 10 Holes @ 100m Depth Each:			
Footage price	\$21 x 1,500 (NQ)		\$31,500.00
Mob/demob			2,500.00
Standby/machine time (if required) Field costs			5,500.00
Moving	Field costs		3,000.00
Meals/Accommodations		At Contractor's Expense	
Set up	Field costs		<u>3,000.00</u>
		Subtotal	\$45,500.00
Dozer time in moves/road access			
	Road - 15 hrs @ \$85		\$ 1,275.00
	Moves - 15 hrs @ \$85		<u>1,275.00</u>
		Subtotal	42,550.00
		GST	2,883.00
	Diamond Drilling Subtotal		\$50,933.00
Metallurgical Ongoing Work			
Samples out to end users & Followup			\$ 6,000.00
Calcining Followup			2,500.00
Magnetic Separation to Address Iron Content			2,500.00
Classification of Undersize Thickener & Hydrocycloning			10,000.00
Market & Customer Study, Update of 1989 Study			<u>19,000.00</u>
		Subtotal	\$ 40,000.00
Bulk Sample			
Environmental Survey & Report			\$ 8,000.00
Application & Preparation of required reports & documents for Bulk Sample Permit			6,000.00
Tote Road Preparation			10,000.00
Bulk Sample Mining & Crushing 10,000 tons + Loadout	45,000.00		
Trucking Sample to Loadout	35,000.00		
Final Report Preparation			<u>6,000.00</u>
		Subtotal	\$110,000.00
	TOTAL		\$200,933.00

REFERENCES

- Bacon, W. R., 1957:
Geology of the Lower Jervis Inlet, British Columbia; Bulletin 39, pages 17, 37.
- Bradley, R. K., 1972:
Upper Cretaceous Plant Fossils from Mainland Coastal Deposits North of Vancouver, British Columbia, Canada; Canadian Journal of Earth Sciences, v. 10, p. 1841-1843.
- Bustin, R. M., 1990:
Stratigraphy, Sedimentology and Petroleum Source Rock Potential of the Georgia Basin, Southwest British Columbia and Northwest Washington State; in Current Research, part F, Geological Survey of Canada, Paper 90-1F, p. 103-108.
- Crickmay, C. E. and Pocock, S. A. J., 1963:
Cretaceous at Vancouver, British Columbia, Canada; American Association of Petroleum Geologists Bulletin, v. 47, p. 1928-1942.
- Currie, J. A., 1988A:
Assessment Report on the Kelly 1-5 and Trish 1-2 Mineral Claims, Fargo Resources Assessment Report 16734, 225 pp.
- 1988B:
Same Report # Assessment Report 17616, 225 pp.
- England, T. D. J., 1989:
Lithostratigraphy of the Nanaimo Group, Georgia Basin, South-western British Columbia; in Current Research, Part E, Geological Survey of Canada, Paper 89-1E, p.103-108.
- 1990:
Late Cretaceous to Paleogene Evolution of the Georgia Basin, South-western British Columbia; unpublished Ph.D. theses, Memorial University of Newfoundland, St. John's, 481 p.
- Foundex Geophysics, 1987a:
Seismic Refraction Investigation, Lang Bay Kaolin Prospect, October 1987.
- 1987b:
Report on an Electrical Resistivity and Magnetometer Survey, Lang Bay Kaolin Prospect, December 1987.
- Hilchey, G. R., 1986:
1986 Assessment Report Kelly, Trish Claims.
- 1985:
1985 Assessment Report Kelly, Trish Claims.
- Lobdell, D., 1988:
Report on February 1988 Core Drilling, Lang Bay Kaolin Prospect.

- Mak, S.:
Investigation on the Kaolin at the Lang Bay Prospect, Department of Metals and Material Engineering, University of British Columbia (NRC sponsored study).
- Mak, S., and Chaklader, A. C. D., 1987:
University of British Columbia – Department of Metals and Materials Engineering, October 1987 – “Investigation on the Kaolin at the Lang Bay Deposit”.
- Muller, J. E., and Jeletzky, J. A., 1970:
Geology of the Upper Cretaceous Nanaimo Group, Vancouver Island and Gulf Islands, British Columbia; Geological Survey of Canada, Paper 69-25, 77 p.
- Mustard, P. S., and Rouse G. E.,
Sedimentary Outliers of the Eastern Georgia Basin Margin in Current Research, Part A, Geological Survey of Canada, Paper 91-1A p. 229-240.
- Pilon, C. G., 1987:
Drilling Report on the Lang Bay Kaolin Prospect, November, 1987.
- Read, P. B., 1994:
Kaolin Potential of the Comox Sub-Basin, B.C. Ministry of Energy, Mines and Petroleum Resources, Open File 1996-16 57 pp.
- Roddick, J. A. and Hutchinson, W. W., 1967:
Coast Mountains Project, British Columbia; in Report of Activities, Paper 1968-1A, pages 37-40.
- Roddick, J. A., Woodsworth, G. J. and Hutchinson, W. W., 1979:
Geology of Vancouver West Half and Mainland Part of Alberni, Open file 611.
- Rouse, G. E., Mathews, W. H., and Blunden, R. H., 1975:
The Lions Gate Member: a New Late Cretaceous Sedimentary Division in the Vancouver Area of British Columbia; Canadian Journal of Earth Sciences, v. 12, p.464-471.
- Rouse, G. E., Lesack, K. A., and White, J. M., 1990:
Palynology of Cretaceous and Tertiary Strata of Georgia Basin, Southwestern British Columbia; in Current Research. Part F. Geological Survey of Canada, Paper 90-1F, p. 109-113.
- Shearer, J. T., 1998:
Mining Permit Application Summary on the South Slesse Limestone Quarry, Mx7-114, for I.G. Machine & Fibers Ltd., Dated January 10, 1998, 23 pages.
- 1999:
Diamond Drilling Report on the Duck Lake Claims, Assessment Report, 18 pp.
- 2006:
Geological and Metallurgical Assessment Report on the Lang Bay (Duck Lake) Kaolinite Deposit for Electra Gold Ltd., dated August 15, 2006.

2007:

Diamond Drilling Assessment Report on the Lang Bay (Duck Lake) Kaolinite Deposit, for Electra Gold Ltd., Dated May 15, 2007, Assessment Report #29,269

2011:

Germanium Assessment Report on the Lang Bay (Duck Lake) Kaolinite Deposit, for Electra Gold Ltd., Dated September 10, 2011

White, G. V., 1986:

Preliminary Report. Lang Bay Germanium Prospect (92F/1610). Paper 1986-1, Geological Field Work (1985), Ministry EMPR of British Columbia

APPENDIX I

STATEMENT of QUALIFICATIONS

NOVEMBER 10, 2012

Appendix I


STATEMENT OF QUALIFICATIONS

I, Johan T. Shearer of 3572 Hamilton Street, in the City of Port Coquitlam, in the Province of British Columbia, do hereby certify:

1. I graduated in Honours Geology (B.Sc., 1973) from the University of British Columbia and the University of London, Imperial College, (M.Sc. 1977).
2. I have practiced my profession as an Exploration Geologist continuously since graduation and have been employed by such mining companies as McIntyre Mines Ltd., J.C. Stephen Explorations Ltd., Carolin Mines Ltd. and TRM Engineering Ltd. I am presently employed by Homegold Resources Ltd.
3. I am a fellow of the Geological Association of Canada (Fellow No. F439). I am also a member of the Canadian Institute of Mining and Metallurgy, and the Geological Society of London. I am a member in good standing of the Association of Professional Engineers and Geoscientists of British Columbia (P.Ge., Member Number 19,279).
4. I am an independent consulting geologist employed since December 1986 by Homegold Resources Ltd. at Unit #5 2330 Tyner Street, Port Coquitlam, British Columbia.
5. I am the author of the report entitled "Geochemical Assessment Report on the Lang Bay (Duck Lake) Kaolinite Deposit, November 10, 2012".
6. I visited the property on May 18, 2012 and between May 1, 2011 and July 31, 2011 (on June 1+2, 2011) and in May, June, July and August 1999. I supervised and logged the diamond drill core. I worked on drillcore and reverse circulation samples on January 5 to 7 and 10 to 12, 2006. I supervised the diamond drilling completed between November 15, 2006 and December 14, 2006. I am familiar with the regional geology and geology of nearby properties. I have become familiar with the previous work conducted on the Duck Lake Property by examining in detail the available reports, plans and sections, and have discussed previous work with persons knowledgeable of the area.

Dated at Port Coquitlam, British Columbia, this 10th day of November, 2012.

Respectfully Submitted

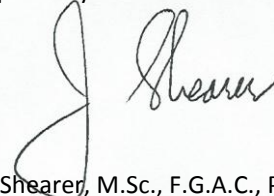

J.T. Shearer, M.Sc., F.G.A.C., P.Ge.
November 10, 2012

APPENDIX II

STATEMENT of COSTS

NOVEMBER 10, 2012

Appendix II

STATEMENT of COSTS

LANG BAY PROJECT (DUCK LAKE CLAIMS)

	Total without HST
Wages & Benefits	
J. T. Shearer, M.Sc., P.Geo., Senior Geologist	
1.5 days @ \$700/day (May 18+19, 2012)	\$ 1,000.00
Ron Savelieff, 1.5 days @ \$600/day (May 18+19, 2012)	900.00
Sub-total Wages	<u>\$ 1,900.00</u>
Expenses	
Truck Rental, fully equipped 4x4, 1 days @ \$120/day	120.00
Gas	155.00
Motel	125.00
Meals	80.00
Analytical, AGAT Labs, Invoice # 12K56488M	98.11
Core Shack Rental (to house voluminous core & chip samples)	1,000.00
Ferry	140.00
Report Preparation and Data Interpretation	1,400.00
Word Processing and Reproduction	250.00
Sub-total Expenses	<u>\$ 3,368.11</u>
Grand Total	\$ 5,268.11

Event # 5403976
Date September 8, 2012
Total Work - \$4,500
PAC - \$1,859.57
Total Applied - \$6,359.57

APPENDIX III

ASSAY CERTIFICATES

NOVEMBER 10, 2012



CLIENT NAME: HOMEGOLD RESOURCES LTD.
UNIT# 5-2330 TYNER STREET
PORT COQUITLAM, BC V3C2Z1
(604) 696-1022

ATTENTION TO: JO SHEARER

PROJECT NO: Lang Bay

AGAT WORK ORDER: 12V658845

SOLID ANALYSIS REVIEWED BY: Yufei Chen, Analyst

DATE REPORTED: Nov 09, 2012

PAGES (INCLUDING COVER): 7

Should you require any information regarding this analysis please contact your client services representative at (905) 501-9998

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.



Certificate of Analysis

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
<http://www.agatlabs.com>

CLIENT NAME: HOMEGOLD RESOURCES LTD.

ATTENTION TO: JO SHEARER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Nov 01, 2012	DATE RECEIVED: Nov 01, 2012			DATE REPORTED: Nov 09, 2012			SAMPLE TYPE: Other							
Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
Sample Description														
Hole 87-17, 120-122	<0.2	1.07	7	42	128	0.8	<1	0.34	1.4	30	8.5	18.1	22.7	2.74
Hole 87-19, 80-82	<0.2	0.98	16	44	106	0.6	3	0.32	2.0	28	10.3	13.6	61.0	3.14
Hole 87-126, 271-273	0.2	0.78	75	56	69	<0.5	1	0.54	4.9	23	19.6	16.7	60.3	3.07
Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
Sample Description														
Hole 87-17, 120-122	<5	<1	<1	0.36	10	20	0.52	534	1.0	0.03	4.6	33	5.2	85
Hole 87-19, 80-82	<5	<1	<1	0.26	10	21	0.44	403	<0.5	0.02	4.1	44	8.9	53
Hole 87-126, 271-273	<5	<1	<1	0.07	8	19	0.36	387	<0.5	0.06	32.9	59	5.4	11
Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
Sample Description														
Hole 87-17, 120-122	0.013	2	6.3	<10	<5	22.9	<10	<10	5	0.10	<5	<5	58.3	3
Hole 87-19, 80-82	0.014	2	8.0	<10	<5	22.9	<10	<10	5	0.08	<5	<5	70.9	4
Hole 87-126, 271-273	0.287	1	10.3	<10	<5	30.6	<10	<10	<5	0.02	<5	<5	57.0	<1
Analyte:	Y	Zn	Zr											
Unit:	ppm	ppm	ppm											
RDL:	1	0.5	5											
Sample Description														
Hole 87-17, 120-122	15	41.8	<5											
Hole 87-19, 80-82	15	58.1	<5											
Hole 87-126, 271-273	11	45.1	<5											

Comments: RDL - Reported Detection Limit

Certified By:



Certificate of Analysis

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

5623 McADAM ROAD
 MISSISSAUGA, ONTARIO
 CANADA L4Z 1N9
 TEL (905)501-9998
 FAX (905)501-0589
<http://www.agatlabs.com>

CLIENT NAME: HOMEGOLD RESOURCES LTD.

ATTENTION TO: JO SHEARER

Lithium Borate Fusion - Summation of Oxides, XRF finish (201676)

DATE SAMPLED: Nov 01, 2012		DATE RECEIVED: Nov 01, 2012					DATE REPORTED: Nov 09, 2012					SAMPLE TYPE: Other			
Analyte:	Sample Login Weight	Al2O3	BaO	CaO	Cr2O3	Fe2O3	K2O	MgO	MnO	Na2O	P2O5	SiO2	TiO2	SrO	
Unit:	kg	%	%	%	%	%	%	%	%	%	%	%	%	%	
RDL:	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
Sample Description															
Hole 87-17, 120-122	5.79	17.84	0.05	0.67	<0.01	4.96	2.27	1.03	0.07	0.27	0.01	64.76	0.46	0.01	
Hole 87-19, 80-82	2.81	19.94	0.03	0.53	<0.01	5.71	0.92	0.88	0.05	0.08	0.02	61.80	0.57	<0.01	
Hole 87-126, 271-273	2.82	20.69	0.04	0.87	0.01	5.74	1.21	0.76	0.05	0.21	0.02	57.44	0.80	0.01	
	Analyte:	V2O5	LOI	Total											
	Unit:	%	%	%											
Sample Description	RDL:	0.01	0.01	0.01											
Hole 87-17, 120-122		0.01	7.40	99.8											
Hole 87-19, 80-82		0.02	9.51	100											
Hole 87-126, 271-273		0.03	11.3	99.2											

Comments: RDL - Reported Detection Limit

Certified By:



Quality Assurance

CLIENT NAME: HOMEGOLD RESOURCES LTD.

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

ATTENTION TO: JO SHEARER

Solid Analysis												
RPT Date: Nov 09, 2012			REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD	Result Value		Expect Value	Recovery	Acceptable Limits		
							Lower			Upper		
Lithium Borate Fusion - Summation of Oxides, XRF finish (201676)												
Al2O3	1	3880768	17.84	17.91	0.4%	< 0.01	20.81	20.69	100%	90%	110%	
BaO	1	3880768	0.05	0.05	0.0%	< 0.01				90%	110%	
CaO	1	3880768	0.67	0.68	1.5%	< 0.01	8.00	8.05	99%	90%	110%	
Cr2O3	1	3880768	<0.01	<0.01	0.0%	< 0.01				90%	110%	
Fe2O3	1	3880768	4.96	5.00	0.8%	< 0.01	6.28	6.21	101%	90%	110%	
K2O	1	3880768	2.27	2.25	0.9%	< 0.01	1.66	1.66	100%	90%	110%	
MgO	1	3880768	1.03	1.03	0.0%	< 0.01	0.53	0.54	98%	90%	110%	
MnO	1	3880768	0.07	0.07	0.0%	< 0.01	0.11	0.108	101%	90%	110%	
Na2O	1	3880768	0.27	0.29	7.1%	< 0.01	7.10	7.10	100%	90%	110%	
P2O5	1	3880768	0.01	0.01	0.0%	< 0.01	0.12	0.131	91%	90%	110%	
SiO2	1	3880768	64.76	65.10	0.5%	< 0.01	49.98	49.9	100%	90%	110%	
TiO2	1	3880768	0.46	0.45	2.2%	< 0.01	0.30	0.287	104%	90%	110%	
SrO	1	3880768	0.01	0.01	0.0%	< 0.01	0.14	0.14	100%	90%	110%	
V2O5	1	3880768	0.01	0.02	66.7%	< 0.01				90%	110%	
LOI	1	3880768	7.40	7.52	1.6%	< 0.01	23.29	23.6	98%	90%	110%	
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)												
Ag	1	3880768	< 0.2	< 0.2	0.0%	< 0.2	16.3	14.0	116%	80%	120%	
Al	1	3880768	1.07	1.07	0.0%	< 0.01				80%	120%	
As	1	3880768	7	8	13.3%	< 1				80%	120%	
B	1	3880768	42	43	2.4%	< 5				80%	120%	
Ba	1	3880768	128	128	0.0%	< 1				80%	120%	
Be	1	3880768	0.8	0.8	0.0%	< 0.5				80%	120%	
Bi	1	3880768	< 1	1		< 1				80%	120%	
Ca	1	3880768	0.34	0.34	0.0%	< 0.01				80%	120%	
Cd	1	3880768	1.35	1.34	0.7%	< 0.5				80%	120%	
Ce	1	3880768	30	29	3.4%	< 1				80%	120%	
Co	1	3880768	8.5	8.1	4.8%	< 0.5				80%	120%	
Cr	1	3880768	18.1	18.0	0.6%	< 0.5				80%	120%	
Cu	1	3880768	22.7	22.4	1.3%	< 0.5	6321	6000	105%	80%	120%	
Fe	1	3880768	2.74	2.72	0.7%	< 0.01				80%	120%	
Ga	1	3880768	< 5	< 5	0.0%	< 5				80%	120%	
Hg	1	3880768	< 1	< 1	0.0%	< 1				80%	120%	
In	1	3880768	< 1	< 1	0.0%	< 1				80%	120%	
K	1	3880768	0.356	0.352	1.1%	< 0.01				80%	120%	
La	1	3880768	10	9	10.5%	< 1				80%	120%	
Li	1	3880768	20	20	0.0%	< 1				80%	120%	
Mg	1	3880768	0.518	0.512	1.2%	< 0.01				80%	120%	
Mn	1	3880768	534	520	2.7%	< 1				80%	120%	
Mo	1	3880768	1.0	0.8	22.2%	< 0.5	380	360	105%	80%	120%	
Na	1	3880768	0.03	0.03	0.0%	< 0.01				80%	120%	
Ni	1	3880768	4.60	4.45	3.3%	< 0.5				80%	120%	
P	1	3880768	33	33	0.0%	< 10				80%	120%	
Pb	1	3880768	5.2	5.6	7.4%	< 0.5				80%	120%	
Rb	1	3880768	85	83	2.4%	< 10				80%	120%	



Quality Assurance

CLIENT NAME: HOMEGOLD RESOURCES LTD.

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

ATTENTION TO: JO SHEARER

Solid Analysis (Continued)												
RPT Date: Nov 09, 2012			REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD	Result Value		Expect Value	Recovery	Acceptable Limits		
							Lower			Upper		
S	1	3880768	0.0133	0.0141	5.8%	< 0.005				80%	120%	
Sb	1	3880768	2	3		< 1				80%	120%	
Sc	1	3880768	6.3	6.1	3.2%	< 0.5				80%	120%	
Se	1	3880768	< 10	< 10	0.0%	< 10				80%	120%	
Sn	1	3880768	< 5	< 5	0.0%	< 5				80%	120%	
Sr	1	3880768	22.9	23.4	2.2%	< 0.5				80%	120%	
Ta	1	3880768	< 10	< 10	0.0%	< 10				80%	120%	
Te	1	3880768	< 10	< 10	0.0%	< 10				80%	120%	
Th	1	3880768	5	5	0.0%	< 5				80%	120%	
Ti	1	3880768	0.10	0.10	0.0%	< 0.01				80%	120%	
Tl	1	3880768	< 5	< 5	0.0%	< 5				80%	120%	
U	1	3880768	< 5	< 5	0.0%	< 5				80%	120%	
V	1	3880768	58.3	57.8	0.9%	< 0.5				80%	120%	
W	1	3880768	3	3	0.0%	< 1				80%	120%	
Y	1	3880768	15	15	0.0%	< 1	6	7	80%	80%	120%	
Zn	1	3880768	41.8	40.7	2.7%	< 0.5				80%	120%	
Zr	1	3880768	< 5	< 5	0.0%	< 5				80%	120%	

Certified By:

Method Summary

CLIENT NAME: HOMEGOLD RESOURCES LTD.

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

ATTENTION TO: JO SHEARER

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
Sample Login Weight	MIN-12009		BALANCE
Al ₂ O ₃	MIN-200-12027		XRF
BaO	MIN-200-12027		XRF
CaO	MIN-200-12027		XRF



Method Summary

CLIENT NAME: HOMEGOLD RESOURCES LTD.

AGAT WORK ORDER: 12V658845

PROJECT NO: Lang Bay

ATTENTION TO: JO SHEARER

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Cr2O3	MIN-200-12027		XRF
Fe2O3	MIN-200-12027		XRF
K2O	MIN-200-12027		XRF
MgO	MIN-200-12027		XRF
MnO	MIN-200-12027		XRF
Na2O	MIN-200-12027		XRF
P2O5	MIN-200-12027		XRF
SiO2	MIN-200-12027		XRF
TiO2	MIN-200-12027		XRF
SrO	MIN-200-12027		XRF
V2O5	MIN-200-12027		XRF
LOI	MIN-200-12021		GRAVIMETRIC
Total	MIN-200-12027		CALCULATION

APPENDIX IV

SAMPLE DESCRIPTION

NOVEMBER 10, 2012

APPENDIX IV

SAMPLE DESCRIPTION

Sample: Hole 87-17 120'-122':	kaolinitic, light tan to cream coloration, 17.84% Al ₂ O ₃ at 17.7 and 18.3 sandy shale composition
Sample: Hole 87-19 80'-82':	18.3% Al ₂ O ₃ in core, kaolinitic, light tan in colour, sandy shale composition, 19.94% in recent assay
Sample Hole 87-126	271-273, Kaolinitic, whitish colour, very fine grained, shaley, 20.69% Al ₂ O ₃