

HEAD BAY



Ministry of Energy, Mines & Petroleum Resources  
Mining & Minerals Division  
BC Geological Survey

Assessment Report  
Title Page and Summary

TYPE OF REPORT [type of survey(s)]: Geological & Magnetometer Assessment

TOTAL COST: \$21,500.00

AUTHOR(S): J. T. Shearer, M.Sc., P.Geol.

SIGNATURE(S): 

NOTICE OF WORK PERMIT NUMBER(S)/DATE(S):

YEAR OF WORK: 2013

STATEMENT OF WORK - CASH PAYMENTS EVENT NUMBER(S)/DATE(S): Event # 5452293

PROPERTY NAME: Head Bay

CLAIM NAME(S) (on which the work was done): Reverted Crowngrants and Rob Roy  
404162, 404163, 404168, 403908

COMMODITIES SOUGHT: Gold/Iron

MINERAL INVENTORY MINFILE NUMBER(S), IF KNOWN:

MINING DIVISION: Alberni

NTS/BCGS: 92E/15E + 16W

LATITUDE: 49 ° 47 '57 " LONGITUDE: 125 ° 32 '52 " (at centre of work)

OWNER(S):

1) J. T. Shearer 2)

MAILING ADDRESS:

Unit 5 - 2330 Tyner Street

Port Coquitlam, BC V3C 2Z1

OPERATOR(S) [who paid for the work]:

1) Same as above 2)

MAILING ADDRESS:

Same as above

PROPERTY GEOLOGY KEYWORDS (lithology, age, stratigraphy, structure, alteration, mineralization, size and attitude):

Triassic Quatsino Formation Limestone in contact with Jurassic intrusives forming garnet-magnetite skarn (past producer in 1960) also gold bearing quartz veins present

REFERENCES TO PREVIOUS ASSESSMENT WORK AND ASSESSMENT REPORT NUMBERS:

Assessment Reports #16355, #13681, #13026

TYPE OF WORK IN THIS REPORT	EXTENT OF WORK (IN METRIC UNITS)	ON WHICH CLAIMS	PROJECT COSTS APPORTIONED (incl. support)
<b>GEOLOGICAL (scale, area)</b>			
Ground, mapping _____		404162, 404163, 404168	\$9,000.00
Photo interpretation _____			
<b>GEOPHYSICAL (line-kilometres)</b>			
Ground			
Magnetic _____		404162, 404163, 404168	\$12,500.00
Electromagnetic _____			
Induced Polarization _____			
Radiometric _____			
Seismic _____			
Other _____			
Airborne _____			
<b>GEOCHEMICAL (number of samples analysed for...)</b>			
Soil _____			
Silt _____			
Rock _____			
Other _____			
<b>DRILLING (total metres; number of holes, size)</b>			
Core _____			
Non-core _____			
<b>RELATED TECHNICAL</b>			
Sampling/assaying _____			
Petrographic _____			
Mineralographic _____			
Metallurgic _____			
<b>PROSPECTING (scale, area)</b>			
<b>PREPARATORY / PHYSICAL</b>			
Line/grid (kilometres) _____			
Topographic/Photogrammetric (scale, area) _____			
Legal surveys (scale, area) _____			
Road, local access (kilometres)/trail _____			
Trench (metres) _____			
Underground dev. (metres) _____			
Other _____			
<b>TOTAL COST:</b>			<b>\$21,500.00</b>

**GEOLOGICAL and MAGNETOMETER  
ASSESSMENT REPORT  
on the  
HEAD BAY PROPERTY**

**TAHSIS AREA  
VANCOUVER ISLAND, ALBERNI MINING DIVISION  
BRITISH COLUMBIA**

**Longitude 125°32'52"W/Latitude 49°47'57"N  
NTS 92E/15E, 92E 16W  
Event #5452293 + 5452492**

**Prepared for**

**Canadian Dehua International Mines Group Inc.  
Unit 5 – 2330 Tyner Street  
Port Coquitlam, B.C.  
V3C 2Z1**

**BC Geological Survey  
Assessment Report  
34292**

**Prepared by**

**J. T. Shearer, M.Sc., P.Geo. (BC & Ontario)  
Consulting Geologist**

**June 10, 2013**

**Work done between September 1, 2012 and June 3, 2013**

## TABLE OF CONTENTS

	<u>Page</u>
LIST of FIGURES .....	ii
LIST of TABLES .....	ii
SUMMARY .....	iii
INTRODUCTION .....	1
PROPERTY DESCRIPTION and LOCATION .....	3
ACCESSIBILITY .....	8
HISTORY .....	10
REGIONAL GEOLOGY .....	18
LOCAL GEOLOGY.....	23
MINERALIZATION .....	25
PREVIOUS EXPLORATION.....	31
DETAIL GEOLOGY and MAGNETOMETER SURVEYS 2013 .....	
CONCLUSIONS and RECOMMENDATIONS .....	36
PROPOSED EXPLORATION BUDGET .....	39
REFERENCES .....	40
<b>APPENDICES</b>	
Appendix I    Statement of Qualifications .....	42
Appendix II   Statement of Costs .....	43
Appendix III  Magnetometer Data and GPS Locations .....	44

## LIST OF FIGURES

	<u>Page</u>
Figure 1	Property Location Map.....viii
Figure 2	Mineral Tenure Map ..... 2
Figure 3	Mineral Showing Location Plan..... 4
Figure 4	VIG Showing (Road Zone) and Glengarry Mine Geology Plan..... 7
Figure 5	VIG Showing – Geology and Geochemistry – Road Zone..... 9
Figure 6	Glengarry – Rob Roy Magnetite Skarn Showings ..... 12
Figure 7	Mohawk Showing – Compilation Plan..... 14
Figure 8	Vivian Showing – Geology ..... 17
Figure 9	Regional Geology Map ..... 19
Figure 10	Location of Drill sites – General ..... 29
Figure 11	Location of Drill Holes – Detail..... 30
Figure 12	Detail Geological Map (E-size) ..... in pocket
Figure 13	Detail Magnetometer Map (E-size) ..... in pocket

## TABLES

	<u>Page</u>
Table 1	List of Mineral Tenures..... 3
Table 2	Previous Drill Data ..... 31

## SUMMARY

The Head Bay property consists of 26 mineral claims consisting of a total area of 5,698.30 hectares and is centered at approximately 126° 32' 52" W longitude and 49° 47' 57" N latitude in the Alberni Mining Division approximately 132 road kilometres west-southwest of Campbell River on Vancouver Island. The road connects Campbell River with Gold River, the Head Bay Property and Tahsis which is approximately 20 kilometers northwest of the Property (Figure 1 and Figure 2).

Gold was discovered in the Zeballos Gold Camp, located approximately 25 kilometres northwest of the Head Bay Property prior to the 1930s. A total 13 mineral deposits produced a total of 287,811 troy ounces of gold and 124,700 troy ounces of silver from as early as 1930 to 1948 (Hoadley, 1953). Of the 13 small mines, the Privateer accounted for 154,381 troy ounces of gold and 60,878 troy ounces of silver. A total of 285,711 tons of ore was mined from Privateer's five main veins and 158,332 tons was milled. There are 33 published lode gold occurrences in the Zeballos Gold Camp which are associated with quartz veining. The ore zones also contained pyrite, arsenopyrite, calcite, and chalcopyrite with minor amounts of galena and sphalerite.

### Glengarry-Rob Roy Magnetite Zones

The Head Bay property encompasses two historical magnetite occurrences known as the Glengarry and Rob Roy which occur on 3 reverted crown grants (Glengarry, Stormont and Texas). These showings were originally staked in 1902 by Stockham, Grand and Dawley. Little work was done on the claims which were then optioned to Canadian Collieries (Dunsmuir) Ltd. in 1916. In 1959 Canadian Collieries optioned the property to Hualpai Enterprises Ltd. of Japan. Hualpai drilled 115 short drill holes totaling 2125 m (6972 ft.) to explore various showings. According to Canadian Collieries information supplied to the Minister of Mines in 1956 (page 133), the drilling outlined an inferred resource of 327,000 tonnes of magnetite grading an average of 42.7 % iron. The mineralization was encountered in 11 distinct locations (pods) with the following inferred resources indicated as follows:

<u>Location</u>	<u>Tons</u>	<u>Grade (Per Cent Iron)</u>
A	8,500	52.5%
B	9,000	50.0%
C	23,500	35.6%
D	58,000	37.5%
E	5,750	40.3%
F	174,000	40.7%
G	15,400	50.9%
H	33,000	55.4%
I	24,800	45.2%
J	6,000	50.7%
K	2,000	50.8%

This resource calculation was carried out prior to the existence of NI 43-101 standards and is therefore, not in compliance with the current NI43-101 standards and definitions and should not be relied upon to represent the mineral resources that occur on the known showing. The author has not attempted to recalculate the inferred resource at this time as the calculation methodology, the sampling

methodology, sample preparation and analytical procedures used at the time are not known and as such are not in compliance with NI 43-101 standards.

### **Elaine Showing**

The Elaine Showing (also known as the Oh Boy and Zeballos Showing) is located on the west side of Head Bay approximately 650 m upstream along small creek that enters Head Bay south of the dry land log sorting yard. A quartz vein carrying gold, chalcopyrite and pyrite was discovered in the 1930s and a 36.6 m adit was collared 9 metres above the vein in 1934. According to the Minister of Mines, Annual Report, Index #3 records in 1939 production of 4.5 tonnes of ore yielded 240 grams of gold, 103 grams of silver and 3 kilograms of copper. The only recorded work carried out on the Elaine Showing since 1939 was a small geochemical soil sampling program conducted by Crystal Mountain Resources Ltd. in 1983. A total of 60 soil, silt and rock samples were collected along contours, road and streams. Six of the sixty samples were anomalous in gold (> 20 ppb gold) with one sample registering 130 ppb gold near the suspected location of the original adit on the Elaine Vein.

During the 2007 exploration program conducted by Silverlake Capital Corporation, two soil sampling grids were installed over the showing area and along the fault contact between the Eocene Catface granodiorite pluton located along the west side of Head Bay and Bonanza Volcanic units further to the west. A total of 215 soil samples and 31 rock chips samples were collected and analyzed for 30 elements (Figures 4 and 5). As a result of the 2007 exploration program, a new showing was discovered near the mouth of Elaine Creek where it empties into Head Bay. The Elaine Beach Vein was found to be 0.5 m wide and contained gold values in rock chip samples ranging from 34 to 123 ppb gold. Soil samples along westerly trending grid lines over the showing indicate anomalous gold in soils extend northward from the showing. Further west on the grid, an anomalous (gold) band of soil samples occurs over the suspected location of the original Elaine Vein adit between stations 4 +75 W and 6 +25 W from lines EL L 1+50 S to EL L1+00 N. The trend of the gold in soil anomaly is northerly beyond the last grid line (EL L1 +00N).

The second main Elaine grid (Figure 4) that trends northeasterly across a major logging road that is located at the west end of the above described westerly trending Elaine grid was established to sample soil across the northwesterly trending fault contact zone over a strike length of 1100 m between the intrusive granodiorites to diorites to the east towards Head Bay and the Bonanza Volcanic sequence to the west. Soil samples and geological mapping was conducted along the logging road initially and then along the grid lines

A 50 to 75 m wide soil anomaly is located southeast of the logging road from grid lines RL 5 to RL 7B, a distance of approximately 400 m between the elevations of 120 to 140 m asl. The gold values range from 16 ppb to 81 ppb gold.

The anomaly does not extend northward to line RL 8 and may be the result of a cross fault that has displaced the potential underlying gold bearing structure responsible for the soil anomaly. Further to the north along grid line RL 12 between stations 1 + 50 NE and 2 + 50 NE the soil anomaly reappears along the same trend as the anomaly between grid lines RL 5 and RL 7B described above. Along grid line RL 12 the gold values range from 10 ppb gold to 53 ppb gold. At the time of the exploration program the grid was not extended further to the north beyond line RL 12.

Six rock samples from Bonanza volcanic unit were collected along line R1S (at the southwest end of the northeasterly trending Elaine grid) over a distance of 140 m between stations 00 + 25 W to 1 + 65 W. Four of the six samples were anomalous in gold with gold values of 37 ppb, 167 ppb, 60 ppb, and 79 ppb gold. Approximately 50 m further to the southeast, a rock sample collected on line R2S at station 00 + 25 SW yielded an analytical result of 10 ppb gold and a small quartz veined outcrop of Bonanza volcanics along the road at station R2S 0 + 00 contained 178 ppb gold (Figure 4). Soil samples were not collected during the program along line RL 1 to RL3.

### **VIG Road Zone Showing**

Silverlake Capital Corporation conducted a limited rock chip sampling program on the VIG Road Zone No. 1 Vein showing. As the former trenches (#1, #2 and #3) excavated by Great Keppel Resources Ltd. in 1987 were filled in with overburden soil, Silverlake Capital Corporation personnel collected seven rock samples across the No#1 Vein of the Road Zone in March 2007 to confirm the tenor of the mineralization reported by previous operators such as Great Keppel Resources Ltd. The author also collected seven duplicate samples at the seven Silverlake sample sites. The analytical results confirmed the tenor of the gold grades recorded by Great Keppel Resources Ltd. with gold grades from the total of 14 Silverlake rock chip samples ranging from 1.37 to 28.56 g/tonne gold. These grades are also reflective of those obtained from a drilling program on the No.1 Vein by Centaur Resources Ltd. in 1988 where four of the nine holes intersected the No. 1 Vein. In drill holes V88-1, 3, 4 and 5 over widths ranging from 0.25 m to 0.36 m and gold grades ranging from 1.4 to 58.2 g/tonne gold.

Approximately 450 m southeast of the VIG Road Zone showing towards the north end of the northeasterly trending Elaine Grid, mineralized intrusive float rock was observed near a double switch back in a logging road that goes to the Head Bay log sort. Silverlake Capital Corporation personnel collected 16 soil samples from "B" horizon soils at 25 m intervals along the road to determine the potential source of the mineralized float rock (ELW-V1 to ELW-V16). At the location where the logging road comes back to trend northeast, soil samples ELW-V12 (48 ppb gold), ELW-V14 (231 ppb gold) and ELW-V16 (61 ppb gold) are strongly anomalous. Sample ELW-V14 is located at the peak of the second switch back curve and contains the highest gold value. It is also closest to the mineralized float rock location. The position of these anomalous soil samples may represent an extension of the VIG Road Zone No. 1 Vein further to the southeast of its present exposed limit. Due the above described gold values found at the VIG Road Zone No. 1 vein showing, further exploration work is warranted between the VIG Road Zone showing and the anomalous soil sample locations to determine whether or not there is a structural and mineralogical connection between the two areas.

### **Mohawk Showing**

The Mohawk showing was discovered in 1939 and is located approximately 2 kilometres southwest of the VIG showing. The Mohawk vein is approximately 35 cm wide and strikes 035° and dips steeply (50° – 80°) southeasterly and consists of a quartz-carbonate filled fissure vein with fine grained pyrite and minor galena hosted in shear zones within fragmental Bonanza Group volcanic rocks. Two adits were driven in 1939 to explore the Mohawk Vein

A small prospecting program was conducted by Mr. Neil DeBock in 1985 and 8 samples of vein material for gold analysis. Gold values ranged from 17 to 1080 ppb with higher results coming from the upper adit. A total of 12 rock samples were collected along the access logging road where four similar style



and type of mineralization were discovered. Analytical results for the veins exposed in the logging road ranged from 1 to 620 ppb gold.

During March of 2007, the Mohawk showing was examined by Silverlake Capital Corporation. The upper and lower (cross-cut) adit portals were located and entered. Silverlake personnel collected two rock chip samples across the Mohawk vein and shear zone structure in the upper adit and one sample from the end of the lower adit approximately 6 m east of the vein shear structure. Silverlake also collected a sample of mineralized vein float downslope from the upper adit portal in line with the projection of the vein shear zone. The analytical results were of similar tenor as those collected by DeBock in 1985 with the gold grades in the rock chip samples ranging from 209 ppb to 1045 ppb gold.

### **Vivian Showing**

The Vivian mineral showing is also located on the Head Bay Property approximately 2.4 kilometres north of the Mohawk showing and 3.6 kilometres east of the VIG Road Zone showing. The workings are within 100 metres of a lower borrow quarry along the Tsowwin River. The showing was discovered in 1939 and a 15 m long adit was driven along a shear zone containing quartz and calcite. The adit was abandoned in 1940 and has since collapsed.

Aberford Resources Ltd. conducted an extensive exploration program around the Vivian Showing in 1983. A rock chip sample from the adit dump averaged 3.537 troy oz./ton gold and 10.53 troy oz./ton silver (average of 2 samples collected) (J.E. Robinson, November 1983, Assessment Report 12,058). Several other shear and vein systems were also encountered in the logging road cuts and borrow quarries near the Vivian showing which led to further exploration in the area.

Silverlake Capital Corporation conducted a limited geochemical rock sampling program along the logging road approximately 100 m east of the Vivian adits in two borrow pits where sulphide bearing quartz veins were exposed. A total of 5 rock chip samples were collected from mineralized quartz vein and float in the borrow pit nearest the Vivian adit area and a total of 3 rock chip samples were collected from the second borrow pit further to the east of the Vivian adit. The analytical results for the 5 samples collected from the borrow pit nearest the Vivian adit area ranged from 6 to 692 ppb gold and the analytical results from the 3 samples collected from the borrow pit located furthest away from the Vivian adit ranged from 272 to 872 ppb gold.

Exploration potential at the Head Bay Property is considered good as indicated by the numerous gold-bearing quartz-calcite veins and shear zones associated with Early to Mid-Jurassic granodiorites and Eocene Catface diorite to hornblende monzonite intrusions into Upper Triassic Vancouver Group volcanics and sediments comprised of Karmutsen Formation basalts and the Quatsino and Parsons Bay formation carbonates and clastics. Contact metamorphism of the intrusive suites with the Quatsino limestone unit at the Glengarry and Rob Roy showings has produced of garnetite skarn pods which are associated with the deposition of magnetite mineralization. As a result of the exploration programs conducted over the years, it is recommended that further and more detailed exploration be carried out on the Glengarry – Rob Roy, Elaine, VIG Road Zone, Mohawk and Vivian Showings.


The major northwest trending fault mapped on the property near the “Road Zone Gold Showing” is easily discernible. This fault bounds the intrusive stock associated with the gold veins at the Road Zone Gold Showing and may be related to skarn development at Rob Roy. Well-developed northeast trending

linears are common to the east of Head Bay in the Coast Crystalline Complex but also occur in the Bonanza Group rocks west of Glengarry.

A subtle northwest-southeast linear is close to the Glengarry magnetite deposit which parallels the Sucwoa Valley.

Detail geological mapping (using ARCGIS) was completed in May 2013 using a Trimble Yuma Tablet in conjunction with close spaced magnetometer readings using a fluxgate magnetometer.

Respectfully submitted,

A handwritten signature in black ink, appearing to read 'J. T. Shearer', is written over a light grey rectangular background.

J. T. Shearer, M.Sc., P.Ge. (BC & Ontario)

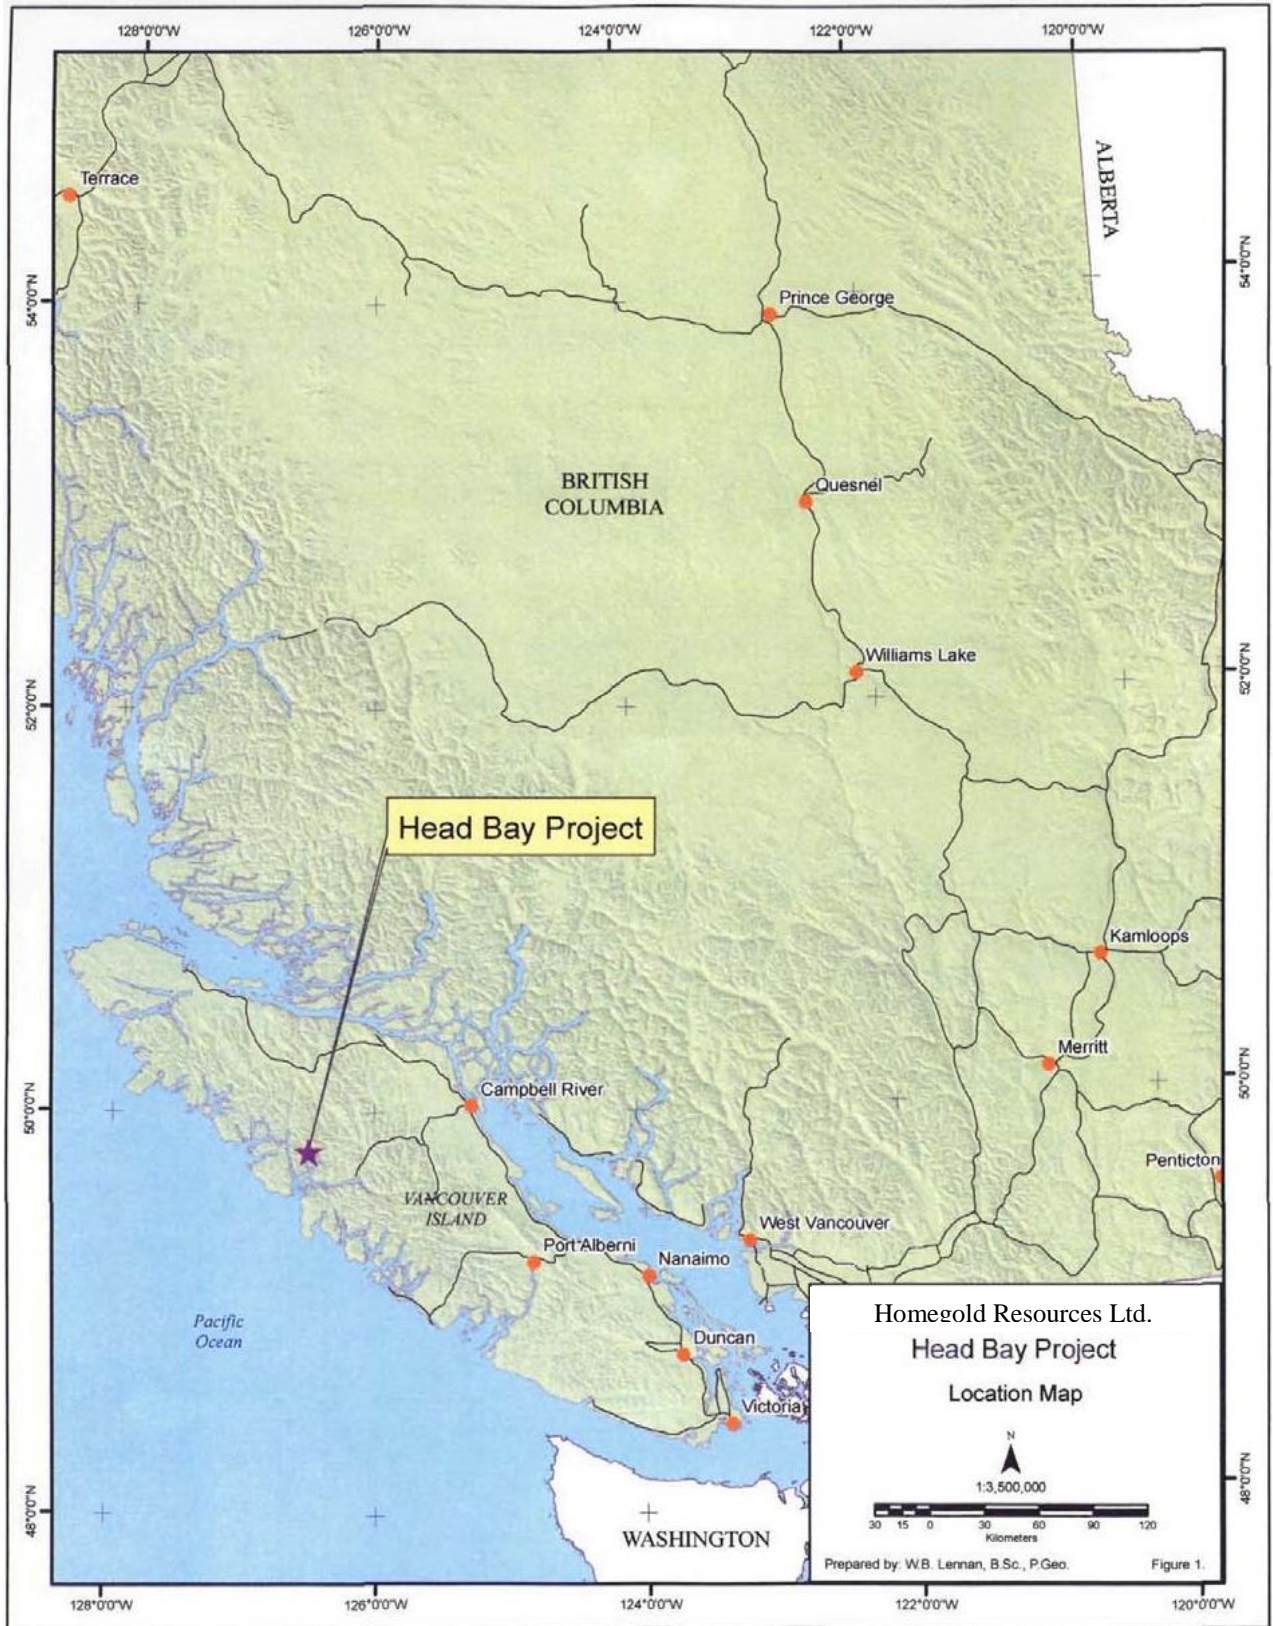


Figure 1

## INTRODUCTION

This report has been prepared for Canadian Dehua International Mines Group Inc. to review the results of historical data and document the recent detail geological mapping and fluxgate magnetometer surveys.

Gold was discovered in the Zeballos Gold Camp, located approximately 25 kilometres northwest of the Head Bay Property prior to the 1930s. A total 13 mineral deposits produced a total of 287,811 troy ounces of gold and 124,700 troy ounces of silver from as early as 1930 to 1948 (Hoadley, 1953). Of the 13 small mines, the Privateer accounted for 154,381 troy ounces of gold and 60,878 troy ounces of silver. A total of 285,711 tons of ore was mined from Privateer's five main veins and 158,332 tons was milled. There are 33 published lode gold occurrences in the Zeballos Gold Camp which are associated with quartz veining. The ore zones also contained pyrite, arsenopyrite, calcite, and chalcopyrite with minor amounts of galena and sphalerite.

Five showings have been consolidated under mineral claims belonging to a single owner. With the exception of the Glengarry – Rob Roy magnetite deposits, the remaining four showing indicate similar mineralogical and genetic signatures for gold mineralization as found at the Zeballos Mining Camp to the northwest.

The Elaine Showing (also known as the Oh Boy and Zeballos Showing) is located on the west side of Head Bay approximately 650 m upstream along small creek that enters Head Bay south of the dry land log sorting yard. A quartz vein carrying gold, chalcopyrite and pyrite was discovered in the 1930s and a 36.6 m adit was collared 9 metres above the vein in 1934. According to the Minister of Mines, Annual Report, Index #3 records in 1939 production of 4.5 tonnes of ore yielded 240 grams of gold, 103 grams of silver and 3 kilograms of copper.

During February and March of 2007, Silverlake Capital Corporation established two main grids over the suspected location of the 1934 adit and over the projected northwesterly trending strike length the structure believed to host the Elaine vein system. Silverlake Capital Corporation collected and analyzed total of 215 soil samples and 31 rock chips samples were collected and analyzed for 30 elements (Figures 4 and 5). The analytical results are presented in Section 10 of this report.

The VIG (Road Zone) showing consists of a mineral showing located along a former logging road approximately two kilometers northwest of the Elaine showing and occurs as shallow dipping, northwest striking system of discontinuous pyrite-quartz-chlorite-chalcopyrite lenses within a weakly sheared magnetite-rich mafic diorite with gabbroic to pyroxenitic phases. Aberford Resources Ltd., Great Keppel Resources and Centaur Resources Ltd. explored the VIG Road Zone showing in 1982, 1987 and 1988 respectively. In 1988 Centaur Resources Ltd. drilled 9 BQ drill holes to test the VIG Road Zone No. 1 Vein at depth.

Detail geological mapping (using ARCGIS) was completed in May 2013 using a Trimble Yuma Tablet in conjunction with close spaced magnetometer readings using a fluxgate magnetometer.

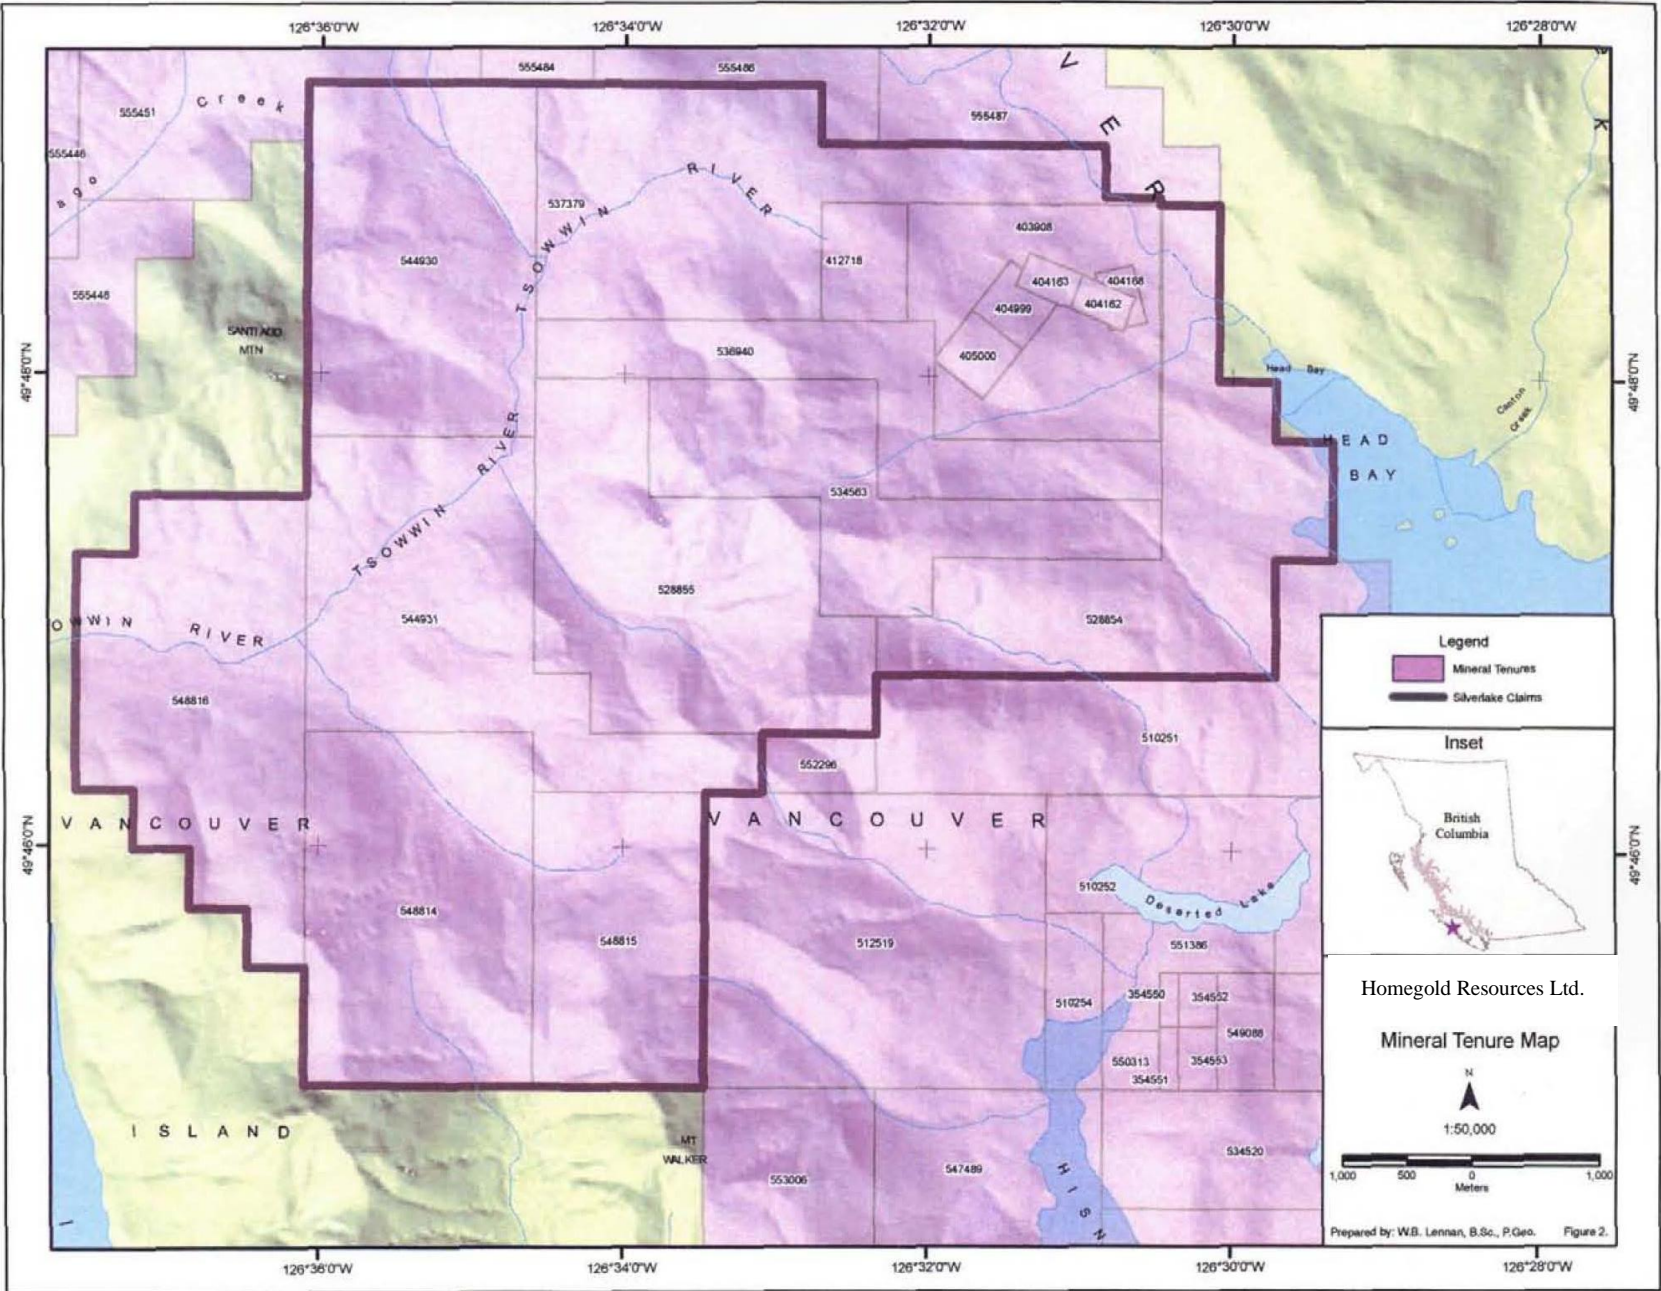


Figure 2 Mineral Tenure Map

## PROPERTY DESCRIPTION AND LOCATION

The Head Bay property consists of 26 mineral tenures consisting of an area of 5,698.30 hectares and is centered at approximately 126° 32' 52" W longitude and 49° 47' 57" N latitude in the Alberni Mining Division approximately 105 road kilometres west-southwest of Campbell River on Vancouver Island. The road connects Campbell River with Gold River, the Head Bay Property and Tahsis which is approximately 20 kilometers northwest of the Property.

The property consists of a total of 26 mineral claims (Figure 2) which are described as follows:

### Head Bay Claim List

**TABLE 1**  
**List of Claims**

Claim Name	Tenure #	Date Located	Current Anniversary Date	Size ha.	Owner
Rob Roy 3	405000	Sept. 11, 2003	July 17, 2015	25.00	Dehua Int.
Lot 411 Stormont	404162	July 21, 2003	July 17, 2015	25.00	Dehua Int.
Lot 410 Glengarry	404163	July 21, 2003	July 17, 2015	25.00	Dehua Int.
Lot 412 Texas	404168	July 21, 2003	July 17, 2015	25.00	Dehua Int.
Rob Roy 2	404999	Sept. 11, 2003	July 17, 2015	25.00	Dehua Int.
Rob Roy	403908	July 27, 2003	July 17, 2015	400.00	Dehua Int.
Head Bay West	544930	Nov. 5, 2006	July 17, 2014	62.55	Dehua Int.
Head Bay Southwest	544931	Nov. 5, 2006	July 17, 2014	62.58	Dehua Int.
Head Bay 10	928415	Nov. 7, 2011	July 17, 2014	521.53	Dehua Int.
Head Bay 11	928421	Nov. 7, 2011	July 17, 2014	521.29	Dehua Int.
HB 1	940396	Jan. 9, 2012	July 17, 2014	521.69	Dehua Int.
HB 2	940405	Jan 9, 2012	July 17, 2014	521.81	Dehua Int.
Rob Roy 5	537379	July 18, 2006	July 17, 2014	62.55	Dehua Int.
GlennGarry Frac	536940	July 11, 2006	July 17, 2014	41.71	Dehua Int.
Head Bay 2	534563	May 29, 2006	July 17, 2014	41.72	Dehua Int.
Rob Roy 5	941273	Jan. 18, 2012	July 17, 2014	417.09	Dehua Int.
Rob Roy 6	941280	Jan. 18, 2012	July 17, 2014	521.25	Dehua Int.
Rob Roy 7	941285	Jan. 18, 2012	July 17, 2014	41.69	Dehua Int.
Rob Roy 8	941286	Jan. 18, 2012	July 17, 2014	104.23	Dehua Int.
Head Bay 2	528855	Feb. 24, 2006	July 17, 2014	62.58	Dehua Int.
Rob Roy 15	941430	Jan. 19, 2012	July 17, 2014	458.93	Dehua Int.
Head Bay 1	528854	Feb. 24, 2006	July 17, 2014	125.14	Dehua Int.
WOA 1	942912	Jan. 27, 2012	July 17, 2014	271.19	Dehua Int.
WOA 2	942929	Jan. 27, 2012	July 17, 2014	250.23	Dehua Int.
HB West	995913	June 10, 2012	July 17, 2014	41.73	Dehua Int.
HB2	940405	Jan. 9, 2012	July 17, 2014	521.81	Dehua Int.
Total				5,698.30	

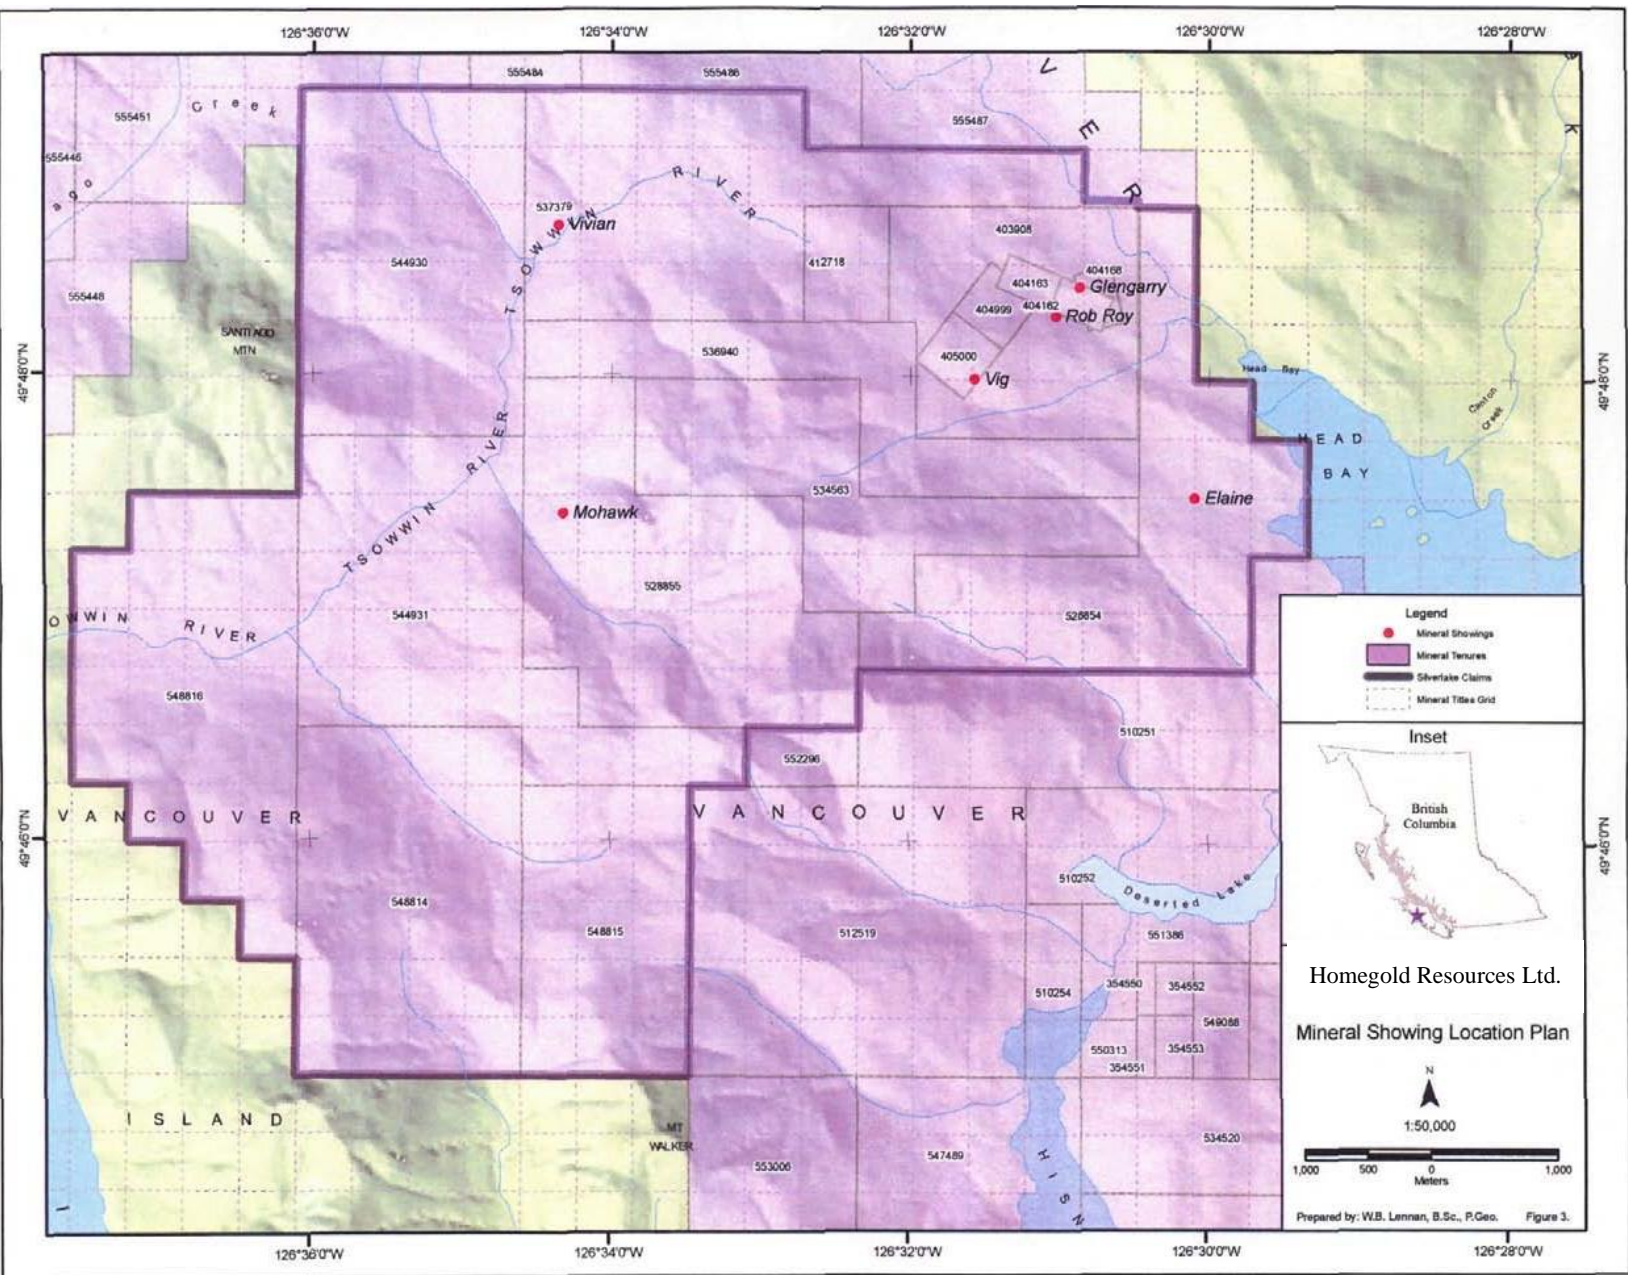


Figure 3 Mineral Showing Location Plan

Homegold Resources Ltd.  
 Mineral Showing Location Plan

Prepared by: W.B. Lennan, B.Sc., P.Geo. Figure 3.

The twenty-six mineral tenures listed above are currently owned by Dehua International Mines Group. The total area enclosed by the above listed twenty-five mineral tenures is 5,698.30 hectares. The Government of the Province of British Columbia owns the surface rights to the area encompassed by the twenty-six mineral claims. The owner has met the obligations to retain the property by applying the cost of exploration work to the claims for assessment purposes.

The mineral claim boundaries within the property were located by selecting the claim areas on maps provided on-line by utilizing The British Columbia Ministry of Energy, Mines and Petroleum Resources Mineral Titles Online system (Figure 2). The corners of the claimed areas are assigned Universal Transverse Mercator (UTM) coordinates and the claim owner is able to locate the claim boundaries on the ground using a Global Positioning System (GPS) receiver. The Mineral Titles On line system virtually eliminates claim overlaps and disputes.

The five currently known mineralized zones are identified and located as follows:

- Glengarry and Rob Roy                      49° 48' 27" N. Lat., 126° 31' 0" W. Long
- Elaine    49° 47' 29" N. Lat., 126° 30' 5" W. Long.
- VIG     49° 48' 08" N. Lat., 126° 31' 26" W. Long
- Mohawk                                         49° 47' 25" N. Lat., 126° 34' 20" W. Long
- Vivian    49° 48' 36" N. Lat., 126° 34' 26" W. Long

The property falls within the overlap of the traditional territories of the Nuu-chah-nulth Tribal Council First Nations as described in First Nation Statement of Intent (SOI) to negotiate treaties which have been submitted to and accepted by the B.C. Treaty Commission. The final boundaries have not been agreed to by the First Nations, the Province of British Columbia or the Government of Canada at this time.

Environmental baseline studies under the current Environmental Assessment Act have not been undertaken at this early stage of exploration throughout the property, therefore, potential environmental liabilities are not known at this time. Environmental baseline studies will be required in the future as more intrusive exploration and development takes place on the property.


More intrusive exploration programs where excavation of material, construction of drill pads, trenches and structures may require water quality monitoring as water quality parameters must meet the recommended standards for freshwater and marine aquatic life according to the British Columbia and Canadian Working and Approved Water Quality Guidelines (Criteria – 2000 and updated in 2006).

Drainage water from mine workings, stockpiles and service roads should be directed to detention ponds to protect adjacent streams from sediment and contaminants. The containment facilities should be capable of collecting and storing large sources of contaminated drainage waters over the range of hydrologic and climatic conditions expected at this property.

Areas where fuel storage, truck washes and servicing garages may be required to be sampled and monitored for grease, oil and fuel. These facilities should be located a minimum of 30 m from any watercourse and spill containment structures and spill kits should be available at the site. Future reclamation strategies should commence with the start of operations and allow for sequential restoration of areas no longer needed for mining purposes. The reclamation strategies should be designed early on to enhance and restore the natural habitat attributes found at the site prior to the commencement of operations.



Historically, the area has been subjected to clear-cut logging and is currently forested primarily with young second growth timber. During the February to April 2007 exploration program, several of the original logging roads located on the property were overgrown and/or were inaccessible due to deep snow. Evidence of the most significant exploration conducted during the 1980s on the property showings such as drillpads, trenches and cut lines were virtually non-existent as observed by the author due regrowth of underbrush plants and dense second growth forest cover. The construction of logging road appears to have impacted several of the original development adits by causing them to cave in.

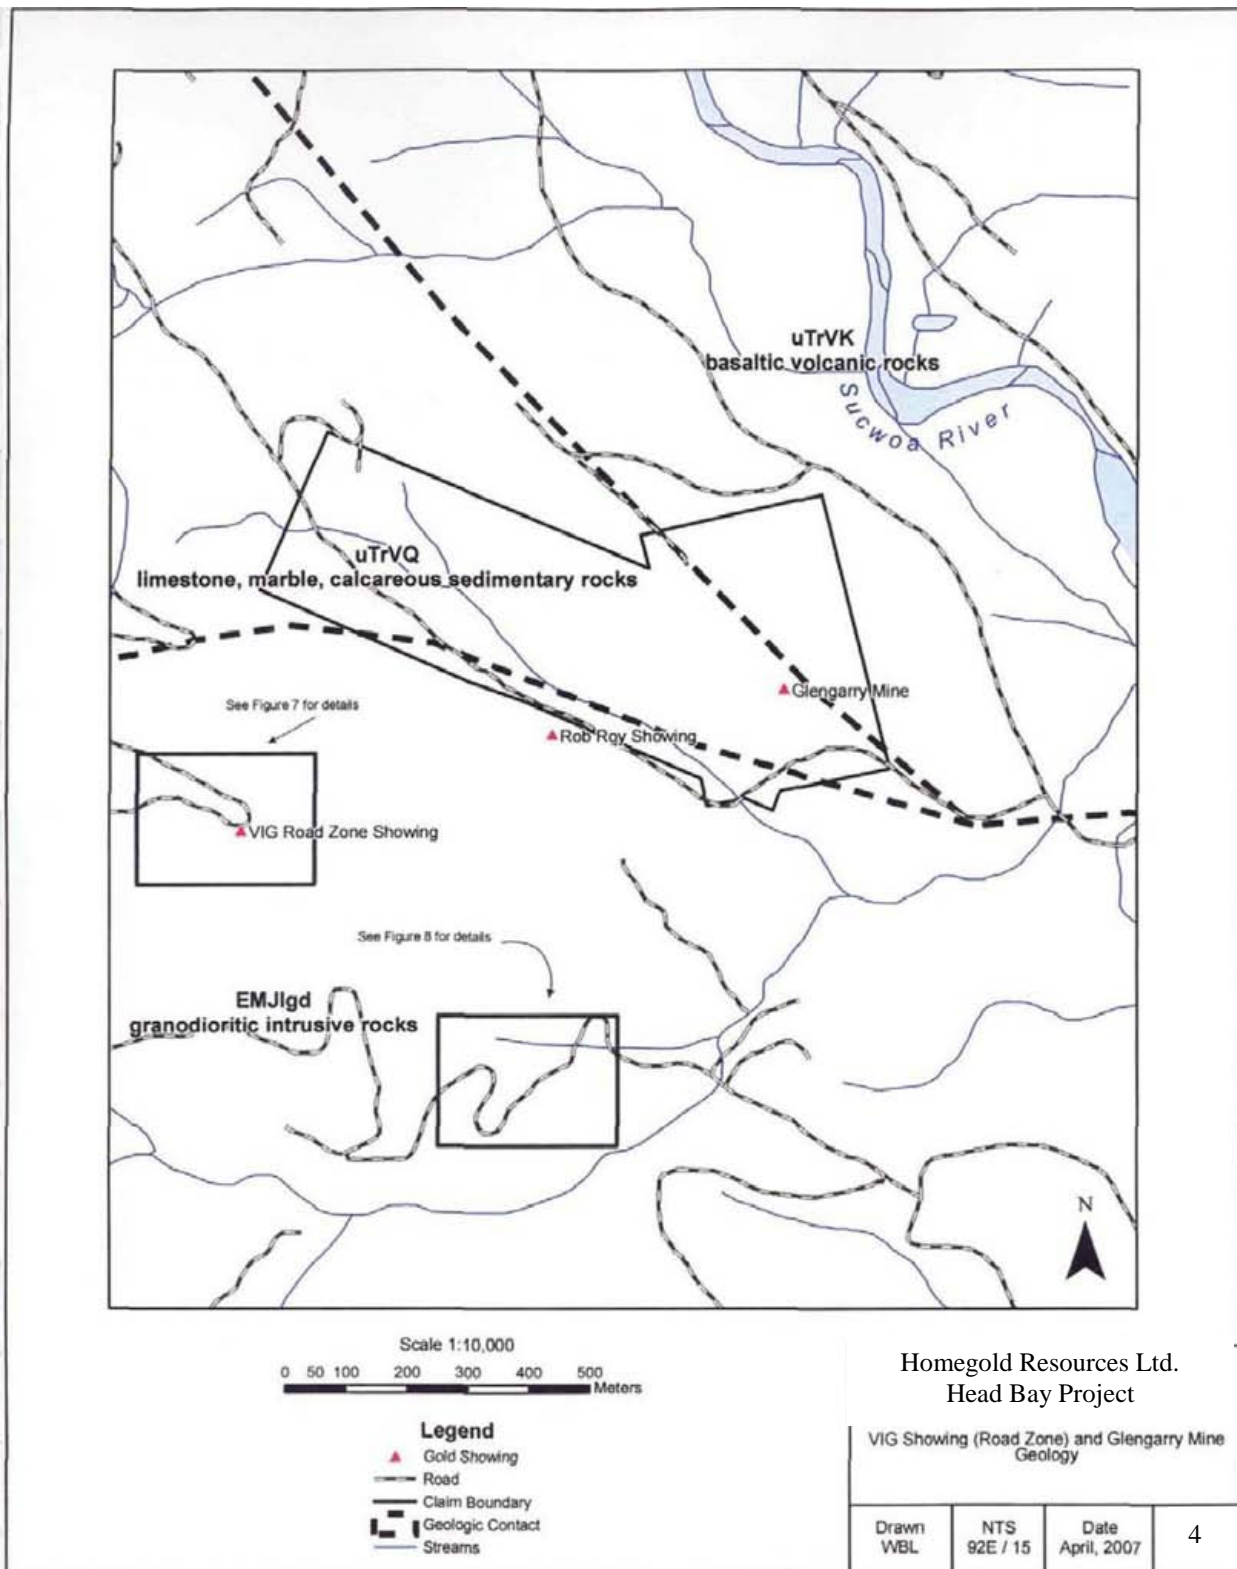

## ACCESSIBILITY

The Head Bay Property is located approximately 125 kilometers west-southwest of Campbell River and is accessible by 89 kilometres of paved highway (Highway 2) from Campbell River to Gold River, then by a gravel logging road (Head Bay Forest Road) for approximately 36 kilometres to the property. The logging road continues northward for a distance of approximately 18 kilometres to the village of Tahsis. The property, consisting of the five previously noted mineral showings is located immediately west of the former Head Bay logging camp which is at the north end of Tlupana Inlet. Numerous logging roads cross the northern part of the property as they branch off the Sucwoa Main Line. Logging roads constructed by BC Forest Products that branch off the Tlupana Main Line provide access to the southern and eastern parts of the property. A high voltage power line crosses the northern portion of the property. The Head Bay Property covers the eastern flank of an unnamed mountain of the Vancouver Island Range between the Sucwoa River and Desperate Lake to the south.

The topography is rugged, with deeply incised creeks and steep rock bluff. On the eastern portion of the property adjacent to Head Bay log sort, the valleys are less incised and soil cover obscures outcrop in places. Elevations range from sea level at the Head Bay log sort to over 900 metres above sea level along the western boundary of the property.


Mature forest covers the southern and western portion of the property with the exception of the logged areas. Hemlock, red cedar and fir are the most common species of merchantable timber while moderate to dense undergrowth consists of salal, devil's club, huckleberry and salmonberry. Areas logged in the 1960's and 1970's are choked with the above noted shrubs and more recent logging has clogged some drainages (valleys) with slash making movement on foot very difficult.

The climate of the area is west coast marine rainforest and receives around 500 cm of precipitation per year with overall cool temperatures year round. Heavy snowfall occurs at higher elevations and during the 2007 exploration program conducted by Silverlake Capital Corporation in February and March, snow depths of up to 1.5 metres in depth were encountered at an elevation of only 100 metres above sea level which prevented safe access to some of the showing areas.

The main access road (Head Bay Forest Road) to the property from Gold River is currently well maintained up to the property and northward to the village of Tahsis.


The climate of the area is west coast rainforest with temperatures ranging from -10° C in the winter to +30° C in the summer. Although snowfall depths can be significant in this area, the temperate weather will allow mining operations to be carried out year round. Power requirements are readily available as the main Hydro power line from Gold River to Tahsis passes over the northeast portion of the claim block near the VIG (Road Zone showing) and Glengarry – Rob Roy magnetite showings. Adequate water supplies are available from nearby large creeks and rivers such as the Sucwoa and Tsoowin Rivers.

Food, fuel and accommodations are available at the town of Tahsis to the north or at Gold River approximately 40 km to the east. Both communities have deep water port facilities.

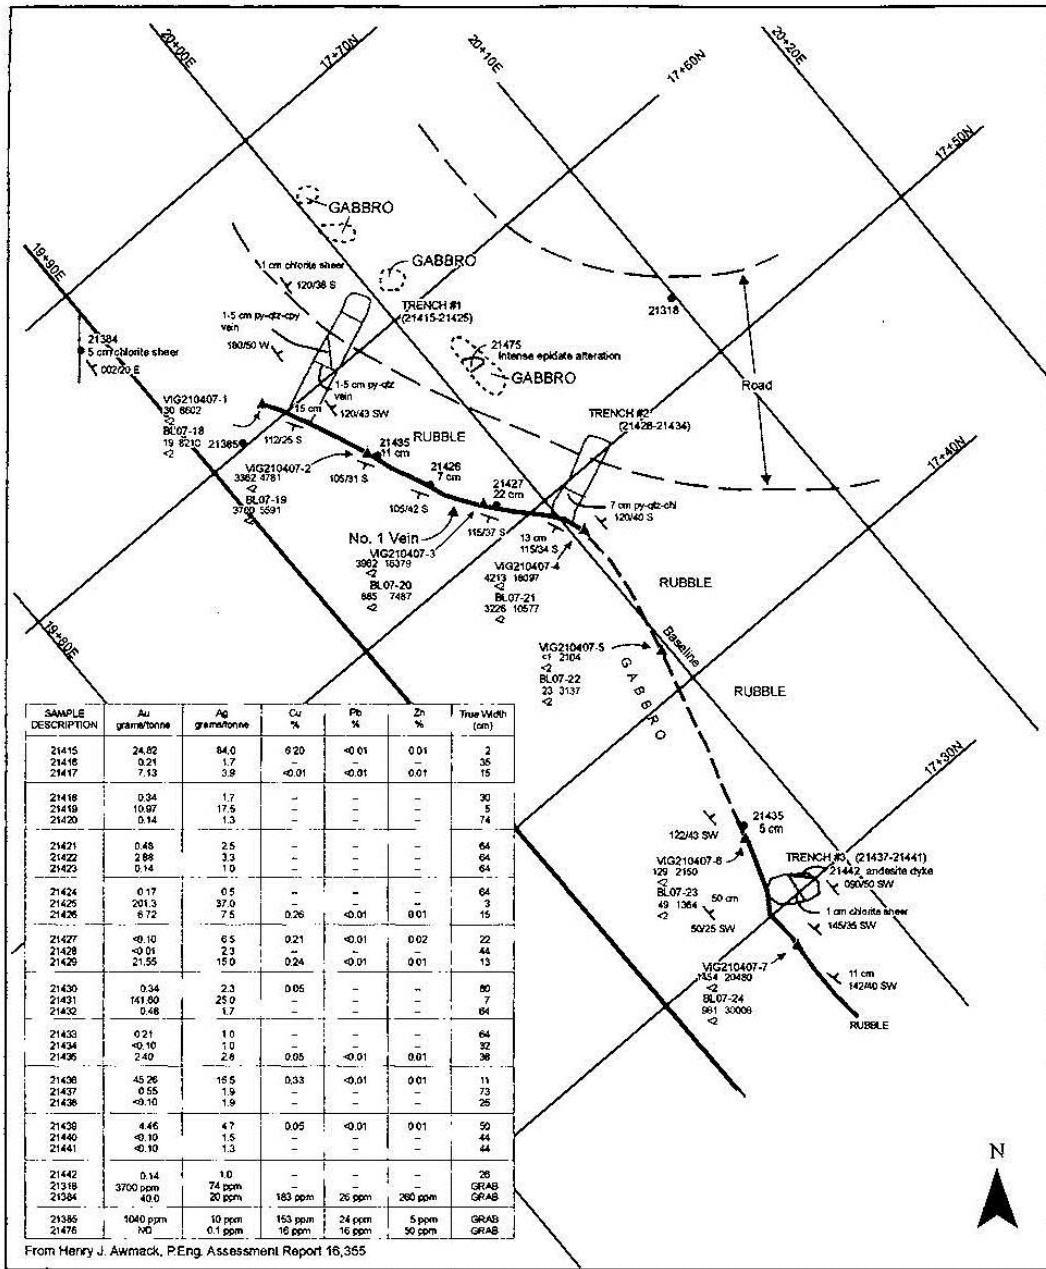

SAMPLE DESCRIPTION	Au grams/tonne	Ag grams/tonne	Cu %	Pb %	Zn %	True Width (cm)
21415	24.82	84.0	0.20	<0.01	0.01	2
21416	0.21	1.7	-	-	-	36
21417	7.13	3.9	<0.01	<0.01	0.01	15
21418	0.34	1.7	-	-	-	30
21419	10.07	17.5	-	-	-	5
21420	0.14	1.3	-	-	-	74
21421	0.48	2.5	-	-	-	64
21422	2.88	3.3	-	-	-	64
21423	0.14	1.0	-	-	-	64
21424	0.17	0.5	-	-	-	64
21425	201.3	37.0	-	-	-	3
21426	6.72	7.5	0.26	<0.01	0.01	15
21427	<0.10	0.5	0.21	<0.01	0.02	22
21428	<0.01	2.1	0.24	<0.01	0.01	44
21429	21.55	15.0	-	-	-	13
21430	0.34	2.3	0.05	-	-	80
21431	141.89	25.0	-	-	-	7
21432	0.48	1.7	-	-	-	64
21433	0.21	1.0	-	-	-	64
21434	<0.10	1.0	-	-	-	32
21435	2.40	2.6	0.05	<0.01	0.01	38
21436	45.26	18.5	0.33	<0.01	0.01	11
21437	0.55	1.9	-	-	-	73
21438	<0.10	1.9	-	-	-	25
21438	4.46	4.7	0.05	<0.01	0.01	50
21440	<0.10	1.5	-	-	-	44
21441	<0.10	1.3	-	-	-	44
21442	0.14	1.0	-	-	-	26
21318	3700 ppm	74 ppm	-	-	-	GRAB
21384	40.0	20 ppm	163 ppm	26 ppm	260 ppm	GRAB
21385	1040 ppm	10 ppm	153 ppm	24 ppm	5 ppm	GRAB
21476	ND	0.1 ppm	16 ppm	16 ppm	50 ppm	GRAB

From Henry J. Awmack, P.Eng. Assessment Report 16,355



LEGEND

ppm Cu    ppb Au  
981        53008  
ppm Pb    <

- ▲ VIG210407-1 to 7    2007    Silverleika Capital Corporation Rock Samples
- BL07 - 16 to 24    2007    W.B. Lennan Duplicate Samples

Homegold Resources Ltd.  
Head Bay Project

VIG Road Zone Showing  
Geology and Geochemistry Plan

Drawn WBL	NTS 92E / 15	Date April, 2007	5
--------------	-----------------	---------------------	---

## HISTORY

The Zeballos Gold camp (Hoadley, 1953) was recognized as an important source of economic gold mineralization localized within quartz-carbonate vein systems in shear zones and fault structures. All 33 published lode gold deposits in the camp have gold mineralization associated with pyrite, arsenopyrite, calcite and chalcopyrite and minor quantities of galena and sphalerite mineralization. The similarities of structural and mineralogical signatures found at four of the five mineral showings on the Head Bay property with the Zeballos Gold camp deposits indicate there is potential to locate economic deposits of gold and silver. The occurrence of magnetite mineralization on the property associated with contact metamorphic alteration of the Quatsino limestone unit adjacent to the Jurassic aged northwest trending Island Intrusive granodioritic stocks also indicates that there is potential to locate additional deposits along the contact aureole.

The author has reviewed and sourced information on five showing located on the Head Bay property from several assessment reports for various exploration companies which were authored by a variety of geologists. Provincial Government publications such as Ministry of Mines Annual Reports and Geological Publications relevant to the Head Bay Property area were also reviewed and are documented in Section 17 (References) section of this report. Exploration work conducted in the past by various companies or individuals is summarized as follows:

### **Canadian Collieries (Dunsmuir) Ltd. and Hualpai Enterprises – 1902 - 1960**

The Head Bay property encompasses two historical magnetite occurrences known as the Glengarry and Rob Roy which occur on 3 reverted crown grants (Glengarry, Stormont and Texas). These showings were originally staked in 1902 by Stockham, Grand and Dawley. Little work was done on the claims which were then optioned to Canadian Collieries (Dunsmuir) Ltd. in 1916. In 1959 Canadian Collieries optioned the property to Hualpai Enterprises Ltd. of Japan. Hualpai drilled 115 short drill holes totaling 2125 m (6972 ft.) to explore various showings. According to Canadian Collieries information supplied to the Minister of Mines in 1956 (page 133), the drilling outlined an inferred resource of 360,000 tons (327,000 tonnes) of magnetite grading an average of 42.7 % iron. The mineralization was encountered in 11 distinct locations (pods) with the following inferred resources indicated as follows:

<u>Location</u>	<u>Tons</u>	<u>Grade (Per Cent Iron)</u>
A	8,500	52.5%
B	9,000	50.0%
C	23,500	35.6%
D	58,000	37.5%
E	5,750	40.3%
F	174,000	40.7%
G	15,400	50.9%
H	33,000	55.4%
I	24,800	45.2%
J	6,000	50.7%
K	2,000	50.8%

The 11 iron mineralized locations are shown on Figure 6.

Hualpai commenced production in 1959 with the mining of 125,000 tons of ore and waste from which 62,500 tons were milled. A total of 25,000 tons of magnetite concentrate was produced and shipped from Head Bay by boat. Production ceased in 1960 as Hualpai Enterprises Ltd. went into receivership.

This resource calculation was carried out prior to the existence of NI43-101 standards and is therefore, not in compliance with the current NI43-101 standards and the resource definitions of used in the Ministry of Mines Annual Report in 1956 are also not in compliance with the current 43-101 standards. The above tabulated inferred resources for the 11 mineralized zones should not be relied upon to represent the actual mineral resources that occur on the Glengarry showing. The author has not attempted to recalculate the inferred resource at this time as the calculation methodology, geological modeling (if any), the sampling methodology, sample preparation and analytical procedures used at the time are not known and the drilling data is not available.

At these magnetite occurrences, northwest striking Quatsino limestone dips 45° to the southwest. Intruding the limestone to the south and east is a large granodiorite body and associated diorite dykes. The limestone strata have been recrystallized or altered to a garnetite skarn. Magnetite mineralization is contained within the garnet skarn with minor chalcopyrite and pyrite. At the Glengarry magnetite occurrence, mineralization outcrops over an area of 570 by 400 m that contains 11 or more pods of magnetite ranging in thickness from 2 to 12 m and are parallel to bedding along the margin of the granodiorite contact. A sample of the magnetite assayed 66.8% iron (Minister of Mines Annual Report - 1916, page K293).


At the nearby Rob Roy magnetite showing, Brewer (1916) reported that the grade is similar to the Glengarry although no assays were done and that resource estimates amounted to approximately 45,360 tonnes of magnetite grading 56.8 % iron (Minister of Mines Annual Report 1916, page K294). Information regarding the estimation of the mineral resource is not available.

#### **Crystal Mountain Resources Ltd. - 1982**

A small exploration program was conducted by Crystal Mountain Resources Ltd. in 1982 in the vicinity of the Elaine (Oh Boy) Vein, however, as a result of intensive logging and logging road building over the showing and adit area, the adit was not located. A small number of soil, rock and silt samples (60 in total) were collected along the drainages, roads and contours in the vicinity of the suspected location of the old adit. Six of the 60 samples had gold results exceeding 20 parts per billion (ppb) with the highest gold value of 130 ppb being recorded. No follow up work was carried out. The historical exploration work and analytical work was performed before the implementation of 43-101 standards and are, therefore, not in compliance with 43-101 protocols. Although it is expected that the analytical procedures used during the work conducted in the 1980s were carried out at the standards of the day, they are not in compliance with current 43-101 standards. The laboratory analyses were performed by Vangeochem Lab Ltd. formerly of North Vancouver, BC.

#### **Aberford Resources Ltd – 1983**

Aberford Resources Ltd. (Aberford) conducted a geological mapping and geochemical sampling program that focussed on the quartz –sulphide veins that were hosted in shear and fault zones. The Vivian showing and associated veins are exposed in a road cut approximately 100 m northward along the logging road from the “lower borrow pit quarry”. The extensive mapping and soil and rock chip sampling conducted by Aberford suggested that the logging road cut veins, if they are not part of a

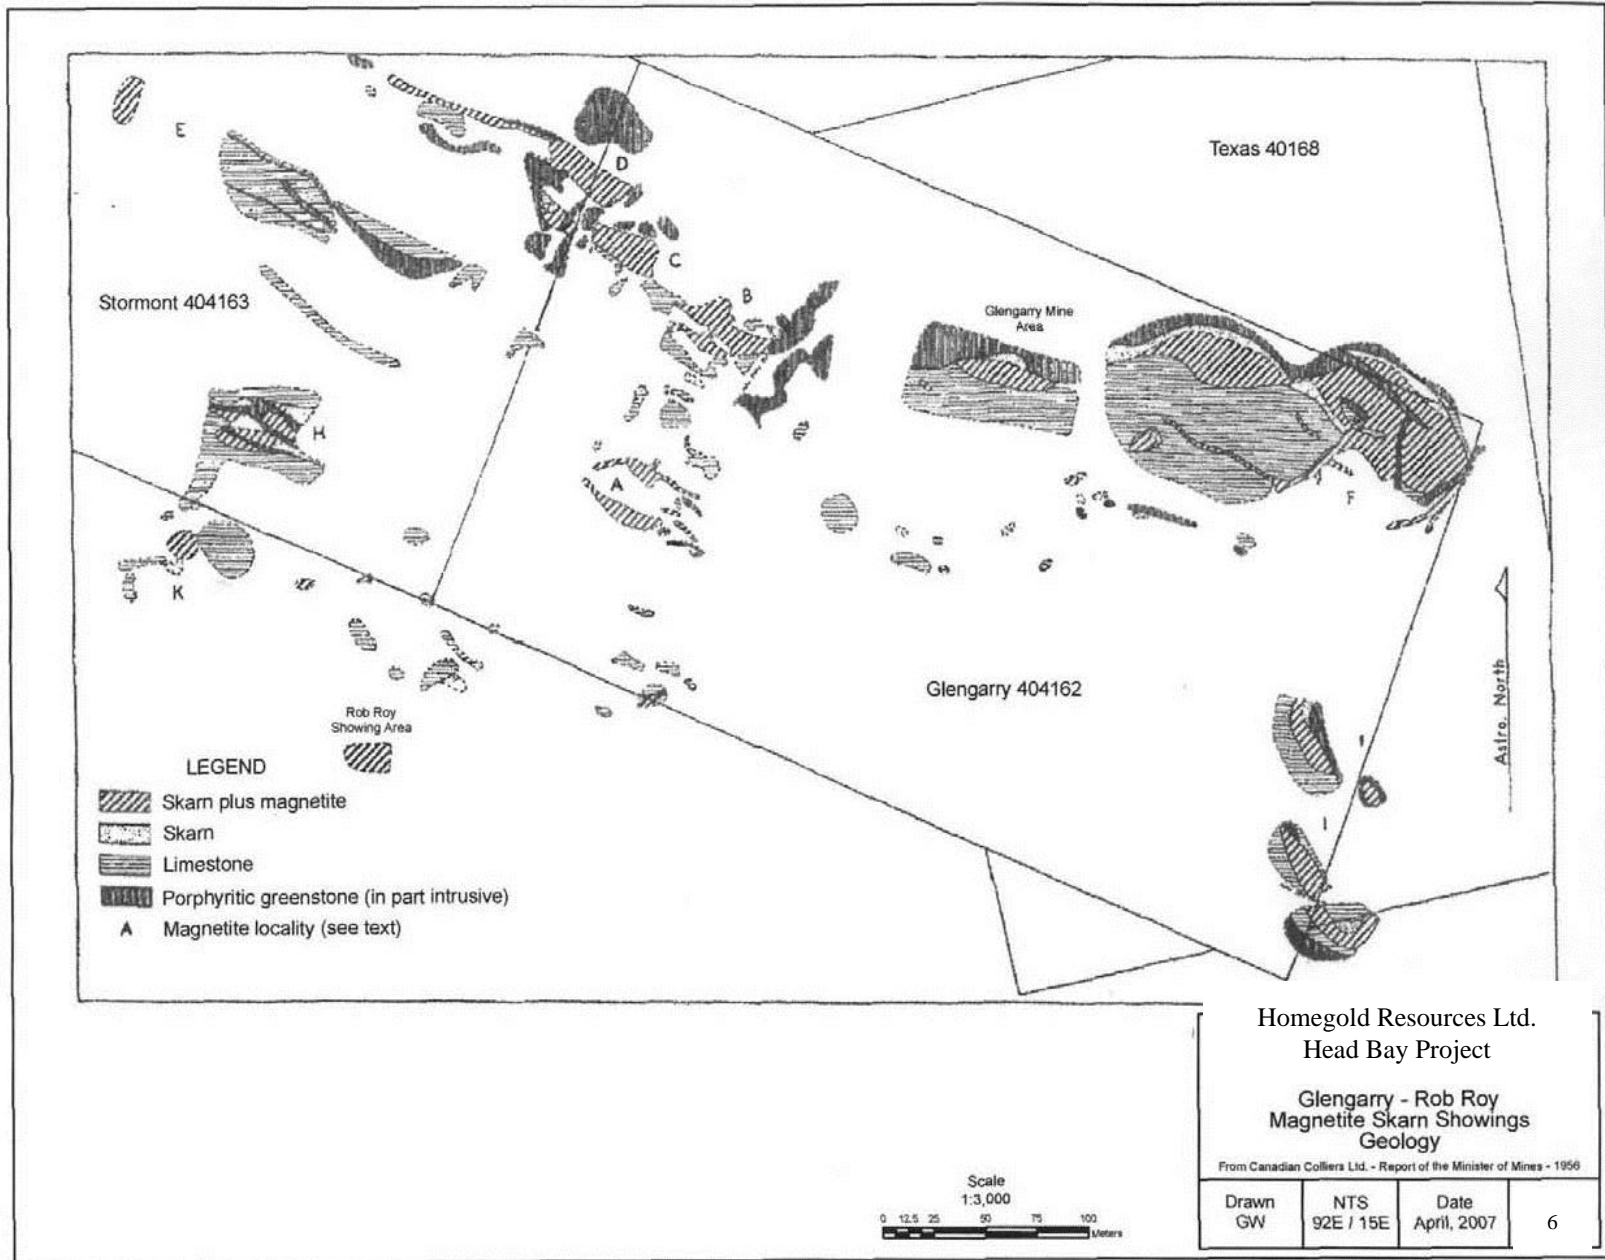

separate system, may be the same vein as the Vivian only that it has been offset by a cross-fault. Samples collected by Aberford Resources Ltd, from the 2 to 3 cm wide veins in the 5 to 10 cm wide shear near the lower quarry averaged 2.241 troy ounces per ton. Aberford samples collected from the Vivian adit rock dump averaged 3.537 troy ounces per ton. Aberford also collected samples from the Vivian vein system for 100 m along strike where it was exposed in the Tsowwin River bank. The samples averaged 0.148 troy ounces per ton. The Aberford 1983 assessment report 12058 does not indicate how many samples were averaged nor how they accounted for the varying widths of the vein at the sample site in the averaging calculation.

Aberford Resources Ltd. also conducted exploration work on what became later known as the VIG Road Zone showing. Aberford reported that the vein was exposed for 23 m along strike and varied from 20 to 60 cm wide. Pyrite was found to comprise at least 50% of the vein material and discrete pods of massive pyrite were also present. Aberford collected 15 rock chip samples from the Road Zone vein and reported that the samples averaged 1.598 troy ounces per ton gold. The highest gold grades (7.374 troy ounces per ton) reported by Aberford came from the massive pyrite pods containing rounded quartz fragments. Aberford also reported that the Tertiary Catface diorite intrusive that contacts the quartz-pyrite vein was gold bearing with one 30 cm wide rock chip sample assaying 0.018 troy ounces per ton gold. Arsenic concentrations were also found to range from 100 ppm to greater than 1000 ppm when associated with the gold mineralization. In addition to collecting and analyzing rock chip samples from quartz-pyrite veins and associated shear zones described above, Aberford also collected and analyzed silt samples and heavy mineral samples which were panned down from a larger volume of sediment to yield a heavy mineral bearing pan concentrate. All analytical work for the rock chip, panned rock concentrate, heavy mineral samples and silt samples was performed by Bondar-Clegg and Company Ltd. formerly located in North Vancouver, BC. Homestake Mineral Development Company optioned the property from Aberford Resources Ltd. in 1983-1984 but only conducted a limited property reconnaissance visit to the property and then dropped the option.


The historical exploration work and analytical work was performed before the implementation of 43-101 standards and are, therefore, not in compliance with 43-101 protocols. Although it is expected that the analytical procedures used during the work conducted in the 1980s were carried out at the standards of the day by Bondar-Clegg & Company Ltd., they are not in compliance with current 43-101 standards.

### **Great Keppel Resources Ltd. - 1987**

Great Keppel Resources Ltd. established a 1300 m square grid over the VIG Road Zone No. 1 Vein area with lines spaced 50 m apart. Soil samples were collected at 25 m spacings and analyzed for gold, silver, copper, lead, zinc and arsenic. Two soil anomalies were identified on the grid at 17+50N 25+25 E (3080 ppb Au) and contour line sample CL150-36 (2845 ppb). The source of the anomaly was not determined. The geochemical survey near the Road Zone No. 1 vein not anomalous in gold but showed a strong association with copper, silver and arsenic with soil sample 21+00N 21+0E assaying 1282 ppm Cu, 5052 ppm Pb, 1992 ppm Zn, 2.1 ppm Ag and 91 ppm As.

Great Keppel Resources Ltd conducted a proton magnetometer survey over parts of the geochemical grid in order to outline the geological units, extend the Road Zone No.1 Vein and to potentially identify similar zones within the Head Bay Pluton. The magnetometer survey delineated the contact between the Head Bay pluton and the Quatsino Limestone and identified the magnetite bearing skarn bodies. The survey found that the magnetic response had variations of up to 5000 gammas over 25 m and in some locations the magnetic gradient was too high for accurate measurement with the proton magnetometer



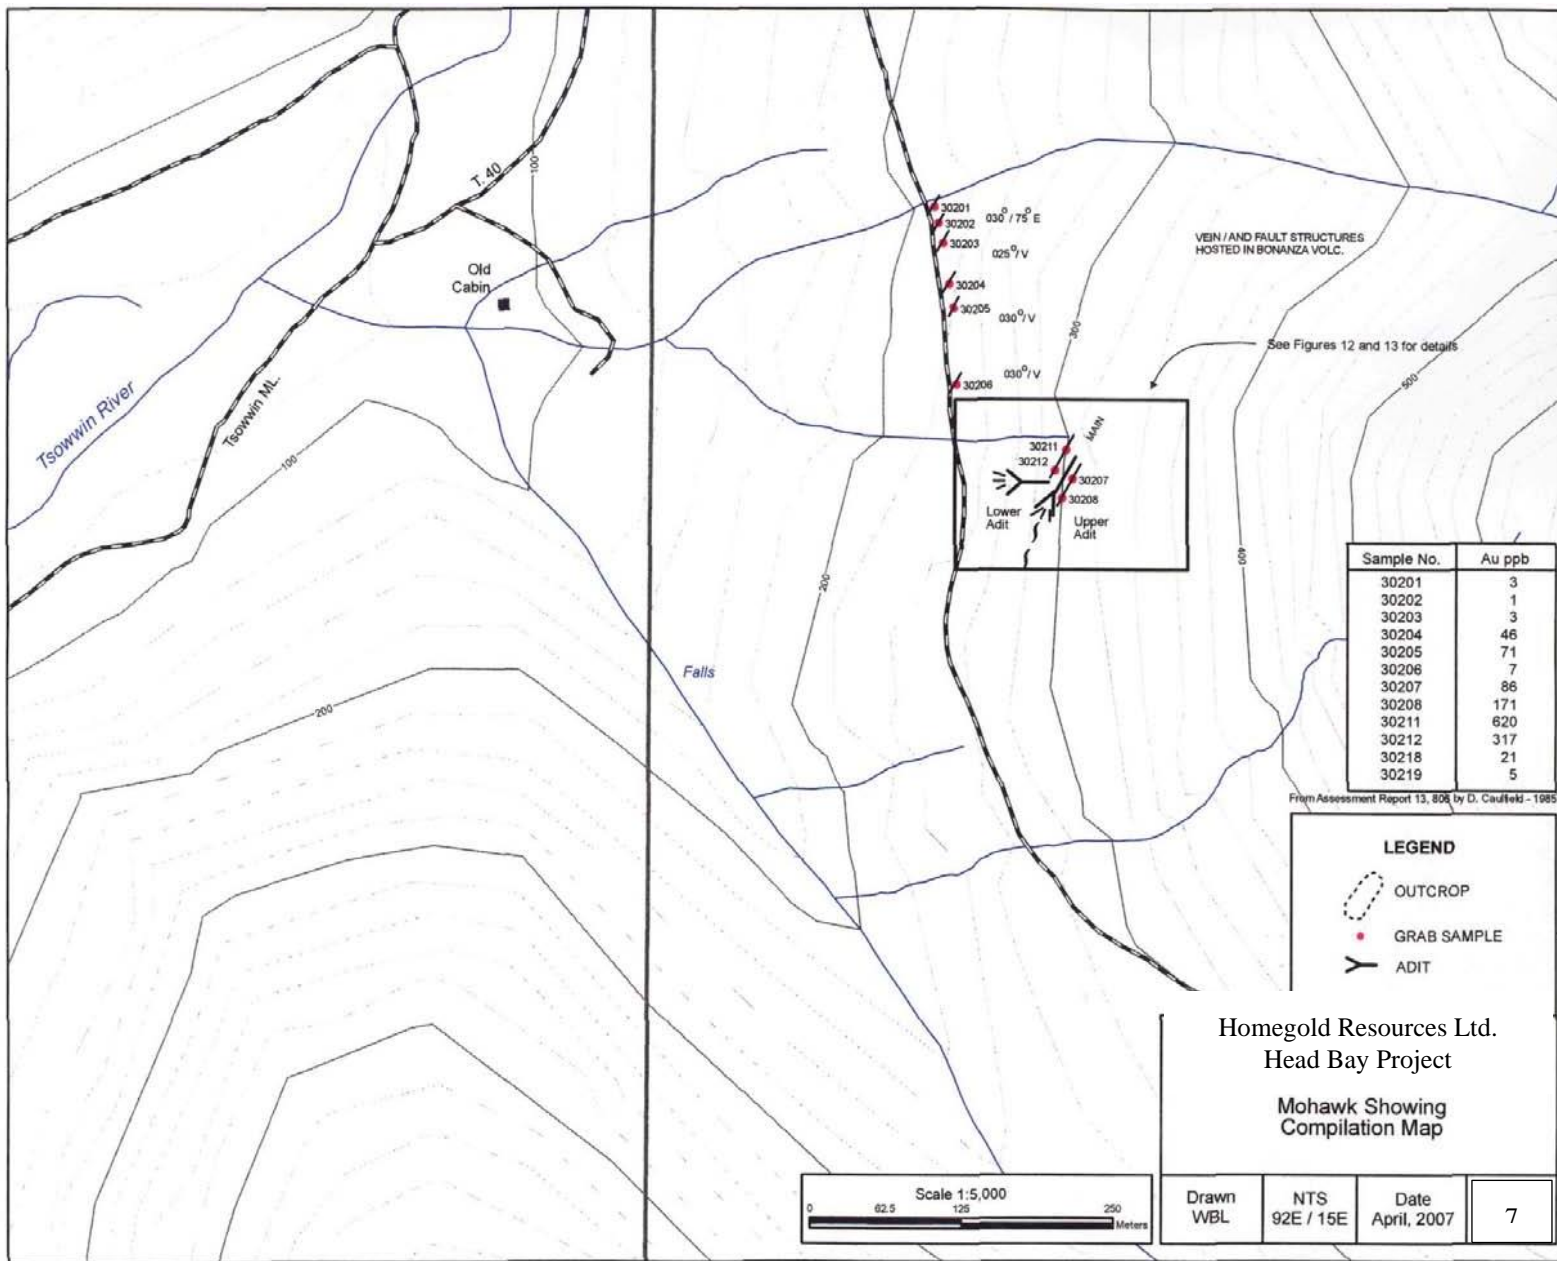

technology of the day. A magnetic response contour map was not produced by Great Keppel Resources Ltd.

Historical trenching (three trenches) conducted 1987 by Great Keppel Resources Ltd. exposed the VIG Road Zone No. 1 vein showing over a 38 m strike length and yielded gold content of up to 201.3 g/tonne over a few centimeters in a sulphide lens over a few centimeters (Awmack, 1987 – AR 16355). Trench #1 averaged 1.41 g/tonne gold across a true width of 2.87 m which included a hanging wall section grading 3.44 g/tonne gold over 0.5 m. Trench #2 averaged 12.98 g/tonne gold across a 1 m width and Trench #3 averaged 4.46 g/tonne gold across a width of 0.5 m (Figure 8). The footwall of the Road Zone No. 1 Vein system has not been delineated to date and as the No. 1 Vein and parallel vein and sulphide lenses are recessive over a width of approximately 16 m to the west-northwest, the total width of the Road Zone system may be significantly wider than the current exposed portion suggests. The recessive “valley” trends towards the northwest as confirmed by a rock outcrop exposed approximately 10 m north of the limit of the No. 1 Vein exposure. A Great Keppel Resources Ltd. sample from this outcrop assayed 3700 ppb gold in a semi-massive pyrite mineralized matrix.

### **Centaur Resources Ltd. - 1988**

In 1988 Great Keppel Resources Ltd. (Centaur) changed names and became Centaur Resources Ltd. Centaur Resources Ltd. continued prospecting on the Road Zone and completed 437.1 m of BQ diamond drilling in nine drill-holes from one set up to test the VIG Road Zone No. 1 Vein system below the previous year’s trenches (Figure 7). Centaur also collected 130 reconnaissance “B” horizon soil samples along contours. Six silt samples were also collected from major drainages in the immediate area around the Road Zone.


The drilling intersected significant gold mineral in 3 of the 9 drill holes. In drill hole V88-01, a 0.25 m section of the Road Zone No. 1 vein assayed 22.94 g/tonne gold. In drill hole V88-04 a 0.25 m section of the Road Zone No. 1 vein assayed 58.2 g/tonne gold and in drill hole V88-05 a 0.36 m of the Road Zone No. 1 vein assayed 17.6 g/tonne gold.

The drill hole locations are shown on Figure 7 and the bearing, dips and lengths of the drill holes from the one set-up are as follows:

<b><u>Drill Hole Number</u></b>	<b><u>Bearing (Azimuth)</u></b>	<b><u>Dip</u></b>	<b><u>Length (m)</u></b>	<b><u>Ground Elevation</u></b>
V-88-01	030°	-50°	91.1	451.3 m
V88-02	030°	-70°	37.79	451.3 m
V88-03	----	-90°	30.48	451.3 m
V88-04	090°	-45°	30.48	451.3 m
V88-05	130°	-45°	45.72	451.3 m
V88-06	170°	-45°	45.72	451.3 m
V88-07	210°	-45°	31.69	451.3 m
V88-08	270°	-45°	31.69	451.3 m
V88-09	330°	-45°	92.35	451.3 m

Four of the nine holes intersected quartz-sulphide mineralization and none of the holes encountered more than one quartz-sulphide vein. Awmack (1987) described the Road Zone No. 1 Vein system as it was encountered in the drill core as a “narrow shear or series of shears, sporadically mineralized with

highly auriferous quartz-pyrite-chalcopyrite-chlorite veins flanked by less than one meter of weak shearing and clay alteration with minor disseminated pyrite and unaltered diorite.

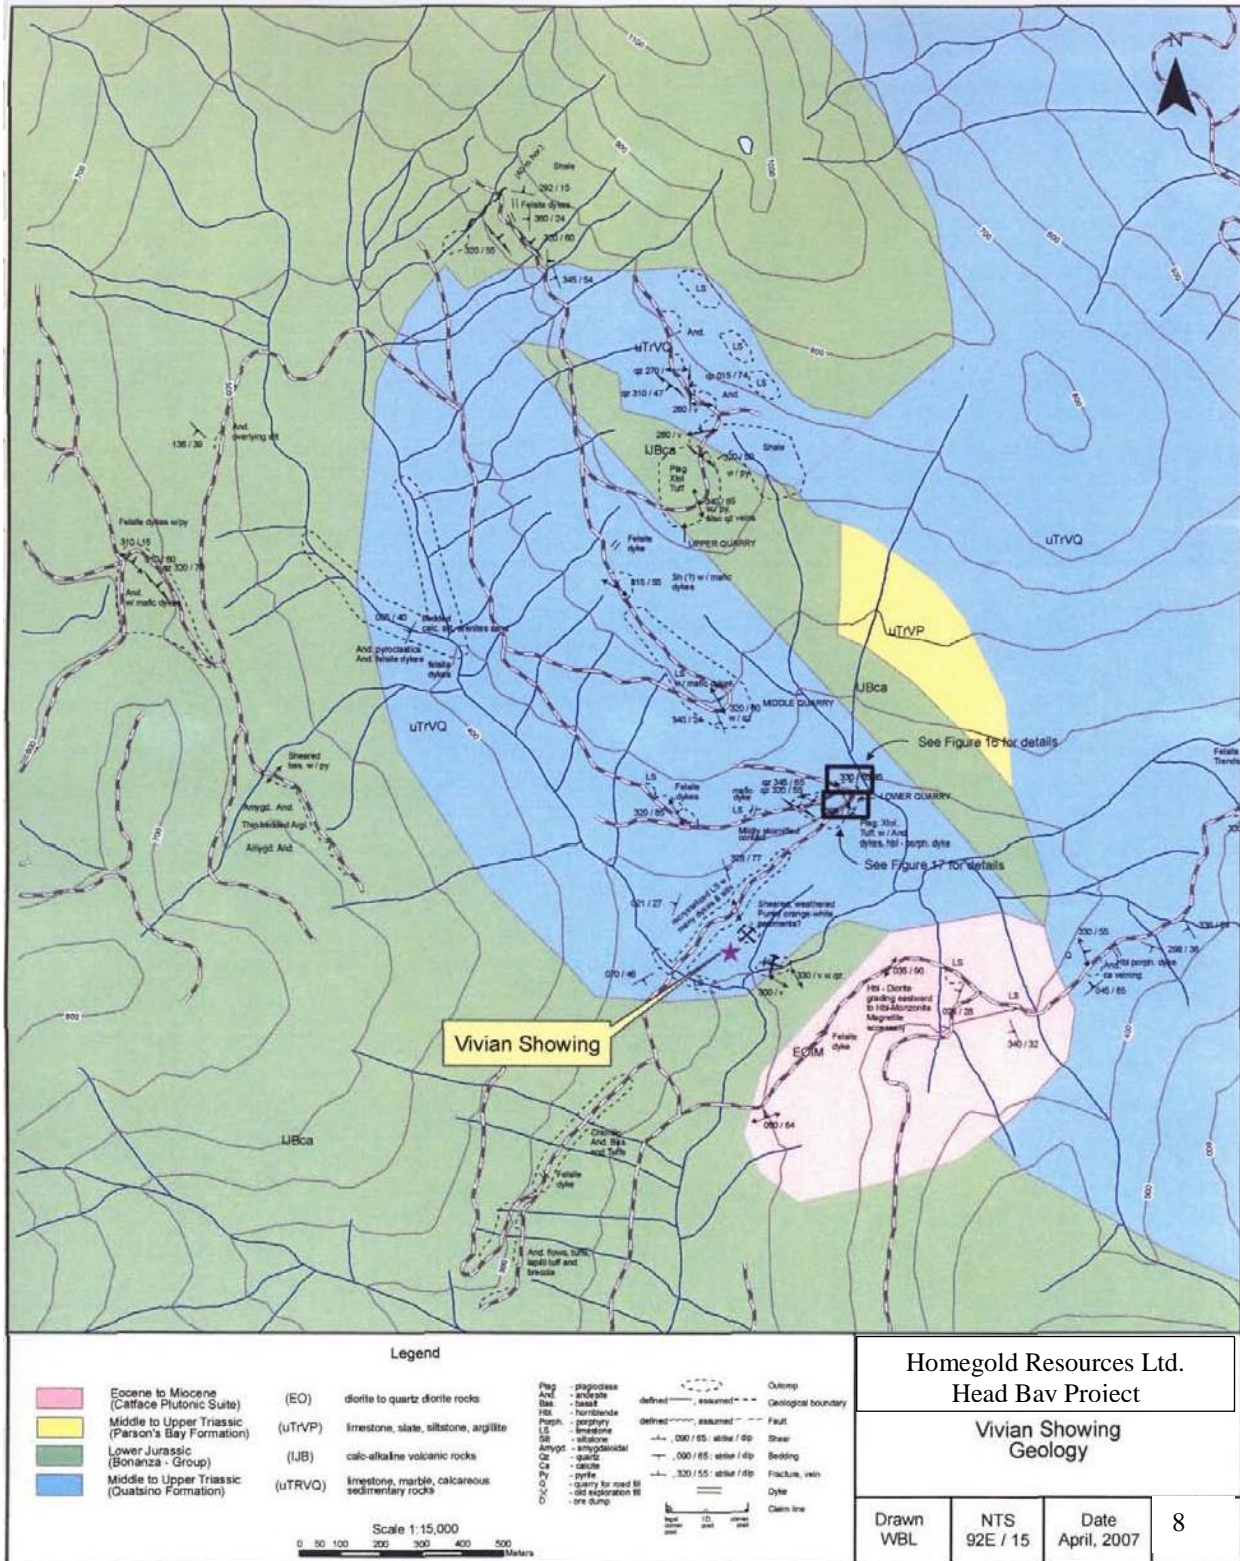

## REGIONAL GEOLOGY

The Tahsis Head Bay area is primarily underlain by rocks of the Vancouver and Bonanza Group. The regional geology of this area is illustrated on Figure 9. The Vancouver Group consists of thick sequence of Upper Triassic age basaltic volcanic rocks of the Karmutsen Formation which is overlain by Upper Triassic age Quatsino and Parson's Bay Formation carbonates and pelitic sediment units composed of volcanic derived clasts respectively. The Bonanza Group overlies the Quatsino limestones and Parson's Bay formation units and consists of sequences of basaltic to dacitic volcanic flows and pyroclastic units with minor intercalated sedimentary units.

The Vancouver and Bonanza Groups have been intruded by at least two stages of plutonic rocks of different ages. The Island Intrusions are generally granitic in composition and form stocks and batholiths of Early Jurassic age. The Island Intrusions are primarily in contact with the Karmutsen Formation volcanics and Bonanza Group volcanics.

Small Early Tertiary age quartz diorite to granodiorite stocks of the Catface Intrusions are also common in the area and on the Head Bay property. South of the Head Bay property, migmatitic Lower Jurassic age units possibly cogenetic with the Island Intrusion and Bonanza volcanic are found in outcrops.


Regional mapping in the Tahsis area has been conducted at least three times by the Geological Survey of Canada and the BC Ministry of Mines. J.W. Hoadley's 1953 report in GSC Memoir 272 provides a relatively detailed description of the geology of the Head Bay property and a history of some of the exploration prospects in the area. Muller et al (1974 Paper 74-8) also provides a detailed description of the mapping they carried out in the area and the remainder of northern Vancouver Island. This paper refined and updated Hoadley's lithological nomenclature. In a second study of the Vancouver and Bonanza Group rocks by Muller et al (Paper 80-16) the Parson's Bay formation was excluded from Bonanza Group (it was considered to be a lower sedimentary division of the Bonanza Group) and placed as the youngest formation within the Vancouver Group. This nomenclature change sets apart the Triassic carbonate-clastic sequence of the Vancouver Group from the Jurassic basalt-andesite-dacite-rhyolite-sediment assemblage of the Bonanza Group (Muller, 1981).

### ***Vancouver Group***

#### **Karmutsen Formation**

The Karmutsen Formation consists of a thick succession of tholeiitic basalts estimated to be between 450 and 6000 m thick (Muller et al, 1981). The lower portion of the formation consists of an approximately 2450 to 2750 m thick sequence of pillow basalts overlain by approximately 600 to 900 m of pillow breccias and aquagene tuffs which are overlain by an upper section of basaltic flows. For the most part the Karmutsen Formation is disconformable with the overlying Quatsino Formation, however, some thin limestone and argillite units of the Quatsino Formation are intercalated within the upper units of the Karmutsen Formation suggesting localized conformity. As the oceanic-type Karmutsen basalts overlie the Paleozoic Sicker Group sediments, Muller (1977) suggests that the Karmutsen volcanic are derived from a rifting basin at the continental margin.

Figure 9 Regional Geology Map

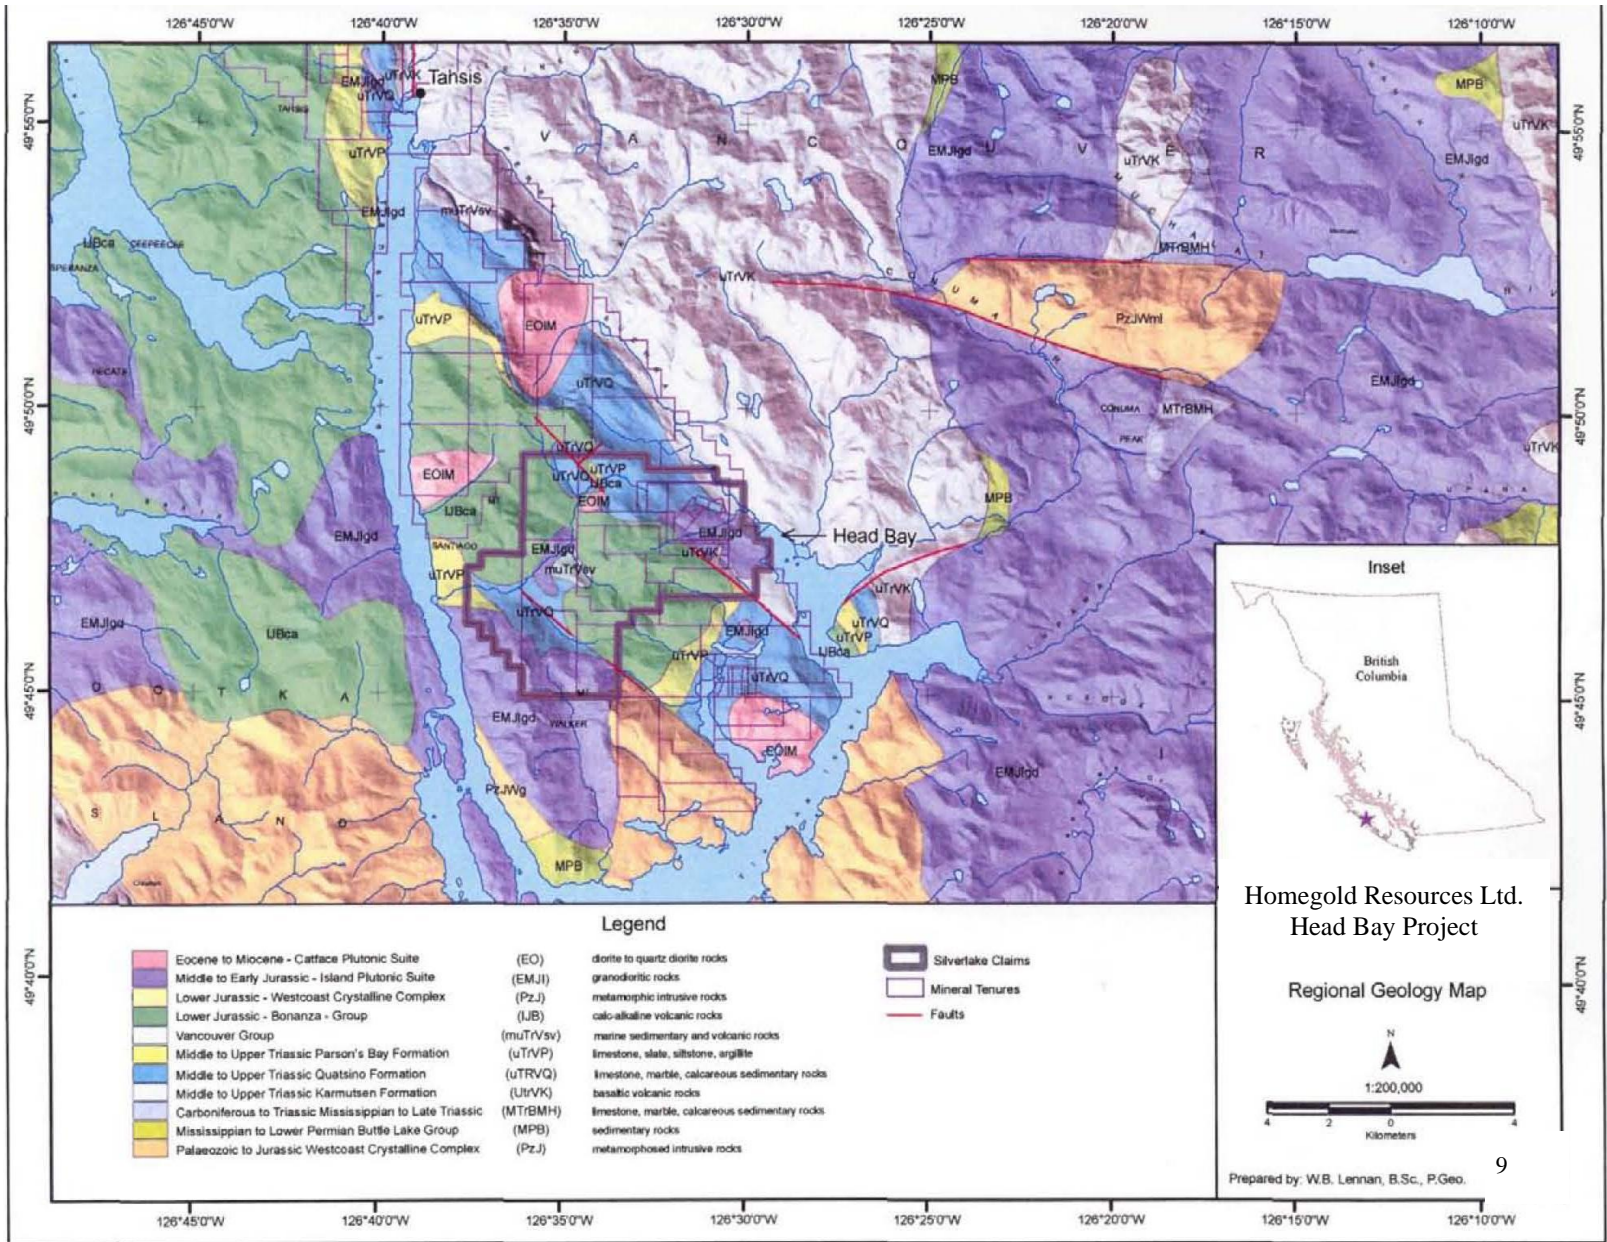

## **Quatsino Formation**

The Quatsino Formation is approximately 700 m thick and consists of thick bedded to massive light brown to light grey limestone that has a grey to white weathered surface where exposed as outcrop. The limestone is fine grained to microcrystalline and often contains stylolites. The Formation has a gradational contact with the overlying Parson's Bay Formation and becomes darker brown as intercalations of calcareous pelite occur more frequently. The Quatsino limestone formation likely represents a carbonate reef that formed along shallow shelf of the Karmutsen volcanic rocks.

## **Parson's Bay Formation**

The Parson's Bay Formation consists of a sequence of fine to coarse grained sediments that appears to represent a transition zone from the shallow more turbulent shelf area to a deeper quiescent anaerobic environment (Muller, 1981). Muller et al (1974) described a 400 m thick section of the Parson's Bay units within the Alert May area north of Tahsis. Muller (1981) considered the formation to be much thicker in the Tahsis area where brown weathering black siltstone and shale along with minor tuffaceous units occur. These rocks were considered to be from 150 to 300 m thick in the property area (Hoadley, 1953)

## ***Bonanza Group***

The Bonanza Group was formed in an island arc environment (Muller, 1981) and exhibits considerable lithological variation consisting of interbedded lava, breccia and tuff with compositions ranging from basaltic, andesitic, dacitic to rhyolitic. In outcrop, the Bonanza volcanics are commonly observed to be green and/or maroon amygdaloidal, massive to agglomeratic flow lavas that contain salmon coloured plagioclase phenocrysts. Crystal tuff units are also found containing plagioclase and pyroxene crystals or crystal fragments.

## ***Westcoast Complex***

Units of the Lower Jurassic age Westcoast Complex are believed to have been derived by metamorphism and migmatization of pre-Jurassic aged volcanic and sedimentary strata. The Westcoast Complex is made up of a migmatite unit and an amphibolite unit. The migmatite unit includes quartz diorite and tonolite and other varieties of migmatite which occurs south to southeast of the Head Bay Property. The amphibolite unit includes strata of metavolcanics and metasedimentary rocks of low amphibolite metamorphic grade. The amphibolite unit has limited exposure in outcrop south of the property

## ***Island Intrusions***

Island Intrusions are early Jurassic in age and are composed of granitic stocks and batholiths that underlie the majority of the Tahsis area and the Head Bay Property. The Muchalat batholith lying approximately 12 km east of the property is the largest intrusive body in the area of Head Bay covering an area of approximately 750 km<sup>2</sup>. Three other northwest trending and much narrower batholiths also occur in the property area with the Nootka and Ehatisah batholiths lying approximately 12 to 24 km southwest of the Head Bay property and the Sydney batholith which lies approximately 25 km to the southeast.

The Island Intrusions range in composition from granodiorite to granite where potassium feldspar makes up greater than one third of the total feldspar and quartz makes up greater than 20 % of the light coloured crystals. Granite composition ranges from aplitic to medium grained with dull grey to smoky quartz and white and more rarely pink feldspar. Biotite is commonly chloritized and occurs as small flakes and hornblende occurs as indistinct patches. Granodiorite lacks the smoky quartz and dioritic rocks generally occur in contact zones and contain mafic inclusions. The diorites are finer grained and hornblende content is less than biotite content. Muller, (1981, pp.25) has postulated that the Island Intrusions may be cogenetic with the Westcoast Complex and/or the Bonanza Group volcanic rocks.

### ***Catface Intrusions***

The Catface Intrusions are Middle Eocene to Early Oligocene in age and are comprised of small dioritic stocks found in many parts of Vancouver Island. The outcrops expose a generally massive light coloured appearance. The stocks are fine to medium grained equigranular with regular closely spaced jointing. The Catface Intrusions are similar in appearance to the Island Intrusions and are relatively unaltered with approximately 10 % biotite as small flakes. Hornblende patches < 2 mm across occur within granular quartz-feldspar crystal aggregates with crystals 2 – 4 mm across. Plagioclase crystals 2 – 5 mm across account for approximately 50 % of the rock mass and have interstitial fine grained quartz and potassium feldspar. Although the plagioclase and quartz are clear, potassium feldspars are altered to cloudy perthite. Apatite is a common accessory mineral (Muller, 1981).

### ***Dykes and Sills***

The Head Bay property and surrounding area are transected by numerous dykes and sills and generally are broken down into three types. The oldest dykes appear to be mafic dykes that acted as feeders for the Bonanza volcanic flows. The most common type of dykes on the Head Bay property appear to be related to the Catface Intrusions and range from mafic composition to feldspar porphyries to felsites. The felsite dykes may be late stage differentiates of the Catface Intrusions. The youngest dykes are comprised of dark green mafic dykes that cross-cut all other lithologies and dyke systems (Chabot, 1982).

### **Structural Geology**

The northern part of Vancouver Island is underlain by broad, northwest trending antiform and synform with a periodicity of approximately 10 to 15 km. In the immediate area of the Head Bay property the underlying structure is part of a southwest dipping monocline limb of one of the synforms. The property is dominated by block faulting with steep to vertical and transcurrent offsets of unknown displacement. The faults are identified by narrow, linear shatter zones which are exhibited topographically as valleys, inlets, lakes and V-shaped notches in mountain ranges. North trending early Mesozoic age fault systems are the most prominent in the area and are expressed by Tahsis Inlet and the Hecate Channel to the Zeballos area.

Although less prominent, but more important economically are late Jurassic to early Eocene aged northwest trending faults. These faults cut both the Jurassic and Tertiary aged rocks and follow the Pacific coastline. Uplift generally occurs on the southwest side of these fault blocks. On the Head Bay property these faults occur along the eastern margin of the mineral tenures and occupy the Sucwoa River Valley and in the vicinity of the Elaine, Vivian and Mohawk showings. These northwest trending fault structures host the majority of the gold mineralization on the Head bay property.

A third set of Tertiary aged northeast trending faults occur near the Head Bay property, however they are primarily located in coastal areas. The main expression of this faulting is one that extends from Tahsis Inlet northeasterly along Santiago Creek and cuts across the southern flank of Tahsis Mountain where it eventually crosses the Sucwoa River Valley south of Perry Lake. The southern contacts of two Catface Intrusive stocks abut against this fault. The fault is located immediately northwest of the northern Head Bay property boundary. There appears to be a small section of faulting along the northern property boundary towards the east that shows examples of both the northwest and northeast trending fault system north of the Vivian showing and south of Mohawk showing. In the Zeballos Gold Camp, the northeast and east trending faults host the highest grade mineralization.



## LOCAL GEOLOGY

The simplified geology of the area is shown on figures relative to each of the five main showing areas on the Head Property. Generally the Head Bay property is underlain by lithologic units of the middle to upper Triassic age Vancouver Group, the lower to middle Jurassic age Bonanza Group as well as dioritic intrusions of Tertiary age Catface Intrusions. The Karmutsen Formation (Vancouver Group) underlies only the northeastern corner of the property off the north end of Head Bay. The Karmutsen basaltic to andesitic flow rock are in conformable contact with the overlying Quatsino Formation limestones to the west on the eastern extremities of tenures 404162, 404168 and 537379.

Limestone and shale of the Quatsino Formation trends northwesterly through the northeastern half of the property and is the most visible rock type on the property as it forms the most abundant outcrops. Its characteristic grey to white colour, stylonitic and massive nature make it readily identifiable in the field. Near the top of the Quatsino Formation sand content occurs in varying amounts and the colour ranges to brownish as clay content increase. Where carbonate infilling has occurred in formerly porous material, a distinctive mottled appearance of white and brown markings is imparted to the limestone. The Quatsino limestone is cross-cut by mafic dykes across the property. These dykes likely fed the overlying Bonanza volcanics as occasionally, interbedded flows can be observed. The limestone maintains its bedding angles where intruded by the dykes, however, the orientation of the bedding is disrupted in some areas where it appears that blocks of limestone have been rafted away from main body by being surrounded by more intensive dyking.

The Parson's Bay Formation is gradational with the underlying Quatsino Formation and forms thin bedded dark brown to black argillite units. On the ridge north of the Vivian Showing Parson's Bay strata have been observed underlying Bonanza volcanics which cap the ridge. It also forms thin interbeds within the upper portion of the Quatsino limestone which it overlies. On the west side of the property near the Vivian Showing along the north branch of the Tsoowin River, thin bedded calcareous siltstone to calcarenite occurs near the contact with overlying Bonanza Group rocks.

Bonanza Group rocks observed on the property have been divided into two facies: distal, finer grained tuffs with interbedded flow, and proximal, coarse grained lapilli to lapilli-block tuffs. The distal facies is dominant on the western portion of the mineral tenures and massive, dark green andesitic crystal tuff and lithic crystal tuff units are most common. Feldspar laths and tuffaceous fragments can be seen in a fine grained chloritic groundmass. In the upper and lower quarries north of the Vivian showing a very distinctive lithic crystal tuff containing fragments of light blue, rhombohedral or hexagonal crystals have been observed.

Bonanza flow lavas are lighter green than the andesitic tuff units and often have a vesicular texture with or without calcite amygdules. The calcite may have remobilized from the underlying Quatsino Formation.

The proximal facies of the Bonanza Group is located on the south central and south boundary area of property. Outcrops have been observed on a ridge top located approximately 1500 m due west of the VIG Road Zone showing and westward towards the Mohawk Showing. The proximal facies rocks are comprised of angular to sub-angular lapilli sized fragments (2 – 3 cm diameter) of tuffaceous rock in a fine ash matrix.

Three Tertiary age Catface intrusions have been located on the property. They are of similar composition ranging from quartz diorite to diorite to monzonite and may contain up to 20% magnetite.

One small Catface stock is located immediately south of the Vivian showing and where two northern branches of the Tsowwin River join. This stock grades from hornblende diorite near its western margin to hornblende monzonite towards the east. The stock contains small limestone and volcanic rock pendants and is cut by mafic dykes.

A second northeasterly trending and elongate Catface stock is located near the southwest margins of the property near the Mohawk showing. This stock consists of medium grained granodiorite body.

The third and largest Tertiary age Catface stock is located along the eastern margin of the property boundary and trends northwesterly from Head Bay and the Elaine Showing for a distance of approximately 3.2 km to the Glengarry, Rob Roy and VIG Road Zone showings. The stock averages 1.6 km wide. South of the Elaine showing it contacts the Bonanza Group in dyke form with diorite dykes having intruded and assimilated blocks and fragments of volcanic rocks. At the northwestern end of the stock, it contacts the Quatsino Formation limestones and has formed an approximately 50 m wide thermal metamorphic halo along the northern contact with the limestone (Figure 6). The limestones have been altered to recrystallized calcite (marble) and skarn. This stock appears to be responsible for the formation of the magnetite rich skarn pods associated with the Glengarry and Rob Roy showings.

The elevated gold content in the intrusive rocks at the VIG Road Zone showing appear to be related to felsic dykes and sills that trend 030° to 050°. Antimony and arsenic geochemical values are also elevated in the felsic dykes. The dykes weather to an orange brown colour and contain fine grained quartz and feldspar an up to 5% pyrite and minor arsenopyrite. The dykes appear to have been emplaced along zones of structural weakness as evidenced by shearing and chloritic fault gouge which is also commonly associated with the gold bearing quartz –carbonate veins located at the VIG Road Zone, Mohawk, Vivian and Elaine showing. Previous exploration work conducted by Pan Ocean in 1981 yielded gold assays averaging 500 ppb in the dyke material with 2500 ppb gold being the highest results.

## MINERALIZATION

### Elaine Showing

The Elaine Showing consists of a gold-chalcopryrite-pyrite bearing quartz vein in a fissure zone within amygdaloidal basalts belonging to the Lower Jurassic Bonanza Group. Little is known about the Elaine Showing (formerly known as the Oh Boy vein) as the adit that was driven on the vein in 1934 had collapsed and evidence of the dump has disappeared as a result of much surface disturbance due to intensive logging and road building in the area. Ministry of Mines Annual Report, Index #3 records 1939 production of 4.5 tonnes yielding 240 grams of gold, 103 grams of silver and 3 kilograms of copper.

A 0.5 m wide vein (Elaine Beach Vein) was discovered by Silverlake Capital Corporation in an eroded bank of Elaine Creek near the mouth of the creek at Head Bay. The vein system consists of banded quartz sulphide that trends 050° and dips 80° to the northwest. The vein is hosted in an Island granodioritic pluton. It is believed that the nature of this vein is similar to the Elaine (Oh Boy) Vein with the exception that the Elaine Vein is presumed to be located further upstream on Elaine Creek near the contact between the Bonanza Volcanics and the Island granodiorite pluton. A northwest trending fault zone defines this contact zone to the northwest near the logging road immediately west of the showing. The late stage gold bearing hydrothermal veins in the Elaine Showing area may be related to faulting during the late stage emplacement of the Island pluton. Silverlake Capital Corporation collected and analyzed three rock chip samples across the 0.5 m width of the new vein. The analytical results indicate that the three samples are anomalous in gold (>20 ppb) and two of the three samples are anomalous in copper.

### VIG (Road Zone) Showing

The VIG showing was discovered in a road cut in 1983 by Aberford Resources Ltd. (Aberford) and was subsequently identified as the Road Zone. The Road Zone vein is a shallow dipping west-northwesterly striking gold bearing pyrite-quartz-chlorite- chalcopryrite vein system with parallel lenses hosted in a weakly sheared, coarse magnetite-rich mafic dioritic phase of the Island Intrusive suite. Aberford identified the intrusive rocks as belonging to the Tertiary age Catface dioritic suite. The Road Zone vein ranges from 20 cm to 60 cm wide and has been exposed along strike for approximately 23 m. Pyrite comprises at least 50 % of the vein material. In wider sections of the vein, quartz and pyrite are in equal proportions but have a banded appearance. Aberford collected 15 rock chip samples from the Road Zone vein and the analytical results ranged from trace gold to 8.228 troy oz. per ton gold. Discrete pods of massive pyrite are also present in the vein. Aberford collected two samples from the pyrite pods averaged 7.374 troy oz. per ton gold. Arsenic values appear to be elevated in and adjacent to the gold bearing vein system ranging from 100 to greater than 1000 ppm.

In 1987 Great Keppel Resources Ltd. extended the exposed strike length to 38 m and excavated three trenches across the Road Zone (No.1 vein) and parallel sulphide mineralized lenses. Trench 1 averaged 1.41 grams per tonne gold across a true width of 2.87 m. Further north, Trench 2 averaged 12.98 grams per tonne gold across a true width of 1.0 m and still further north, Trench 3 average 4.46 grams per tonne gold across a true width of 1.46 m.

In 1988 Centaur Resources Ltd. (previously Great Keppel Resources Ltd.) drilled nine diamond drill holes from one drill pad to test the Road Zone at depth below the 1987 trenches. One of the drill holes intersected 0.25 m of quartz-sulphide veining that yielded a grade of 58.2 grams gold per tonne. Four of

the nine holes intersected a zone of shears that were mineralized with auriferous quartz-pyrite, chalcopyrite and chlorite flanked by approximately 1 m of weak shearing and clay alteration with disseminated pyrite and chalcopyrite within unaltered diorite.

The above noted gold assays are from historical work on the claims and although it is expected that the analytical procedures used during the work conducted in 1983 by Aberford Resources Ltd., in 1987 by Great Keppel Resources Ltd and in 1988 by Centaur Resources Ltd. were carried out at the standards of the day, the work and laboratory analyses were carried out prior to the existence of NI43-101 standards and are therefore, not in compliance with the current NI43-101 standards and should not be relied upon as to quality of the results.

In 2007, Silverlake Capital Corporation collected 7 rock chip samples across the Road Zone No. 1 to confirm the tenor of the gold values attained by the previous operators. Silverlake Capital Corporation also collected 16 soil samples approximately 450 m southeast of the Road Zone along a logging road trending southeasterly towards the Elaine Showing Grid along the suspected projection of the northwesterly trending structure that appears to host the Elaine mineralized vein systems and the VIG Road Zone vein system. Centaur Resources Ltd. sampled mineralized float in this area that yielded an analytical result of 17 grams gold per tonne

### **Glengarry, Stormont, Rob Roy Magnetite Showings**

The magnetite deposits associated with the Glengarry Mine and the Stormont and Rob Roy showings are located approximately 1.8 km from tidewater on Head Bay. The deposits are hosted within a garnet skarn located north of the VIG Road Zone vein system. Quatsino Limestone strikes northwest and dips approximately 45° to the southwest (Young and Uglow, 1926). Intruding the limestone to the east and south is a large granodiorite body of the Island Intrusive suite as well as pre-skarn diorite dykes that crosscut the limestone unit. The limestone has been “skarnified” along its contact with the granodiorite pluton. Magnetite mineralization is contained within the garnet skarn and the magnetite is often, but not always free of garnet. Sulphides are rare within the deposits, with a small amount of pyrite being found in some of the eastern pods. Closer to the VIG Road Zone showing, sphalerite and galena mineralization was observed by Centaur Resources Ltd. in 1988 in several skarns formed at the contact between sheared andesitic dykes and Quatsino Limestone. One Centaur Resources Ltd. sample yielded an analytical result of 18.6% zinc and 55.5 grams of silver per tonne across 0.20 m. A second Centaur sample from a chalcopyrite rich skarn yielded 8.67 grams per tonne gold and 6.13% copper. Centaur also found that some localized gold anomalies were found in magnetite skarn without any sulphide mineralization. Centaur Resources did not conduct any follow-up work on these anomalies to determine their extent.

The magnetite mineralization occurs as pods in the skarn zones and they outcrop in at least 11 major pods over an area of 567 m by 403 m (Pods A to K - Figure 10). Pod F forms the Glengarry Mine and Pod J forms the Rob Roy showing. An assay of the magnetite gave the following values: Iron - 56.8%, Sulphur - 0.1%, phosphorous – trace, and Silica - 1.6% (MMAR, 1916, pp K293). Although the deposits were known from 1902, mining did not commence until 1959 and stopped in 1960. The magnetite inferred resources at the Glengarry deposit were estimated to be 327,000 tonnes at a grade of 42.7 % Fe in 1959. Hualpai Enterprises Ltd. mined a total of 125,715 tons from 1959 to 1960. The Rob Roy deposit was estimated to contain an inferred resource of 45,360 tonnes grading 56.8% Fe (MMAR, 1916, pp K294).

The above noted inferred resources and assays are from historical work on the claims some of which were analyzed by the Ministry of Mines in 1916) and although it is expected that the analytical procedures and resource estimation protocols used during the work conducted in early 1900s were carried out at the standards of the day (records, if any, have not been located or reviewed by the author), the resource calculations, resource definitions and laboratory analyses were carried out many years prior to the existence of NI43-101 standards are, therefore, not in compliance with the current NI43-101 standards and should not be relied upon as to grade and resource classification and the quality of the results.

Silverlake Capital Corporation conducted limited geological mapping and soil sampling of the magnetite showings described above as the area was covered with up to 1.2 m of snow during the spring exploration program. Further investigation of the magnetite mineralization is being planned for later in 2007 once the snow cover has melted.

### **Mohawk Showing**

The Mohawk showing was discovered in 1939 and is located approximately 2 kilometres southwest of the VIG showing. The Mohawk vein is approximately 35 cm wide and strikes 035° and dips steeply (50° – 80°) southeasterly and consists of a quartz-carbonate filled fissure vein with fine grained pyrite and minor galena hosted in shear zones within fragmental Bonanza Group volcanic rocks. Slickensiding and shearing are evident and the vein, or possibly sheeted veins, exhibit combed and banded textures. The vein system is located near the contact with intrusive rocks which are observed in outcrops along the nearby Tsowwin River. An alteration halo consisting of disseminated sulphides and sericite surrounds the larger veins. Two adits (lower and upper) were driven on the vein in 1939 and 1940 with the upper adit being driven along the strike of the vein for approximately 15 m and the lower adit was driven for 39.5 m as a cross-cut then drifted along the vein for 15 m (Figures 11, 12 and 13).

A small prospecting program was conducted by Mr. Neil DeBock in 1985 and 8 samples of vein material for gold analysis. Gold values ranged from 17 to 1080 ppb with higher results coming from the upper adit. A total of 12 rock samples were collected along the access logging road where four similar style and type of mineralization were discovered. Analytical results for the veins exposed in the logging road ranged from 1 to 620 ppb gold.

From March to April, 2007, Silverlake Capital Corporation conducted a limited geochemical rock sampling program of the vein system in the upper and lower adits. A total of 4 rock chip samples were collected from the Mohawk vein and the author collected 3 duplicate samples at 3 of the Silverlake Capital Corporation's sample sites. The sampling procedures and analytical techniques conducted and used during the 2007 exploration program on the Mohawk showing are in compliance with 43-101 standards including quality control procedures. The Silverlake Capital Corporation results are described in Section 10 of this report.

### **Vivian Showing**

The Vivian mineral showing (Figure 3) is also located on the Head Bay Property approximately 2.4 kilometres north of the Mohawk showing and 3.6 kilometres east of the VIG Road Zone showing. The Vivian vein consists of a 5 to 10 cm wide quartz-calcite vein within a shear zone that strikes 320° and dips approximately 80° to the northeast. The vein is hosted in weakly altered volcanics described as a plagioclase crystal tuff within carbonates of the Upper Triassic Vancouver Group (Quatsino Limestone

Formation). Several other veins occur in the road cuts located north of the showing and may be off-sets of the Vivian vein or are additional veins in the area. In 1983 Aberford Resources Ltd. analyzed vein material (20 – 30 cm wide) from the 1939 15 m long adit. The vein sample yielded 16.89 grams per tonne gold and 14.39 grams per tonne silver. Vein material from the dump pile at the mouth of the adit yielded an analytical result of 133.67 grams per tonne gold and 454.13 grams per tonne silver (November 1983 Assessment Report 12058). Approximately 60 m to the south east vein material from a flooded shaft (along the south bank of the Twossin River) assayed 68.8 grams gold per tonne (GSC Memoir 272, pp 54). The vein was exposed over a distance of 53 m by open cuts at 8 m intervals, however, the analytical results of any samples collected are not available. Aberford sampled the Vivian system for approximately 100 m along strike in the outcrop along the Twossin River. The shear zone along the river is approximately 20 cm wide and contains sheeted quartz which averaged 0.148 troy ounces per tonne gold and 0.215 troy ounces per ton silver. The 1983 Aberford Resources Ltd. exploration work located a 250 by 500 m exposure of hornblende diorite to hornblende-monzonite Eocene Catface pluton southeast of the Vivian adit. Late stage hydrothermal gold bearing fluids from this intrusion may have mineralized the northwest trending shear zones.

In April, 2007, Silverlake Capital Corporation conducted a limited geochemical rock sampling program along the logging road approximately 100 m east of the Vivian adits (near the first switch back in the logging road) in two borrow pits where sulphide bearing quartz veins were exposed. A total of 5 rock chip samples were collected from mineralized quartz vein and float in the borrow pit nearest the Vivian adit area and a total of 3 rock chip samples were collected from the second borrow pit further to the east of the Vivian adit.

# DRILL HOLE LOCATIONS

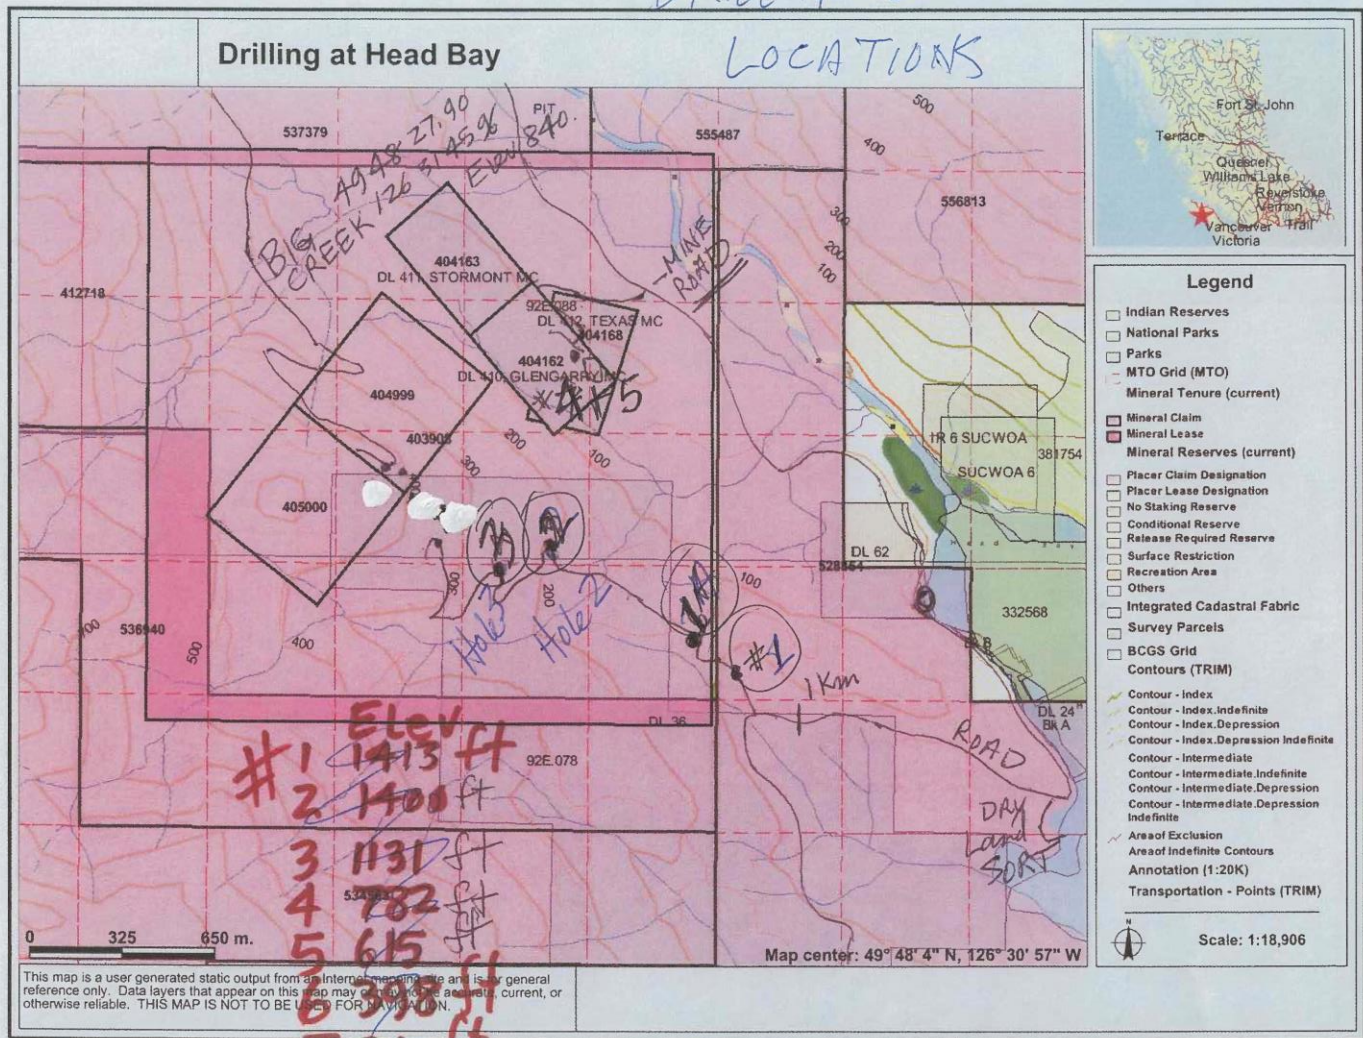


Figure 10 Location of 2008 Drillsites – General

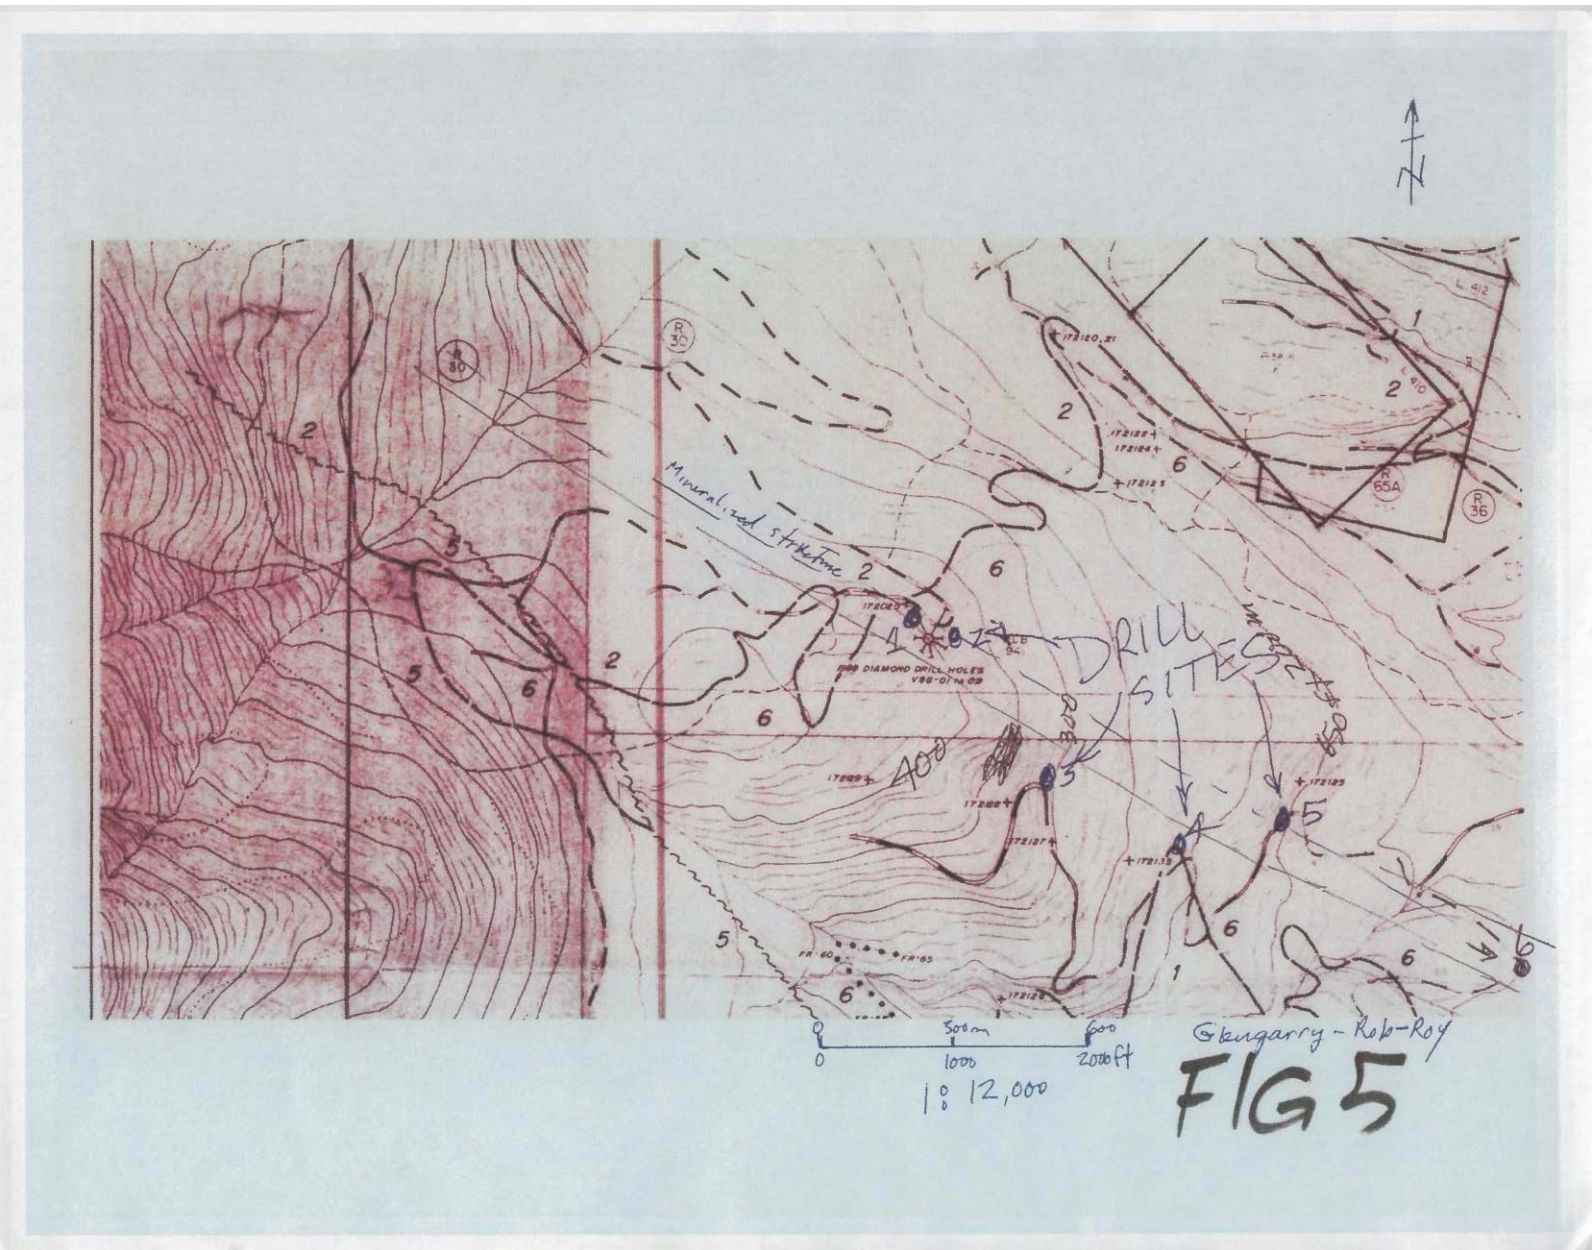


FIGURE 11 Location of 2008 Drill Holes - Detail



## PREVIOUS EXPLORATION

Gold was discovered in the Zeballos Gold Camp, located approximately 25 kilometres northwest of the Head Bay Property prior to the 1930's. a total of 13 mineral deposits produced a total of 287,811 troy ounces of gold and 124,700 troy ounces of silver from as early at 1930 to 1948.

The results of 5 drillholes (totalling 310.5m) which tested the area between the VIG Road Zone and anomalous soil locations gave very low, sub-economic gold values in the core. 159 core samples were split and assayed at International Plasma Labs together with standards, blanks and regular repeats.

No geochemically anomalous intercepts were cut by drilling in all of the zones tested.

The core from the diamond drill program conducted with a Hydrocore 2000 Unitized drill rig producing BQ core in March 2008 was re-logged between July 1, 2010 and October 3, 2010.

The drill core was originally stored in Head Bay and then subsequently moved to the upper landing at the old camp site. The core has been destroyed (2013).

TABLE 2  
Drill Hole Data (re-logged in 2010)

Hole #	Lat. & Long.		Length (m)	Dip	Az	Elev. (ft.)	Remarks
Hole 1	494747.67N	1263025.82	6.10	-45°	360°	390	Melanodiorite
Hole 1A	494748.33	1263031.15	75.8m	56°	360°	398	Diorite-
Hole 2	494750.60	1263031.33	76.2m	60°	360°	615	Diorite-gabbro
Hole 3	494751.48	1263036.05	76.2m	60°	360°	782	Diorite and breccia
Hole 4	494823.95	1263051.87	38.1m	60°	060	303	Limestone-magnetite
Hole 5	494823.95	1263051.87	38.1m	60°	340°	303	Limestone-skarn

Hole 1 and 1A along the extrapolated trend of the Vig (Road) showing intersected melanodiorite which is slightly sericitized. Minor faulting was observed. Clay alteration noted below 60m.

Holes 2 and 3 encountered diorite-gabbro with varying degrees.

Holes 4 and 5 were located northeast of the main Glengarry magnetite zone and encountered up to 4.7m of massive to semi-massive magnetite.

## DETAIL GEOLOGY and MAGNETOMETER SURVEYS 2013

Detail geological mapping (using ARCGIS) was completed in May 2013 using a Trimble Yuma Tablet in conjunction with close spaced magnetometer readings using a fluxgate magnetometer. Check sample locations were done using Garmin GPS 76CSX and mapsource software.

Access on the east side was by the SU8 road which starts near the main powerline. Rock types and outcrop distribution are shown on Figure 12.

Rocks on the east side of the property are dominated by very fine grained, dark green andesite (possibly melano-diorite). Intrusive breccia lenses are widespread (WP915).

A grid was established with 00+00 located at the "Zig-zag" Branch Road at 678741E by 5520257N (91m elevation).

Lithologies encountered are shown below:

- |          |   |
|----------|---|
| <b>6</b> | Epidote-diopside-actinolite skarn   |
| <b>5</b> | Garnet-calcite skarn ± magnetite  |
| <b>4</b> | Massive magnetite   |
| <b>3</b> | Diorite, coarse to fine crystalline + light green, fine grained dykes and shear zones |
| <b>2</b> | Quatsino limestone (often cliff forming)  |
| <b>1</b> | Andesite, very fine grained diorite/diabase   |

The area approaching the historic Glengarry Mine is characterized by lens G along the main access road with large blocks of massive magnetite adjacent to the road and in the road bed. This is where the 4.7m massive magnetite intersection was found in the 2008 drilling. At WP920 the massive magnetite trends 020° and is exposed over a width of 3 to 6 metres. Large cliff forming white limestone occurs immediately to the south of the massive magnetite and south of the Main Pit.

In the main pit, it is apparent from an inspection of the waste pile, that abundant waste was blasted (broken) along with the magnetite creating large scale dilution of the grade. The known historical grade and tonnage confirm this observation. Pre-mining reserve of Lens F, 174,000 tonnes at 40.7. Mined in 1959, 125,000 tonnes from Lens F milled 62,500 tonnes shipped 25,000 tons of concentrate was shipped. It is apparent that the mining dilution caused the project to fail. Magnetite can be observed in the southeast wall of the pit. Thin layers of massive magnetite are observed to the southwest and northeast of the Main Pit associated with skarn intervals.

A significant fault zone was mapped in the west near the Rob Roy occurrence which extends northeast toward 00+00 on the magnetometer grid. Magnetite Zone B, C and D are clearly offset in a right lateral

sense a distance of about 50 metres. Much of the massive magnetite bodies are at or very near the andesite-diorite contact with limestone.

Massive magnetite lenses D, C, B, G and F occur along a mineralized corridor which is off-set (left lateral) by the NE trending Rob Roy Fault. These lenses contain the majority of the known tonnage 279,000/360,000  $\approx$  80%. It appears that this corridor has not been adequately tested at depth. Deeper drilling is recommended along the "F to D" or "Glengarry" corridor. A new showing of massive magnetite "AA" was found to the northwest of the surveyed grid. This new zone requires detail follow-up.

There may be a second corridor along lenses I to H (previously estimated to contain 57,800 tons) which appears to have only minor hand trenching exploration in the past. Drilling is recommended for the "HI" corridor.

### Magnetometer Survey

The results of the magnetometer survey are plotted on Figure 13 (E-size, in pocket). The readings were taken with a fluxgate instrument: a Sharpe MF-1 fluxgate magnetometer; Serial Number 703270.

Each known magnetite zone is reflected by very high magnetometer values. There are also several high magnetometer values which are not associated with known magnetite zones and which require additional follow-up. Examples of high magnetometer readings without known magnetite associated is south of zone B and south of the old access road. A fill-in line is warranted in this area between line 3E and 4E. Other high areas are northwest of D and east of H.

## CONCLUSIONS and RECOMMENDATIONS

Two primary styles of mineral deposits are found on the Head Bay Property. The gold mineralization at the Elaine Showing, VIG Road Zone, Showing, Mohawk Showing and Vivian Showing are classified as a series of hydrothermal quartz veins containing gold-pyrite-carbonate+/- chalcopyrite, sphalerite and galena hosted in northwest to northeast trending fault and shear zones. The fault and shear zones appear to be associated with the emplacement of Eocene age Catface granodioritic to dioritic plutons as they either form a faulted contact between early Jurassic Bonanza volcanic units and/or Quatsino Limestone. Late stage hydrothermal activity along the fault and shears has introduced gold mineralization in quartz veins along with sulphide mineralization. Chlorite and carbonate alteration of the fault zones occurs along the hanging walls and footwalls of the quartz veins.

The second style of mineralization occurs along contact between the Eocene aged Catface granodiorite pluton with the Quatsino limestone unit located on the Glengarry, Stormont, Texas and Rob Roy mineral tenures. A zone of contact metamorphism between the pluton and the Quatsino limestone has altered sections of the limestone unit to a garnet and also diopside skarns. Magnetite mineralization was introduced into the limestone during skarn formation; however, the magnetite is relatively free of the garnet minerals. The magnetite mineralization occurs in pods of varying sizes

At the Glengarry and Rob Roy magnetite showings Silverlake Capital Corporation conducted a very limited prospecting program in 2007 as the original working areas and access roads have been obscured by second growth vegetation that has filled in exposed areas since production from the Glengarry Mine ceased in 1960. The magnetite at the Glengarry – Rob Roy showing warrants further evaluation as there is limited magnetite production in British Columbia available to supply concrete producers, sand blasting media suppliers, heavy media supplies for coal washing plants and high density filter media suppliers. As previously described, 125,715 tons of magnetite bearing skarn was mined out from a total inferred resource of 327,000 tonnes of 42.7% iron (Circa 1951) located at the Glengarry Mine by Haulpai Enterprises Ltd. of Japan in 1959. The Glengarry and Rob Roy showings represent a potentially important source of iron in BC and further exploration work is warranted. Research should also be carried out to:

- locate original data from the extensive drill program (115 holes) conducted in 1951;
- locate, if possible, original reserve calculations data, and;
- locate any geophysical survey data that may have been carried out over the magnetite skarn pods.

The initiation of an early stage exploration is recommended. If the historical inferred resource calculations become available, they should be reviewed in the context of meeting current 43-101 standards as they apply to resource definitions and the resource classification system.

The 2007 exploration program conducted by Silverlake Capital Corporation between February and April 2007 confirmed the findings of previous explorers with respect to the gold grades they encountered on the Elaine Showing, VIG Road Zone Showing, Mohawk Showing and Vivian Showing. The vein systems encountered on each of the above noted showings ranged from approximately 5 cm wide up to 0.6 m wide (VIG Road Zone and Elaine Beach Showings) and they strike northwesterly to northeasterly and dip steeply with the exception of the VIG Road Zone Vein No. 1 which appears to be the only shallow dipping vein located to date (20 – 22° SW).

Parallel veins systems appear to occur at the Elaine or as formerly known “the Oh Boy Vein” with the discovery of the Elaine Beach Vein system by Silverlake Capital Corporation in 2007. The tenor of the original Elaine Vein grade of approximately 24 g/tonne is similar to that found at the Elaine Beach Vein. From the results of the 2007 exploration program conducted by Silverlake Capital Corporation, it is concluded that gold in soil and rock geochemical anomalies associated with the Elaine Beach Vein and in the area of the suspected location of the original Elaine (Oh Boy) Vein adit are reflective of underlying sources of gold and further detailed exploration is warranted as described in Section 16 of this report. The soil and rock gold geochemical anomalies that trend north-northeasterly across the northeast trending Elaine Grid are likely associated with the fault contact system between the Catface granodiorite pluton to the east and Bonanza Volcanics to the west appear to extend northeasterly beyond line RL12 towards the VIG Road Zone Showing. The gap in the band of the gold geochemical between line RL7B and RL12 may be the result of cross-faulting that has displaced the mineralized zone to the east or west. Grid lines RL8 to RL11 should be extended and sampled to the northwest and southeast for a distance of at least 200 m in each direction in order to re-establish the gold in soil anomaly.

At the VIG Road Zone No. 1 Vein showing, the recessive nature of the mineralized structure up appears to extend up to a width of 16 m which may indicate a broader shear or fault zone that may host additional parallel gold bearing veins. Although the diamond drilling performed in 1988 by Centaur Resources Ltd. indicated that the Road Zone No.1 vein was a singular vein exhibiting a wide variation in width and grade along strike, the angle of the drill holes may not have allowed for successful penetration of parallel veins if their dips were steeper or changed in attitude towards the northeast. It is concluded that further exploration of the VIG Road Zone across the full 16 m width of the recessive zone is warranted in order to locate additional gold bearing parallel vein systems. The apparent strength of the Road Zone No.1 Vein indicates a significant potential for the No. 1 vein to extend to the northwest and southeast from the 38 m strike length that is currently exposed.

The Mohawk Vein strikes north 30 degrees east and dips 50 to 70 degrees to the southeast and consists of mainly quartz and carbonate with pyrite and trace galena. The Mohawk vein is made up primarily of a sheeted vein system that is from 2 to 50 cm wide. The four rock chip samples collected by Silverlake Capital Corporation and three duplicate samples collected by the author confirmed the general grades of gold mineralization as obtained in 1985 by Mr. Neil DeBock. The Mohawk Vein appears to be a single system in and around the adits, but sampling along a logging road west of the adits located four other veins exhibiting a similar style and type of mineralization. The exploration program conducted in 1985 by Mr. Neil DeBock was very limited in scope. The 1985 assessment report (#13,806) prepared for Mr. Neil DeBock hypothesized that the lower adit may not have been driven far enough to the east to test the down dip extension of the Mohawk vein and may have, if fact, cross-cut a small foot wall vein. Further exploration was not carried out to test this hypothesis by Mr. DeBock and underground work was beyond the scope of work for the 2007 exploration program for Silverlake Resources Ltd. Further exploration of the Mohawk Vein system is warranted.

At the Vivian vein the historical adit had collapsed and the nearby historical shaft could not be identified as it was also collapsed. The showing at the adit location is hosted in altered Quatsino limestones that have been intruded by a dioritic Eocene Catface pluton immediately south of the showing. Numerous dykes and sills are also located in and around the showing area.

The work conducted by Silverlake along road cuts along the north side of a logging road that is located north of the adit and running easterly confirmed the presence of additional narrow veins trending parallel to the Vivian Vein and to veins found by Aberford Resources Ltd. in 1983 near the switch back


corner. These veins are hosted in fine grained Bonanza Volcanics. Although currently not known, these veins may be separate veins running parallel to the Vivian Vein or they may represent an extension of the Vivian vein off set by east-west trending cross faults with displacement to the east. Further exploration between the Vivian adit and the first switch back in the logging road located north of the adit is warranted to determine the relationship between the Vivian Vein and the road cut veins in order to develop exploration strategies.

Detail geological mapping (using ARCGIS) was completed in May 2013 using a Trimble Yuma Tablet in conjunction with close spaced magnetometer readings using a fluxgate magnetometer.

Massive magnetite lenses D, C, B, G and F occur along a mineralized corridor which is off-set by the NE trending Rob Roy Fault. These lenses contain the majority of the known tonnage 279,000/360,000  $\approx$  80%. It appears that this corridor has not been adequately tested at depth. Deeper drilling is recommended along the "F to D" or "Glengarry" corridor. A new showing of massive magnetite "AA" was found to the northwest of the surveyed grid. This new zone requires detail follow-up.

There may be a second corridor along lenses I to H (previously estimated to contain 57,800 tons) which appears to have only minor hand trenching exploration in the past. Drilling is recommended for the "HI" corridor.

Respectfully submitted,

A handwritten signature in black ink, appearing to read "J. T. Shearer". The signature is written in a cursive style with a large initial "J".

J. T. Shearer, M.Sc., P.Geo. (BC & Ontario)

## PROPOSED EXPLORATION BUDGET

It is recommended that exploration be continued on the Head Bay Property and the program for the next stage of exploration on the magnetite portion is as follows:

Geophysical Surveying (IP)	\$30,000
Road Rehabilitation	\$2,000
Diamond Drilling (1290 m i @ \$108/m all inclusive)	\$139,500
Senior Field Geologist – mapping, core logging, supervision 50 days @ \$700/day	\$35,000
Junior to intermediate geologist – mapping, core logging etc. 50 days@ \$500/day	\$25,000
Field assistant/pro prospector – soil sampling, grid establishment 50 days @ \$300/day	\$15,000
Room – 50 days @ \$95/day x 3 persons	\$14,250
Food – 50 days @ \$50/day/per person	\$9,300
Supplies – propane, gas and diesel fuel	\$7,500
Analytical	\$33,000
400 drill core samples @ \$35 ea. (Cu, Ag, Pb, Zn)	
200 prospecting samples @ \$25 ea.	
700 soil samples @ \$20 ea.	
Report Preparation and Drafting	<u>\$10,000</u>
Total	\$311,250

## REFERENCES

Annual Report of the Minister of Mines:

1902 – pg 208, 1903 – pg 193, 1906 – pg185, 1909 – pg 278, \*1916 – pg 293 & 294, 1956 – pg 131-134, 1959 – pg A45, 134-135, 282, 1960 – pg 106.

Atherton, P. G., 1983a:

Report on Geological Survey and Sampling of the Pete #1, Iron Mike, Iron Joe Claims, Sayward Area, Vancouver Island, British Columbia for Dickenson Mines Limited, Dec. 29, 1983 10pp. Assessment Report 12,102 part 1.

Awmack, H.J. 1988:

Diamond Drilling Report on the Vig 3, 5, 7-8 Claims, Centaur Resources, Assessment Report 17521, 117 pp.

Chabot, G., 1981:

Geological Report on the TAH Claims, Pan Ocean, Assessment Report 10157.

Carson, D. J. T., 1973:

The Plutonic Rocks of Vancouver Island, British Columbia: Their Petrography, Chemistry, Age and Emplacement, Geological Survey of Canada, Paper 72-44, Department of Energy Mines and Resources.

Caulfield, D. and Awmack, J. J., 1987:

Geological, Geophysical and Trenching Report on the VIG3 and VIG5 Claims, Assessment Report 16355, Great Keppel Resources Ltd.

Caulfield D. 1985:

Prospecting Report on the Mohawk Group; Assessment Report #13,806, Mr. Neil DeBock

Hancock, K. D., 1988:

Magnetite Occurrences in British Columbia, B.C. Energy and Mines, Open File, 1988 – 28, 154 pp.

Hoadley, J.W. 1953

Geology and Mineral Deposits of the Zeballos-Nimkish Area, Vancouver Island, British Columbia; GSC Memoir 272

Muller, J. E., Northcote, K. E. and Carlisle, D., 1974:

Geology and Mineral Deposits of Alert-Cape Scott Map Area (92L), Vancouver Island, B.C., Geological Survey of Canada, Paper 74-8, 77pp.

Robinson, J. E., 1983:

Geological Report on the TAH Group, Aberford Resources, Assessment Report 12058.

Sangster, D., 1969:

The Contact Metasomatic Magnetite Deposits in Southwestern British Columbia, Geological Survey of Canada, Bulletin 172.



Shearer, J. T., 2011:

Geological Assessment Report on the Head Bay Gold Property, March 1, 2011

2012:

Assessment Report on the Head Bay Property for Homegold Resources Ltd., July 25, 2012

2013:

Airphoto Interpretation Assessment Report on the Head Bay Property, for Canadian Dehua International Mines Group Inc. dated March 1, 2013

Stevenson, John S. 1950:

Geology and Mineral Deposits of the Zeballos Mining Camp; BC Ministry of Energy, Mines and Petroleum Resources Bulletin No. 27

# **APPENDIX I**

## **Statement of Qualifications**


**June 10, 2013**

## STATEMENT of QUALIFICATIONS

I, JOHAN T. SHEARER, of 3572 Hamilton Street, in the City of Port Coquitlam, in the Province of British Columbia, do hereby certify:

1. I am a graduate of the University of British Columbia (B.Sc., 1973) in Honours Geology, and the University of London, Imperial College (M.Sc., 1977).
2. I have over 35 years experience in exploration for base and precious metals and industrial mineral commodities in the Cordillera of Western North America and Superior Province in Manitoba and Northern Ontario with such companies as McIntyre Mines Ltd., J. C. Stephen Explorations Ltd., Carolin Mines Ltd. and TRM Engineering Ltd.
3. I am a fellow in good standing of the Geological Association of Canada (Fellow No. F439) and I am a member in good standing with the Association of Professional Engineers and Geoscientists of British Columbia (Member No. 19,279) and a member of the CIMM and an elected fellow of the Society of Economic Geologists (SEG Fellow #723766).
4. I am an independent consulting geologist employed since December 1986 by Homegold Resources Ltd. at #5-2330 Tyner St., Port Coquitlam, B.C.
5. I am the author of the present report entitled "Geological and Magnetometer Assessment Report on the Head Bay Property for Homegold Resources Ltd." dated June 10, 2013.
6. I have visited the property on May 20 to May 30, 2013. I have carried out mapping and sample collection and am familiar with the regional geology and geology of nearby properties. I have become familiar with the previous work conducted on the Head Bay Project by examining in detail the available reports and maps and have discussed previous work with persons knowledgeable of the area.

Dated at Port Coquitlam, British Columbia, this 10<sup>th</sup> day of June, 2013.



---

J. T. Shearer, M.Sc., F.G.A.C., P.Geo.  
June 10, 2013

**APPENDIX II**

**Statement of Costs**

**June 10, 2013**

**Appendix II**  
**Statement of Costs**  
**Head Bay Project**

Wages		without HST
J.T. Shearer, M.Sc., P.Geo., 10 days @ \$700/day, May 20 to 29, 2013		\$ 7,000.00
	Sub-total on Wages	\$ 7,000.00
 Expenses		
Truck 1 Rental, 8 days @ \$120/day, fully equipped 4x4		960.00
Truck 2 Rental, 8 days @ \$120/day, fully equipped 4x4		960.00
Fuel		690.00
Ferries		245.00
Hotel		1,200.00
Food		400.00
Meals		800.00
Magnetometer Rental		450.00
Drafting, Computer Drafting, Yuma Mapping Computer System		3,595.00
E. MacKenzie, 8 days @ \$350/day		2,800.00
A. Alden, 8 days @ 400/day		3,200.00
Report and Data Compilation		1,400.00
	Sub-total	\$ 16,700.00
	<b>Grand Total</b>	<b>\$ 23,700.00</b>

Filed on June 3, 2013  
 Event # 5452293  
 Amount \$21,500.00  
 PAC \$3,607.72  
 Total \$26,107.72

Filed on June 4, 2013  
 Event # 5452492  
 Amount \$2,050.00  
 PAC \$823.51  
 Total \$2,873.51

## **APPENDIX III**

### **MAGNETOMETER DATA and GPS LOCATIONS**

**June 10, 2013**

Grid  
Datum UTM  
WGS 84

Header	Name	Position	Altitude	magnetometer
Waypoint	2W020	9 U 678543 5519921	144 m	21000
Waypoint	2W040	9 U 678524 5519928	147 m	21000
Waypoint	2W060	9 U 678508 5519933	150 m	21000
Waypoint	2W080	9 U 678482 5519935	154 m	21000
Waypoint	2W100	9 U 678467 5519946	156 m	18000
Waypoint	2W120	9 U 678450 5519949	165 m	16000
Waypoint	2W140	9 U 678434 5519958	169 m	22000
Waypoint	2W160	9 U 678412 5519945	173 m	21000
Waypoint	2W180	9 U 678396 5519957	176 m	24000
Waypoint	2W200	9 U 678384 5519954	179 m	21000
Waypoint	2W220	9 U 678366 5519961	182 m	22000
Waypoint	2W240	9 U 678345 5519964	182 m	22000
Waypoint	2W260EOL	9 U 678328 5519972	184 m	22000
Waypoint	3.00E+20	9 U 678613 5519990	127 m	
Waypoint	3.00E+40	9 U 678621 5519995	126 m	
Waypoint	3.00E+60	9 U 678643 5519988	125 m	
Waypoint	3.00E+80	9 U 678661 5519992	125 m	
Waypoint	3.00E+100	9 U 678683 5519992	122 m	
Waypoint	3.00E+120	9 U 678697 5519992	118 m	
Waypoint	3.00E+140	9 U 678718 5519994	114 m	
Waypoint	3.00E+160	9 U 678734 5519991	115 m	
Waypoint	3E160A	9 U 678742 5519909	103 m	22000
Waypoint	3.00E+180	9 U 678738 5519990	114 m	
Waypoint	3E180A	9 U 678757 5519920	101 m	18500
Waypoint	3.00E+200	9 U 678764 5519982	115 m	
Waypoint	3E200A	9 U 678772 5519909	102 m	16000
Waypoint	3.00E+220	9 U 678790 5519897	99 m	10000
Waypoint	3.00E+240	9 U 678812 5519897	99 m	920000
Waypoint	3.00E+260	9 U 678833 5519885	96 m	-15500
Waypoint	3.00E+280	9 U 678849 5519889	93 m	20000
Waypoint	3.00E+300	9 U 678870 5519880	94 m	20500
Waypoint	3E320	9 U 678883 5519879	93 m	20500
Waypoint	3E340	9 U 678902 5519871	90 m	21000
Waypoint	3E360	9 U 678919 5519858	89 m	20500
Waypoint	3E380	9 U 678932 5519859	85 m	21000
Waypoint	3E400	9 U 678953 5519846	83 m	21000
Waypoint	3E420	9 U 678977 5519850	83 m	21000
Waypoint	3E440	9 U 678989 5519848	81 m	21000
Waypoint	3E460	9 U 679016 5519838	78 m	21000
Waypoint	3E480	9 U 679029 5519838	74 m	21000
Waypoint	3E500	9 U 679047 5519831	70 m	20750
Waypoint	3E520	9 U 679066 5519816	67 m	21500
Waypoint	3E540	9 U 679089 5519815	65 m	21000
Waypoint	3E560	9 U 679114 5519819	64 m	21000
Waypoint	3E580	9 U 679120 5519813	61 m	21000
Waypoint	3E600	9 U 679142 5519797	55 m	21000
Waypoint	3W020	9 U 678561 5520000	121 m	
Waypoint	3W040	9 U 678546 5520005	119 m	
Waypoint	3W060	9 U 678536 5520013	122 m	
Waypoint	3W080	9 U 678508 5520020	128 m	
Waypoint	3W100	9 U 678491 5520027	133 m	
Waypoint	3W120	9 U 678472 5520020	138 m	


Waypoint	3W140	9 U 678463 5520023	136 m	
Waypoint	4.00E+20	9 U 678630 5520086	143 m	23000
Waypoint	4.00E+40	9 U 678647 5520096	142 m	21000
Waypoint	4.00E+60	9 U 678669 5520089	139 m	22000
Waypoint	4.00E+80	9 U 678687 5520075	135 m	15000
Waypoint	4.00E+100	9 U 678708 5520078	133 m	100000
Waypoint	4.00E+120	9 U 678737 5520071	137 m	22000
Waypoint	4.00E+140	9 U 678755 5520063	137 m	24000
Waypoint	4.00E+160	9 U 678765 5520063	138 m	22500
Waypoint	4.00E+180	9 U 678785 5520047		22000
Waypoint	4.00E+200	9 U 678806 5520041	142 m	18500
Waypoint	4.00E+220	9 U 678824 5520050	140 m	28000
Waypoint	4.00E+240	9 U 678839 5520042	139 m	74000
Waypoint	4.00E+260	9 U 678852 5520047	134 m	14000
Waypoint	4.00E+280	9 U 678874 5520041	132 m	19000
Waypoint	4.00E+300	9 U 678905 5520044	131 m	16500
Waypoint	4E320	9 U 678912 5520036	130 m	30200
Waypoint	4E340	9 U 678931 5520029	132 m	8000
Waypoint	4E360	9 U 678951 5520017	126 m	10750
Waypoint	4E380	9 U 678954 5520000	112 m	21000
Waypoint	4E400	9 U 678971 5520001	107 m	21000
Waypoint	4E420	9 U 679000 5519996	106 m	21000
Waypoint	4E440	9 U 679011 5519994	107 m	20500
Waypoint	4E460	9 U 679030 5519982	110 m	20000
Waypoint	4E480	9 U 679057 5519987	112 m	21000
Waypoint	4E500	9 U 679067 5519976	115 m	22000
Waypoint	4W000+B/L	9 U 678629 5520088	149 m	23000
Waypoint	4W020	9 U 678578 5520115	147 m	25000
Waypoint	4W020A	9 U 678595 5520109	152 m	22000
Waypoint	4W020B	9 U 678607 5520095	152 m	22000
Waypoint	4W020C	9 U 678623 5520087	152 m	22000
Waypoint	4W040	9 U 678563 5520138	145 m	22000
Waypoint	4W060	9 U 678543 5520159	140 m	32000
Waypoint	4W080	9 U 678536 5520162	139 m	17000
Waypoint	4W100	9 U 678518 5520169	137 m	20000
Waypoint	4W120	9 U 678501 5520174	134 m	19000
Waypoint	4W140	9 U 678486 5520176	133 m	20500
Waypoint	4W160	9 U 678465 5520174	134 m	20000
Waypoint	4W180	9 U 678443 5520178		22000
Waypoint	4W200	9 U 678421 5520183	144 m	21500
Waypoint	4W220	9 U 678402 5520171	141 m	21000
Waypoint	4W240	9 U 678388 5520193	143 m	20000
Waypoint	4W260	9 U 678380 5520194		30000
Waypoint	4W280	9 U 678373 5520195	147 m	22000
Waypoint	4W300	9 U 678337 5520203	164 m	22000
Waypoint	4W320	9 U 678320 5520206	170 m	28000
Waypoint	4W340	9 U 678305 5520216	168 m	21000
Waypoint	4W360	9 U 678285 5520226	172 m	25000
Waypoint	4W380	9 U 678260 5520230	169 m	20500
Waypoint	4W400EOL	9 U 678249 5520238	167 m	22000
Waypoint	5,5W020	9 U 678652 5520228	110 m	18500
Waypoint	5,5W040	9 U 678634 5520255	114 m	20000
Waypoint	5,5W060	9 U 678610 5520260	122 m	20000
Waypoint	5,5W080	9 U 678592 5520257	122 m	23500
Waypoint	5,5W100	9 U 678580 5520256	127 m	24000
Waypoint	5,5W120	9 U 678578 5520281	131 m	23000
Waypoint	5,5W140	9 U 678535 5520267	139 m	22000
Waypoint	5,5W160	9 U 678522 5520278	139 m	22000
Waypoint	5,5W180	9 U 678512 5520294	147 m	22000
Waypoint	5,5W200	9 U 678496 5520284	154 m	20500
Waypoint	5,5W220	9 U 678470 5520291	159 m	24500
Waypoint	5,5W240	9 U 678451 5520292	159 m	20000



Waypoint	5,5W260	9 U 678448 5520317	158 m	20000
Waypoint	5,5W280	9 U 678444 5520319	161 m	21500
Waypoint	5,5W300EOL	9 U 678425 5520335	160 m	21500
Waypoint	5.00E+00	9 U 678658 5520206	125 m	21000
Waypoint	5.00E+20	9 U 678661 5520190	127 m	22000
Waypoint	5.00E+40	9 U 678686 5520185	127 m	21750
Waypoint	5.00E+60	9 U 678710 5520178	133 m	21250
Waypoint	5.00E+80	9 U 678737 5520180	134 m	23000
Waypoint	5.00E+100	9 U 678747 5520165	133 m	22500
Waypoint	5.00E+120	9 U 678769 5520163	129 m	20250
Waypoint	5.00E+140	9 U 678782 5520165	127 m	21000
Waypoint	5.00E+160	9 U 678797 5520162	119 m	17000
Waypoint	5.00E+180	9 U 678811 5520152	123 m	22500
Waypoint	5.00E+200	9 U 678846 5520149	123 m	20750
Waypoint	5.00E+220	9 U 678860 5520140	125 m	20000
Waypoint	5.00E+240	9 U 678883 5520137		20500
Waypoint	5.00E+260	9 U 678907 5520134	132 m	21500
Waypoint	5.00E+280	9 U 678915 5520122	132 m	17500
Waypoint	5.00E+300	9 U 678928 5520107	125 m	15500
Waypoint	5E320	9 U 678955 5520106	122 m	21000
Waypoint	5E340	9 U 679003 5520123	117 m	21500
Waypoint	5E360	9 U 679018 5520121		21500
Waypoint	5E380	9 U 679036 5520118		21500
Waypoint	5E400	9 U 679056 5520115	108 m	22000
Waypoint	5E420	9 U 679051 5520084	110 m	21500
Waypoint	5E440	9 U 679069 5520085	104 m	21500
Waypoint	5E460	9 U 679081 5520058	105 m	22000
Waypoint	5E480	9 U 679081 5520049	107 m	21000
Waypoint	5E500	9 U 679090 5520028	107 m	21000
Waypoint	5W020	9 U 678624 5520191	115 m	21000
Waypoint	5W040	9 U 678603 5520195	117 m	43000
Waypoint	5W060	9 U 678585 5520188		32000
Waypoint	5W080	9 U 678567 5520182	121 m	20500
Waypoint	5W100	9 U 678548 5520204	118 m	21000
Waypoint	5W120	9 U 678540 5520208	120 m	22000
Waypoint	5W140	9 U 678520 5520217	125 m	21500
Waypoint	5W160	9 U 678500 5520225	128 m	21500
Waypoint	5W180	9 U 678484 5520223	135 m	21500
Waypoint	5W200	9 U 678468 5520234	140 m	23000
Waypoint	5W220	9 U 678448 5520240	137 m	26000
Waypoint	5W240	9 U 678430 5520239	139 m	23000
Waypoint	5W260	9 U 678411 5520242	137 m	24000
Waypoint	5W280	9 U 678395 5520242	134 m	21000
Waypoint	5W300	9 U 678376 5520233	139 m	19750
Waypoint	5W320	9 U 678360 5520265	156 m	21000
Waypoint	5W340	9 U 678352 5520268	172 m	24000
Waypoint	5W360	9 U 678337 5520273	178 m	22000
Waypoint	5W380	9 U 678314 5520285	181 m	23000
Waypoint	5W400EOL	9 U 678298 5520294	181 m	22000
Waypoint	6.00E+20	9 U 678696 5520265	88 m	21500
Waypoint	6.00E+40	9 U 678719 5520281	82 m	23000
Waypoint	6.00E+60	9 U 678736 5520281	81 m	21000
Waypoint	6.00E+80	9 U 678757 5520257	80 m	22000
Waypoint	6.00E+100	9 U 678779 5520256	83 m	22500
Waypoint	6.00E+120	9 U 678798 5520242	84 m	22000
Waypoint	6.00E+140	9 U 678820 5520228	81 m	22000
Waypoint	6.00E+160	9 U 678837 5520218	80 m	22000
Waypoint	6.00E+180	9 U 678854 5520219	79 m	22000
Waypoint	6.00E+200	9 U 678876 5520212	72 m	22500
Waypoint	6.00E+220	9 U 678897 5520210	68 m	19000
Waypoint	6.00E+240	9 U 678909 5520206	77 m	22000
Waypoint	6.00E+260	9 U 678927 5520204	69 m	22000

Waypoint	6.00E+280	9 U 678945 5520197	67 m	22000
Waypoint	6.00E+300	9 U 678963 5520190	66 m	21500
Waypoint	6E320	9 U 678971 5520183	70 m	23000
Waypoint	6E340	9 U 679000 5520177	70 m	22500
Waypoint	6E360	9 U 679008 5520158	63 m	22000
Waypoint	6E380	9 U 679029 5520161	66 m	22000
Waypoint	6E400	9 U 679041 5520148	62 m	22000
Waypoint	6E420	9 U 679066 5520154	58 m	22000
Waypoint	6E440	9 U 679082 5520140	56 m	21000
Waypoint	6E460	9 U 679104 5520145	53 m	21500
Waypoint	6E480	9 U 679123 5520134	48 m	22000
Waypoint	6E500	9 U 679142 5520126	47 m	22500
Waypoint	6W020	9 U 678667 5520286	96 m	22000
Waypoint	6W040	9 U 678649 5520289	99 m	20500
Waypoint	6W060	9 U 678639 5520305	98 m	17000
Waypoint	6W080	9 U 678617 5520297	106 m	-700
Waypoint	6W100	9 U 678606 5520306	115 m	31500
Waypoint	6W120	9 U 678582 5520328	118 m	35000
Waypoint	6W140	9 U 678559 5520329	121 m	24500
Waypoint	6W160	9 U 678544 5520347	121 m	24000
Waypoint	6W180	9 U 678535 5520341	124 m	22500
Waypoint	6W200	9 U 678514 5520360	124 m	20000
Waypoint	6W220	9 U 678494 5520361	129 m	20000
Waypoint	6W240	9 U 678479 5520379	134 m	19500
Waypoint	6W260	9 U 678455 5520381	136 m	14500
Waypoint	6W280	9 U 678448 5520400	144 m	29000
Waypoint	6W300	9 U 678421 5520400	149 m	29000
Waypoint	6W320	9 U 678413 5520403	158 m	28000
Waypoint	6W340	9 U 678390 5520401	160 m	25000
Waypoint	6W360EOL	9 U 678371 5520408	161 m	23000
Waypoint	B/L+L200	9 U 678546 5519915	140 m	22000
Waypoint	B/L+L300	9 U 678588 5519987	122 m	
Waypoint	B/L+L400	9 U 678621 5520107	161 m	23000
Waypoint	B/L+L500	9 U 678656 5520174	118 m	22000
Waypoint	B/L+L600	9 U 678686 5520285	93 m	22000
Waypoint	B/L+ROAD	9 U 678558 5519935	132 m	
Waypoint	LMST1	9 U 678618 5520084	158 m	
Waypoint	LMST10	9 U 678447 5520400	145 m	
Waypoint	LMST11	9 U 678357 5519958	182 m	
Waypoint	LMST12	9 U 678445 5520319	161 m	
Waypoint	LMST13	9 U 678390 5520403	160 m	
Waypoint	LMST2	9 U 678616 5520051	146 m	
Waypoint	LMST3	9 U 678552 5520002	118 m	
Waypoint	LMST4	9 U 678665 5519996	126 m	
Waypoint	LMST5	9 U 678764 5519989	115 m	
Waypoint	LMST6	9 U 678490 5520226	133 m	
Waypoint	LMST7	9 U 678360 5520270	160 m	
Waypoint	LMST8	9 U 678443 5520178	142 m	
Waypoint	LMST9	9 U 678550 5520335	120 m	
Waypoint	MT1	9 U 678378 5520231	134 m	
Waypoint	MT2	9 U 678437 5520235	148 m	
Waypoint	MT3	9 U 678285 5520226	172 m	
Waypoint	MT4	9 U 678320 5520205	170 m	
Waypoint	MT5	9 U 678542 5520157	141 m	
Waypoint	MT6	9 U 678608 5520309	108 m	
Waypoint	MT7	9 U 678458 5520379	138 m	
Waypoint	MT8	9 U 678842 5519893	95 m	
Waypoint	MT9	9 U 678831 5519885	96 m	
Waypoint	RIVER	9 U 678575 5519983	121 m	
Waypoint	ROAD1	9 U 678596 5520221	131 m	
Waypoint	ROAD2	9 U 679060 5519830	67 m	


Header	Name	Length	Average Speed		Link	
Track	ACTIVE LOG	28/05/2013 9:02	2:51:12	471 m	0.2 kph	
Header	Position	Altitude	Leg Length	Leg Time	Leg Speed	Leg Course
Trackpoint	9 U 678656 5520262	108 m				
Trackpoint	9 U 678629 5520255	112 m	28 m	0:08:06	0.2 kph	257° true
Trackpoint	9 U 678635 5520262	113 m	9 m	0:04:21	0.1 kph	46° true
Trackpoint	9 U 678622 5520254	122 m	16 m	0:19:05	0.0 kph	242° true
Trackpoint	9 U 678585 5520258	128 m	37 m	0:12:16	0.2 kph	278° true
Trackpoint	9 U 678538 5520268	140 m	48 m	0:08:35	0.3 kph	284° true
Trackpoint	9 U 678508 5520289	147 m	37 m	0:15:16	0.1 kph	308° true
Trackpoint	9 U 678540 5520267	139 m	39 m	0:03:17	0.7 kph	128° true
Trackpoint	9 U 678509 5520278	148 m	33 m	0:10:46	0.2 kph	291° true
Trackpoint	9 U 678471 5520291	158 m	40 m	0:17:43	0.1 kph	291° true
Trackpoint	9 U 678437 5520366	158 m	82 m	0:37:16	0.1 kph	338° true
Trackpoint	9 U 678445 5520389	150 m	25 m	0:04:05	0.4 kph	21° true
Trackpoint	9 U 678392 5520400	160 m	54 m	0:14:10	0.2 kph	284° true
Trackpoint	9 U 678373 5520415	159 m	23 m	0:16:16	0.1 kph	309° true

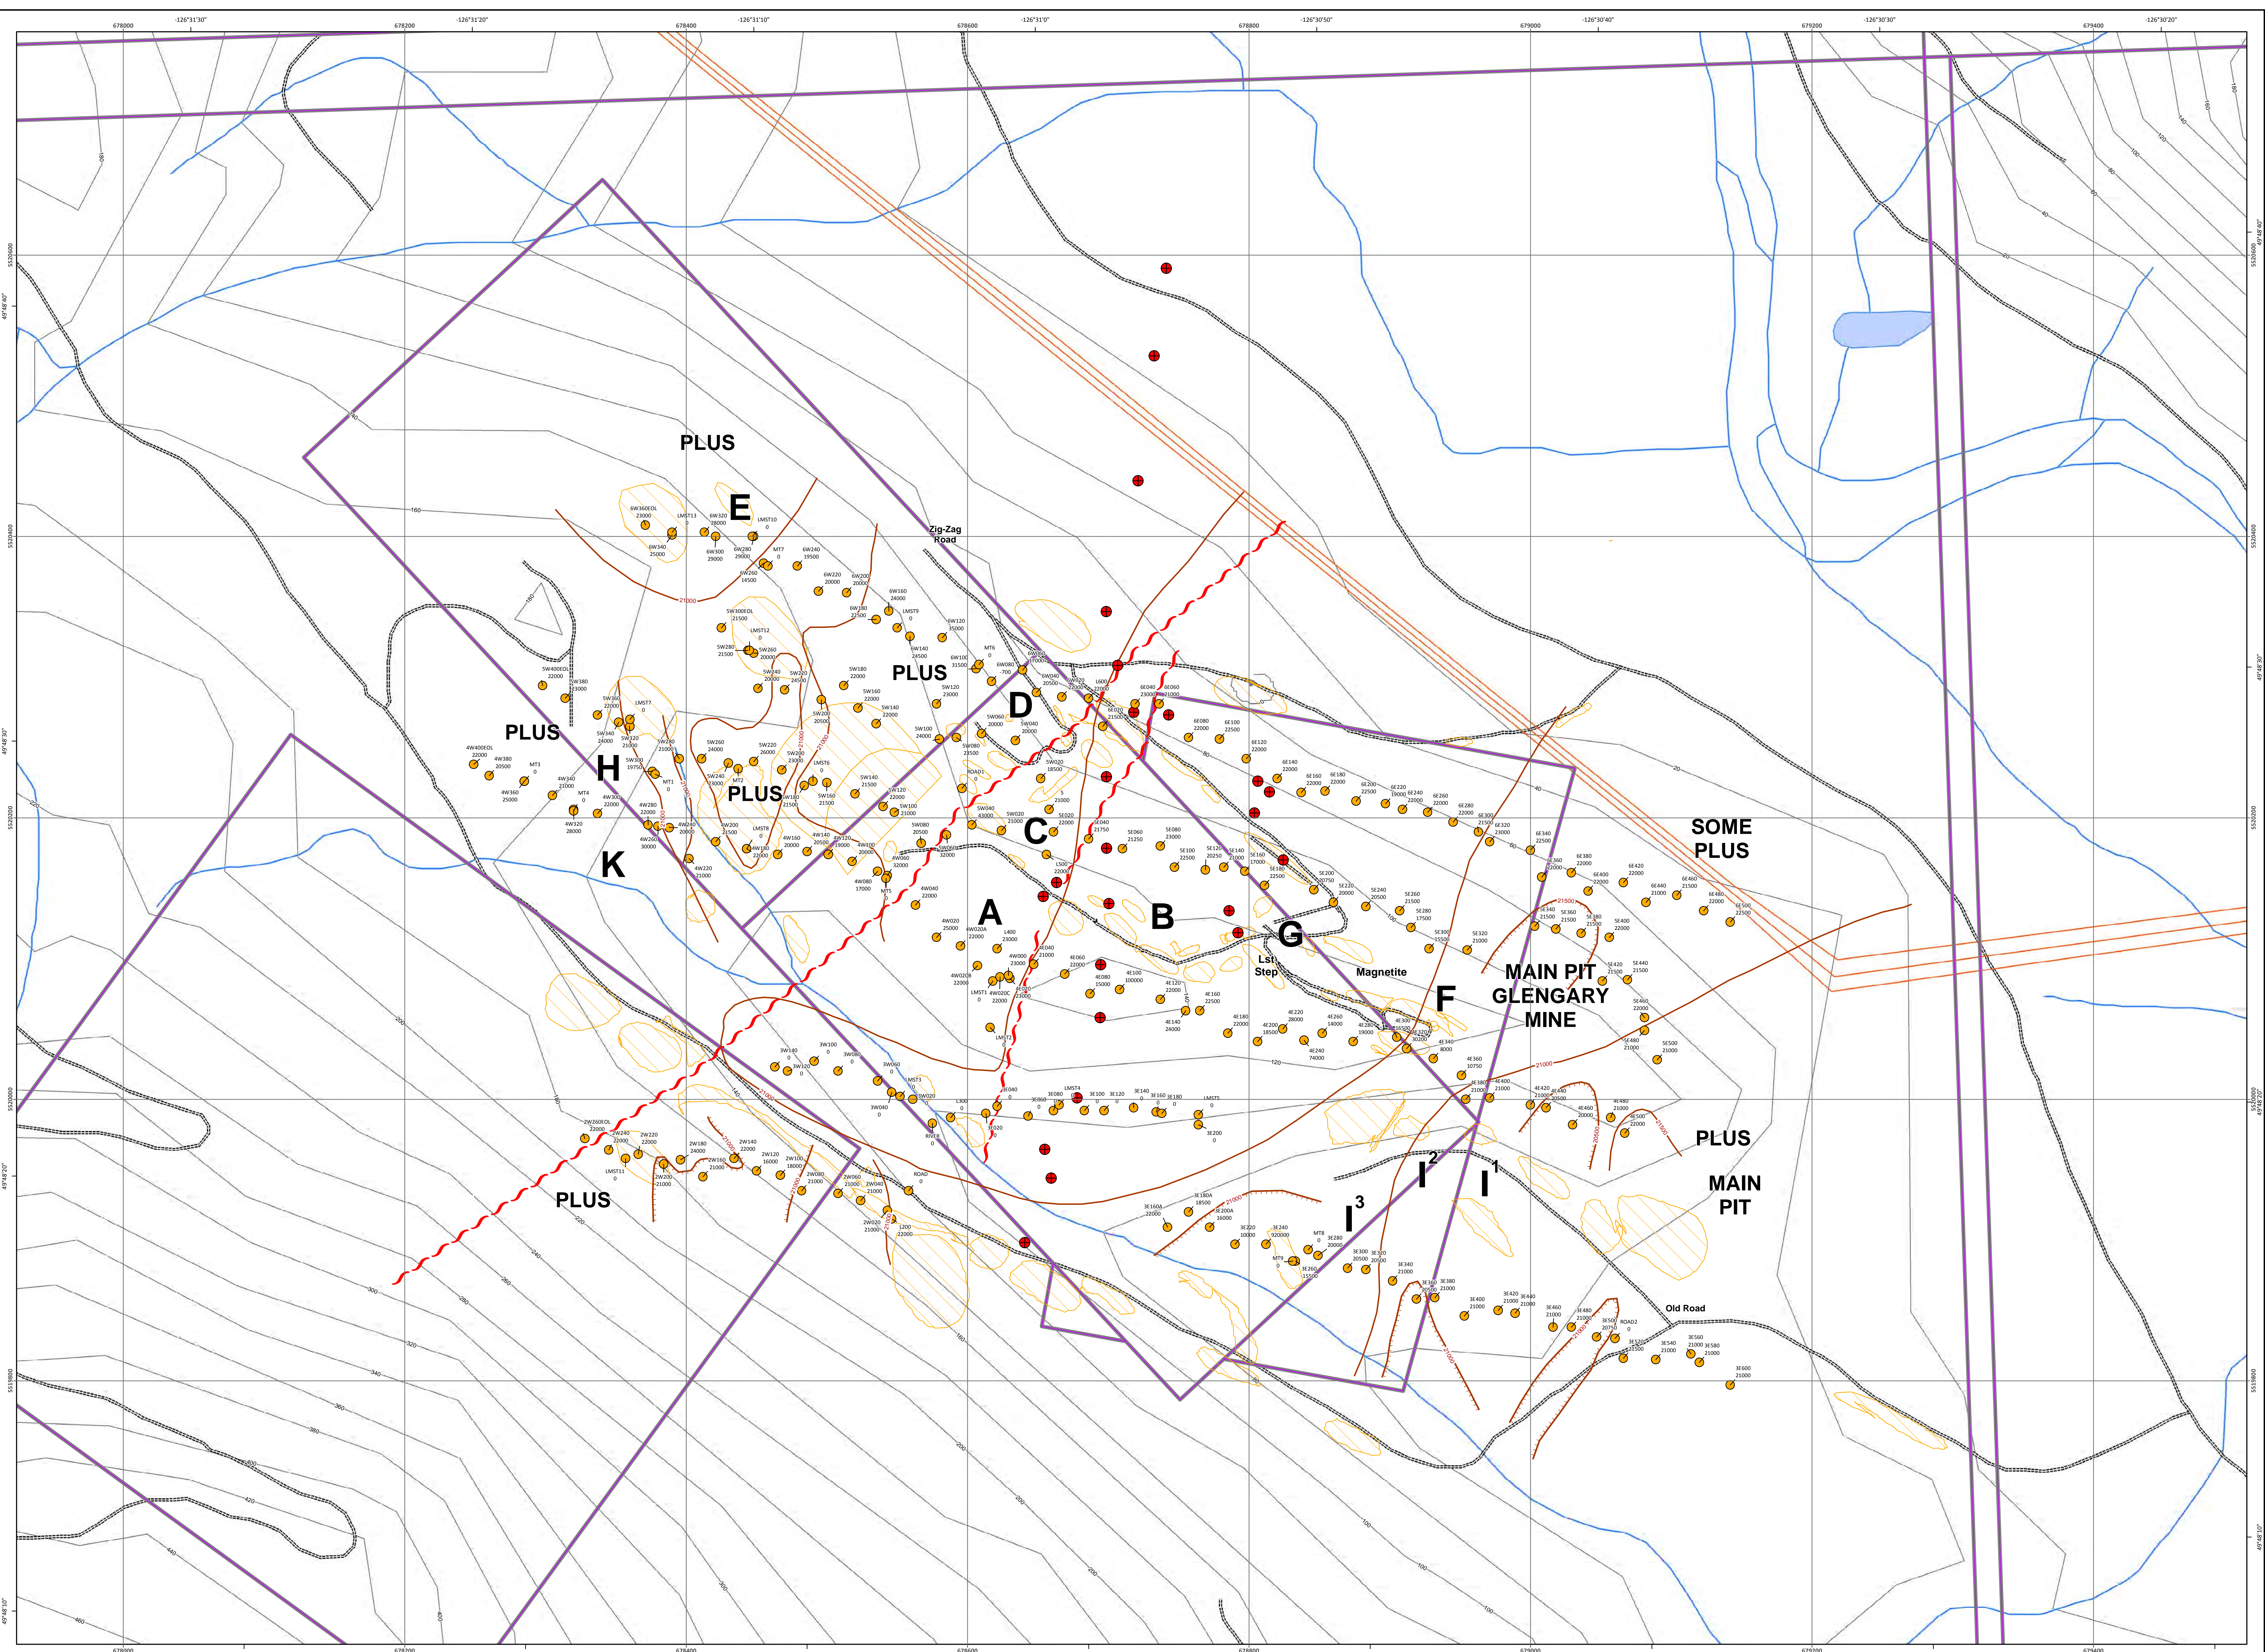


- Legend**
- Mag Points
  - Working Plot
  - Fault Zone
  - Outcrop Area
  - Mineral Claim Areas
  - Roads
  - Transmission Line (Hydro)
  - Contour 20m
  - Streams
  - F** Known Magnetic Zone

## Head Bay Detail Magnetometer Results


Map 2 of 2

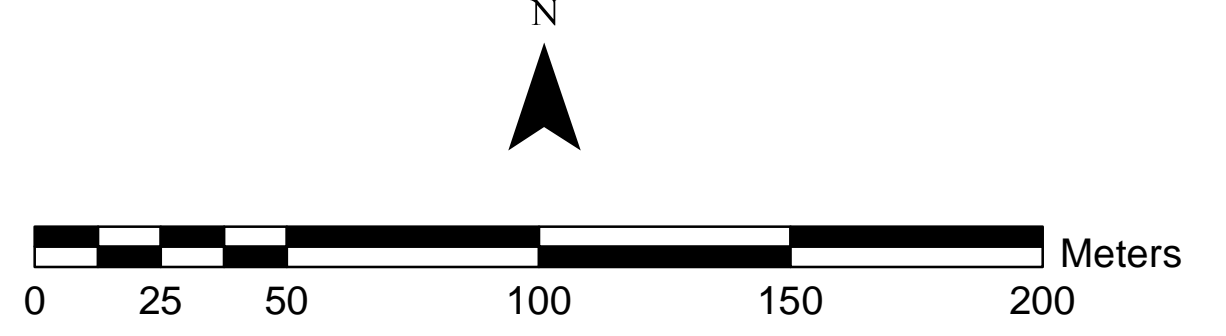

**Map Information**  
 Map Projection: NAD 1983 UTM Zone 9N  
 Map Plot File: Plot\_ANSLE\_HeadBay\_Mag.mxd  
 Map Produced By: CRM Ltd. - CB



CRM LTD  
 Coastal Resource Mapping  
 #5 - 4515 Highlands Drive, Nanaimo, BC  
 (250) 758-4121 www.crm-ltd.ca support@crm-ltd.ca

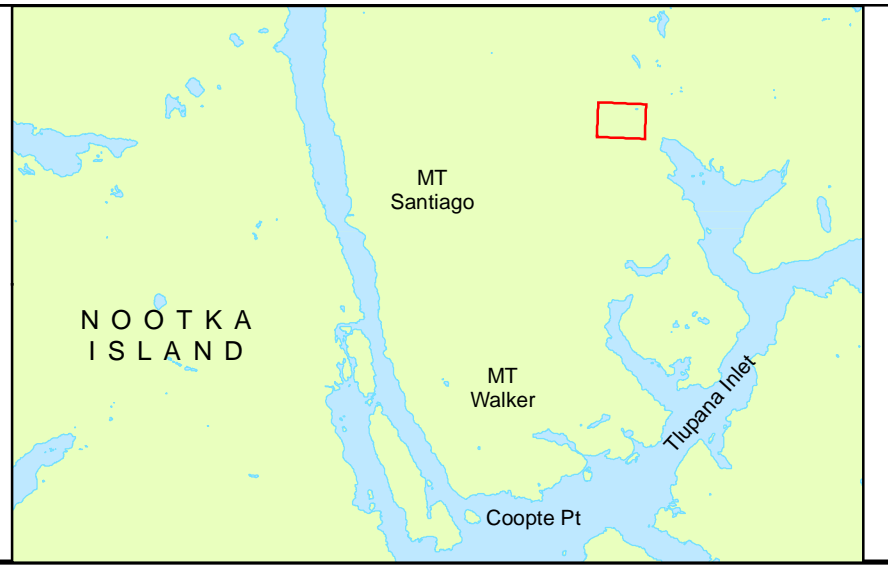


Canadian Dehvia International Mines Group Inc.  
**Detail Magnetometer**  
 (Glengary Mine)

Geology By: J.T. Shearer, M.Sc., P.Geo.  
 NTS: 92E/15E  
 To Accompany Assessment Report  
 Dated: June.10, 2013



### Geology Legend


- 6** Epidote - diopside - Actinolite skarn
- 5** Garnet - calcite skarn & Magnetite
- 4** Massive Magnetite
- Middle to Early Jurassic Island Plutonic Suite**
- 3** Diorite, coarse to fine crystalline + light green, fine grained dykes and shear zones
- Upper Triassic**
- 2** Quartsino Limestone uRVO
- 1** Andesite, very fine grained (some melano diorite/diabase) Possibly Karmutsen Formation
- MT** Magnetite Outcrop

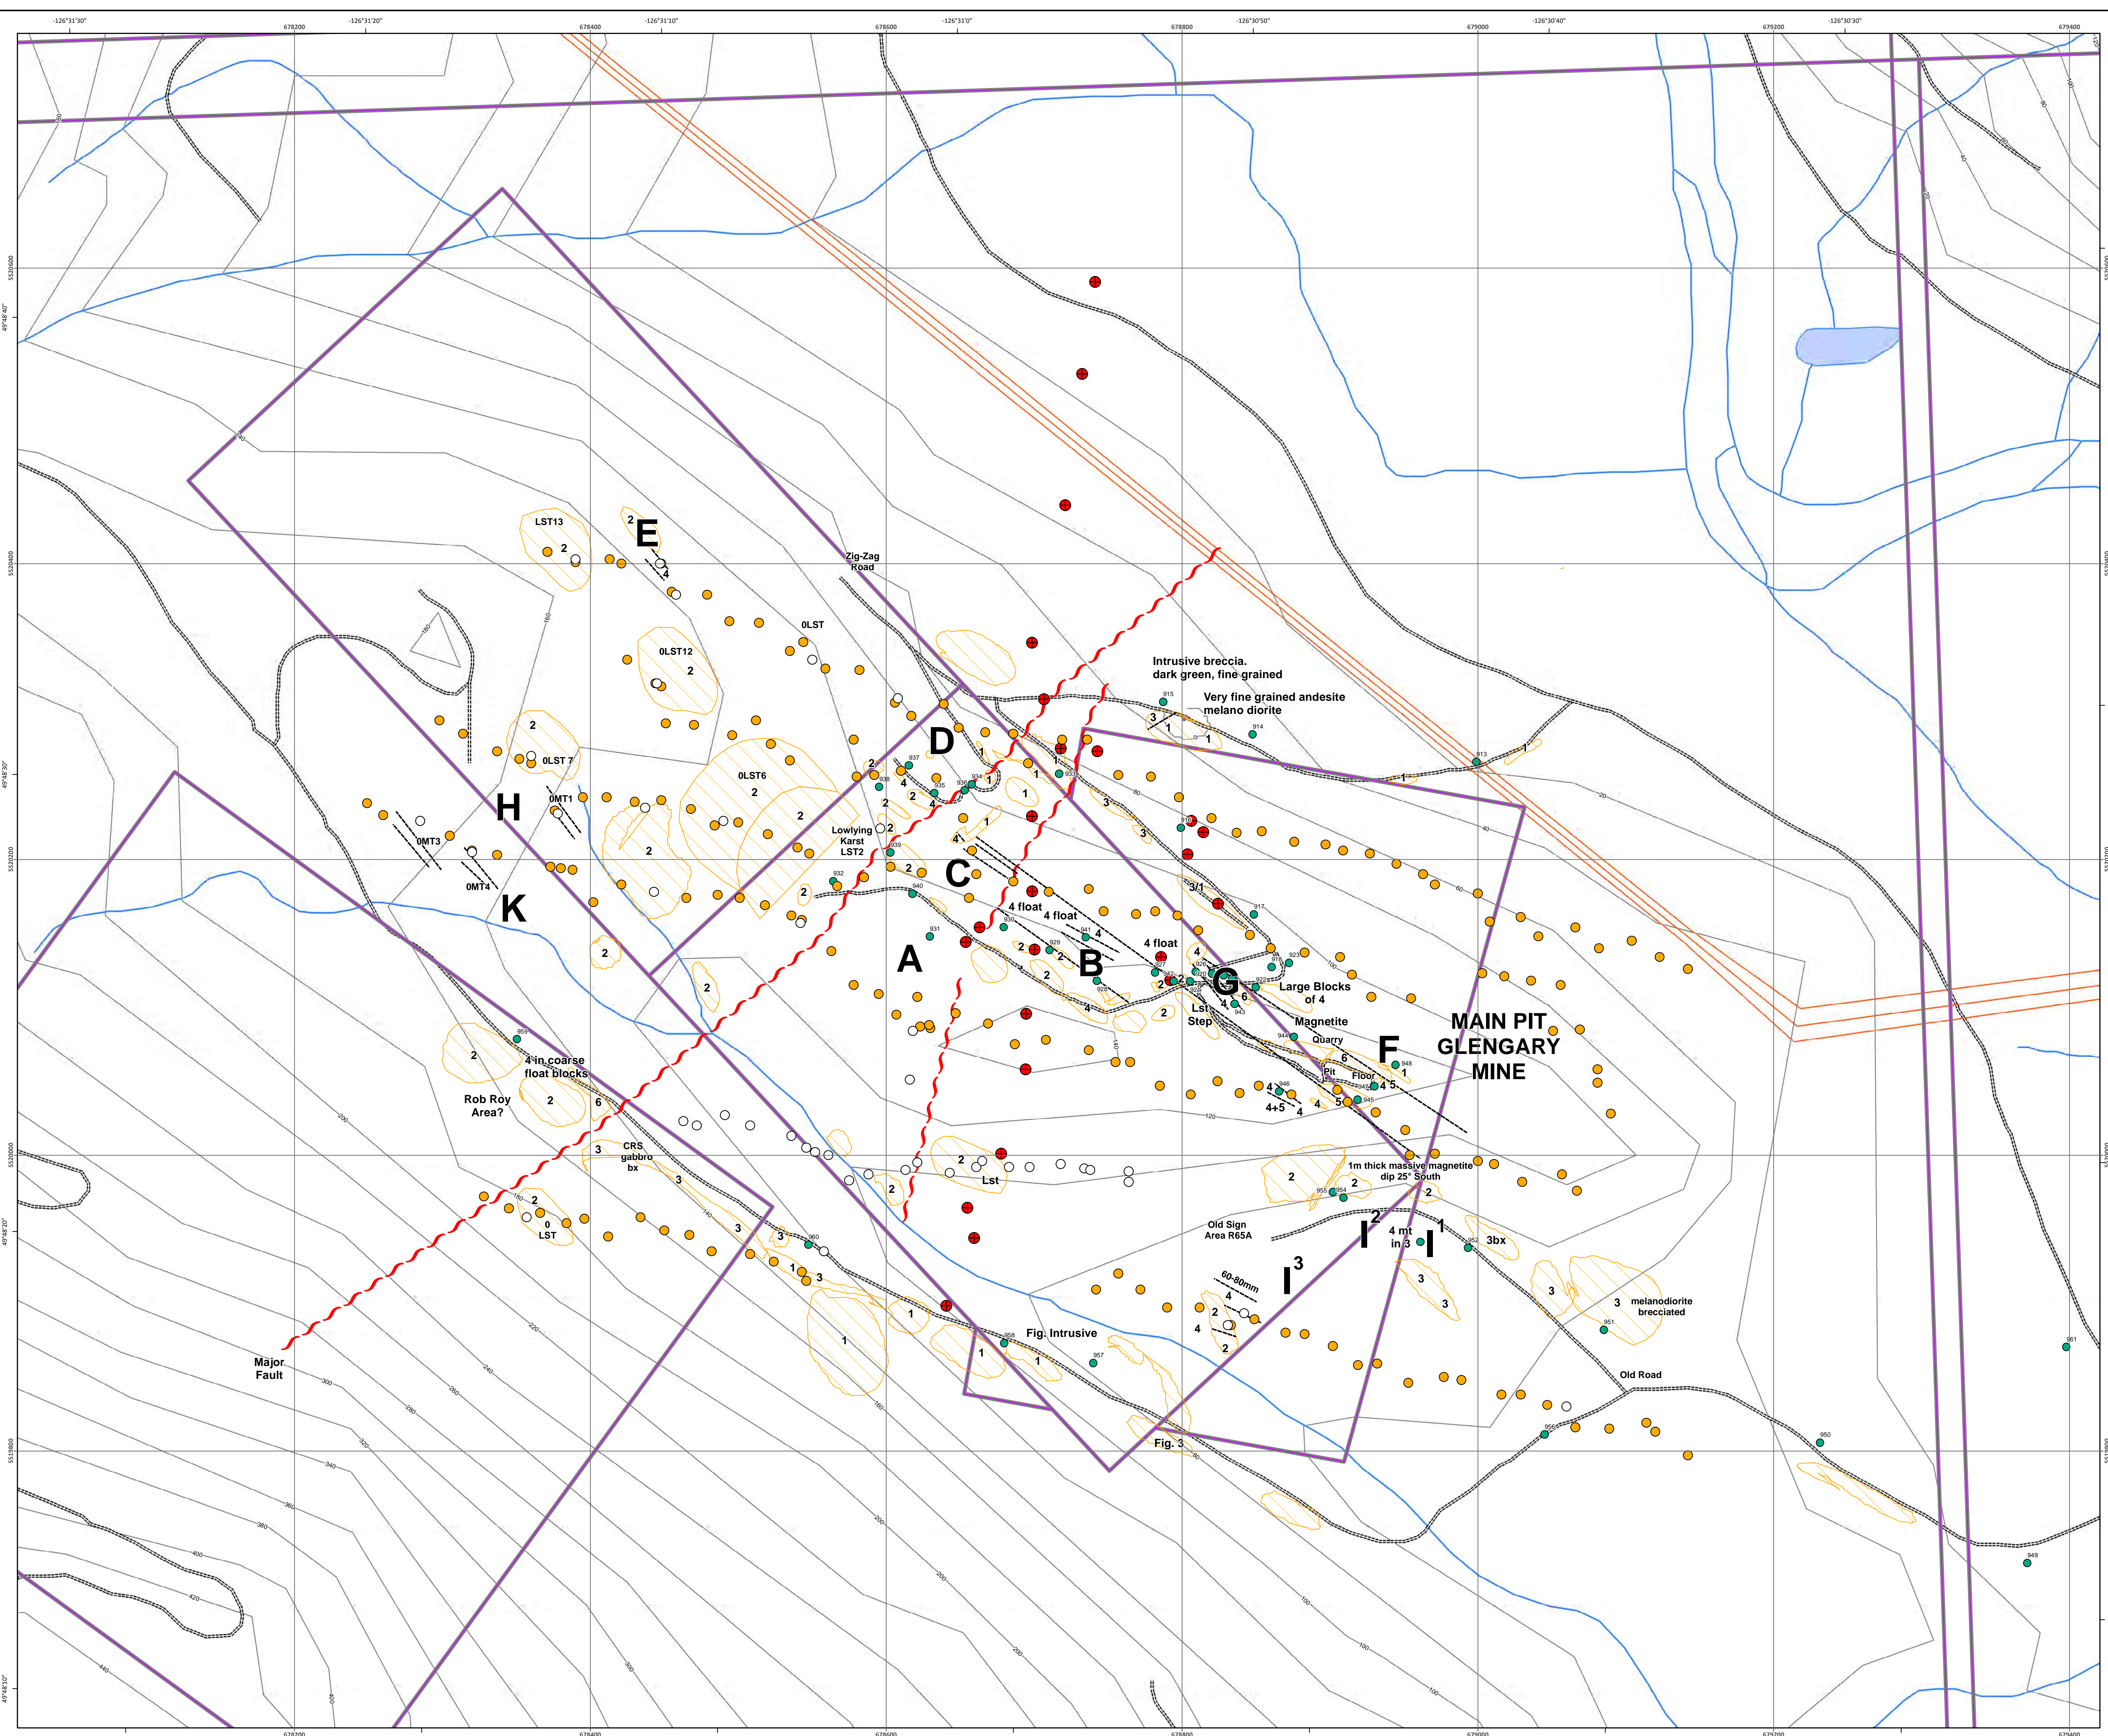

- Legend**
- Mag Points (without magnetic reading)
  - Mag Points
  - Way Points
  - Working Plot
  - Fault Zone
  - ▭ Outline of Crown Grants
  - Roads
  - Transmission Line (Hydro)
  - Contour 20m
  - Streams
  - F** Previously Known Magnetite Zone
  - AA** New Magnetite Zone
  - ▨ Outcrop Area


## Head Bay Detail Geology

Map 1 of 2

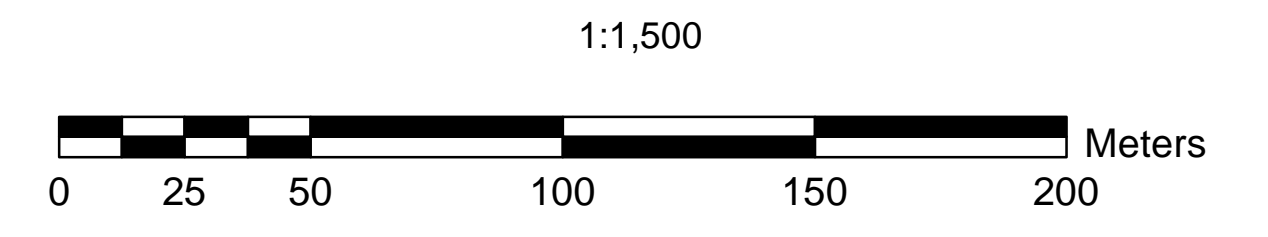

**Map Information**

Map Projection: NAD 1983 UTM Zone 9N  
 Map Plot File: Plot\_ANSLE\_HeadBay\_WP.mxd  
 Map Produced By: CRM Ltd. - CB

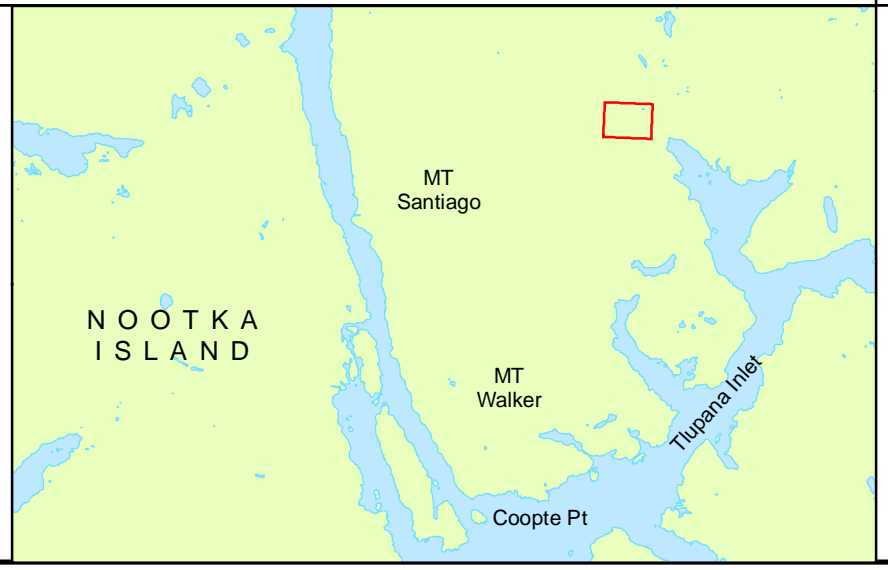

Canadian Dehua International Mines Group Inc.  
 Head Bay Project  
**Detail Geology**  
 (Glengarry Mine)

Geology By: J.T. Shearer, M.Sc., P.Geo.  
 NTS: 92E/15E  
 To Accompany Assessment Report  
 Dated: June 10, 2013